

Lighting: Incandescent and Compact Flu. Portable Hand Lamp, EIHL, EPHLA Series



A QUALITY PRODUCT

**Flameproof
Zone 1 & 2 – 21 & 22**

Specification


Body material : Rubber coated copper-free aluminium
Guard and hook : PVC coated steel wire
Globe : Heat and impact resistant glass

Technical Data

Hazardous Area	Gas	Dust
Zones	1 & 2	21 & 22
Conforming to ATEX	Ex II 2G	Ex II 2D
Symbol of Protection ATEX	Ex db IIB Gb	Ex tb IIIC Db
Symbol of Protection IEC		
Standard	ATEX Directive 2014/34/EU, std. EN 60079-0:2012 + A11:2013, EN 60079-1:2014, EN 60079-31:2014	
	IECEX Scheme, std. IEC 60079-0:2011, IEC 60079-1:2014, IEC 60079-31:2013	
Ambient Temperature	-20 °C to +55 °C	
Index of Protection	IP66	
Rated Voltage	220V.AC. ±5% 50Hz.	

Catalogue Number and Dimension

Lamp Watt	Cat. No.	Voltage	Lamp Model	Temp. Class (for zone 1 & 2)		Max. Surface Temp (for zone 21 & 22)		Volume (dm ³)	Approx. Weight (kgs.)
				Ta 40 °C	Ta 55 °C	Ta 40 °C	Ta 55 °C		
Halogen									
60W.	EIHL-60	220V. 50Hz.	CLAS 60W E27 A55 (730lm)	T4	T4	T135°C	T135°C	0.72	2.38
Compact Fluorescent									
11W.	EPHLA-11	220V. 50Hz.	Genie 11W CDL E27 (570lm)	T5	T4	T100°C	T135°C	0.72	2.38

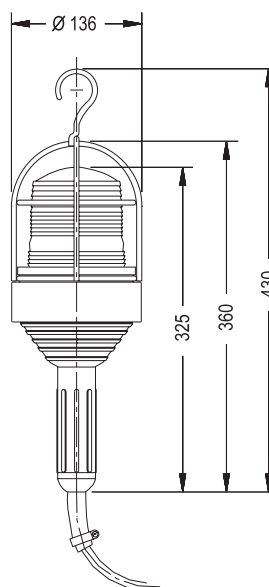

F