

# Fluorescent – Emergency & Non-Emergency

Zones 1 & 2, 21 & 22



- An energy saving LED light designed for use in hazardous and marine locations.
- For lighting of walkways and alleys.
- Anti-glare, low wattage for use in small areas.
- Service life up to 50,000 hours
- Lamp options – 30W & 60W
- Multiple mounting accessories sold separately

Comes standard with:

- Cage terminals
- Energy saving LED lamp



PROTECTION RATINGS	CERTIFICATION	AMBIENT TEMPERATURE	RATED VOLTAGE	RANGE
Ex de IIC DIP A21 Ta For T ratings refer to certificate	IECEx CQM 13.0025x	-40°C ≤ Ta ≤ +50°C	AC 100-240V, 50/60Hz	CZ0873/1 (30W) CZ0874/1 (60W)

## ORDERING GUIDE

Product	Catalogue No.	Watts	No. of Lamps	Dimensions (mm)			Weight (kg)
				Length (A)	Width (B)	Height (C)	
Standard	FLUG018X1CA1 <sup>▲</sup>	18	1	808	222	134	6.7
	FLUG018X2CA1	18	2	808	222	134	6.9
	FLUG036X1CA1 <sup>▲</sup>	36	1	1380	222	134	11.3
	FLUG036X2CA1	36	2	1380	222	134	11.4
Emergency	FLUG018X2CA1E	18	2	808	222	134	8.7
	FLUG036X2CA1E	36	2	1380	222	134	13.1


<sup>▲</sup> Available on request

# Fluorescent – Emergency & Non-Emergency


Zones 1 & 2, 21 & 22




## TECHNICAL DRAWINGS



Front View

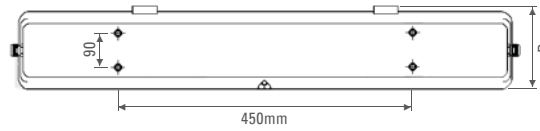


Top View




Side View

## LIGHT DISTRIBUTION CURVE

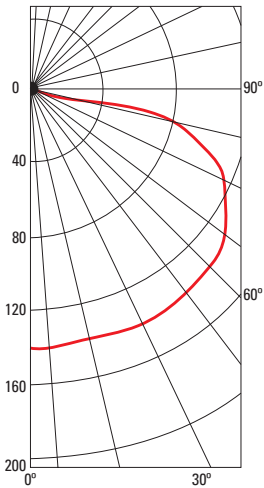

18W x 2

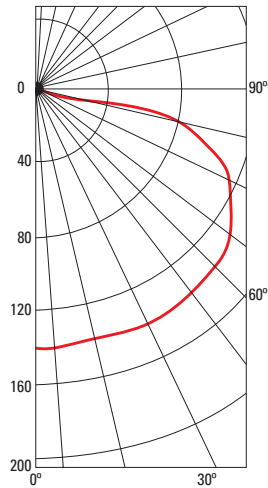

36W x 2