

GE-HRW238-IR


4MP Network IR Bullet



Key features

- 1/3" Progressive Scan CMOS
- 2.8-12mm lens
- 4MP@30fps
- Multiple Streams
- Smart IR up to 35m
- Low bitrate control
- 3D DNR,dWDR,ICR
- Support ROI,Corridor mode,HLC

Dimension

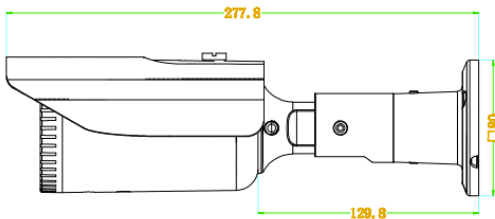

Accessories



CAMERA	
Image Sensor	1/3" Progressive Scan CMOS
Min. illumination	Color :0.05Lux@(F1.2,AGC ON);B/W: 0 Lux@(IR LED ON)
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Fixed
Wide Dynamic Range	WDR >120dB
Digital Noise Reduction	2D/3D
Lens	2.8-12mm
FOV	90° -35°
IR LED	24pcs
IR Range	Up to 35m
IMAGE	
Video Compression	H.265/H.264/ MJPEG
Bit Rate (CBR/VBR)	Stream1: 500kbps ~ 12000kbps; Stream2: 100kbps ~ 6000kbps Stream3: 100kbps ~ 3kbps
Max.Resolution	2592*1520/30fps
Stream	Stream1: 2592*1520/2560*144 /2304*1296/1920*1080/1280*720 @25/30fps Stream 2: D1 / VGA / 640*360 / CIF / QVGA @25/30fps Stream3: VGA / CIG / QVGA @25/30fps
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor mode	Yes
ROI	Yes
Defog	N/A
NETWORK	
Network Protocols	IPv4/IPv6, APR, 802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast
Alarm Trigger	Perimeter ,Single Virtual Fences ,Double Virtual Fences ,Loiter ,Multi Loiter , Object Left ,Object Removed, Abnormal Speed ,Converse, Illegal Parking , Signal Bad ,Motion Detection
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware Watch Do
System Compatibility	Onvif
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	N/A
Alarm I/O	N/A
Rs485	N/A
BNC Output	N/A
Reset Button	N/A
Edge Storage	N/A
GENERAL	
Power Supply	DC12V/POE
Power Consumption	2.5W(IR LED OFF);5W(IR LED ON)
OperatingTemperature	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
Operating Humidity	0% - 90% RH
Ingress Protection	Ip66
Approvals	CE/FCC
Product Dimensions	277*80mm
Product Weight	800g