

GE-NFE566-IR


Camera IP Fisheye 6MP Umbrella S2



Key features

- 1/1.8" Progressive Scan CMOS
- Resolution: 6MP 3072(H)*2048(V) / 30fps
- 6 units of super array IR LED, Max. 25m IR Distance
- Len 12MP 1.6mm Fisheye 360°
- Unique De-warping Image
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR,HLC
- Power DC12V/PoE

Dimension

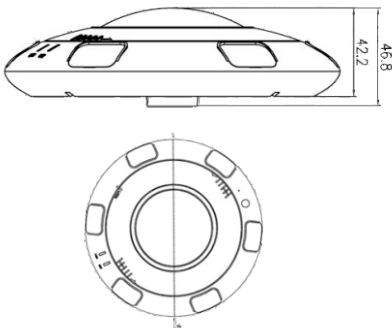

Accessories



CAMERA	
Image Sensor	1/1.8" Progressive Scan CMOS
Min. illumination	Color 0.01Lux(AGC ON);IR ON 0 Lux
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	N/A
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	1.6mm
FOV	360 degrees
IR LED	6pcs
IR Range	10m
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	500kb-12000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	3072*2048@15fps
Stream	Stream1 3072*2048@15fps ,1920*1920/1440*1440/1920*1080@20fps Stream 2 1280*1280/720*720/D1@15fps/25fps/30fps
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
De-warping	1F+3/5/7,180 degrees panorama
HLC	Yes
9:16 Corridor mode	N/A
DIS	N/A
ROI	N/A
Defog	N/A
NETWORK	
Network Protocols	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, Unicast and Multicast supported.
Alarm Trigger	Motion Detection,Networkdisconnect,Disk alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
System Compatibility	Onvif
INTERFACE	
Ethernet	1 1 Ethernet (10/100 Base-T) RJ-45 Connector
Microphone	Yes (Built-in)
Audio I/O	1ch Audio In,1ch Audio Out
Alarm I/O	1ch Alarm In,1ch Alarm Out
Rs485	N/A
BNC Output	N/A
Reset Button	N/A
Edge Storage	Micro SD/SDHC/SDXC slot ,Max 64GB
GENERAL	
Power Supply	AC24V/DC12V/POE
Power Consumption	5W IR LED OFF; 8W IR LED ON
OperatingTemperature	Starting Temperature: -30 °C~ 60 °C (-22 °F ~ 140 °F) Working Temperature:-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Operating Humidity	0% - 90% RH
Ingress Protection	Ip66
Approvals	CE/FCC
Product Dimensions	φ 160*46.8mm
Product Weight	700g