

GE-NMW414-IR


1080P Network IR Eyeball




Key features

- 1/2.9" Progressive Scan CMOS
- VF Lens 2.8-12mm
- Full HD 1080P
- Multiple Streams
- IR Range 20-25m
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR
- Support ROI,Corridor mode,HLC

Dimension

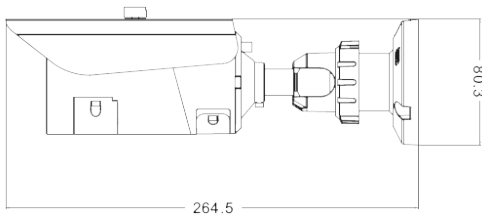

Accessories

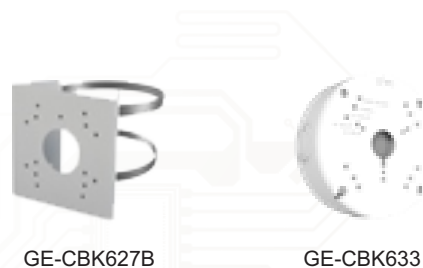

| CAMERA | |
|-------------------------|--|
| Image Sensor | 1/2.9" Progressive Scan CMOS |
| Min. illumination | Color 0.2Lux;IR ON 0 Lux |
| Day & Night | ICR |
| Shutter Speed | 1/5-1/20000 |
| Auto Iris | Default Fixed,Auto Iris Optional |
| Wide Dynamic Range | dWDR |
| Digital Noise Reduction | 2D/3D |
| Lens | 2.8-12mm |
| FOV | 90° -35° |
| IR LED | 10pcs |
| IR Range | 20-25m |
| IMAGE | |
| Video Compression | H.264 High/Main/Baseline Profile, MJPEG |
| Bit Rate (CBR/VBR) | Main stream:500kb-12000kb ; Sub stream 100kb-6000kb |
| Audio Compression | G.711 ,RAW_PCM |
| Max.Resolution | 1920x1080/30fps |
| Stream | Stream1 1920x1080/1280x720 ; Stream 2 D1 to QVGA |
| Image Setting | Rotate Mode, Saturation, Brightness, Contrast, Sharpness |
| HLC | Yes |
| 9:16 Corridor mode | Yes |
| ROI | Yes |
| Defog | N/A |
| NETWORK | |
| Network Protocols | HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, Unicast and Multicast supported. |
| Alarm Trigger | Motion Detection,Networkdisconnect,Disk alarm |
| RTSP Video | Standard RFC2326, Support QuickTime / VLC Player. |
| Security | User security authentication, Reset, Hardware WatchDog |
| System Compatibility | Onvif, CGI |
| INTERFACE | |
| Ethernet | 1 Ethernet (10/100 Base-T) RJ-45 Connector |
| Audio I/O | N/A |
| Alarm I/O | N/A |
| Rs485 | N/A |
| BNC Output | N/A |
| Reset Button | N/A |
| Edge Storage | N/A |
| GENERAL | |
| Power Supply | DC12V/POE |
| Power Consumption | 5W(IR LED OFF); 7W (IR LED ON) |
| OperatingTemperature | Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F) |
| Operating Humidity | 0% - 90% RH |
| Ingress Protection | Ip66 |
| Approvals | CE/FCC |
| Product Dimensions | φ 81×265mm |
| Product Weight | 750g |