

GE-NSQ414-IR



1080P Network IR Mini Bullet




Key features

- 1/2.7" Progressive Scan CMOS sensor
- 3.6mm,6mm optional
- 1080P@30fps
- Multiple Streams
- IR Range 15-20m
- Low bitrate control
- 3D DNR,dWDR,ICR
- Support ROI,Corridormode,HLC

Dimension

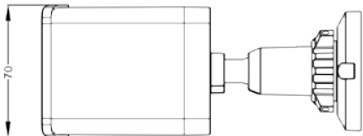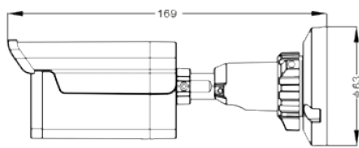

Accessories



GE-CBK627B



GE-CBK633

CAMERA	
Image Sensor	1/2.7" Progressive Scan CMOS sensor
Min. illumination	Color 0.2Lux;IR ON 0 Lux
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Fixed
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	3.6mm,6mm optional
FOV	85°
IR LED	2pcs
IR Range	15-20m
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	1920x1080/30fps
Stream	Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA
Image Setting	Rotate Mode,Saturation,Brightness,Contrast,Sharpness
HLC	Yes
9:16 Corridor mode	Yes
ROI	Yes
Defog	Yes
NETWORK	
Network Protocols	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, Unicast and Multicast supported.
Alarm Trigger	Motion Detection,Networkdisconnect,Disk alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
System Compatibility	Onvif, CGI
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	N/A
Alarm I/O	N/A
Rs485	N/A
BNC Output	N/A
Reset Button	Yes
Edge Storage	N/A
GENERAL	
Power Supply	DC12V/POE
Power Consumption	2.5W(IR LED OFF); 5W (IR LED ON)
OperatingTemperature	Starting Temperature: -30 °C~ 60 °C (-22 °F ~ 140 °F) Working Temperature:-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Operating Humidity	0% - 90% RH
Ingress Protection	Ip66
Approvals	CE/FCC
Product Dimensions	169(W) ×70(H) ×60(D)
Product Weight	631g