


Features:

- **Original**
 - SDA+ over LAN technology inside, One-click Access third-party ONVIF camera
 - All channel real-time synchronous playback
 - Support IE, Chrome, Firefox, Safari, and browser plug-in free
 - All channel synchronous live view and playback by smart phone
- **HD Input & Output**
 - H.265 / H.264 video formats
 - Up to 32 8MP IP camera can be accessed
 - HDMI at up to 4K, VGA at up to 1080P
- **HD Storage & Communication**
 - 4 HDDs supported, Up to 8TB for each
 - 1 self-adaptive 10/100/1000M RJ45 interface
 - Up to 8 SDA RJ45 interfaces for Plug&Play access third-party ONVIF camera
- **Special**
 - Instant playback for assigned channel during multi-channel live view mode
 - Smart search for selected area in the video, and smart playback to improve the efficiency
 - Support HDD quota and group mode
 - Support HDD hot swap

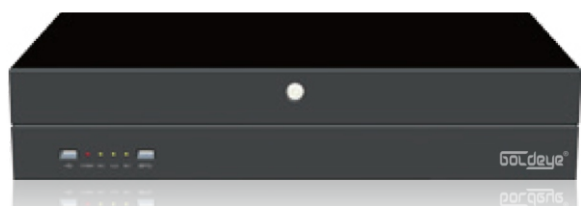

GE-NVR7432P

Specifications

Model		GE-NVR7432P	
Video / Audio input	IP video input	32 channel	
		Up to 12 MP for the first 2 Ch. , Up to 8MP for the rest	
	File IP audio input	32 channel	
	Two-way audio	1× RCA (2.0 Vp-p, 1 kΩ)	
Network	Incoming	Standard	ONVIF, RTSP, HB-protocol
		Bandwidth	320Mbps
	Outgoing	Standard	CGI, RTSP, RTMP(Only for H.264), HB-SDK
		Bandwidth	320Mbps
Video / Audio output	Recording resolution		Up to 12 MP for the first 2 Channel, Up to 8MP for the rest
	HDMI output		4K (3840×2160)/60Hz, 1080p (1920×1080)/60Hz, 720p (1280×720)/60Hz, UXGA (1600×1200)/60Hz, 1280×1024/60Hz
	VGA output		1080p (1920×1080)/60Hz, 720p (1280×720)/60Hz, UXGA (1600×1200)/60Hz, 1280× 1024/60Hz
	Audio output		1× RCA (Linear, 1 kΩ)
Decoding	Decoding standard		H.265 / H.264
	Like view / playback resolution		Up to 12 MP for the first 2 Ch. , Up to 8MP for the rest
	Synchronous playback		All channel real-time synchronous playback
HDD	SATA		4 SATA interfaces for 4 HDDs
	Capacity		Up to 8TB capacity for each HDD
External interface	Network		1x 10/100/1000Mbps self-adaptive RJ45 interface
	USB		Front panel: 1× USB2.0, Rear panel: 1× USB3.0
	Alarm		4 in / 2 out
	RS-485		1×RS-485 interface
POE	Interface		8 10/100Mbps RJ45 interfaces
	Max. power		Up to 32 Ch., Up to 8 Channel for each SDA interface
General	Power supply		12V 90W
	Operating condition		-Temperature: -10°C – 55°C (14°F – 131°F) Humidity: 10 - 90%
	Dimensions (W×D×H)		440×323×89mm