

# GE-NZD414-IR


# 1080P Network IR Eyeball



### Key features

- 1/2.7 " Progressive Scan CMOS
- 2.8-12mm lens
- 1080P@30fps
- Multiple Streams
- IR Range 25-35m
- Low bitrate control
- 3D DNR,dWDR,ICR
- Support ROI,Corridor mode,HLC

### Dimension

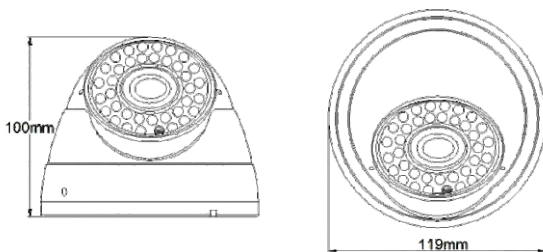

### Accessories



CAMERA	
Image Sensor	1/2.7" Progressive Scan CMOS
Min. illumination	Color 0.2Lux;IR ON 0 Lux
Day & Night	ICR
Shutter Speed	1/1-1/10000
Auto Iris	Fixed
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	2.8-12mm
FOV	90° -35°
IR LED	24pcs
IR Range	25-35m
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ; Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	1920x1080/30fps
Stream	Stream1 1920x1080/1280x720 ; Stream 2 D1 to QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor mode	Yes
ROI	Yes
Defog	N/A
NETWORK	
Network Protocols	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, Unicast and Multicast supported.
Alarm Trigger	Motion Detection,Networkdisconnect,Disk alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
System Compatibility	Onvif, CGI
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	N/A
Alarm I/O	N/A
Rs485	N/A
BNC Output	N/A
Reset Button	N/A
Edge Storage	N/A
GENERAL	
Power Supply	DC12V/POE
Power Consumption	2.5W(IR LED OFF); 5W (IR LED ON)
OperatingTemperature	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F ) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
Operating Humidity	0% - 90% RH
Ingress Protection	Ip66
Approvals	CE/FCC
Product Dimensions	Φ119*100mm
Product Weight	650g