


OMNI III

MULTI-FUNCTION PATIENT MONITOR

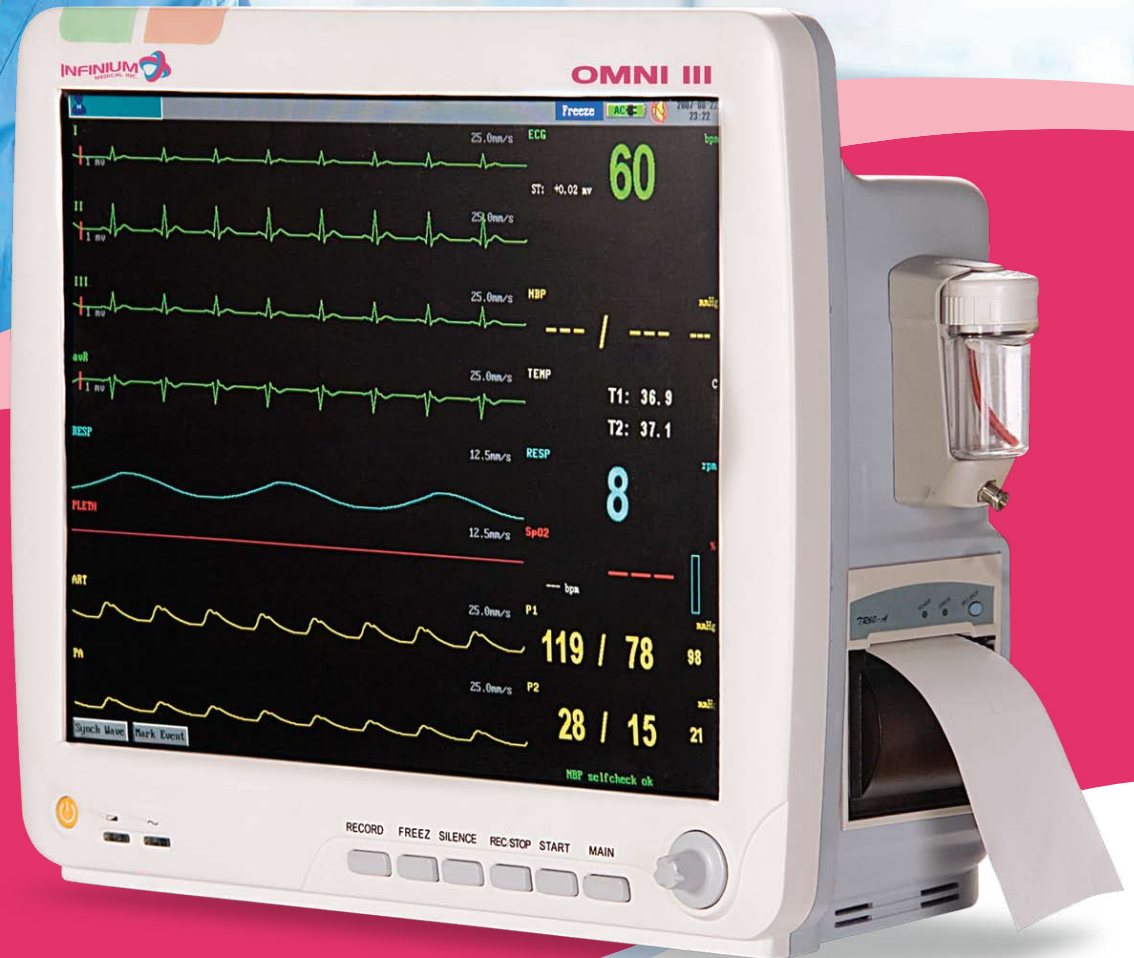

**ECG, Respiration,
SpO₂, NIBP,
Temperature**

- Facility to measure many parameters: ECG (3 or 5 lead) with ST segment monitoring, respiration, dual temperature monitoring, SpO₂, non-invasive blood pressure.
- Up to 8 waveforms displayed
- Multi-lead simultaneous ECG monitoring
- Auto setting of alarm limits
- Graphical / Tabular trending
- Color coded alarms
- Patient data entry
- Battery backup (2 removable batteries)
- Networking capability
- Large high resolution 15 inch screen



Advanced, Affordable Medical Technology For The World

OMNI III TECHNICAL SPECIFICATIONS

The Omni III patient monitor delivers the best performance and flexibility for the price. The Omni III features a large 15" high resolution screen while still remaining light and portable.

PHYSICAL DIMENSIONS & WEIGHT

Base Unit: 309mm Hx365mm Wx159mm D
Weight: 7.0kgs

APPLICATION

Neonatal, pediatric and adult patients

PERFORMANCE SPECIFICATIONS

Display: 15" color TFT
Resolution: 1024x768
Trace: 8 waveforms
ECG(I, II, III, aVR, aVL, aVF, V1-V6), PLETH, RESP
Indicator: Alarm indicator
Power indicator
QRS beep and alarm sound
Trend time: 1- 48 hours
Recorder: Built-in, thermal array, 2 channels
Record width: 48mm
Recorder paper: 50mm
Record speed: 25mm/s, 50mm/s

ECG

Input: 5-lead ECG cable and standard AAMI line for connection
Lead Choice: I, II, III, aVR, aVF, aVL, V, TEST
Gain Choice: x0.5, x1, x2
Frequency Characteristic: 0.05-35 Hz (+3dB)
ECG Waveforms: 7 channels
Penetration Voltage: 4000VAC 50/60Hz
Sweep Speed: 12.5, 25 and 50 mm/s
HR Display Range: 30-300bpm
Accuracy: $\pm 5\%$, whichever is greater
Alarm Limit Range Setting:
upper limit: 80-400bpm
lower limit: 20-150bpm

RESP

Measure Method: RA-LL impedance
Range: 0-120 rpm
Accuracy: + 3 rpm
Alarm Upper-lower Limit Setting:
upper limit: 6-120 rpm,
lower limit: 3-120 rpm
Sweep Speed: 12.5 and 25 mm/s

NIBP

Measuring Technology: automatic oscillating measurement
Cuff Inflating: <30s (0-300 mmHg, standard adult cuff)
Measuring Period: AVE<40s
Mode: Manual, Auto, STAT
Measuring Interval in AUTO Mode: 2 min-4 hrs

NIBP (continue)

Pulse Rate Range: 30-250 (bpm)
Measuring Range:
Adult/Pediatric Mode
SYS 40-250 (mmHg)
DIA 15-200 (mmHg)
Neonatal Mode
SYS 40-135 (mmHg)
DIA 15-100 (mmHg)
Resolution: 1mmHg
Accuracy:
Pressure
Maximum Mean error: ± 5 mmHg
Maximum Standard deviation: 8mmHg
Overpressure Protection:
Adult Mode 280 (mmHg)
Neonatal Mode 150 (mmHg)
Alarm Limit Setting
SYS 50-240 mmHg
DIA 5-180 mmHg

TEMP

Range: 25-50 (°C)
Accuracy: $\pm 0.2^\circ\text{C}$ (25.0-34.9 °C)
 $\pm 0.1^\circ\text{C}$ (35.0-39.9 °C)
 $\pm 0.2^\circ\text{C}$ (40.0-44.9 °C)
 $\pm 0.3^\circ\text{C}$ (45.0-50.0 °C)
Display Resolution: 0.1 °C
Alarm Upper-lower Limit Setting
upper limit 0-50 °C,
lower limit 0-50 °C
Channel: 2 channels
Alarm Limit Setting: 10-50 °C

SPO2

ASpO2: Anti-motion SpO2
SpO2% Range: 0-100%
SpO2 Accuracy: $\pm 2\%$ (70-100%, non-motion)
 $\pm 3\%$ (70-100%, motion)
Pulse Rate Range: 30-250 bpm
Pulse Rate Accuracy: ± 2 bpm
 ± 3 bpm (motion)
Alarm Upper-lower Limit Setting
upper limit 70-100%,
lower limit 70-100%
SpO2 Probe
Red light LED wavelength 660nm \pm 5nm
Infrared light LED wavelength 940nm \pm 10nm

NETWORKING

Industry standard 802.11b/g wireless network
Frequency Range: 2.412 - 2.484 GHz
Connected bedside number: up to 8 bedside monitors

POWER

Source: External AC power or internal battery
AC Power: 100-240VAC, 50/60Hz, 150VA
Battery: Built-in and rechargeable
Charge Time: 4 hours
Operating Time: 1 hour

ENVIRONMENTAL SPECIFICATIONS

Temperature:
Operating: 5-40 °C
Storage: -10-45 °C
Humidity range:
Operating: $\leq 80\%$
Storage: $\leq 80\%$

BATTERY

Rechargeable Lead-Acid
Operating time under the normal condition - 1 hour
Operating time after the first alarm of low battery - 10 minutes

RECORDER (OPTION)

Record Width 48 (mm)
Paper Speed 25 (mm/S)
Trace 2

FUSE (SELF-RECOVERY)

Input fuse: 3.15A/250V

LIFETIME

8 Years

Authorized Distributor:



12151 62nd St N #5 • Largo FL 33773 • USA

Phone: (1) 727-531-8434 • Fax: (1) 727-531-8436

Web: www.infiniummedical.com • Email: sales@infiniummedical.com