

XNP-8250R

6MP 25x IR PTZ Camera

Network



FC | | CE | EAC

Key Features

- Max. 6MP resolution
- 5~125mm (25x) optical zoom (digital 32x, total 800x zoom)
- Max. IR viewable length 200m (Wise IR)
- Day & Night (ICR), extreme WDR (120dB), DIS (Built-in gyro sensor)
- Intelligent Analytics, Object auto tracking (Person/Vehicle), Target lock tracking
- H.264, H.265, MJPEG codec, WiseStreamII
- IP66, IK10, NEMA4X, NEMA-TS 2 (2.2.8, 2.2.9)
- PTZ PLUS Design applied (Compact, Lighter, Simple cabling)

Compatible Accessories (Optional)



SBP-156HMW



SBP-156WMW



SBP-300WMW



SBP-156CMW



SBP-156LMW



SBP-156KMW



SPB-PTZ85W



SBP-300WMW1



SBP-300CMW



SBP-300LMW



SBP-300PMW



SBP-300BW



SBP-300KMW

| Video | |
|-----------------------------|--|
| Imaging Device | 1/2.8" CMOS |
| Resolution | 3328x1872, 3072x1728, 2592x1944, 2688x1520, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240 |
| Max. Framerate | H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz) |
| Min. Illumination | Color: 0.1Lux(F1.6, 1/30sec) BW: 0Lux(IR LED On) |
| Lens | |
| Focal Length (Zoom Ratio) | 5~125mm(25x) zoom (digital 32x, total 800x zoom) |
| Max. Aperture Ratio | F1.6(Wide)~F3.73(Tele) |
| Angular Field of View | H: 57.42(Wide)~2.71(Tele) / V: 33.54(Wide)~1.55(Tele) |
| Min. Object Distance | 3m(9.84ft) |
| Focus Control | Oneshot AF, Focus save |
| Lens Type | DC auto iris |
| Pan / Tilt / Rotate | |
| Pan Range | 360 Endless |
| Pan Speed | Max. 700/sec, Manual: 0.024/sec~250/sec |
| Tilt Range | 110(-20~90) |
| Tilt Speed | Max. 500/sec, Manual: 0.024/sec~250/sec |
| Sequence | Preset(300ea), Swing, Group(6ea), Trace, Tour, Auto Run, Schedule |
| Preset Accuracy | Up to '±0.1, Pan/Tilt correction |
| Operational | |
| Camera Title | Displayed up to 85 characters |
| Direction Indicator | Support |
| Day & Night | Auto(ICR)/Color/BW/Schedule |
| Backlight Compensation | BLC, HLC, WDR, SSSDR |
| Wide Dynamic Range | Extreme WDR(120dB) |
| Digital Noise Reduction | SSNR V |
| Digital Image Stabilization | Support(built-in gyro sensor) |
| Defog | Support |
| Motion Detection | 8ea, 8point polygonal zones |
| Privacy Masking | 32ea, polygonal Support - Color: Grey/Green/Red/Blue/Black/White - Mosaic |
| Gain Control | Low / Middle / High |
| White Balance | ATW / AWC / Manual / Indoor / Outdoor |
| Electronic Shutter Speed | Minimum / Maximum / Anti flicker (2~1/12,000sec) |
| Video Rotation | Flip, Mirror |

| | |
|--|---|
| Analytics | Directional detection, Fog detection, Face detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Shock detection * Audio detection, Sound classification(with NW I/O Box) |
| Alarm Triggers | Analytics, Network disconnect * Alarm input(with NW I/O Box) |
| Alarm Events | File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers PTZ Preset Handover * Alarm output(with NW I/O Box) |
| Water Removal | Support(Spinning dry) |
| Auto Tracking | Object auto tracking(Person/Vehicle), Target lock tracking |
| Network | |
| Ethernet | Metal shielded RJ-45(10/100BASE-T) |
| Video Compression | H.265/H.264: Main/Baseline/High, MJPEG |
| Smart Codec | Manual(5ea area), WiseStream II |
| Bitrate Control | H.264/H.265: CBR or VBR MJPEG: VBR |
| Streaming | Unicast(20 users) / Multicast (128 user) Multiple streaming(Up to 10 profiles) |
| Protocol | IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour,LLDP, SRTP |
| Security | HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device certificate(Hanwha Techwin Root CA) |
| Application Programming Interface | ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform |
| General | |
| Webpage Language | English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek |
| Edge Storage | Micro SD/SDHC/SDXC 2slot 1TB |
| Memory | 4GB RAM, 512MB Flash |
| Environmental & Electrical | |
| Operating Temperature / Humidity | Normal : -40°C~+55°(-40°F ~ +131°F) / Maximum Temperature based on NEMA-TS 2(2.2.7) : +74°C(+165°F) * Start up should be done at above -30°C Less than 95% RH(Non-condensing) |
| Storage Temperature / Humidity | -50°C~+60°C (-58°F~+140°F) / Less than 95% RH(Non-condensing) |
| Certification | IP66, IK10, NEMA4X, NEMA-TS 2(2.2.8, 2.2.9) |
| Input Voltage | HPoE(IEEE802.3bt, Class6, Type3, Injector included) |
| Power Consumption | Typical 20W, Max 40W |






Mechanical

| | |
|------------------------------------|---|
| Color / Material | Body : White / Aluminum Head : Black / Polycarbonate Hard-coated dome |
| RAL Code | White: RAL9003 / Black: RAL9005 |
| Product Dimensions / Weight | Ø158x293.3mm(6.22x11.55") / 3.2Kg(7.05lb) |

DORI

| | |
|----------------------------------|---|
| Detect (25PPM/ 8PPF) | Wide: 121.5m(398.7ft) / Tele: 2813.9m(9232.1ft) |
| Observe (63PPM/ 19PPF) | Wide: 48.6m(159.5ft)/ Tele: 1125.6m(3692.8ft) |
| Recognize (125PPM/ 38PPF) | Wide: 24.3m(79.7ft)/ Tele: 562.8m(1846.4ft) |
| Identify (250PPM/ 76PPF) | Wide: 12.2m(39.9ft) / Tele: 281.4m(923.2ft) |

- The latest product information / specification can be found at hanwha-security.com
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

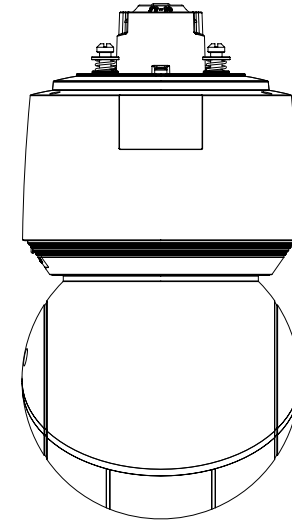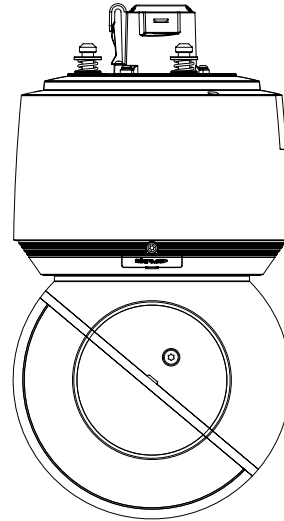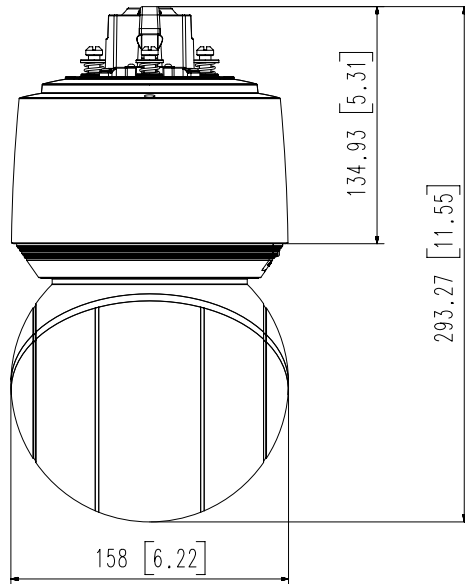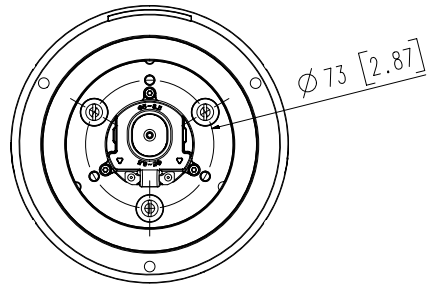

| | | |
|-------------------------|-----------------|----------------|
| 4 | QNP-6320R/6250R | '20.09.01 |
| 3 | XNP-8250(R) | |
| 2 | XNP-6400(R) | |
| 1 | XNP-9250(R) | '20.11.06 |
| No. | MODEL NAME | DATE |
| Unit:mm[inch] SCALE:1/2 | | Hanwha Techwin |

A2

© Hanwha Techwin Co.,Ltd. All rights reserved.