

Control Station and Control Panel: Control Station, WCT2 series



**Weatherproof
IP65**

Application

The WCT2 control stations are used for local or remote control of motor and machines. They are suitable for industrial plants, general areas and wet locations.

Specification

Body, cover : Marine grade copper-free aluminium alloy with polyester powder coated, RAL 7032 (grey)

Sealing gasket : Silicone

Bolts, nuts : Stainless steel

Electrical Rating

Switch rating : AC 15 (inductive load) 3A./220V.
DC 12 (resistive load) 1.1A/220V.
Rated insulation voltage 600V.
Rated continuous current 10A.
LED lamp rating : Transformer input 110, 220, 230V.AC.
Direct 6-24V.DC.
Incan. lamp rating ; Transformer input 380V.AC.

Technical Data

Protection	Weatherproof
Ambient Temperature	-20°C to +50°C
Index of Protection	IP65
Connection Terminals	Terminal block for 1-2.5mm. ² cable
Entries	Ø1/2" to Ø1" NPT (M20x1.5 to M32x1.5)
Mounting	Wall type

Catalogue Number

WCT2 - ■ - □ □ □ - □ T

Series	Number of Unit	Entries		Number of Terminal
		Position	Size	
1	1-unit	T Dead-end/ Top	N1 Ø1/2" NPT	2T 2-Poles
2	2-units	B Dead-end/ Bottom	N2 Ø3/4" NPT	4T 4-Poles
3	3-units	C Through-feed	N3 Ø1" NPT	6T 6-Poles
4	4-units		M1 M20x1.5	8T 8-Poles
5	5-units		M2 M25x1.5	
6	6-units		M3 M32x1.5	


Number of Unit	Cat. No.	Approx. Weight (kgs.)
1-unit	WCT2-1 □ □ □ - □ T	1.45
2-units	WCT2-2 □ □ □ - □ T	2.15
3-units	WCT2-3 □ □ □ - □ T	3.05
4-units	WCT2-4 □ □ □ - □ T	3.65
5-units	WCT2-5 □ □ □ - □ T	3.85
6-units	WCT2-6 □ □ □ - □ T	3.98

Optional : Padlockable by pin for push buttons and/or selector switches




Dimension

1, 2-units

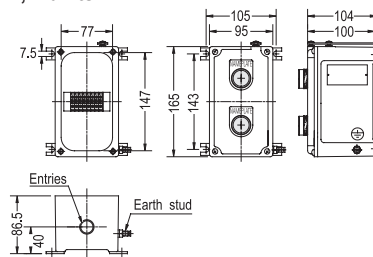

3, 4-units

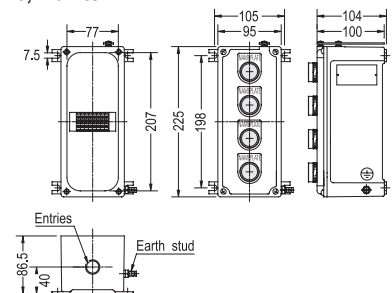

5, 6-units

