




Rotary Gear Pumps  
SINCE : 1993

Series: FTMP

www.rotofluidpumps.com

FLANGE TYPE TROCHOID PUMP

Perfect Solution  
for lubrication

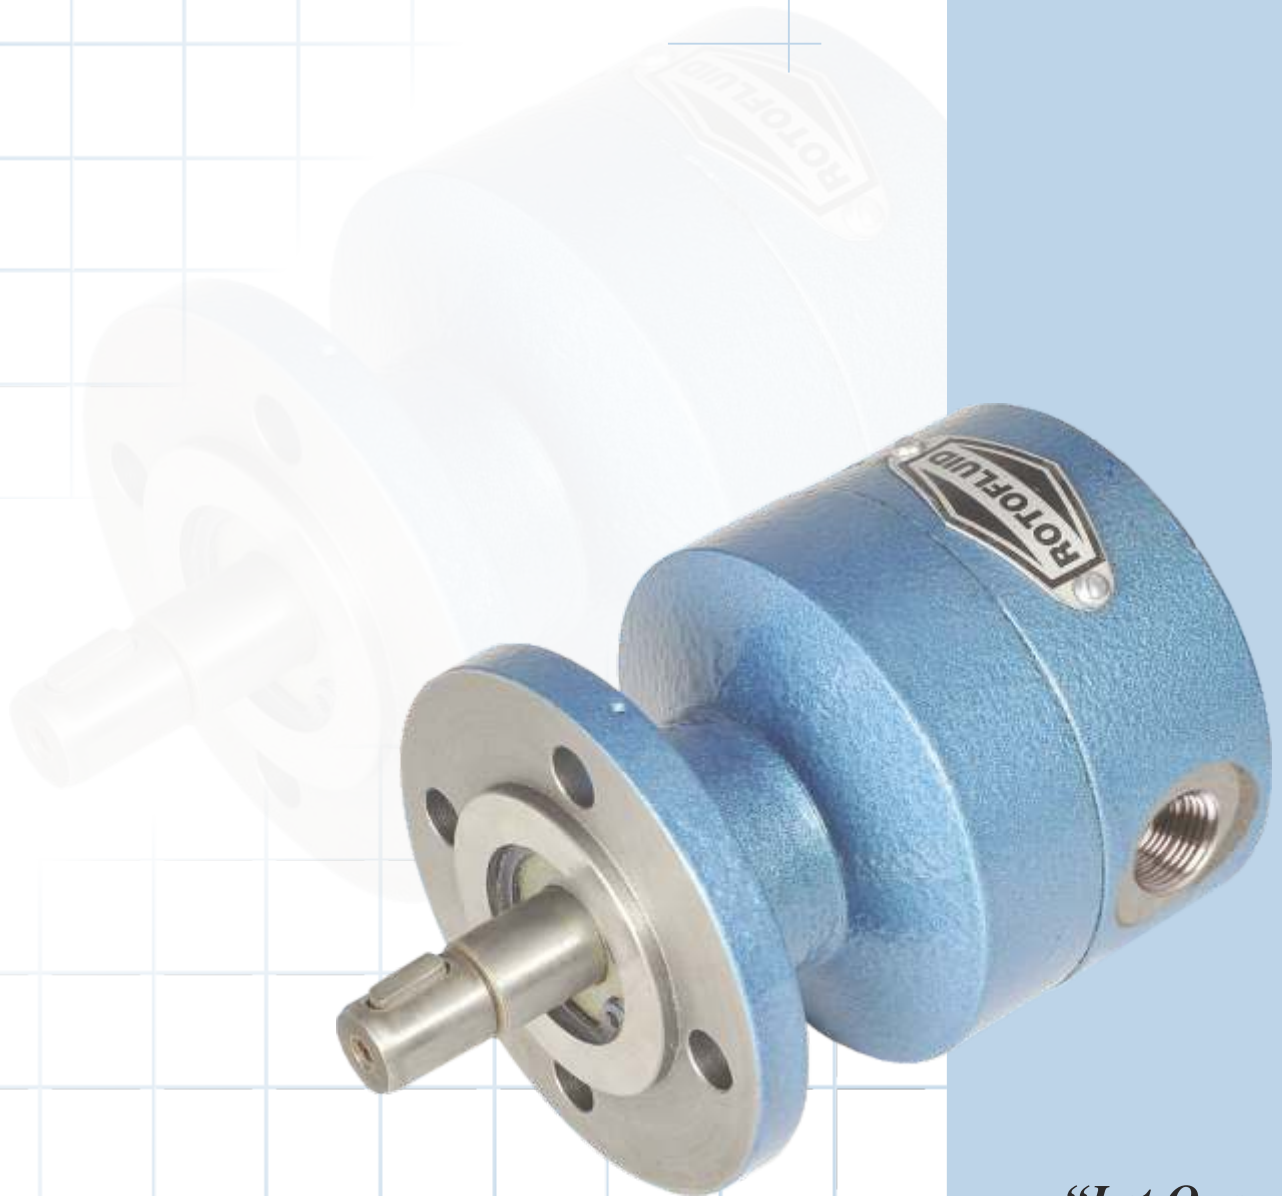

Lubrication





**Fluid Tech Systems**

Ahmedabad - 382 430. (Guj.) INDIA

*“Let Our  
Quality Speak  
For Itself”*



## DIMENSION DRAWING

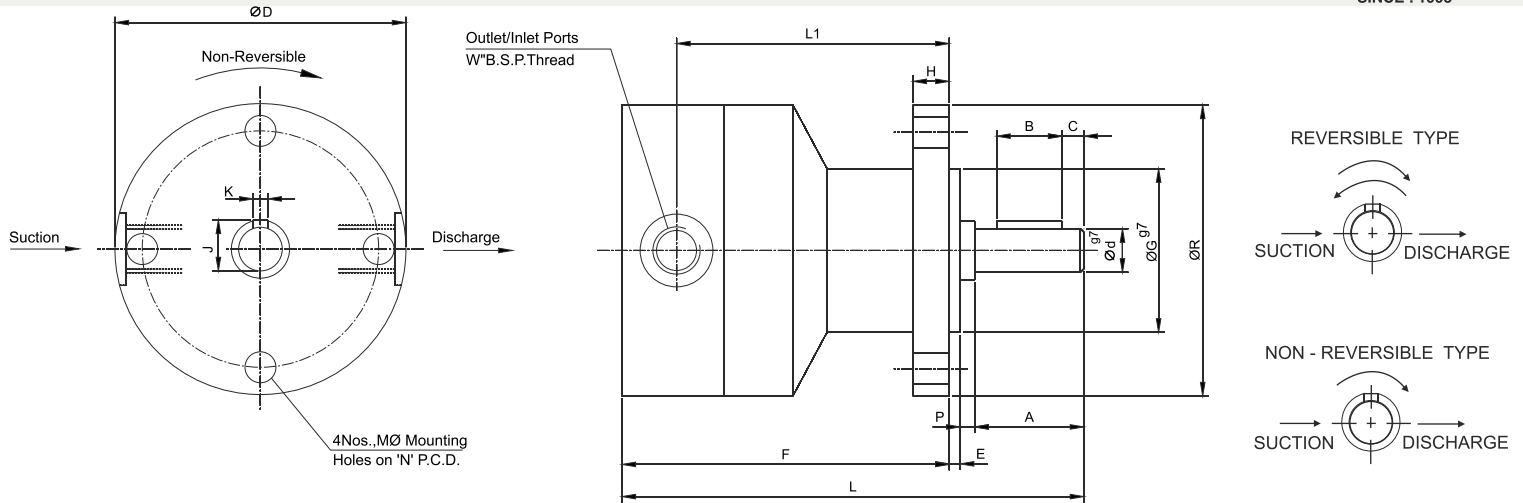

## MODAL & DIMENSION DRAWING DETAILS

PUMP MODEL	CAPACITY AT 1440RPM	DIMENSION DRAWING DETAILS IN MM																		
		A	B	C	D	D*	d	E	F	G	H	J	K	L	L1	M	N	P	R	W
FTMP - 0.5	0.5 LPM	16	10	3	50	-	8	2.5	50	30	6	9.2	3	71	40.5	5.5	37	2.5	50	1/8" BSP
FTMP - 1	1 LPM	22	15	3	60	70	10	3	65	35	7	11.2	3	93	53	6.5	45	3	60	1/4" BSP
FTMP - 3	3 LPM	22	15	3	60	70	10	3	70	35	7	11.2	3	98	58	6.5	45	3	60	1/4" BSP
FTMP - 6	6 LPM	25	18	3	80	92	12	3	89	45	10	13.5	4	122	73	8.5	65	5	80	1/4" BSP
FTMP - 10	10 LPM	30	18	3	80	92	12	3	98	45	10	13.5	4	131	83	8.5	65	5	80	3/8" BSP
FTMP - 16	16 LPM	30	18	6	115	135	16	4	113	65	14	18	5	157	92	8.5	95	10	115	1/2" BSP
FTMP - 25	25 LPM	30	18	6	115	135	16	4	128	65	14	18	5	172	102	8.5	95	10	115	1/2" BSP
FTMP - 40	40 LPM	30	18	6	115	135	18	4	146	65	14	20.5	6	192	116	8.5	95	12	115	1" BSP

**Note :** “L” Brackets for foot mounting are available on request as per requirement.

\*\* REVERSIBLE TYPE

\* NON-REVERSIBLE TYPE

## ROTARY PUMPS (POSITIVE DISPLACEMENT TYPE)

These are gerotor type pumps with positive displacement of oil. These are suitable for various purposes which require low discharge, medium pressure oil pumps such as lubrication of gear boxes, headstocks, transfer of oil, low pressure hydraulic power packs, rotary oil filters etc. The pumps are suitable for oils with viscosity range 30-1000 cst/40°C.

## FUNCTIONWISE PUMPS ARE AVAILABLE OF TWO TYPES

- 1. Non-Reversible :** In these pumps shaft can rotate only as per the direction shown by an arrow on the pump. Suction & Pressure port are indicated accordingly. While ordering please specify the direction of rotation of shaft clockwise or anticlockwise while looking from shaft end.
- 2. Reversible :** In these pumps shaft can rotate either in or direction Suction & pressure ports are indicated accordingly. Minimum R.P.M. of shaft required is 500.

## SELECTION OF A SUITABLE PUMP

1. First, Select the type of pump as per the design & space of the machine.
2. Select the size as per the oil capacity required.
3. Check power requirement of drive element taking into consideration size and maximum working pressure.
4. Check direction of rotation of pump shaft and accordingly connect suction port to the suction side and output port to the pressure line.
5. Check suction height is within limits. Suction height shall not be more than 1000 mm at 1500 rpm of shaft with oil viscosity 68 cst. For higher viscosity this has to be reduced.
6. Also suction tube and suction strainer shall be of proper size to avoid cavitation.
7. **Use proper suction strainer. This is very important for pump life.**
8. Use relief valve as per requirement to avoid unnecessary loading of pump.

Mfgd. by :

**Fluid Tech Systems**  
Ahmedabad - 382 430. (Guj.) INDIA  
Website : [www.rotofluidpumps.com](http://www.rotofluidpumps.com)  
E-mail : [info@rotofluidpumps.com](mailto:info@rotofluidpumps.com), [rotofluid@dataone.in](mailto:rotofluid@dataone.in)

Distributor :