

DATA SHEET

VT 4.40

ROTARY VANE VACUUM PUMPS

oil-free
air-cooled

MAKE IT BECKER.




**COMPACT
& ROBUST**

100% OILLESS OPERATION

**LOW OPERATION &
MAINTENANCE COSTS**

**VANE LIFETIME OF UP TO
8,000 OPERATING HOURS**






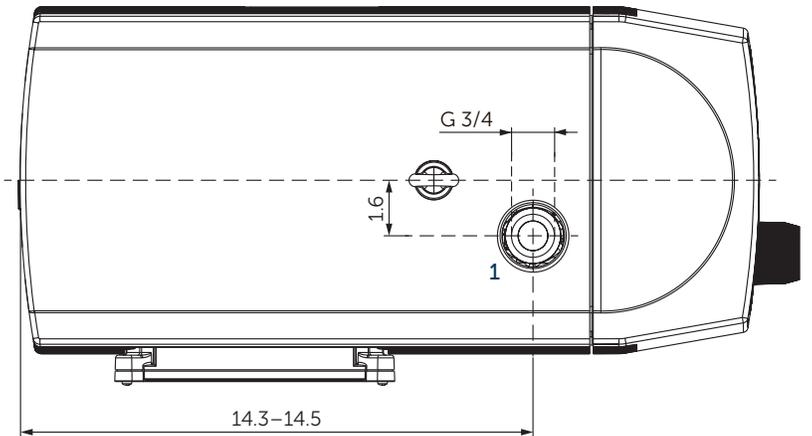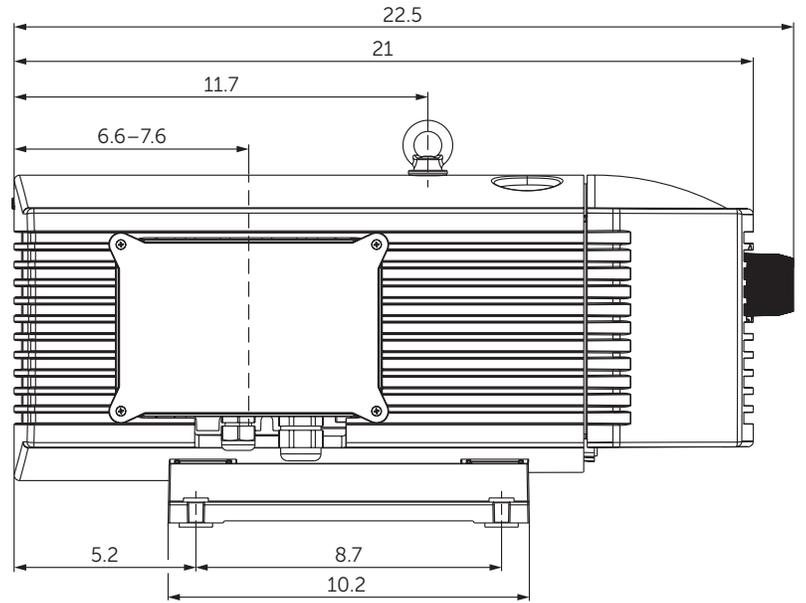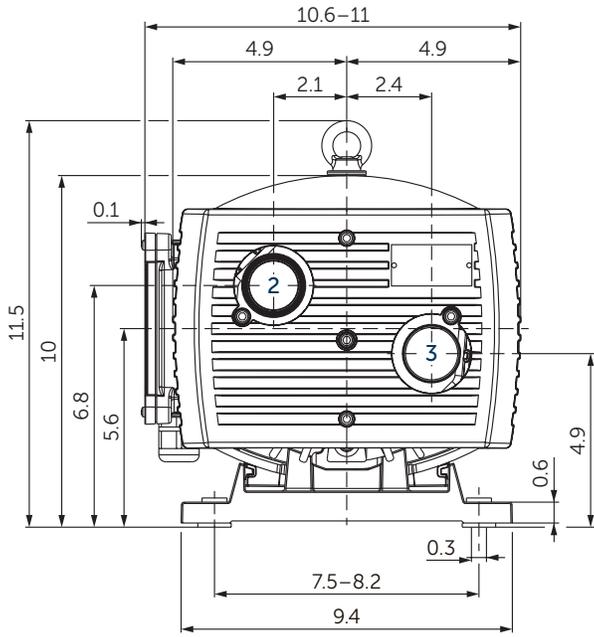

- 1 Vacuum connection (G³/₄)
- 2 Vacuum regulating valve
- 3 Blow-off valve
- Including integrated suction air filter
- The illustration of the terminal box may vary.
- Dimensions in inch

Suction air rate		Vacuum		Installed motor power		Emission sound pressure level ¹⁾		Weight with motor
CFM		Torr	in. HgV	hp		dB(A)		lbs
50 Hz	60 Hz	50 & 60 Hz	50 & 60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	
23.5	28.3	112.5	25.1	1.7	2.0	67	72	≈83.8–90.4

¹⁾ According to DIN EN ISO 3744 (KpA = 3 dB(A)), 39.4 inch distance, at medium load, both connection sides piped
 ▪ The motor specifications can be found in the separate data sheet. – Download see back cover. The overall device length is not affected.

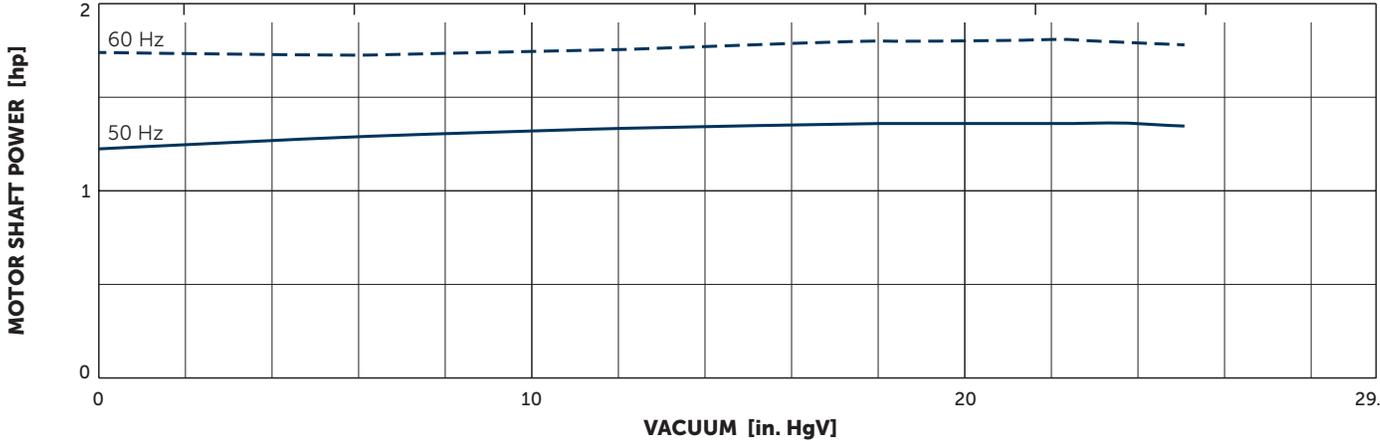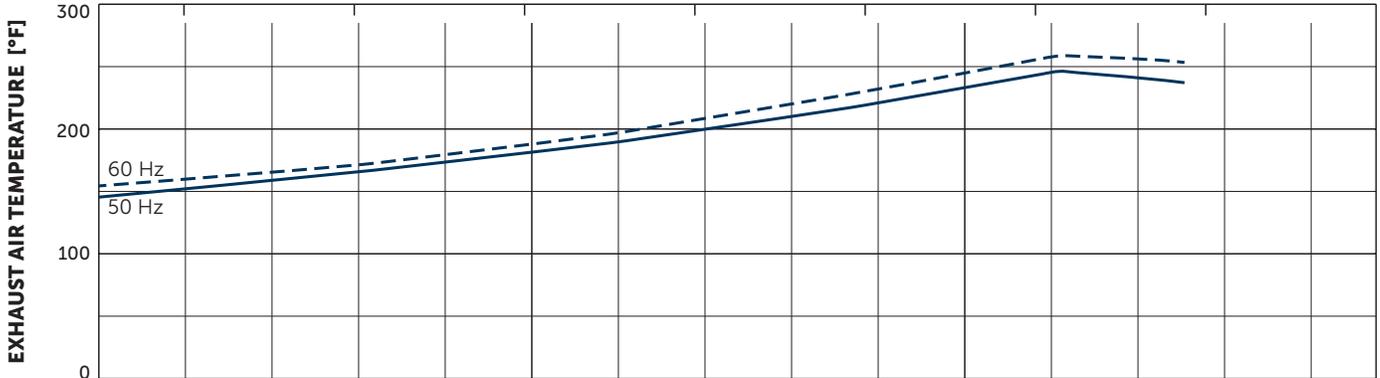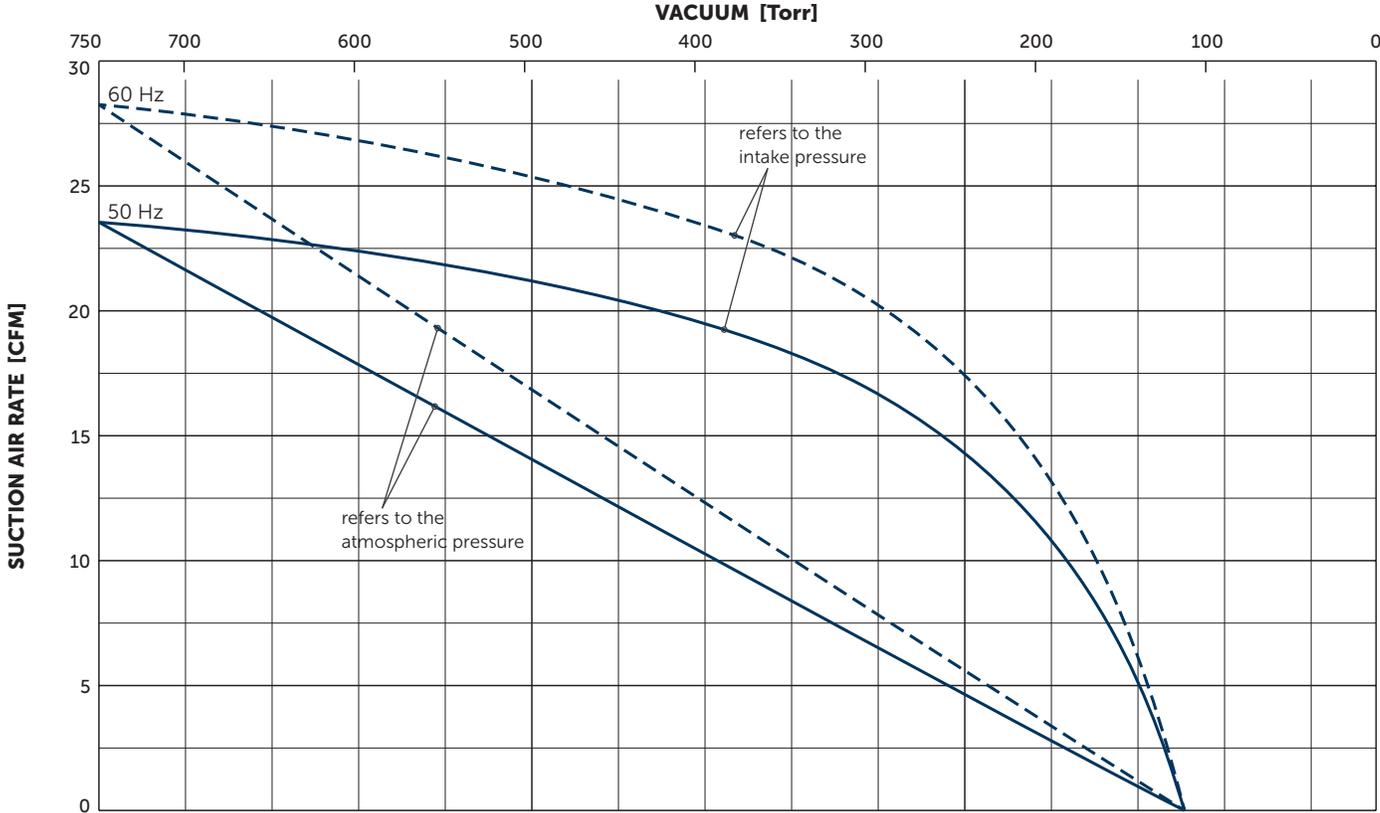

Reference data (atmosphere): 0 in. HgV, 68°F
Tolerance: ±5%

+ VARIANTS AND ACCESSORIES

VX 4.40

SERIES X: BECKER INNOVATION WITH TOP WARRANTY

Equipped with specially developed vanes, these oil-free rotary vane pumps distinguish themselves by high abrasion resistance, and with that extremely long service lives. Due to the low wear there is also minimal dust, so the series X pumps are perfectly suited for precision processes under clean room conditions.

This innovation branded by Becker is outstanding not only because of its 100 percent oil-free operation, excellent degree of efficiency and low power consumption.

In the area of sensitive vacuum, series X also guarantees precise low-pulsation air conduction.

Becker guarantees for these pumps a vane life-time of 20,000 operating hours or a maximum of 3 years. The enhanced longevity of X series pumps also extends service life intervals, and can cut out the need for frequent service visits with costly pump failures now no longer an issue.



ADVANTAGES

- Quick, clean and quiet
- Oil-free
- Wear resistant
- Energy saving
- Long-life reliability
- Ultimate pressure 26.6 in. HgV

OTHER VARIANTS AND ACCESSORIES

- **VT 4.40/0-90** with a higher suction air rate of maximum 26.6/32.3 CFM (50/60 Hz)¹⁾
- With external suction filter¹⁾
- Sound proof box SH 19¹⁾



Example for an external suction filter



Sound proof box SH 19

¹⁾ See separate data sheet

- Possible combinations on request



MAKE IT BECKER.

HOMEPAGE
VT SERIES



DOWNLOAD
MOTOR SPECS.



ONLINE SHOP
VT 4.40



www.beckerpumps.com
www.becker-international.com

