

DATA SHEET

VXLF 2.250

ROTARY VANE VACUUM PUMPS

oil-free
air-cooled


MAKE IT BECKER.




**100% OILLESS
OPERATION**

**ROBUST &
RELIABLE**

**TRANSPARENT FILTER
CAP FOR SIMPLE
VISUAL CONTROL**

**VANE LIFETIME OF
20,000 OPERATING HOUR
or 3 years**



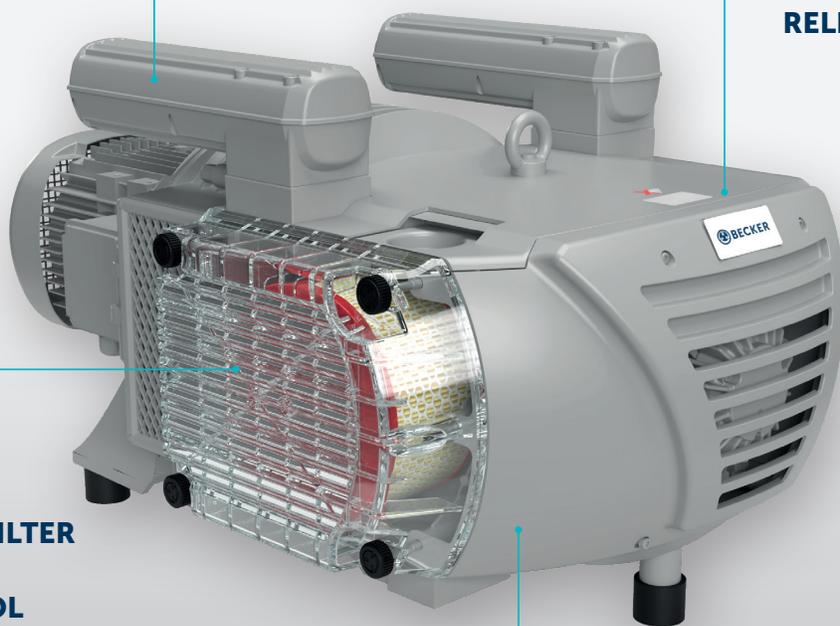


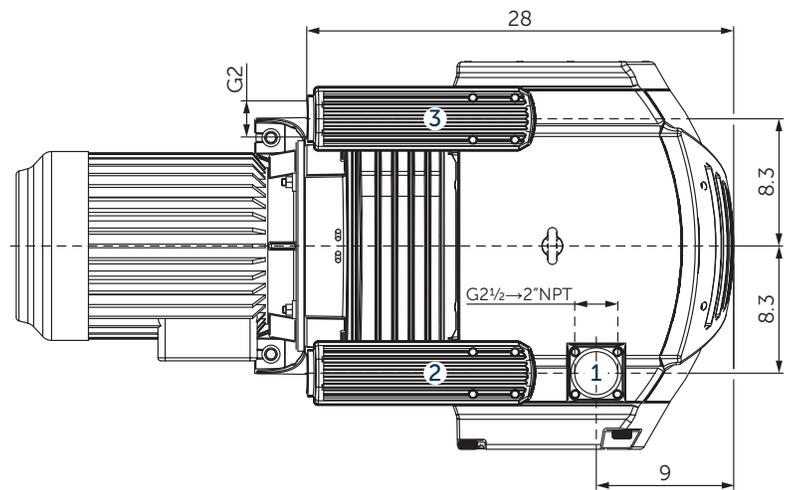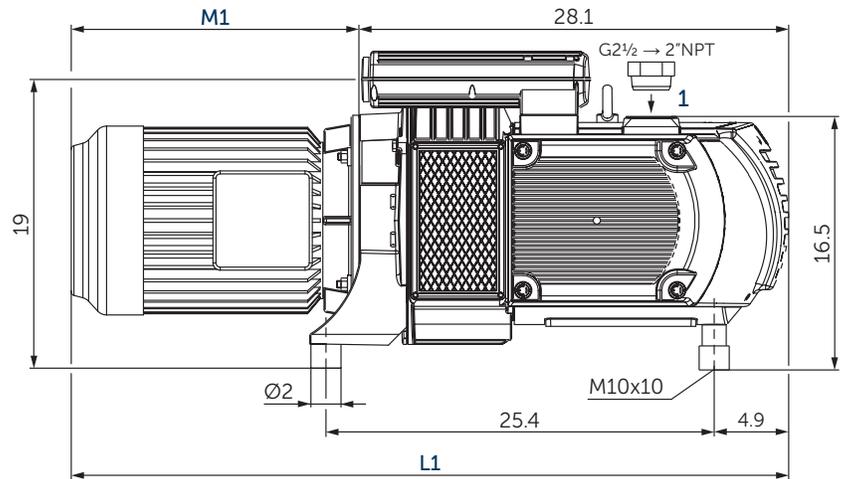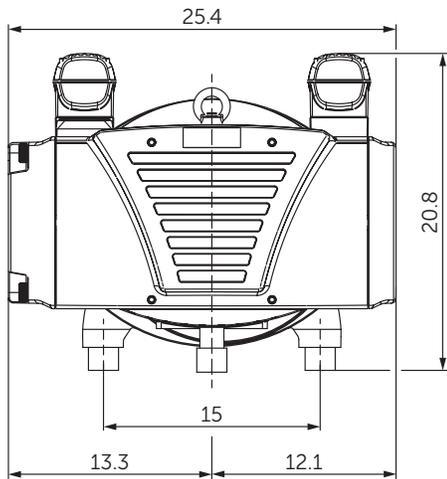

- 1 Vacuum connection (G2½)
- 2 Vacuum relief valve with silencer
- 3 Blow-off valve with silencer
- L Overall device length L1 with motor.
- L1 and M1 are variable, see separate motor specification sheet.
- Including integrated suction air filter
- The motor illustration may vary.
- Dimensions in inch

Suction air rate		Vacuum		Installed motor power		Emission sound pressure level ¹⁾		Weight w/o motor
CFM		in. HgV		hp		dB(A)		lbs
50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	
144	169	23.6	23.6	7.4	8.9-10.0	77	79	333

¹⁾ According to DIN EN ISO 3744 (KpA = 3 dB(A)), 39.4 inch distance, at medium load, both connection sides piped

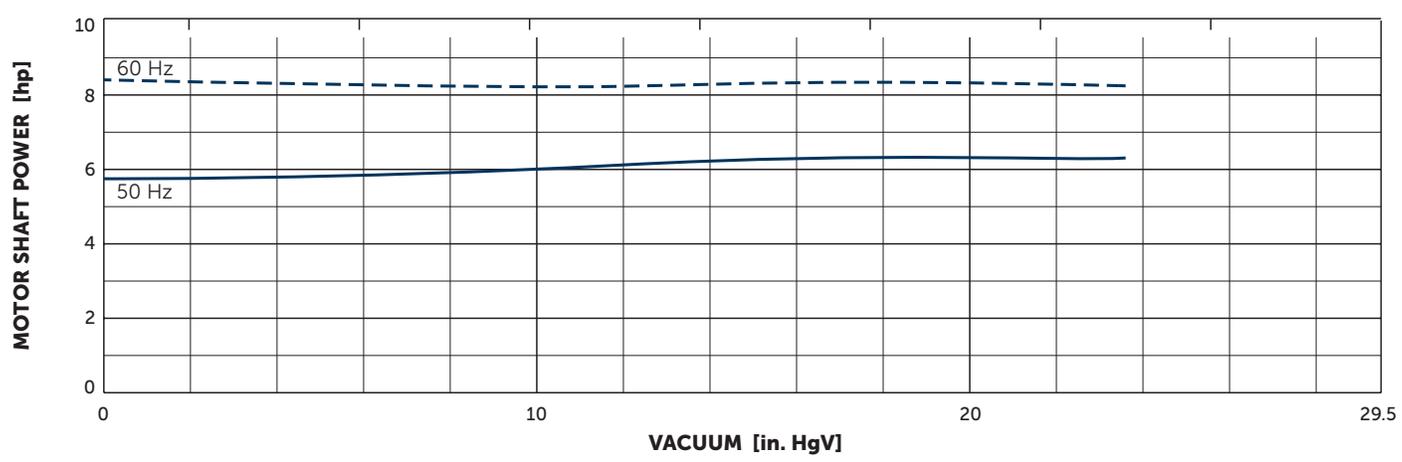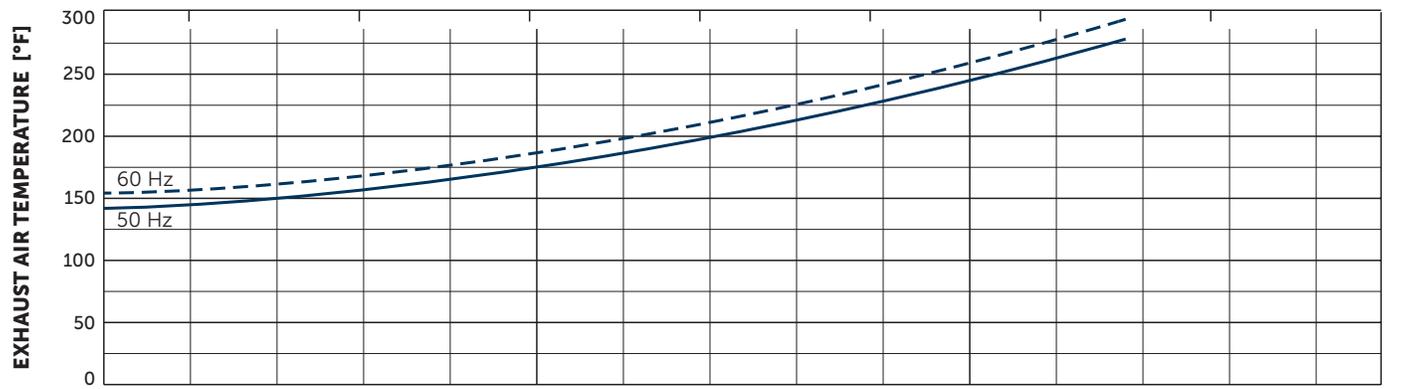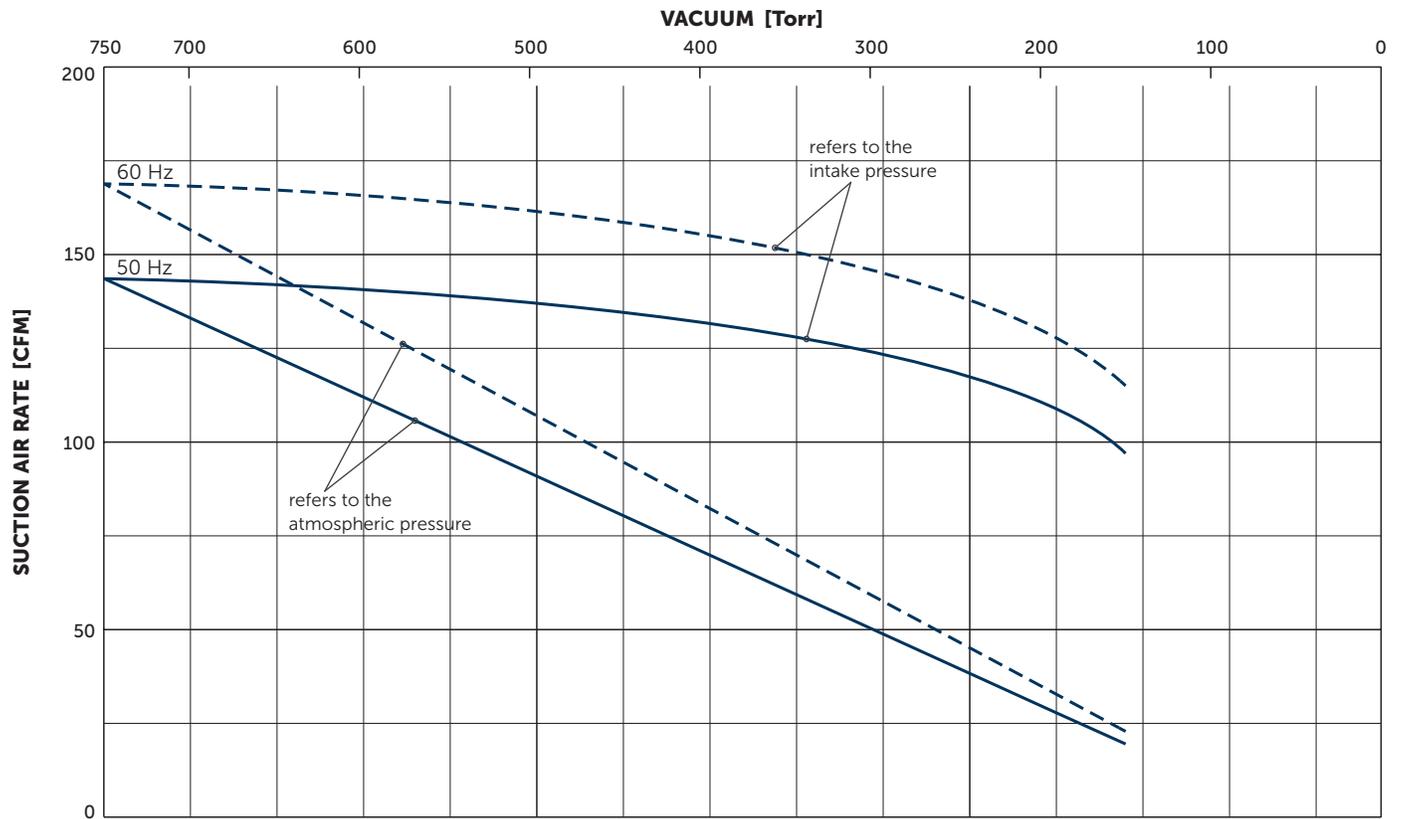

Reference data (atmosphere): 0 in. HgV, 68°F; Tolerance: ±5%

+ VARIAIR AND ACCESSORIES

- **VARIAIR VXLF 2.250/0-400** with frequency inverter¹⁾
- Integrated non return valve
- External suction filter¹⁾
- Sound proof box SH 12¹⁾



VARIAIR VXLF 2.250/0-400



Example for an external suction filter



Sound proof box SH 10

¹⁾ See separate data sheet

- Possible combinations on request

MAKE IT BECKER.

HOMEPAGE
VXLF SERIES



DOWNLOAD
MOTOR SPECS.



ONLINE SHOP
VXLF 2.250



www.beckerpumps.com
www.becker-international.com

