

DATA SHEET

VXLF 2.400

ROTARY VANE VACUUM PUMPS

oil-free
air-cooled


MAKE IT BECKER.




**100% OILLESS
OPERATION**

**ROBUST &
RELIABLE**

**TRANSPARENT FILTER
CAP FOR SIMPLE
VISUAL CONTROL**

**VANE LIFETIME OF
20,000 OPERATING HOUR
or 3 years**



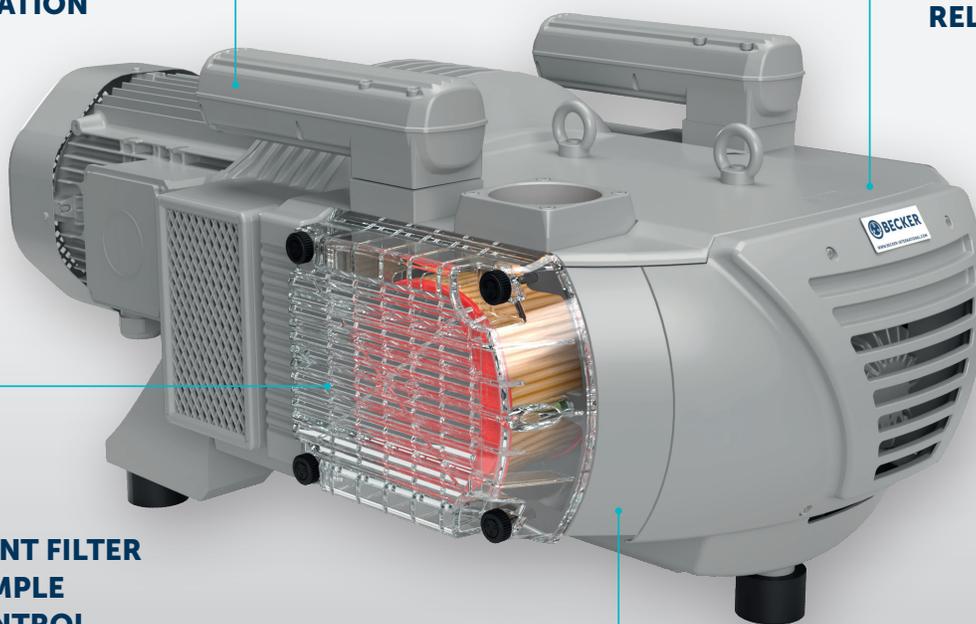


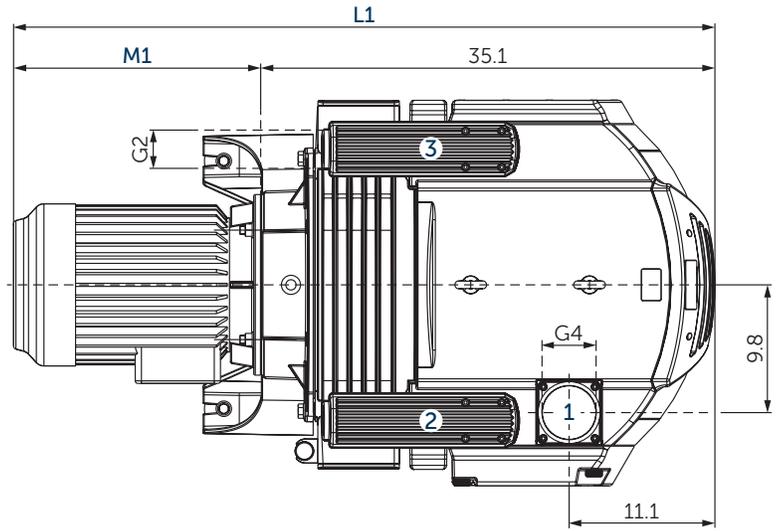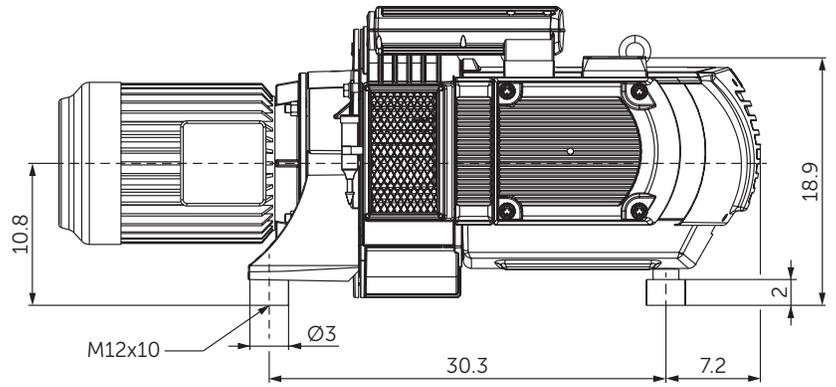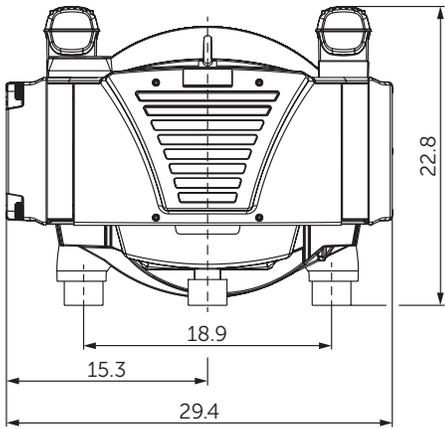

- 1 Vacuum connection (G4)
- 2 Vacuum relief valve with silencer
- 3 Blow-off valve with silencer
- L Overall device length **L1** with motor.
L1 and **M1** are variable, see separate motor specification sheet.
 - Including integrated suction air filter
 - The motor illustration may vary.
 - Dimensions in inch

Suction air rate		Vacuum		Installed motor power		Emission sound pressure level ¹⁾		Weight w/o motor
CFM		in. HgV		hp		dB(A)		lbs
50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	
230	270	23.6	23.6	10.1	12.1	77	79	546.8

¹⁾ According to DIN EN ISO 3744 (KpA = 3 dB(A)), 39.4 inch distance, at medium load, both connection sides piped

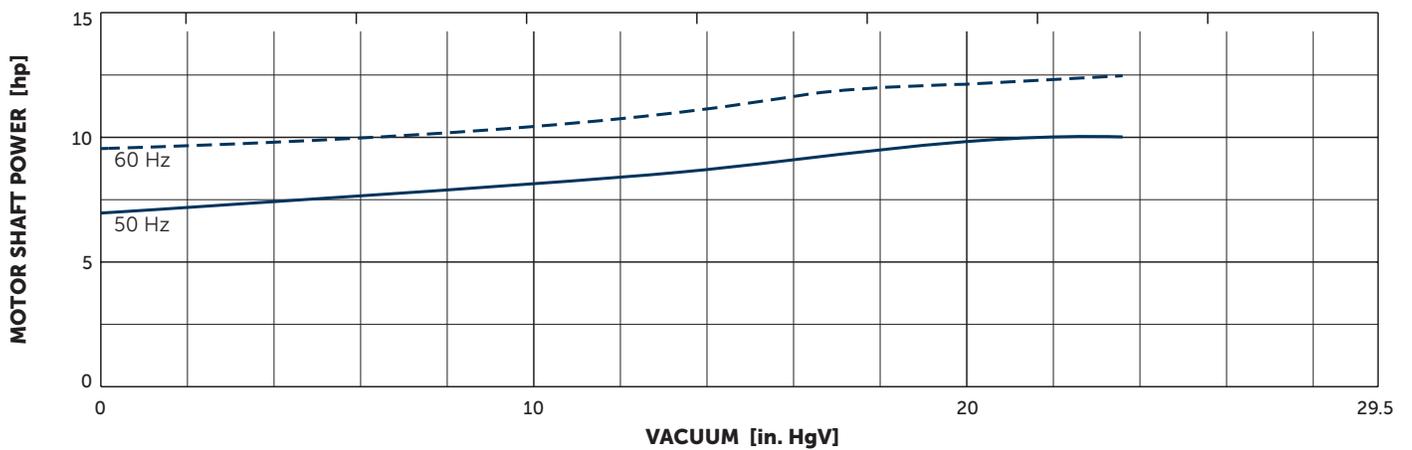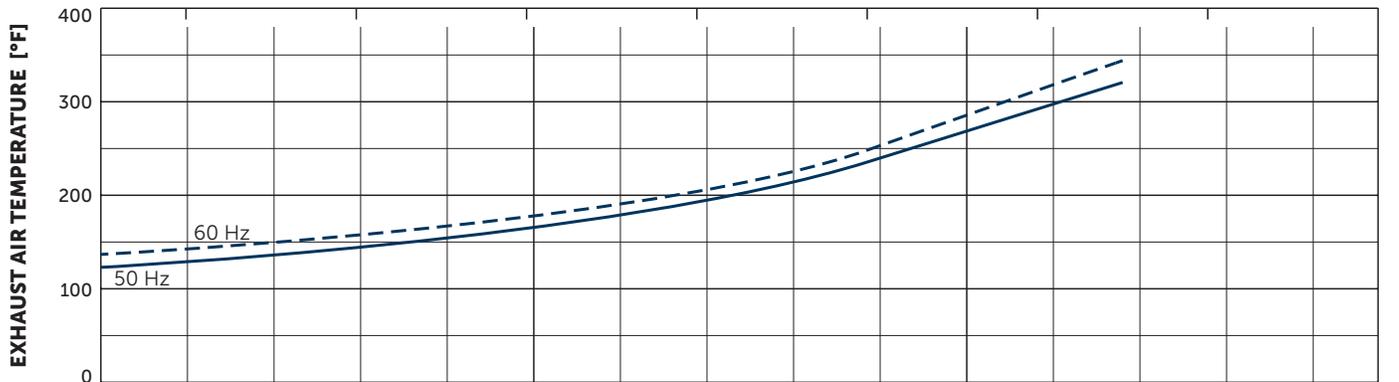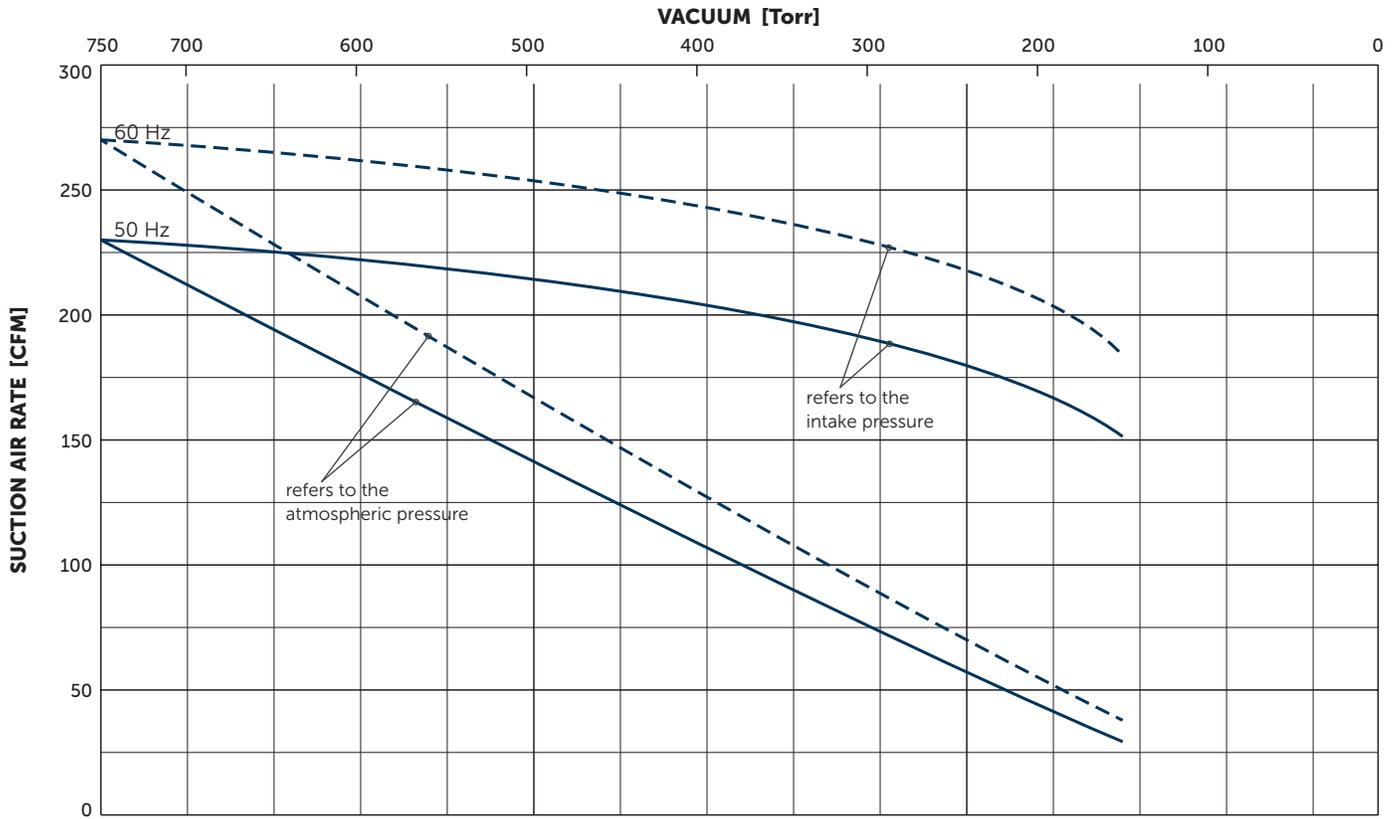

Reference data (atmosphere): 0 in. HgV, 68°F; Tolerance: ±5%

+ VARIANTS AND ACCESSORIES

- Integrated non return valve
- External suction filter¹⁾
- Sound proof box SH 12¹⁾



Example for an external suction filter



Sound proof box SH 12

¹⁾ See separate data sheet

- Possible combinations on request

MAKE IT BECKER.

HOMEPAGE
VXLF SERIES



DOWNLOAD
MOTOR SPECS.



ONLINE SHOP
VXLF 2.400

