

## PS Series (PPG) General Purpose Magnetic Drive Pumps



- OEM & general applications.
- 13 models with flow rates up to 120 lit/min.
- Available in hose, threaded and flange connections.
- Cost saving PP wetted-end material.


### Specification table

Nominal speed : 2,700/3,200 r.p.m

Model	Connection method				Performance M-L/min, 50~60Hz		Motor
	Hose(mm)	Thread(寸)	Union(A)	Flange(A)	Max total head- max discharge	Specified head- specified discharge	Output × Input(W)
	In × Outlet	In × Outlet	In × Outlet	In × Outlet			
<b>125PS (N)</b>	26X26	NPT1×1,G1X1	20×20	-----	3.3-75 / 4.7-85	2-47 / 2-65	65-90/130
<b>150PS</b>	26X26	NPT1×1,G1X1	20×20	25×25	5.6-60 / 8.2-70	4-30 / 4-45	90-130/180
<b>150PS-3</b>	26X26	NPT1×1,G1X1	20×20	25×25	5.6-60 / 8.2-70	4-30 / 4-45	90-130/180
<b>200PS-Z</b>	26X26	NPT1×1,G1X1	20×20	25×25	12.5-35 / 16-37	9-20 / 8-30	150-290
<b>200PS</b>	26X26	NPT1×1,G1X1	20×20	25×25	10-90 / 12-110	6.5-50 / 7.5-70	150-290
<b>200PS-3</b>	26X26	NPT1×1,G1X1	20×20	25×25	10-90 / 12-110	6.5-50 / 7.5-70	150-290
<b>250PS</b>	26X26	NPT1×1,G1X1	20×20	25×25	12.5-120 / 14-120	9-65 / 9-80	250-390
<b>250PS-3</b>	26X26	NPT1×1,G1X1	20×20	25×25	12.5-120 / 14-120	9-65 / 9-80	250-390
<b>250PS-3E</b>	26X26	NPT1×1,G1X1	20×20	25×25	12.5-120 / 14-120	9-65 / 9-80	JEM-0.2kW
<b>275PS</b>	26X26	NPT1×1,G1X1	20×20	25×25	14.5-110 / 18-120	10-60 / 13.5-60	250-390
<b>275PS-3</b>	26X26	NPT1×1,G1X1	20×20	25×25	14.5-110 / 18-120	10-60 / 13.5-60	250-390
<b>300PS</b>	26X20	NPT1×3/4,G1×3/4	20×16	-----	20-50 / 25-50	16-50 / 21-50	330-460
<b>300PS-3</b>	26X20	NPT1×3/4,G1×3/4	20×16	-----	20-50 / 25-50	16-50 / 21-50	330-460

### Pump performance curve

Nominal speed : 2,700 r.p.m

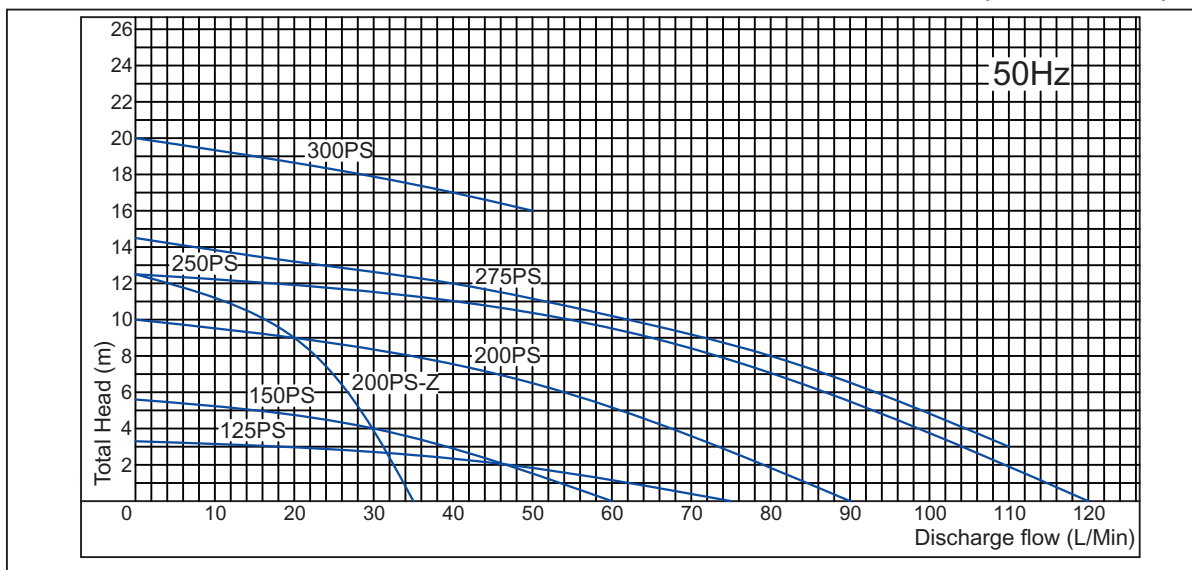

Nominal speed : 3,200 r.p.m

