

Main Specifications

- ▼Size
3" , 4" , 6"
- ▼Installation type
Bottom mount (A) /
Bottom mount with flange (B) /
Back mount with flange
(Eccentric thread) (BDE)
- ▼Window
Acrylic
With external screw adjustment
- ▼Pressure connection
Material: SS316 (Standard)
Thread size: 1/4" , 3/8" , 1/2"
Thread type: BSPT, NPT, PF
- ▼Pressure range
Gauge pressure ▼
0...0.6 to 1600 bar
Negative pressure ▼
-1...0bar / -76...0cmHg
Compound pressure ▼
-1...0 to 20bar
- ▼Applicable fluid
Liquid and gas that compatible
with connection's material
- ▼Ambient temperature
-40°C to +60°C
- ▼Fluid temperature
+100°C
- ▼Liquid-filling
Glycerin
(For concealed magnet base
with junction box type only)
- ▼Temperature drift
20°C as standard, every $\pm 8^{\circ}\text{C}$
max. error: $\pm 0.5\%$ F.S.
- ▼Protection level
IP54 (standard) / IP65 (option)

Other Specifications


- ▼Ring material
Stainless steel
- ▼Ring mount
Visual type:
Outside bayonet
Concealed type:
Inside bayonet
Adjustable set point
- ▼Case material
SS 304
- ▼Wiring type
Visual wiring (FL) /
Visual magnet base with
junction box (JB) /
Concealed magnet base with
junction box (H)
(Only available for 4&6")
- ▼Switch contact type
Magnetic snap-action Switch
SPST (NC / NO)
- ▼Contact function
Single contact N.O. (1a) /
Single contact N.C. (1b) /
Double contacts N.O.+N.C. (1a1b) /
Double contacts N.C.+N.O. (1b1a) /
Double contacts N.O.x2 (2a) /
Double contacts N.C.x2 (2b)
For more information please refer
to single / double contacts wiring
- ▼Contact material
80% silver, 20% nickel, 10 μm
gold-plated (>110V)
Gold ($\leq 36\text{V}$)
- ▼Number of contact
SPSTx1 / SPSTx2 / SPSTx4
- ▼Pointer
Aluminum with black enamel
- ▼Dial face
Red and black scale
Pressure unit, scale, and color
can be customized upon
request
- ▼Measuring elements
Bourdon tube
Material: SS316
- ▼Protection design (option)
Install a blow out back
(Only available for 4")
- ▼Movement
Stainless steel
- ▼Gauge accuracy
 $\pm 2.5\%$ (Option: $\pm 1.6\%$, 1%)
- ▼Set point accuracy
 $\pm 3\sim 6\%$
- ▼Operating pressure
Stabilization: 3/4* F.S.

Pressure Gauge with Electrical Contact (Magnetic Snap-action Switch Type)

Model: ECM

Introduction

ECM pressure gauge with magnetic snap-action switch contact SPST is used to control the connected facility, ensuring field safety operation.

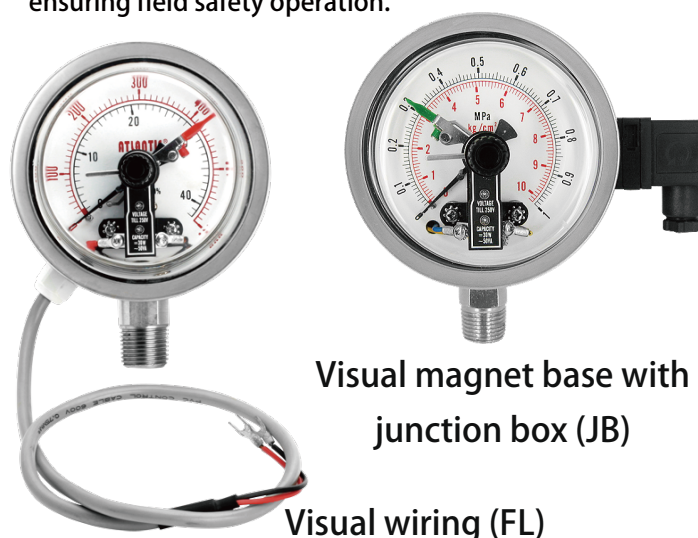

Due to the variety of customization, the picture is only for reference, please confirm the actual item with our sales.
(If there is any change on specification, please take the latest version as standard.)

Features

- OEM service
- The SPST magnetic snap-action switch can be installed on 3" / 4" / 6" pressure gauge, suitable various pressure control application
- Visual / Concealed wiring type for selection
- Install small magnets around the Snap-action switch to prevent frequent actuation and thus extend its service life


Power parameter

Voltage	DC	AC	Inductive load
230V	100mA	120mA	65mA
110V	200mA	240mA	130mA
50V	300mA	450mA	200mA
24V	400mA	600mA	250mA
Capacity 30W / $\sim 50\text{VA}$			




Concealed magnet base with junction box (H)

Contact wiring type

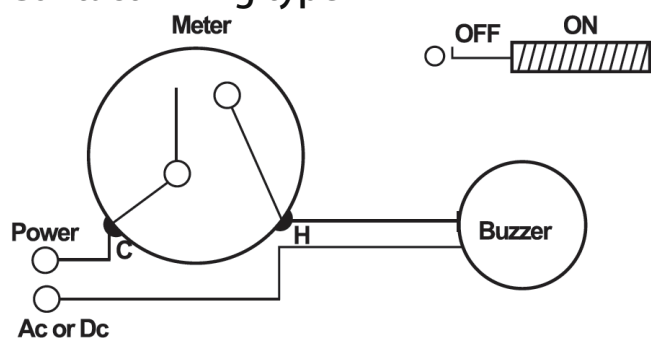



Single contact N.O. (1a)

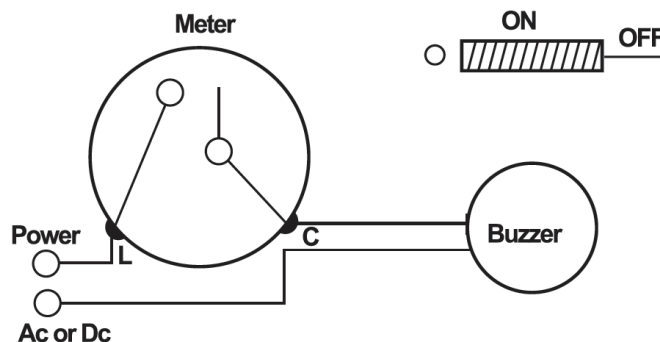

Single contact N.C. (1b)

Double contacts		
	<p>When the pressure indicator reaches left set point (green pointer), "1" contact breaks (circuit open);</p> <p>When the pressure indicator reaches right set point (red pointer), "2" contact makes (circuit close)</p> <p>(NC+NO)</p> <p><Positive pressure: left→right></p> <p>Switch mode: SPST X 2</p>	1a1b
	<p>When the pressure indicator reaches left set point (red pointer), "1" contact makes (circuit close)</p> <p>When the pressure indicator reaches right set point (green pointer), "2" contact breaks (circuit open)</p> <p>(NO+NC)</p> <p><Positive pressure: left→right></p> <p>Switch mode: SPST X 2</p>	1b1a
	<p>When the pressure indicator reaches left set point (yellow pointer), "1" contact makes (circuit close)</p> <p>When the pressure indicator reaches right set point (red pointer), "2" contact makes (circuit close)</p> <p>(NO x 2)</p> <p><Positive pressure: left→right></p> <p>Switch mode: SPST X 2</p>	2a
	<p>When the pressure indicator reaches left set point (green pointer), "1" contact breaks (circuit open)</p> <p>When the pressure indicator reaches right set point (yellow pointer), "2" contact breaks (circuit open)</p> <p>(NC x 2)</p> <p><Positive pressure: left→right></p> <p>Switch mode: SPST X 2</p>	2b

Installation type

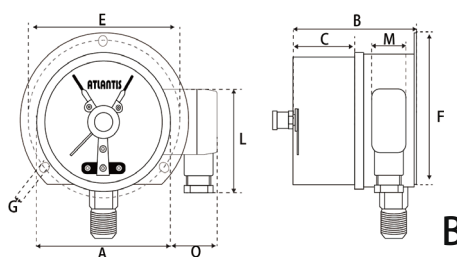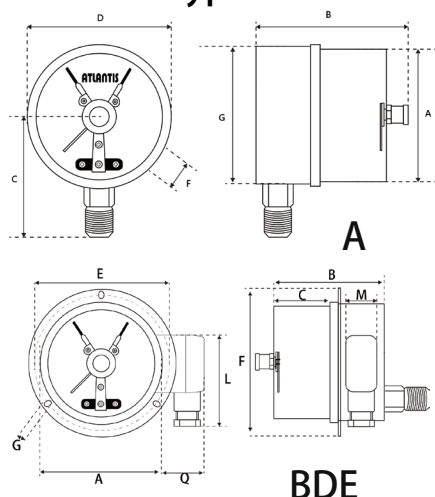

Installation type-size table

Installation type	3"	4"	6"
A	●	●	●
B		●	
BDE	●	●	●

How to order

ECM Pressure Gauge with Electrical Contact (Magnetic snap-action Switch Type)									
Std.	Spec.	Code	Item	Code	Item	Code	Item	Code	Item
04	Size	03	3"	04	4"	06	6"	—	—
FL	Wiring type	FL	Visual wiring	JB	Visual magnet base with junction box	H	Concealed magnet base with junction box (Only for 4&6")	—	—
A	Installation type	A	Bottom mount	B	Bottom mount with flange	BDE	Back mount with flange (Eccentric thread)	—	—
1a1b	Contact function	1a	N.O.	1b	N.C.	1a1b	N.O.+N.C.	1b1a	N.C.+N.O.
		2a	N.O.x2	2b	N.C.x2	—	—	—	—
2	Number of contacts	1	SPSTx1	2	SPSTx2	4	SPSTx4	—	—
316	Connection material	316	SS316	O	Others	—	—	—	—
316	Bourdon tube material	316	SS316	O	Others	—	—	—	—
2	Thread size	2	1/4"	3	3/8"	4	1/2"	O	Others
N	Thread type	P	BSPT	N	NPT	F	PF	O	Others
Custom	Pressure range	Gauge pressure — (0...0.6 to 1600bar) Negative pressure — (-1...0bar) Compound pressure — (-1...0...0.6 to 20bar) Customized pressure unit (psi, bar, kPa, kg/cm2, MPa, inHg, mmHg, cmHg, etc...), single / dual scale							
C	Accuracy	A	±1%	B	±1.6%	C	±2.5%	—	—
N	Liquid-filling (Only for concealed wiring type)	N	Dry	G	Glycerin	O	Other liquids	—	—
/D	Other requests	/A	Third party notarized documents			/B	Inspection report		
		/C	Tag			/D	Customized dial face (scale, color, unit, etc.)		
		/E	Install a diaphragm seal			/F	Internal stop pin for overpressure protection		
		/G	Dampened movement			/H	Epoxy coating		
		/I	Peak hold pointer			/J	Case material SS316		
		/K	Max. voltage AC 380 V			/L	High pressure Bourdon tube: max. pressure 1600bar		
		/M	Install a blow out back			/N	Switch type SPDT		
		/O	Contact material: platinum-iridium alloy			/P	Contact material: pure silver 999		

Order example: ECM - 04 - FL - A - 1a1b - 2 - 316 - 316 - 2 - N - (0...10bar) - C - N + /D