

Main Specifications	Other Specifications
▼ Size 6" , 8" ▼ Installation type Bottom mount (A) / Bottom mount with flange (B) ▼ Window PC Option: Tempered glass / Safety glass With rubber O-ring sealed ▼ Pressure connection Material: SS304 With rubber O-ring sealed Size: 3/8" , 1/2" Type: BSPT, NPT, PF ▼ Pressure range Gauge pressure ▼ 0...0.6 to 1000 bar Negative pressure ▼ -1...0bar Compound pressure ▼ -1...0 to 20bar ▼ Applicable fluid Liquid and gas that compatible with Stainless steel ▼ Ambient temperature 5°C to 40°C ▼ Fluid temperature +40°C ▼ Temperature error Every ±12 °C max. error: ±0.3% F.S ▼ Protection level IP54	▼ Ring Stainless steel Screw fixed ▼ Case SS304 ▼ Pointer Aluminum with black enamel Knife edge design ▼ Dial face Special dial face for precision readings External zero adjustment Pressure unit, scale, color can be customized upon requests ▼ Measuring elements Bourdon tube Material: SS304 / 50 chromium-vanadium steel ▼ Movement Copper alloy ▼ Accuracy 0.4% (Standard)/ 0.25% (Standard)/ 0.16% (Option: available for size 8") ▼ Operating pressure Stabilization: 3/4* full scale Fluctuation: 2/3* full scale Impulse: 1* full scale

All Stainless Steel Precision Test Pressure Gauge Model: TPG-SUS Introduction

TPG series precision test pressure gauge features high accuracy with affordable price, which is suitable for calibration authority or laboratory that need high accuracy pressure measurement.




Due to the variety of customization, the picture is only for reference, please confirm the actual item with our sales.
(If there is any change on specification, please take the latest version as standard.)

Features

- OEM service
- Stainless steel case pressure gauge with high accuracy performance
- Accuracy can up to 0.16%
- Pointer adopts knife edge design, indicating the reading accurately

Installation type

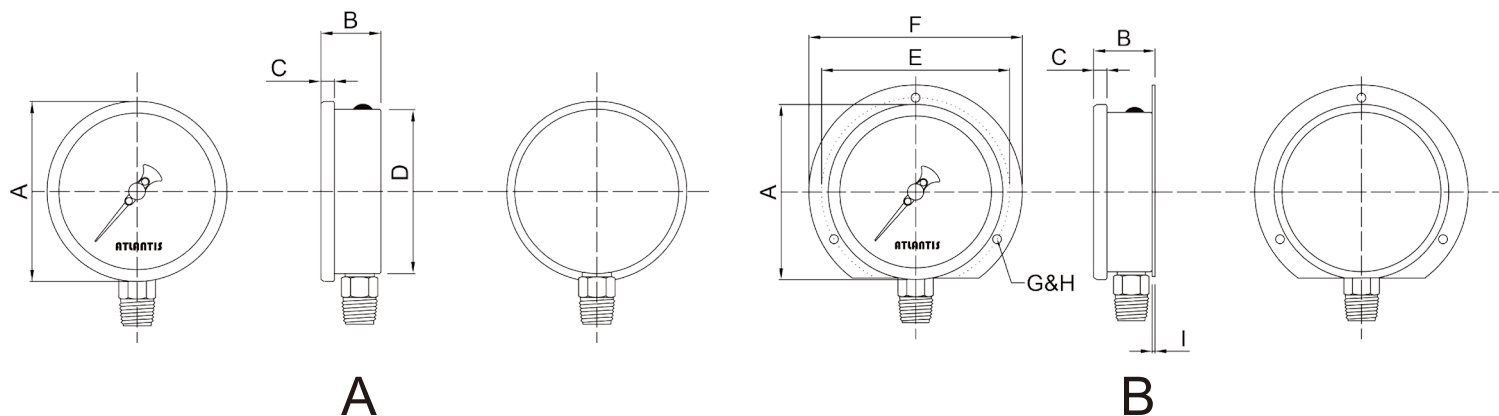

How to order

TPG-SUS Precision Test Pressure Gauge (All Stainless Steel Type)											
Std.	Spec.	Code	Item	Code	Item	Code	Item	Code	Item	Code	Item
06	Size	06	6"	08	8"	—	—	—	—	—	—
A	Installation type	A	Bottom mount	B	Bottom mount with flange	—	—	—	—	—	—
304	Connection material	304	SS304	316	SS316	O	Others	—	—	—	—
304	Bourdon tube material	304	SS304	316	SS316	CS	50 chromium-vanadium steel	O	Others	—	—
4	Thread size	3	3/8"	4	1/2"	—	—	—	—	—	—
N	Thread type	P	BSPT	N	NPT	F	PF	O	Others	—	—
Custom	Pressure range	Gauge pressure — (0...0.6 to 1000bar) Negative pressure — (-1...0bar) Compound pressure — (-1...0...0.6 to 20bar) Pressure unit (psi, bar, kPa, kg/cm2, MPa, inHg, mmHg, cmHg, etc...) & single / dual scale can be customized upon requests									
B	Accuracy	A	0.16%	B	0.25%	C	0.4%	—	—	—	—
/D	Other demands	/A	Third party notarized documents				/B	Inspection report			
		/C	Tag				/D	Customized dial (scale, color, unit, etc.)			
		/E	Dampened movement, oil cup (Applicable to use no oil environment)				/F	Adjustable pointer (In replace of adjustable screw)			
		/G	Internal stop pin for overpressure protection				/H	Window - Safety glass			
		/I	Window - Tempered glass				/J	Epoxy coating			
		/K	Special square nut A type				/L	O-ring material - silicone rubber			
		/M	Case material SS316				/N	Indicator (red, green, yellow)			
		/O	Specify front or rear flange				—	—			

Order example: TPG-SUS - 06 - A - 304 - 304 - 4 - N - (0...0.6 to 10bar) - B + /D