

Absolute Pr. Gauges - Diaphragm Type

MODEL : APDS

Why Absolute Pressure Gauge?

The atmospheric pressure varies from place to place depending up on the altitude of the location and prevailing weather conditions. In such variable conditions, precise pressure measurement can be arrived only if a fixed (un-changing) reference point is established.

For this purpose, the Gauge is provided with 2 Chambers separated by a Diaphragm. One chamber is totally evacuated and sealed, which acts as the reference point for calibration i.e. Absolute Zero. The process pressure is applied to the pressure chamber at the other side of the Diaphragm. Any pressure applied inside the pressure chamber is compared to the sealed chamber to get an accurate measurement of absolute pressure, through a precision Movement mechanism



Features

- Compliance to latest EN-837 standard
- Range : As shown in the table
- Diaphragm in SS316 as standard providing better mechanical properties guaranteeing repeatability and accuracy
- Accuracy $\pm 1.6\%$ FSD

Specifications

Ref. Standard	EN-837
Dial	100 mm/150 in Aluminium, white background, black markings
Case	SS304 / SS316 with bayonet bezel
Protection	IP-68 (IS:13947 part I / IEC:60529)
Window	Safety glass (Shatter proof / Toughened glass)
Sensor	Diaphragm in SS316 / SS316L
Wetted Parts	SS316 / SS316L
Movement	SS304, SS316
Connection	1/2" NPT (M) as standard (other optional)
Accuracy	$\pm 1.6\%$ FSD
Over range	As per EN 837
Zero adjustment	Micrometer Pointer
Temperature suitability	Ambient (-)20°C to 60°C, Media 100°C
Temperature Effect	Within $\pm 0.8\%$ FSD/10°C, when temperature changes from reference temperature of 20°C (as per EN-837 standard)
Optional	NACE compliance CE Atex

Ranges

0 to 500 mmWC(a)
0 to 600 mmWC(a)
0 to 1000 mmWC(a)
0 to 1600 mmWC(a)
0 to 2500 mmWC(a)
0 to 4000 mmWC(a)
0 to 6000 mmWC(a)
Other on request


Note: Equivalent Reading in other pressure Units also can be provided on request

The parameters mentioned here are the standard specifications / values generally used for most of the process applications. Any other specification not appearing here also can be provided as per customer requirement.

Under Technical Collaboration with M/s. Gauges Bourdon, France

Ordering Information

MODEL

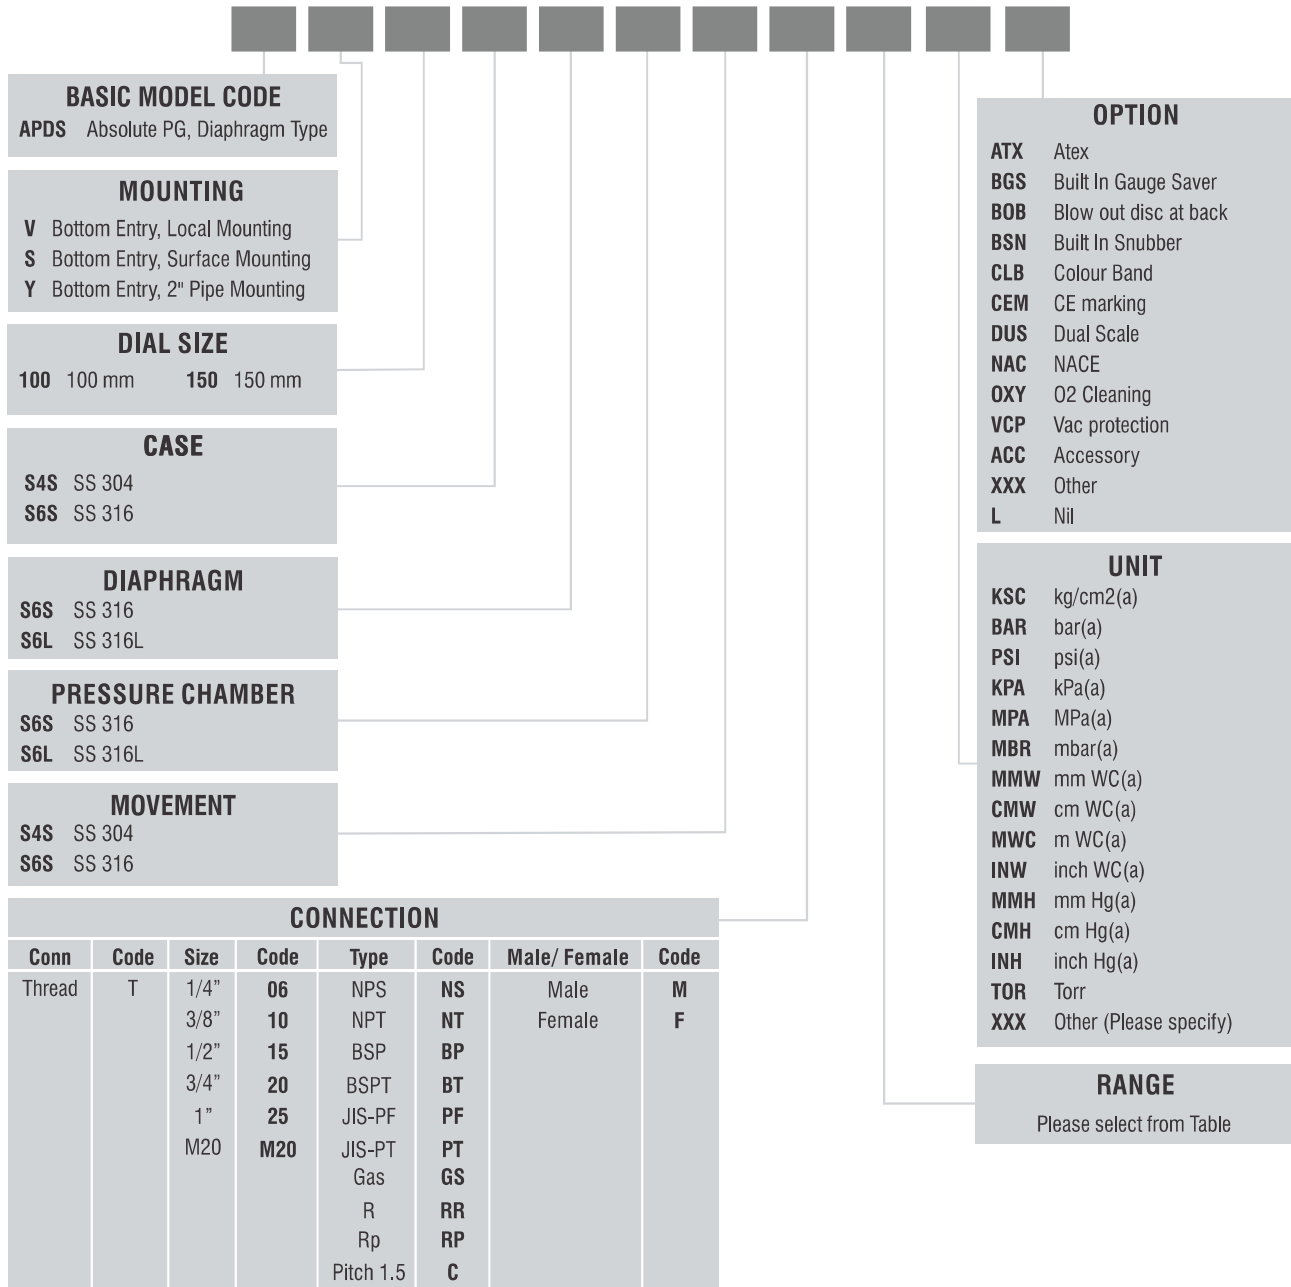

e.g. For 1/2"NPT(M), Code: **T15NTM**
For M20x1.5 (F), Code: **TM20CF**

Sample Model Code: APDS-V-150-S4S-S6S-S6S-S4S-T15NTM-(0-1000)-MMW-L