



Main Specifications	Other Specifications
<p>▼Size 1" ,1.5" ,2" ,2.5" ,3" ,4" , 5" ,6"</p> <p>▼Installation type Back mount</p> <p>▼Window Glass</p> <p>▼Process connection Material: SS304 Thread size: 1/4" , 3/8" ,1/2" ,3/4" ,1" Thread type: BSPT, NPT, PF</p> <p>▼Stem Material: SS 304 / SS 316 Outer diameter: 6.35mm Length: 63mm ~ 2032mm</p> <p>▼Temperature range Min. -50°C Max. +600°C</p> <p>▼Applicable media Liquid and gas that compatible with SS304</p> <p>▼Liquid-filling (Option) Glycerin</p> <p>▼Protection level IP 54</p>	<p>▼Ring Stainless steel Crimp bezel</p> <p>▼Case SS304 With external adjustable screw (Hexagonal flathead screw)</p> <p>▼Pointer Aluminum with black enamel</p> <p>▼Dial face Red and black scale Pressure unit, scale, and color can be customized upon request</p> <p>▼Measuring elements Bimetal Temperature sensing area: last 2" ~4" of stem</p> <p>▼Temperature accuracy 1.5% (Option: 1%)</p> <p>▼Operating temperature Stabilization: 3/4* full scale Short-time: 1* full scale</p>

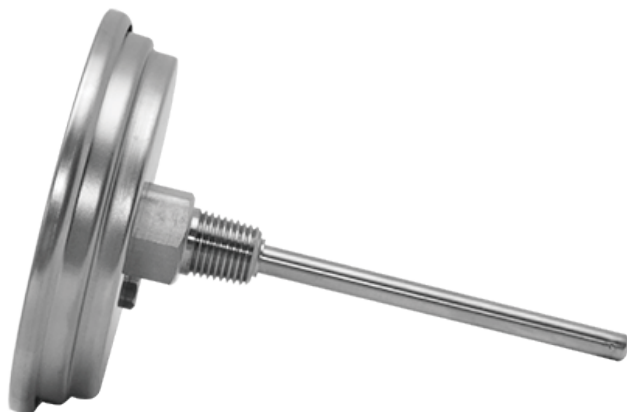

Dimensions

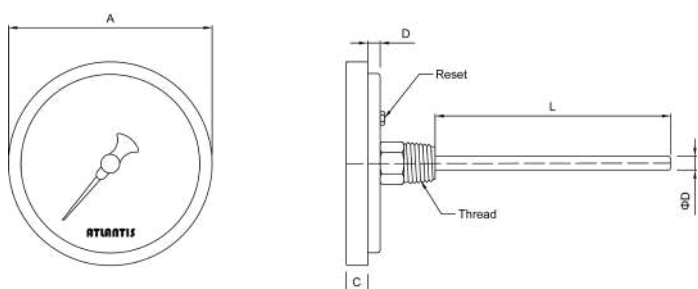

Bimetal Thermometer (Back Mount Type)

Model: BTT

Introduction

BTT back mount type thermometer adopts bimetallic measuring elements with wide temperature measurement range (-50 to 600°C). Stem length and outer diameter can be customized upon request, which makes it suitable for various industrial environment.



Due to the variety of customization, the picture is only for reference, please confirm the actual item with our sales. (If there is any change on specification, please take the latest version as standard.)

Features

- OEM services
- All stainless steel design
- Full scale accuracy within 1.5%
- Customized stem length and outer diameter
- External adjustable screw
- Dual temperature unit scale (°C/°F)
- Filled with liquid to improve vibration-proof performance and service life (option)
- Install a switch contact (option)

How to order

BTT Bimetal Thermometer (Back Mount Type)										
Std.	Spec.	Code	Item	Code	Item	Code	Item	Code	Item	
04	Size	01	1"	015	1.5"	02	2"	025	2.5"	
		03	3"	04	4"	05	5"	06	6"	
4	Thread size	2	1/4"	3	3/8"	4	1/2"	6	3/4"	
		8	1"	O	Others	–	–	–	–	
P	Thread type	P	BSPT	N	NPT	F	PF	O	Others	
304	Stem material	304	SS304	316	SS316	O	Others	–	–	
Custom	Stem outer diameter	Standard: 6.35mm Other stem outer diameter available upon request								
Custom	Stem length	Standard: 63.5mm Other stem length available upon request								
Custom	Temperature range	-50 to 600°C								
/D	Other requests	/A	Third party notarized documents			/B	Inspection report			
		/C	Tag			/D	Customized dial face (scale, color, unit, etc.)			
		/E	Thermowell (thermowell specifications are customized according to the selected stem specifications)			/F	Install a switch contact			
		/G	Filled with liquid (Improve vibration-proof and service life)			/H	Accuracy: 1%			
		/I	Install an swivel nut on connection			/J	Window - safety glass (only available for > 4")			
		/K	Case material SS316			/L	Window - rubber O-ring sealed			
		/M	Concaved dial face for easy reading			/N	Knife edge pointer			
		/O	Remove anti-sway pointer (increase sensibility)			/P	Remove external adjustable screw			
		/Q	Remove stem thread (min. 35mm 200~300°C)			–	–			

Order example: BTT - 04 - 4 - P - 304 - 6.35mm - 63.5mm - (0 to 100°C) + /D