


T10 / G82 Type

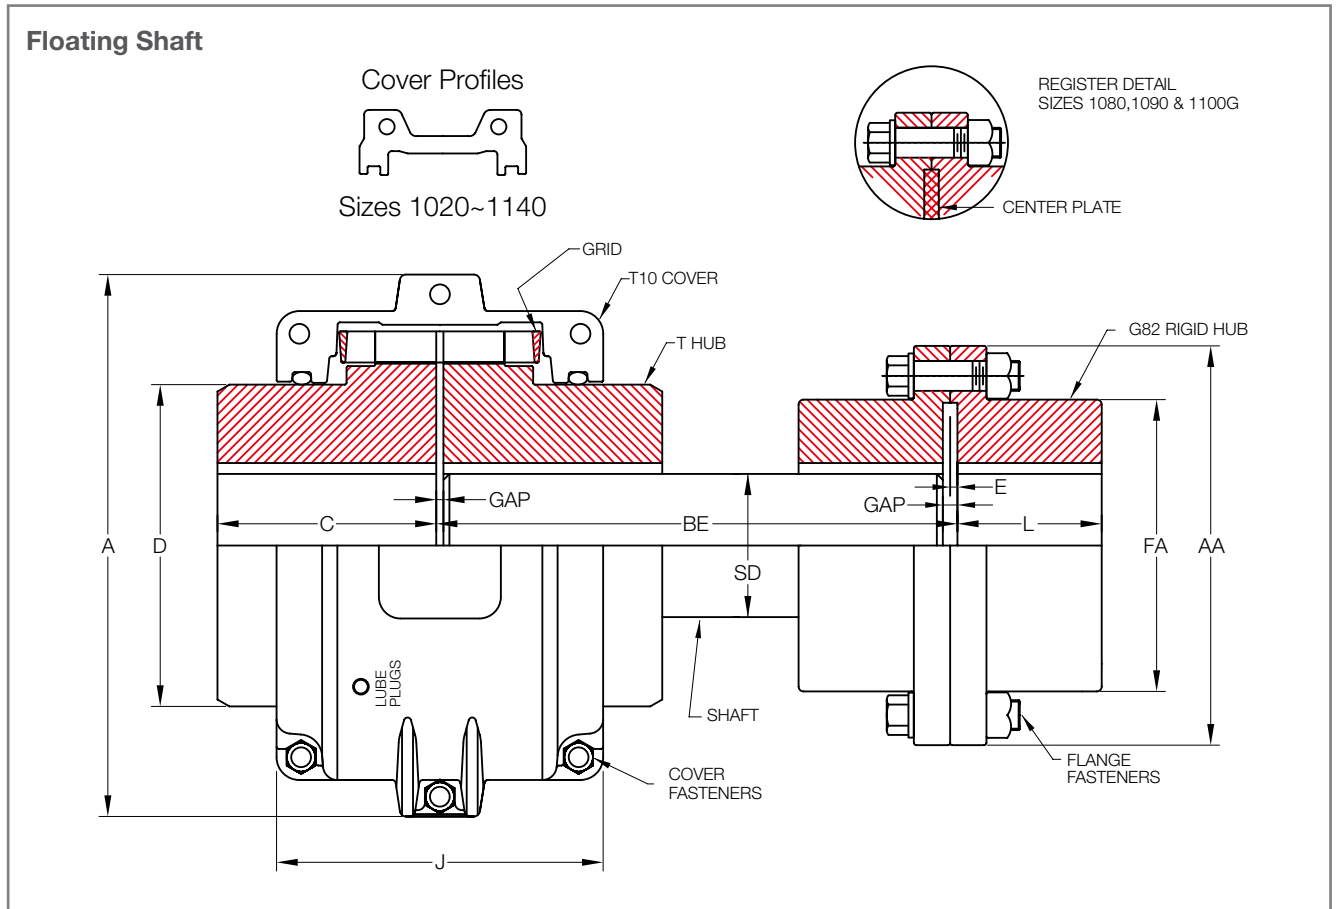

T10 Cplg Size	G82 Cplg Size	Torque Rating (Nm)	Allow Sped RPM	Max Bore		Min Bore		Cplg Weight (Kg)	Add BE Weight (Kg)	Lube Weight (Kg)	Fasteners	
				T10 Hub (mm)	G82 Hub (mm)	T10 Hub (mm)	G82 Hub (mm)				No. per Flange	Dia (mm)
1110	1035	9,320	2,250	120	164	42	51	125	0.0804	0.508	8	0.750
1120	1040	13,700	2,025	140	196	61	64	183	0.0992	0.735	8	0.750
1130	1045	19,900	1,800	170	216	67	76	261	0.1430	0.907	10	0.750
1140	1050	28,600	1,650	200	242	67	89	382	0.2090	1.130	8	0.875
1150	1055	39,800	1,500	215	267	108	102	508	0.2540	1.950	14	0.875
1160	1060	55,900	1,350	240	293	121	115	645	0.3220	2.810	14	0.875
1170	1070	74,600	1,225	280	341	134	127	983	0.3970	3.490	16	1.000
1180	1080	103,000	1,100	300	341	153	102	1313	0.4800	3.760	16	1.125
1190	1090	137,000	1,050	335	380	153	115	1756	0.5720	4.400	18	1.250
1200	1100	186,000	900	360	405	178	127	2254	0.6710	5.620	18	1.250

T10 Cplg Size	G82 Cplg Size	Dimensions (Millimeters)											GAP	
		A	BE		C	D	E	J	L	AA	FA	SD	T Hub	G82 Hub
			Min	Max										
1110	1035	269.7	239.0	304.8	127.0	160.3	2.5	161.5	102.1	279.4	211.3	114.3	5	5
1120	1040	307.8	279.1	355.6	149.2	179.4	4.1	191.5	115.3	317.5	245.4	127.0	6	8
1130	1045	345.9	307.1	381.0	161.9	217.5	4.1	195.1	130.6	345.9	274.1	152.4	6	8
1140	1050	384.0	348.0	406.4	184.2	254.0	5.1	201.2	147.3	388.9	305.8	184.2	6	10
1150	1055	453.1	372.1	406.4	182.9	269.2	5.1	271.5	172.7	425.4	334.3	203.2	6	10
1160	1060	501.9	404.1	457.2	198.1	304.8	6.6	278.4	186.4	457.2	366.0	228.6	6	13
1170	1070	566.9	459.2	508.0	215.9	355.6	8.4	307.3	220.2	527.0	424.9	254.0	6	17
1180	1080	629.9	510.3	660.4	238.8	393.7	8.1	321.1	248.9	590.6	450.8	279.4	6	16
1190	1090	675.6	557.5	711.2	259.1	436.9	8.1	325.1	275.8	660.4	508.0	304.8	6	16
1200	1100	756.9	609.3	762.0	279.4	497.8	9.1	355.6	305.3	711.2	530.4	330.2	6	18

* Coupling Weight is with no Bore and Shaft
 * Shaft Weight is Added Weight per Millimeter of SD dia Between Hubs