


KF4 Type

Double Disc Flex with Four Bolts Spacer Type

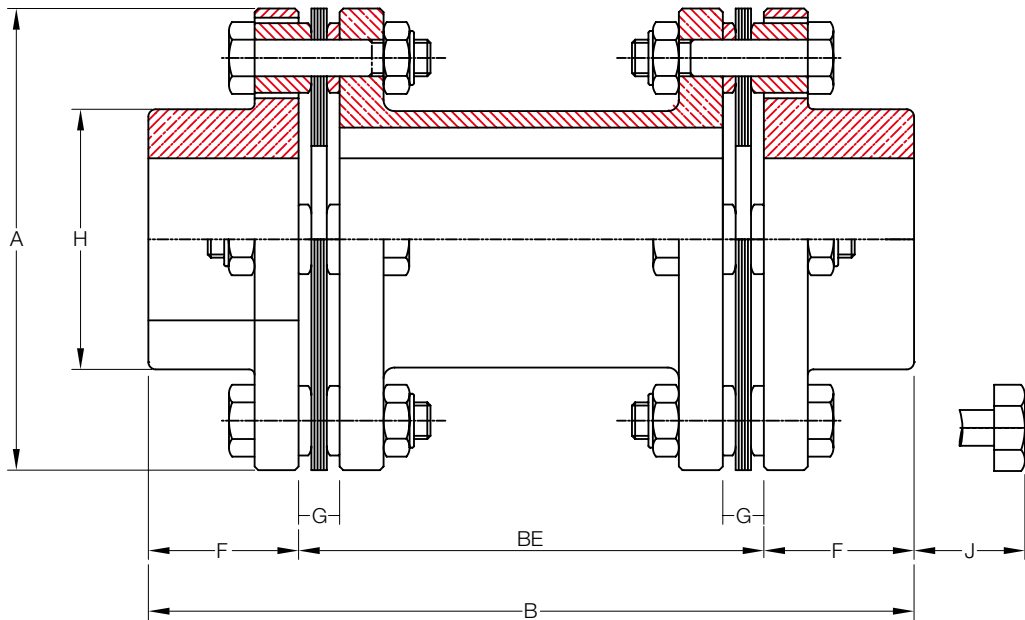

Angular Misalignment = 1.0°
4 Bolt Holes

Size	Torque Rating (Nm)	Allow Speed RPM	Max Bore (mm)	Cplg Weight (Kg)	Bolt Torque (Kg.m)	GD ² (Kg.m ²)	Dimensions (Millimeters)						
							A	B	F	G	H	J	BE
05	33	47,000	23	1.2	0.9	0.0018	67	138.9	25	5.8	33	16	88.9
10	90	39,000	32	1.9	0.9	0.0044	81	138.9	25	7.1	46	16	88.9
15	176	34,000	35	2.9	2.2	0.0084	93	159.6	29	8.4	51	24	101.6
20	245	30,000	42	4.1	2.2	0.0148	104	195.0	34	11.0	61	30	127.0
25	421	25,000	50	7.1	4.2	0.0396	126	209.0	41	11.2	71	27	127.0
30	774	22,000	58	10.8	7.3	0.0800	143	223.0	48	12.5	84	28	127.0
35	1,274	19,000	74	16.3	7.3	0.1680	168	241.0	57	16.0	106	26	127.0
40	2,058	16,000	83	24.7	15.9	0.3400	194	267.7	64	17.0	118	30	139.7
45	3,332	15,000	95	32.5	15.9	0.5600	214	304.4	76	22.8	137	34	152.4
50	4,900	13,000	109	50	22.1	1.1200	246	355.8	89	24.0	157	26	177.8
55	6,370	11,000	118	75	55.3	2.0400	276	381.8	102	26.0	169	42	177.8

* Coupling Weight is without Bore Machining