


## KSC & KEC Type

Close Coupled (Spacer Type)

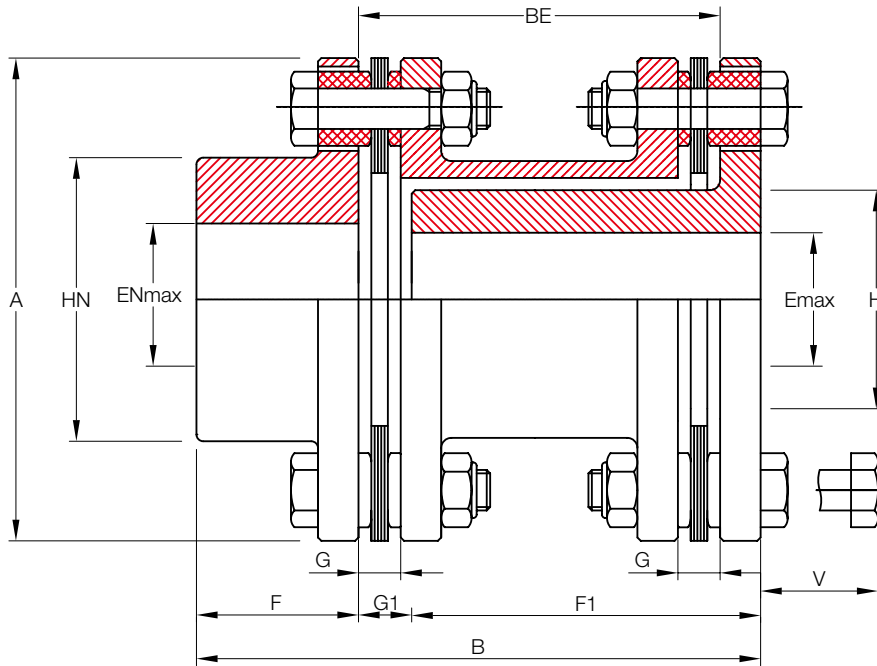

Size	Torque Rating (Nm)	Allow Speed RPM	Max Bore (mm)	Min Bore (mm)	Cplg Weight (Kg)	Axial Deflection (mm)	GD <sup>2</sup> (Kg.m <sup>2</sup> )	Dimensions (Millimeters)									
								A	B	D(BE)	G	F	F1	G1	HN	H	V
KSC 00	568	26,000	51	40	6.2	3.0	0.04	119	126	60	10.3	54	60	12	74	58	51
KSC 01	921	23,000	56	46	9.5	3.4	0.08	137	147	70	11.0	63	70	14	81	67	55
KSC 02	1,705	19,000	67	52	16.2	3.6	0.12	161	164	75	12.0	74	75	15	97	76	64
KSC 03	3,342	17,000	72	56	21.6	.2	0.28	180	188	90	14.0	80	90	18	104	81	77
KSC 04	4,900	15,000	85	66	35.8	4.5	0.60	212	215	100	17.0	95	100	20	124	96	88

Size	Torque Rating (Nm)	Allow Speed RPM	Max Bore (mm)	Min Bore (mm)	Cplg Weight (Kg)	Axial Deflection (mm)	GD <sup>2</sup> (Kg.m <sup>2</sup> )	Dimensions (Millimeters)									
								A	B	D(BE)	G	F	F1	G1	HN	H	V
KEC 01	3,842	15,000	95	84	29.8	2.1	0.60	214	216	90	12.2	108	93	15	137	122	77
KEC 03	7,115	13,000	115	98	45.2	2.1	1.12	246	234	95	13.7	121	98	15	165	142	77
KEC 05	8,967	11,600	125	101	60.7	2.1	1.60	276	264	110	17.5	134	105	25	180	147	88
KEC 10	10,780	11,600	125	101	65.1	2.1	1.60	276	264	110	19.0	134	105	25	180	147	88
KEC 15	15,386	10,300	140	118	98.8	2.4	3.32	308	303	120	19.0	160	118	25	200	171	101
KEC 20	25,578	9,200	158	136	141.0	2.9	6.00	346	336	130	22.5	183	127	26	228	197	107
KEC 25	37,730	8,500	165	147	201.0	3.1	9.92	375	374	150	28.0	198	145	31	240	213	128
KEC 30	47,138	7,800	178	159	259.0	3.3	15.20	410	407	165	31.0	214	160	33	258	231	140
KEC 35	57,036	7,200	187	170	315.0	3.6	23.10	445	430	175	31.0	225	170	35	272	245	149
KEC 40	64,386	6,800	205	187	378.0	4.0	28.90	470	457	180	34.0	247	175	35	297	271	157
KEC 45	83,594	6,200	231	208	489.0	4.5	42.10	511	508	195	35.5	278	190	40	334	302	168
KEC 50	103,194	5,700	254	233	615.0	5.0	65.40	556	540	200	37.0	305	195	40	364	338	174
KEC 55	128,086	5,400	263	240	739.0	5.2	90.10	587	562	210	37.5	317	205	40	382	348	180

\* Coupling Weight is without Bore Machining