


KSP & KEP Type

Plug-in (Spacer Type)

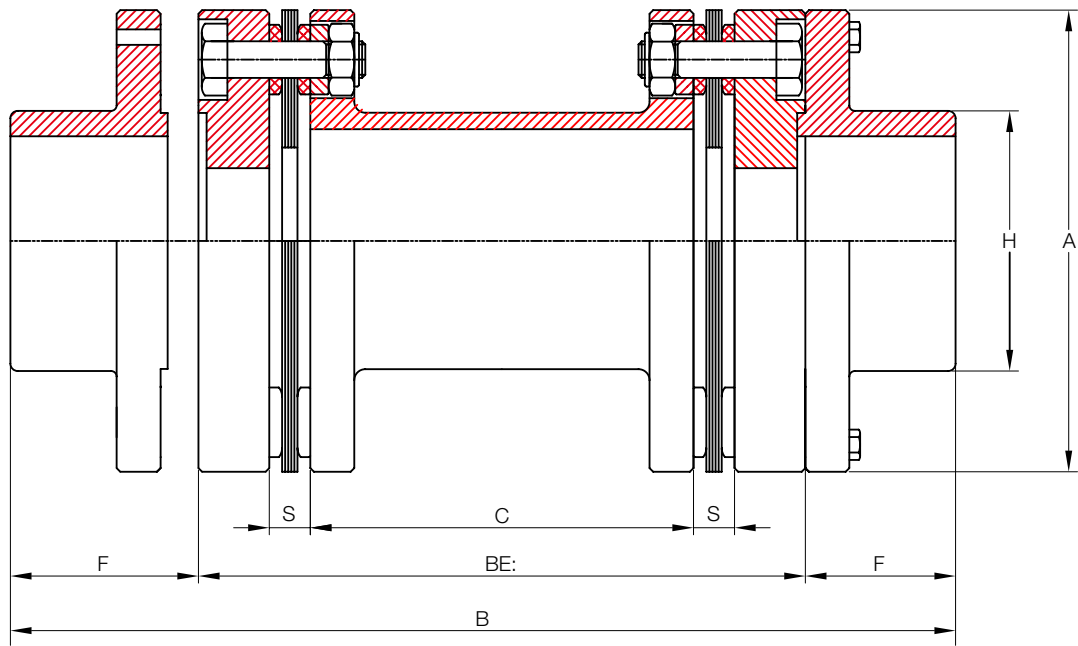

Size	Torque Rating (Nm)	Allow Speed RPM	Max Bore (mm)	Cplg Weight (Kg)	Axial Deflection (mm)	GD ² (Kg.m ²)	Dimensions (Millimeters)						
							A	B	C	BE	S	F	H
KSP 00	568	26,000	68	8.4	3.0	0.072	128	256	90	120	15	68	100
KSP 01	921	23,000	78	11.5	3.4	0.128	146	276	84	120	18	78	112
KSP 02	1,705	19,000	96	21.4	3.6	0.340	170	322	98	140	21	96	138
KSP 03	3,342	17,000	104	33.7	4.2	0.684	198	378	116	170	27	104	150
KSP 04	4,900	15,000	123	51.7	4.5	1.420	226	426	118	180	31	123	178
KSP 05	6,076	11,600	160	96.8	3.9	4.092	282	540	158	220	31	160	232
KSP 10	8,232	11,600	158	100.0	3.9	4.880	294	540	158	220	31	160	228
KSP 15	10,682	10,300	182	153.0	4.2	8.952	330	614	174	250	38	182	264
KSP 20	17,836	9,200	206	216.0	4.9	15.240	366	692	196	280	42	206	300
KSP 25	26,362	8,500	224	309.0	5.2	30.672	422	768	220	320	50	224	324
KSP 30	33,418	7,800	244	395.0	5.4	43.532	452	848	250	360	55	244	354
KSP 35	39,886	7,200	260	505.0	5.6	70.152	498	910	270	390	60	260	376
KSP 40	46,256	6,800	276	576.0	6.3	88.312	522	942	270	390	60	276	400
KSP 45	59,780	6,200	304	749.0	6.7	131.900	564	1,028	288	420	66	304	442

Size	Torque Rating (Nm)	Allow Speed RPM	Max Bore (mm)	Cplg Weight (Kg)	Axial Deflection (mm)	GD ² (Kg.m ²)	Dimensions (Millimeters)						
							A	B	C	BE	S	F	H
KEP 03	7,115	13,000	144	69.9	2.1	2.592	258	468	124	180	28	144	208
KEP 05	8,967	11,600	160	96.8	2.1	4.092	282	540	158	220	31	160	232
KEP 10	10,780	11,600	158	100.0	2.1	4.880	294	540	158	220	31	160	228
KEP 15	15,386	10,300	182	153.0	2.4	8.952	330	614	174	250	38	182	264
KEP 20	25,578	9,200	206	216.0	2.9	15.240	366	692	196	280	42	206	300
KEP 25	37,730	8,500	224	309.0	3.1	30.672	422	768	220	320	50	224	324
KEP 30	47,138	7,800	244	395.0	3.3	43.532	452	848	250	360	55	244	354
KEP 35	57,036	7,200	260	505.0	3.6	70.152	498	910	270	390	60	260	376
KEP 40	64,386	6,800	276	576.0	4.0	88.312	522	942	270	390	60	276	400
KEP 45	83,594	6,200	-	749.0	4.5	131.900	564	1,028	288	420	66	304	442

* Coupling Weight is without Bore Machining