


KFS Type

Spacer Type

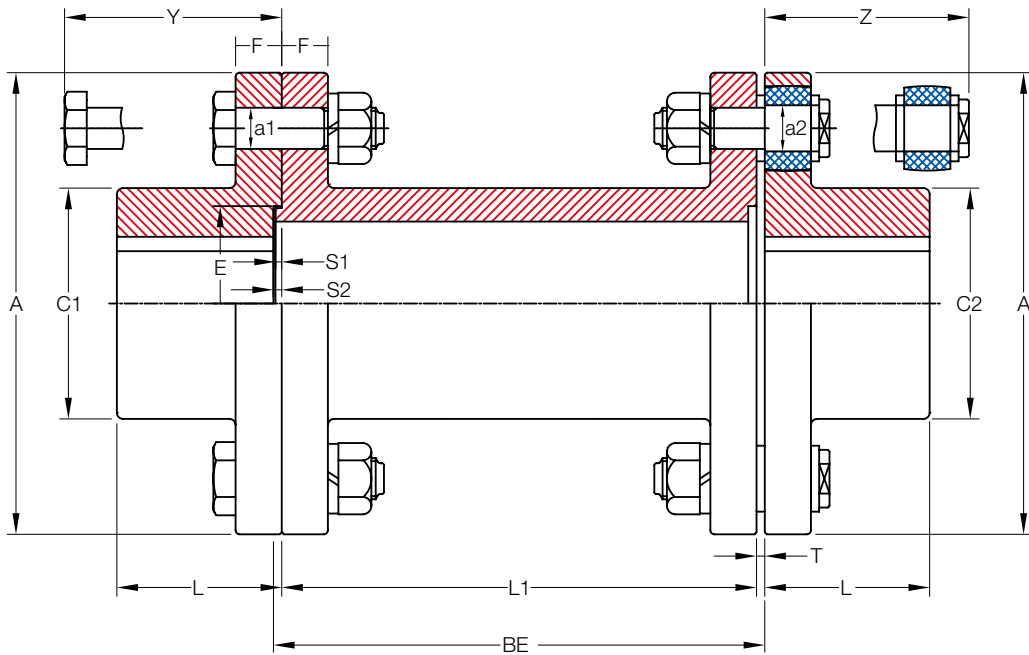

Size	Torque Rating (Nm)	Allow Speed RPM	Bore Dia			Dimensions (Millimeters)									Bolt			
			Max Bore		Min	BE			L1			T	Rigid		Flexible			
			D1	D2									N	$\alpha 1 \times L$	N	$\alpha 1 \times L$		
125	25	4,000	32	29	18	100	-	-	-	97	-	-	-	3	4	4- $\phi 14 \times 53$	4	$\phi 14 \times 64$
140	50	4,000	38	35	20	100	140	-	-	97	137	-	-	3	6	4- $\phi 14 \times 53$	6	$\phi 14 \times 64$
160	110	4,000	45	45	25	100	140	-	-	97	137	-	-	3	8	6- $\phi 14 \times 53$	8	$\phi 14 \times 64$
180	157	3,500	50	50	28	100	140	180	-	97	137	177	-	3	8	8- $\phi 14 \times 53$	8	$\phi 14 \times 64$
200	245	3,200	56	56	32	140	180	220	-	136	176	216	-	4	8	8- $\phi 14 \times 67$	8	$\phi 20 \times 85$
224	392	2,850	63	63	35	140	180	220	-	136	176	216	-	4	8	8- $\phi 16 \times 67$	8	$\phi 20 \times 85$
250	617	2,550	71	71	40	140	180	220	260	136	176	216	256	4	8	8- $\phi 20 \times 82$	8	$\phi 25 \times 100$
280	980	2,300	80	80	50	180	220	260	300	176	216	256	296	4	8	8- $\phi 20 \times 82$	8	$\phi 28 \times 116$
315	1,568	2,050	90	90	63	180	220	260	300	176	216	256	296	4	10	8- $\phi 20 \times 82$	10	$\phi 28 \times 116$

* Coupling Weight is without Bore Machining