


G32 Type

Standard Flanged Sleeve Spacer

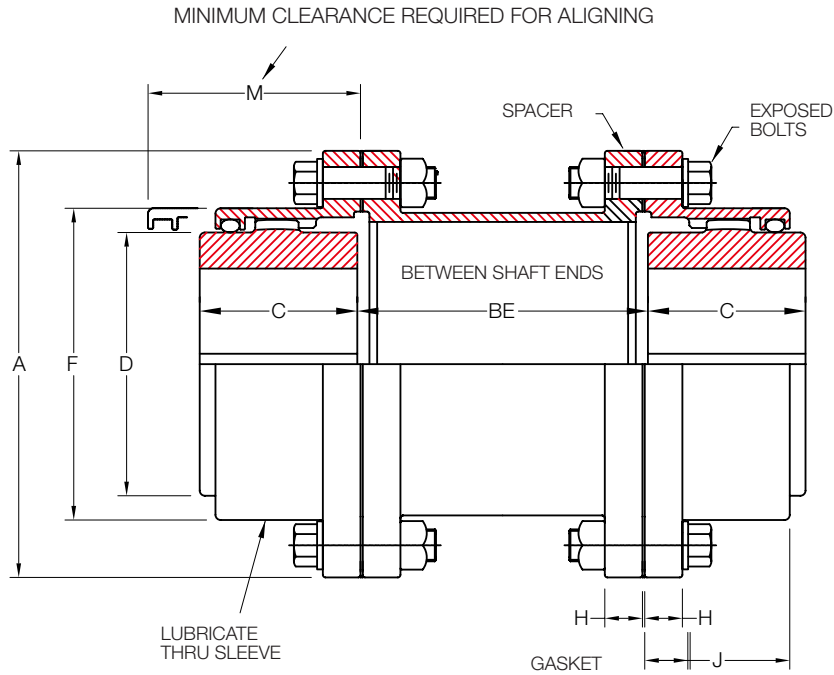

Size	Torque Rating (Nm)	Allow Speed RPM	Max Bore (mm)	Min Bore (mm)	Cplg Weight (Kg)		Lube Weight (Kg)		Dimensions (Millimeters)								
					Cplg (Kg)	Spacer (Kg)	Less Spacer (Kg)	Add Spacer mm (Kg)	A	BE Min		C	D	F	H	J	M
										G31	G32						
1010	1,140	7,000	50	13	6.8	0.0120	0.0408	-	115.9	82	82	42.9	68.6	83.8	14.0	38.9	48
1015	2,350	5,500	65	20	13.6	0.0127	0.0726	-	152.4	82	82	49.3	86.4	105.2	19.0	47.8	56
1020	4,270	4,600	78	26	20.4	0.0166	0.1130	0.00054	177.8	82	82	62.0	105.2	126.5	19.0	59.4	69
1025	7,470	4,000	98	32	38.6	0.0205	0.2270	0.00107	212.7	108	95	77.0	130.6	154.9	21.8	71.6	81
1030	12,100	3,600	111	39	54.4	0.0236	0.3630	0.00107	239.7	108	95	91.2	152.4	180.3	21.8	83.8	94
1035	18,500	3,100	134	51	88.5	0.0359	0.5440	0.00214	279.4	130	120	106.4	177.8	211.3	28.4	97.5	107
1040	30,600	2,800	160	64	122.5	0.0500	0.9070	0.00357	317.5	130	120	120.6	209.6	245.4	28.4	111.3	122
1045	42,000	2,600	183	77	166.0	0.0736	1.0400	0.00357	346.1	130	120	134.9	235.0	274.1	28.4	122.9	135
1050	56,600	2,400	200	89	238.0	0.0814	1.7700	0.00357	388.9	184	146	153.2	254.0	305.8	38.1	140.7	152
1055	74,000	2,200	220	102	306.0	0.0895	2.2200	0.00357	425.4	184	146	168.1	279.4	334.3	38.1	158.0	173
1060	90,400	2,100	244	115	358.0	0.1170	3.1800	0.00357	457.2	-	146	188.2	304.8	366.0	25.4	169.2	183
1070	135,000	1,800	289	127	562.0	0.1410	4.3500	0.00357	527.0	-	146	220.7	355.6	424.9	25.4	195.6	208

* Plus Spacer Weight is Plus per Millimeters of Spacer Length

* Coupling Weight is without Bore Machining

* Spacer Weight is Extra Spaer Weight per Millimeters of Length

* Less Spacer Weight is Minimum Weight Less Spacer