


G52 Type

Standard Flanged Sleeve Single Engagement Floating Shaft

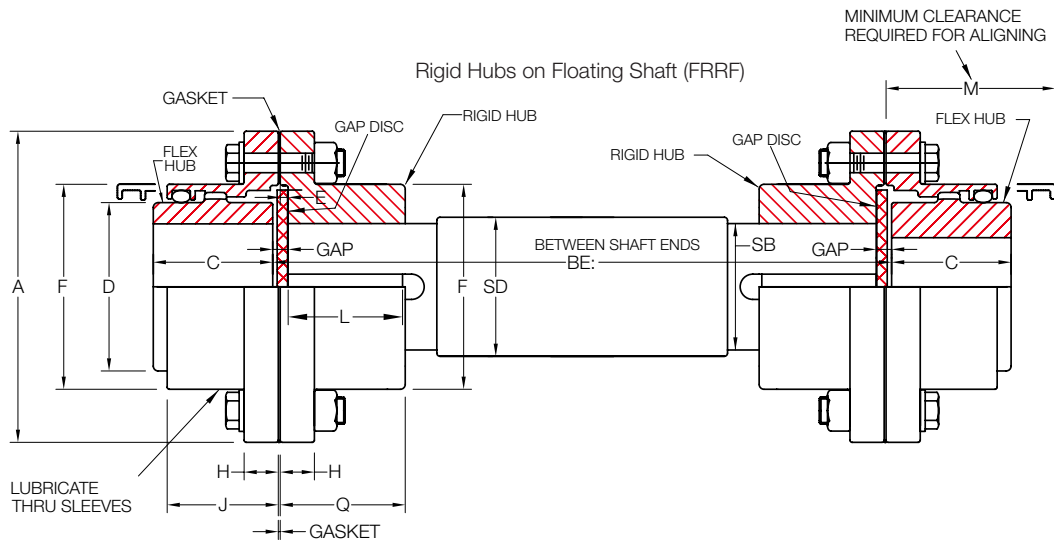


Size	Dimensions (Millimeters)									
	C	D	E	F	H	J	L	M	Q	GAP
1010	42.9	68.6	2.5	83.8	14.0	38.9	39.6	48	42.2	4
1015	49.3	86.4	2.5	105.2	19.0	47.8	46.2	56	48.8	4
1020	62.0	105.2	2.5	126.5	19.0	59.4	58.4	69	61.0	4
1025	77.0	130.6	2.5	154.9	21.8	71.6	73.7	81	76.2	5
1030	91.2	152.4	2.5	180.3	21.8	83.8	87.9	94	90.4	5
1035	106.4	177.8	2.5	211.3	28.4	97.5	102.1	107	104.6	6
1040	120.6	209.6	4.1	245.4	28.4	111.3	115.3	122	119.4	7
1045	134.9	235.0	4.1	274.1	28.4	122.9	130.8	135	134.6	8
1050	153.2	254.0	5.1	305.8	38.1	140.7	147.3	152	152.4	9
1055	168.1	279.4	5.1	334.3	38.1	158.0	172.7	173	177.8	9
1060	188.2	304.8	6.6	366.0	25.4	169.2	186.4	183	193.0	10
1070	220.7	355.6	8.4	424.9	28.4	195.6	220.2	208	228.6	13

* Coupling Weight is without Bore Machining

* Lubrication Weight is per Coupling

G52 Type

Standard Flanged Sleeve Single Engagement Floating Shaft

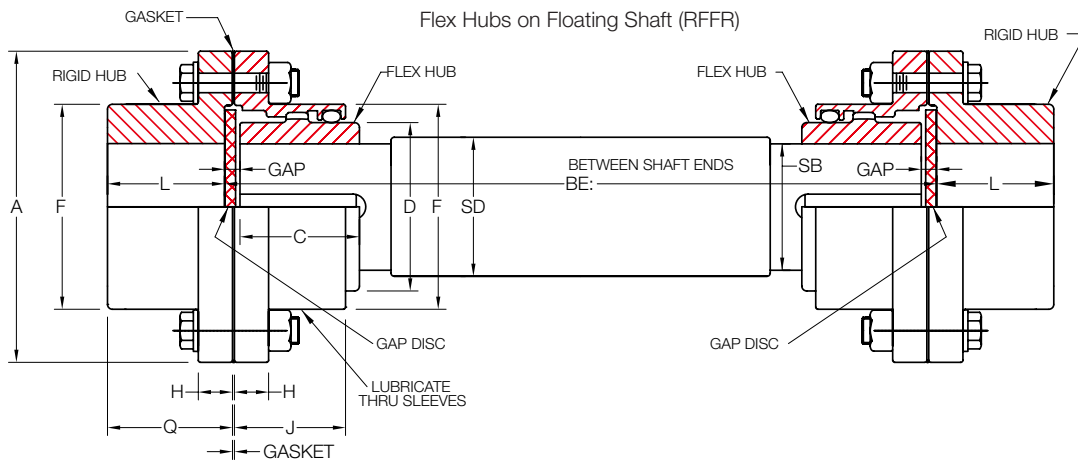

Size	Max Bore		Min Bore (mm)	Cplg Weight		Lube Weight (Kg)	Dimensions (Millimeters)		
	Flex (mm)	Rigid (mm)		G51 (Kg)	G52 (Kg)		A	BE Min	
								RFFR	FRRF
1010	50	65	13	4.08	4.54	0.0227	115.9	133	92
1015	65	80	20	8.16	9.07	0.0408	152.4	159	105
1020	78	98	26	13.6	15.9	0.0680	177.8	197	129
1025	98	118	32	24.9	27.2	0.1180	212.7	241	162
1030	111	140	39	38.6	43.1	0.1810	239.7	279	189
1035	134	163	51	61.2	68.0	0.2720	279.4	324	219
1040	160	196	64	90.7	99.8	0.4670	317.5	419	248
1045	183	216	77	129.3	136.0	0.5570	346.1	508	281
1050	200	235	89	181.4	195.0	0.9070	388.9	533	316
1055	220	266	102	251.7	263.0	1.1300	425.4	572	367
1060	244	290	115	-	324.0	1.7000	457.2	597	397
1070	289	340	127	-	508.0	2.2700	527.0	673	470