

Model/Series: COMBO

Number: Combo\_M\_EU\_EN

Version: Rev. 03

Media: Inert Gas + Hydr. Oil

## **Description**


The Combo solution consists in one MPSS rotary union specifically designed to be used in conjunction with Deublin Slip-Rings. It is available with 1, 2, 4. 6 and 8 passages and 3 different connections port sizes: G ¼", G ¾" and G ½". The unions are designed with interface on the rotor back to mate with the Slip-Rings and have a large central bore for cable passage. Specific anti-rotation bracket is included to prevent relative movement between rotary components.

Model Industry Application


1 to 8 passages Packaging Packaging, Automation, Rotary Table

Mechanical Features	
Passage no.	1-2-4-6-8
Passage dimension	Ø 6 - Ø 10 - Ø 12 mm
Housing thread connections	G ¼" - G%" - G½"
Axial Rotor connections	Ø 6 - Ø 10 - Ø 12 mm with O-ring seal
Central bore for cable passage	Ø 30 mm
Housing Material	Carbon steel with blackening coating
Rotor Material	AISI420B
Deublin Soft Seal	Type DPG-G
Drainage	Plain holes
Drainage configuration	Between passages and bearing protection



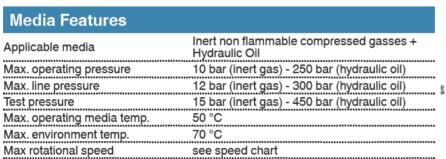






This chart is representing standard operating conditions Deviations might be possible under custom designs.

1 Toddot Oodes		
Pass.#	Code	
1	CMB-M010803	
2	CMB-M020803	
4	CMB-M040803	
6	CMB-M060803	
8	CMB-M080803	
1	CMB-M011003	
2	CMB-M021003	
4	CMB-M041003	
6	CMB-M061003	
8	CMB-M081003	
1	CMB-M011203	
2	CMB-M021203	
4	CMB-M041203	
6	CMB-M061203	
8	CMB-M081203	
	1 2 4 6 8 1 2 4 6 8 1 2 4 6	

Product Codes





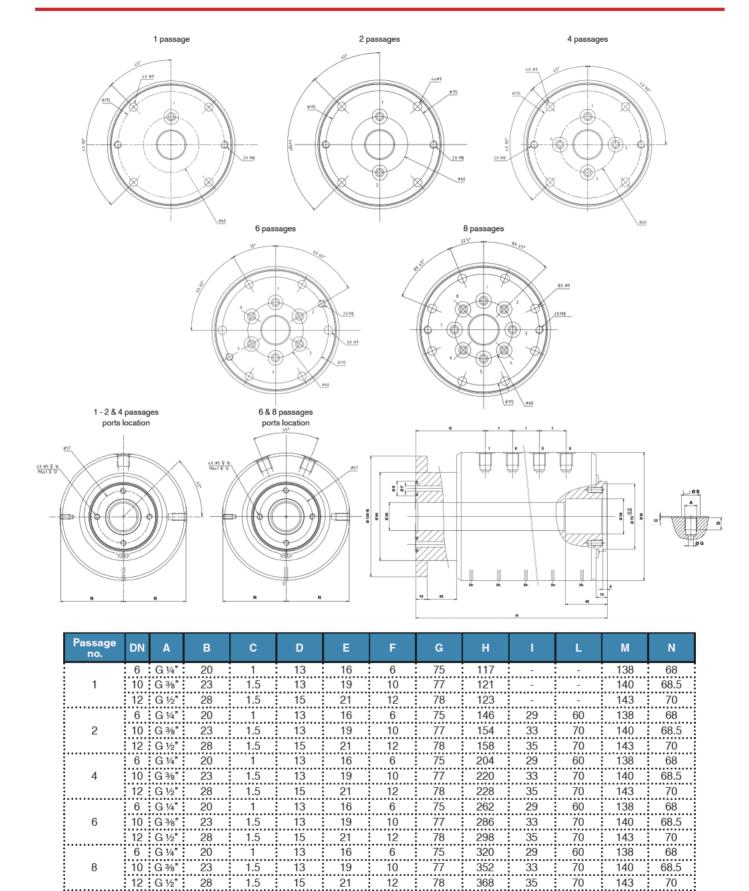

68.5

1.5 1.5

G ½"