



Description

The SRC-40 is a reliable, cost-effective, and proven product that seeks to provide the consumer with maximum efficiency in terms of modularity.

A slip ring particularly suited for being equipped with fluidic Rotary Unions. This product is suitable for signal or power passage up to a max of 60A. Terminal blocks both on stator and rotor side allow an easy and quick connection/disconnection.

Model Family	Industry	Application
SRC-40	Packaging - Wind Energy	Packaging, Automation, Rotary Table, Wind Turbine

Electrical Features



Max. Composition	99 rings
Voltage, max	640 VAC/DC for power – 30VDC for signal
Current, max steady state	60 A power, 1 A signal
Data Communication Speed	Up to 100 Mbps for signal
Conductor Ring	Gold Plated Copper Alloy
Brush Contact	Alloy monofilament or polyfilament/Carbon Brushes
Wiring	10 mm ² power/0,34 mm ² signal
Connection, stator	Connector/Flying leads
Connection, rotor	Connector/Flying leads

Mechanical Features

Speed, max.	100 RPM
Direction of Rotation	Bi-Directional
IP Rating	Standard IP55 - Max. IP67
Mounting Orientation	Vertical or Horizontal
Temperature, operating	-20 °C to +80 °C
Temperature, storage	-40 °C to +90 °C
Material, housing	Anodized Aluminum
Material, rotor	Anodized Aluminum
Material, cover	Anodized Aluminum

Versions

SRC-40 (standard)	Cordgrip connection both on rotor and stator side, 3 m flying leads
Options	Thru Bore Passage, Cord Grips, Mounting Flanges, Painted covers, flying lead length, customized anti-rotation, internal heater for low temperature applications

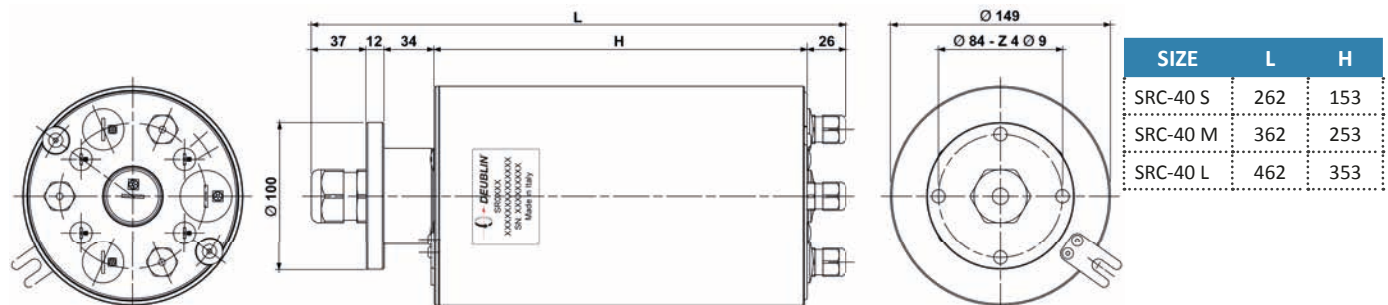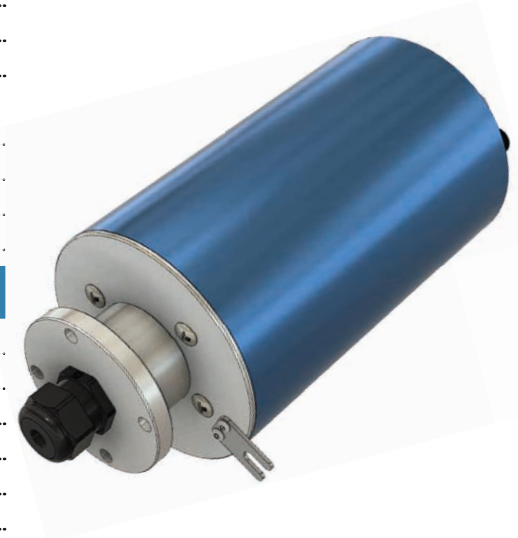

This series includes additional models.

For more information contact your nearest Deublin Division/Distributor or www.deublin.com