

新一代四通视镜、零死角、零滞留

Four-way sight glass, zero dead angle, no retention

充电式灯视镜
Rechargeable battery





基本型
Standard type



接线供电灯视镜
Connection cable



不锈钢外壳, DC24V供电
Stainless steel Shell, DC 24V

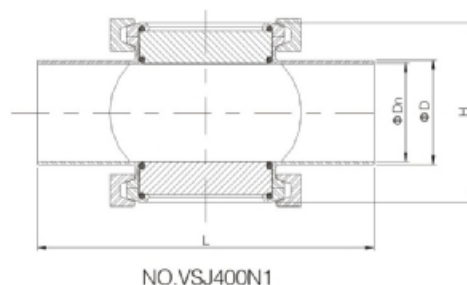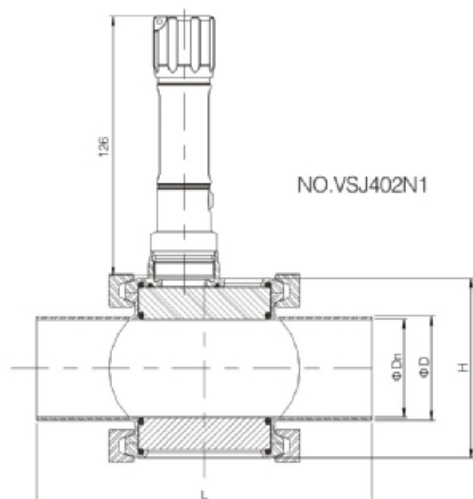

应用 Applications

- ◆四通视镜由不锈钢结构和钢化玻璃组成。在食品加工，化妆品，制药和精细化工工业中，可以通过它清晰并且精确的观察到物料的流程。
- ◆Four-way sight glass is comprised of stainless steel frame and tempered glass. Through it, operator can observe the flowing of the liquid substance clearly and precisely in the fields of food, cosmetics, pharmaceutical and fine chemicals industries.

设计和特点 Design and features

- ◆规格从1"-4"到DN25-DN100玻璃通过卡箍安装到机构上
- ◆连接: 螺纹、卡箍、焊接、DIN、SMS、IDF
- ◆垫圈材质: EPDM NBR 符合FDA177.2600
- ◆材质: AISI 304(1.4301) AISI 316L(1.4404)
- ◆基本型最高温度: -10°C-150°C
- ◆基本型+视镜灯: -10°C-80°C(取决于灯耐温)
- ◆Size: 1"-4" to DN25-DN100 the glass can be installed on the equipment through clamps.
- ◆Connection: weld, clamp, thread, DIN, SMS, IDF
- ◆Gasket material: NBR, EPDM, FPM in accordance with FAD177.2600
- ◆Material: AISI304(1.4301) AISI316L(1.4404)
- ◆Max temperature(Basic): -10°C-150°C
- ◆Max temperature (Basic with clamp): -10°C-80°C (depending on light heat resistance)

技术优势 Technical advantage

- ◆无滞留、零死角、强光、白色冷光源、防水、防爆设计
- ◆有线供电AC110V/220V、DC24V
- ◆无线供电，一次充电可使用2-3月(根据频率而定)
- ◆No retention, zero dead angle, high light, white cold light source, waterproof, explosion-proof.
- ◆Cable power supply AC110V/220V, DC24V
- ◆Wireless power supply, one charging can be used 2-3 months (Depending on the frequency)

DIN四通视镜 DIN four-way glass

SIZE	D	Dn	H	L
DN40	40	37	75.1	165
DN50	52	49	87.8	165
DN65	70	66	108	218
DN80	85	81	123	250
DN100	104	100	141.6	300

INCH四通视镜 INCH four-way glass

SIZE	D	Dn	H	L
1 1/2"	38.1	35.1	75.1	165
2"	50.8	47.8	87.8	165
2 1/2"	63.5	59.5	101.5	205
3"	76.2	72.2	114.2	230
4"	101.6	97.6	141.6	300