



SLG 23 - 06 - AC220V

工厂代号 Factory Code

位通数 The Position counting

22 : 二位二通 Two position two way
23 : 二位三通 Two position three way

接管口径 Joint Pipe Bore

06:1/8" 08:1/4"

标准电压 Standard Voltage


DC12V DC24V
AC24V 50/60Hz
AC36V 50/60Hz
AC110V 50/60Hz
AC220V 50/60Hz
AC380V 50/60Hz

技术参数 Specification

型号 Model	SLG22-06	SLG22-08	SLG23-06	SLG23-08
工作介质 Working Medium	空气、水、油 / Air, Water, Oil			空气 / Air
流量孔径 Aperture of Flow Rate (mm)	1.6	2.4	3.2	4.0
CV值 CV Value	0.10	0.21	0.33	0.43
接管口径 Joint Pipe Bore	1/8"	1/4"	1/8"	1/4"
使用压力范围 Working-pressure Range (Kgf/cm ²)	0~15	0~10	0~7	0~5
电压范围 Voltage Range	±10%			
油封材质 Material of oil seal	NBR或 (or) VITON			

*特殊电压及特殊规格请与厂方接洽。 Please contact factory for special voltage and sepcification.

外形尺寸/Oevrall Dimension

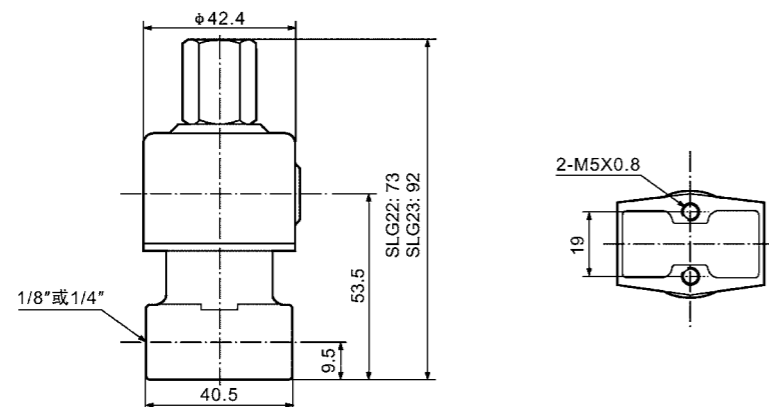

SAB31-02

SAB41-02

SAB42-02

SAB31 - 01 - 1 - AC110V

规格代号 Specification Code

SAB21:二位二通电磁阀 Two position two way solenoid valve
SAB31:二位二通电磁阀 Two position two way solenoid valve
SAB42 : 二位二通电磁阀 (不锈钢阀体)
Two position two way solenoid valve (Body of Stainless steel)

接管口径 Joint Pipe Bore

01:1/8"
02:1/4"
03:1/2"

流量孔径 Aperture of Flow Rate

1:1.5mm
2:2.0mm
3:3.0mm
4:3.5mm
5:4.0mm
6:5.0mm
7:7.0mm
8:10.0mm

标准电压 Standard Voltage

DC12V
DC24V
AC24V 50/60Hz
AC36V 50/60Hz
AC110V 50/60Hz
AC220V 50/60Hz
AC380V 50/60Hz