

DATA SHEET

# VARIAIR VTLF 2.360/0-400

## ROTARY VANE VACUUM PUMPS

oil-free and air-cooled  
with VARIAIR frequency inverter




**MAKE IT BECKER.**



figure VARIAIR VTLF 2.250/0-400

**VARIAIR**  
UNIT




 **BECKER**

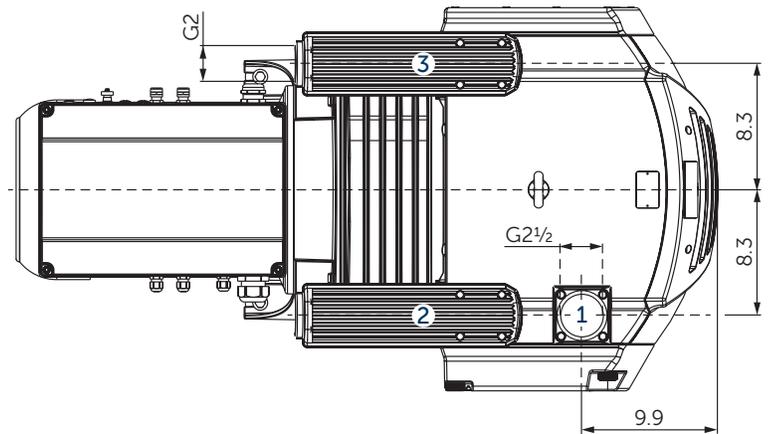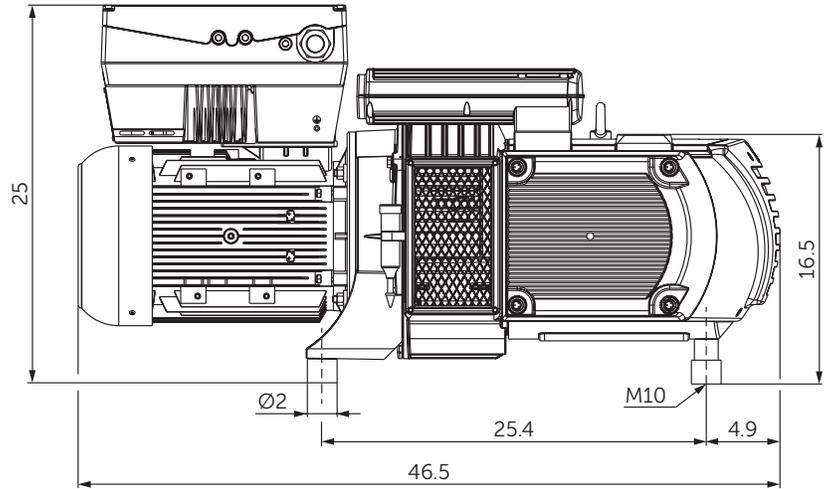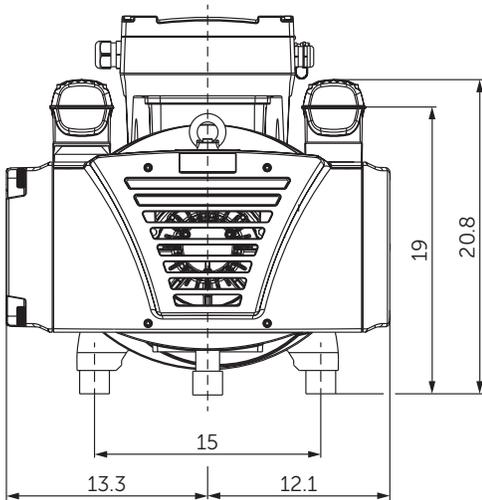

- 1 Vacuum connection (G2<sup>1/2</sup>)
- 2 Vacuum relief valve with silencer
- 3 Blow-off valve with silencer
- Including integrated suction air filter
- The motor illustration may vary.
- Dimensions in inch

Suction air rate	Vacuum	Frequency	Emission sound pressure level <sup>1)</sup>	Weight		
CFM max.	in. HgV max.	Hz	dB(A) max.	lbs	Frequency inverter VAU11-22/3	A max.
238	22.1	60	79	639.5	14.8–29.5 hp 400–480 V ±10% 50/60 Hz	35

<sup>1)</sup> According to DIN EN ISO 3744 (KpA = 3 dB(A)), 39.4 inch distance, at medium load, both connection sides piped

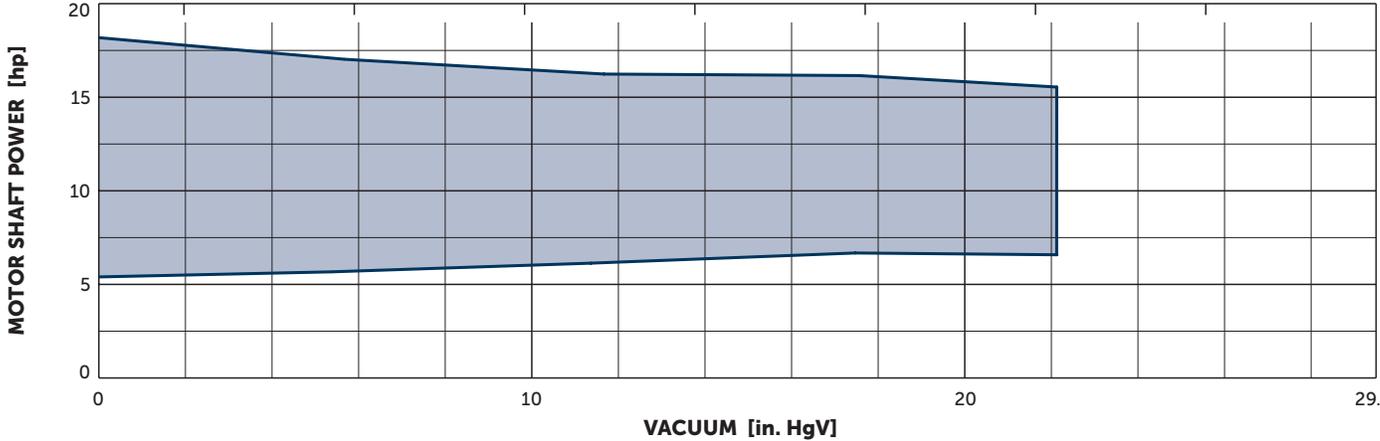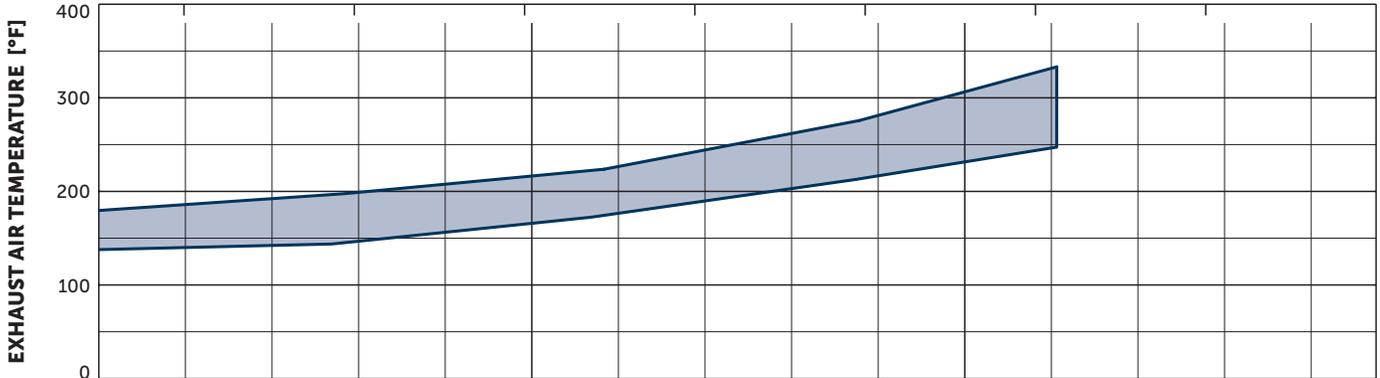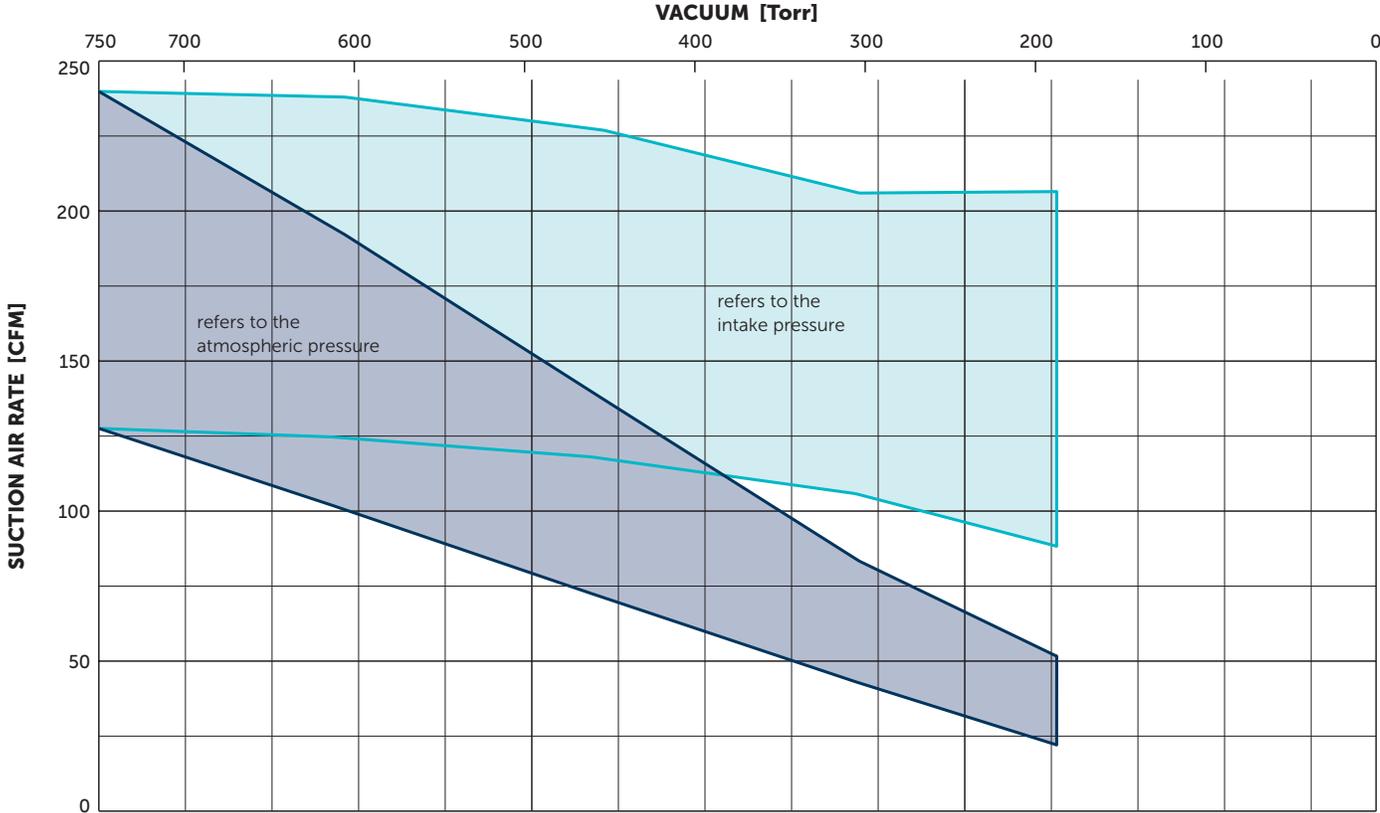

Reference data (atmosphere): 0 in. HgV, 68°F; Tolerance: ±5%



**MAKE IT BECKER.**

