


DATA SHEET

VARIAIR VXLf 2.250/0-400

ROTARY VANE VACUUM PUMPS




oil-free and air-cooled
with VARIAIR frequency inverter

MAKE IT BECKER.

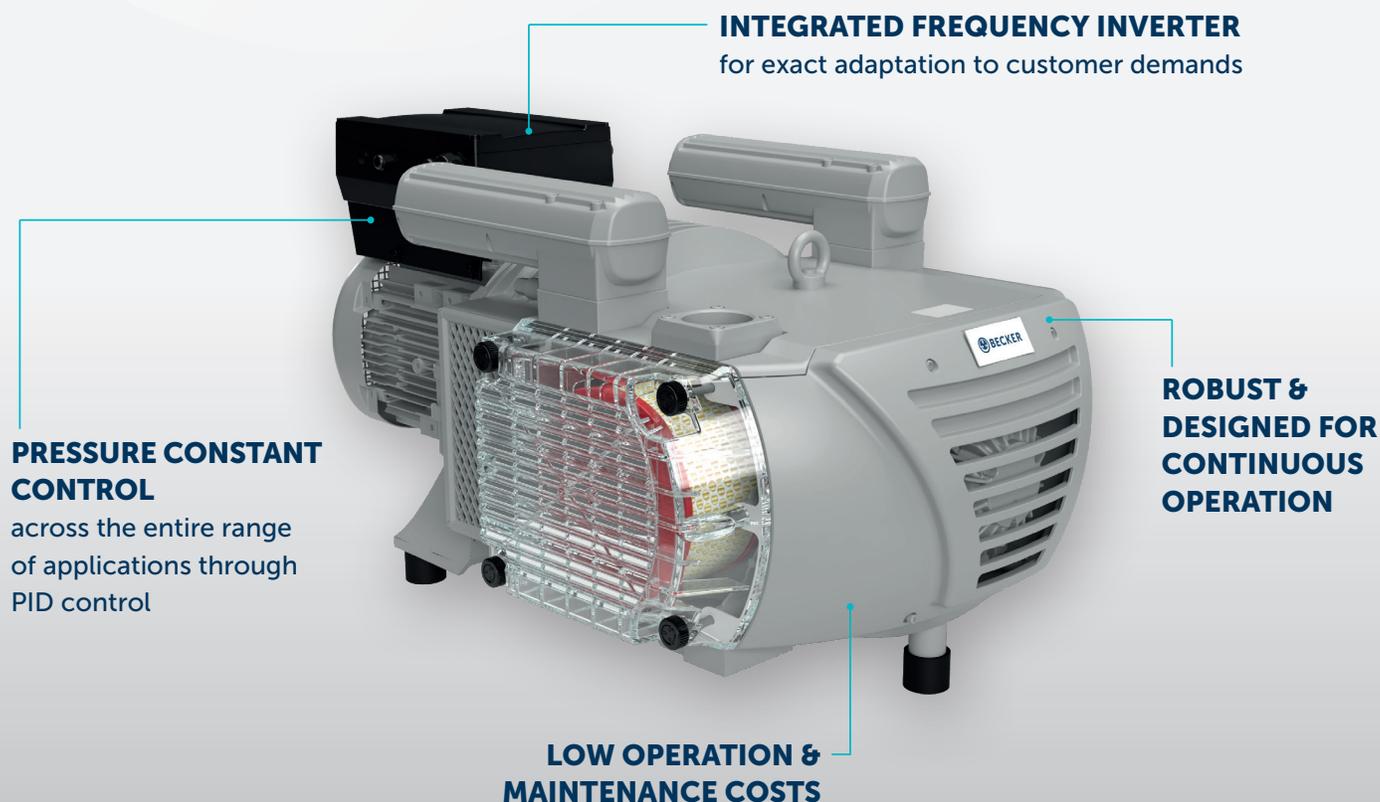

VARIAIR
UNIT

 **BECKER**

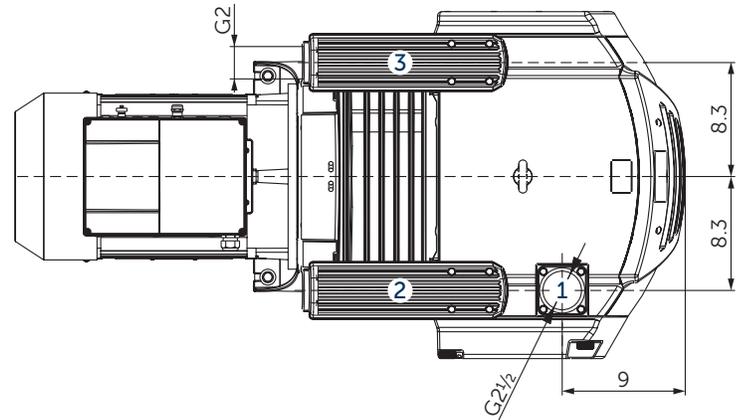
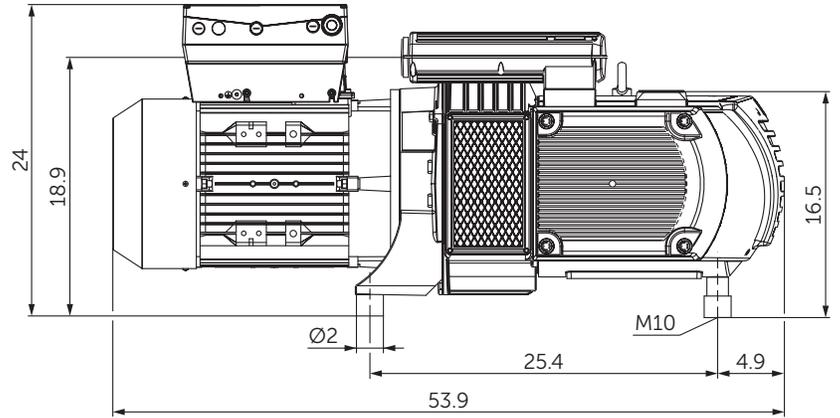
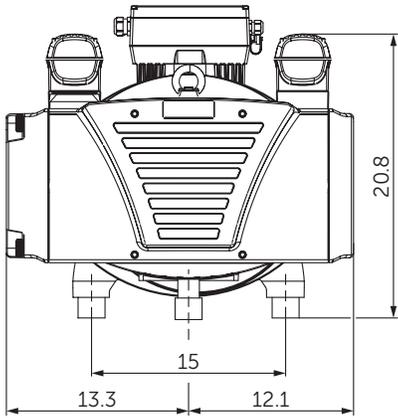


- 1 Vacuum connection (G2½)
- 2 Vacuum relief valve with silencer
- 3 Blow-off valve with silencer
 - Including integrated suction air filter
 - The motor illustration may vary.
 - Dimensions in inch

Suction air rate	Vacuum	Frequency	Emission sound pressure level ¹⁾	Weight	
CFM max.	in. HgV max.	Hz	dB(A)	lbs	Frequency inverter ²⁾ VAU-C
164.7	23.6	30-60	79	≈595.4	400-480 V ±10% 50/60 Hz

¹⁾ According to DIN EN ISO 3744 (KpA = 3 dB(A)), 39.4 inch distance, at medium load, both connection sides piped

²⁾ For details see frequency inverter operating instructions

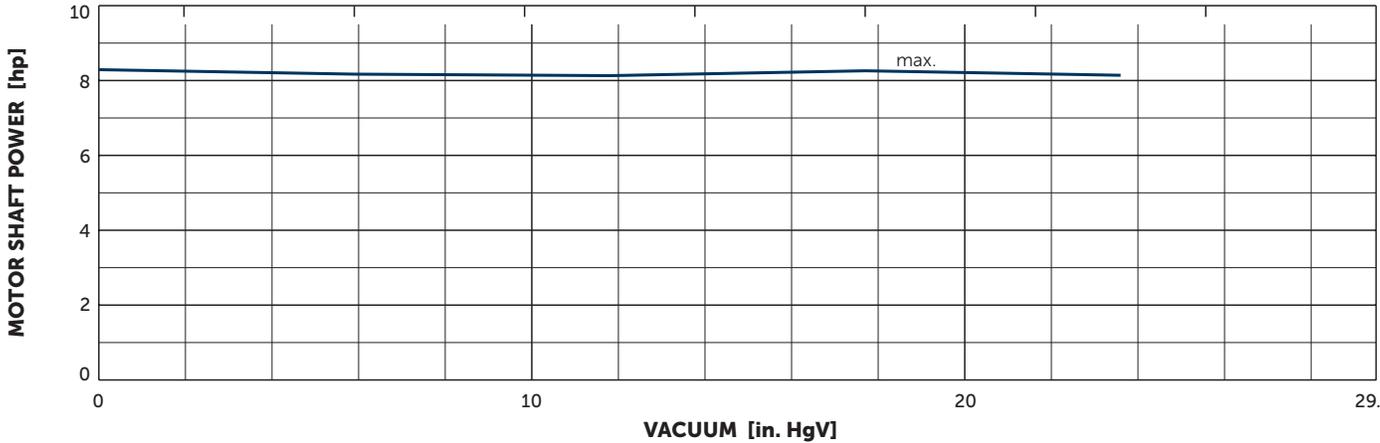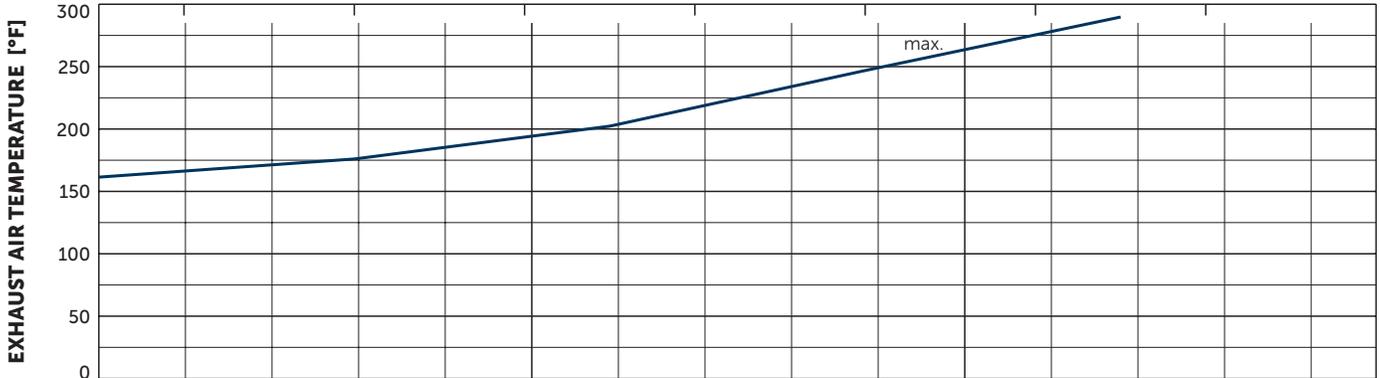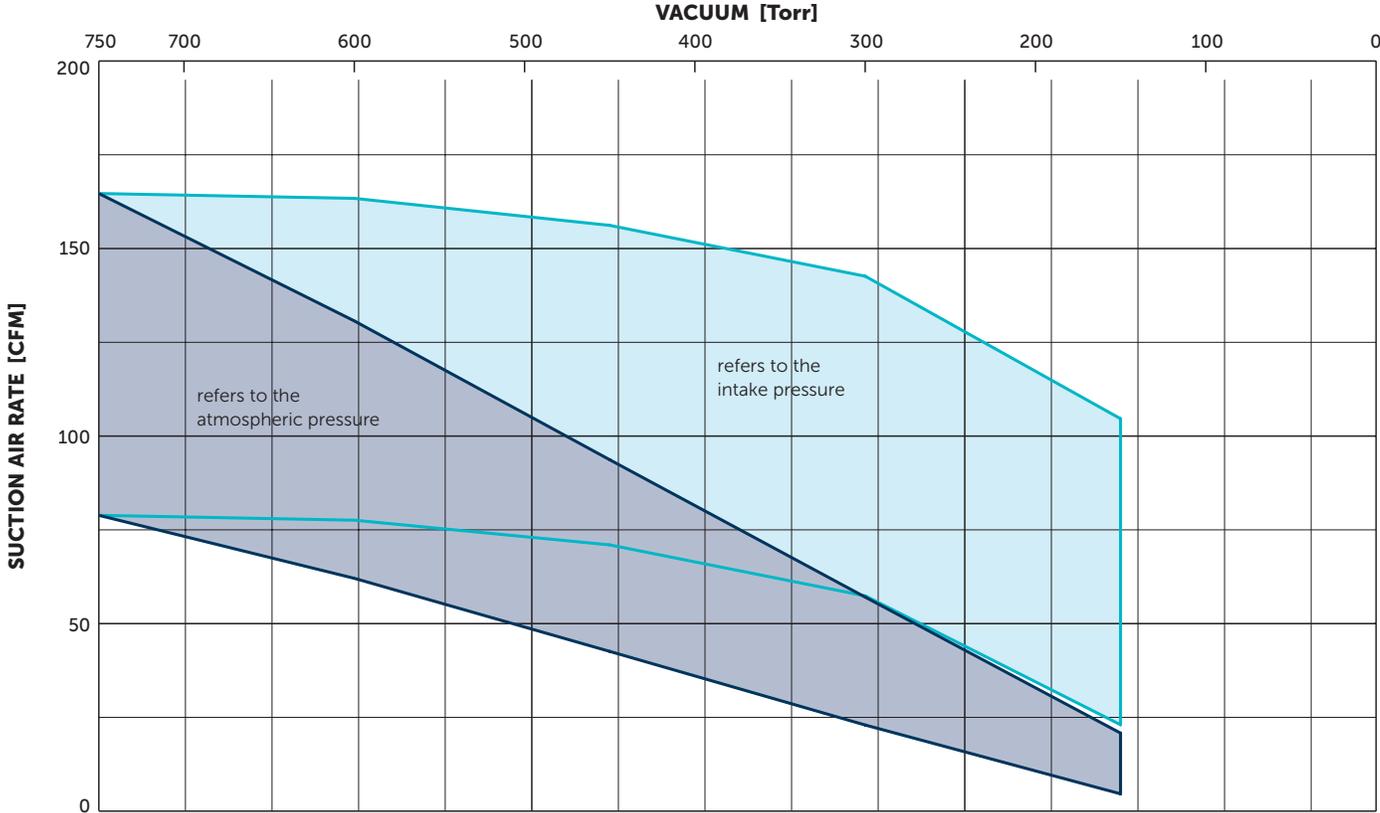

Reference data (atmosphere): 0 in. HgV, 68°F; Tolerance: ±5%

MAKE IT BECKER.

HOMEPAGE
VXLF SERIES



ONLINE SHOP
VXLF 2.250/0-400



www.beckerpumps.com
www.becker-international.com

