

► Cyclo® 6000 offers an expanded range of standard sizes and ratings. Use this chart to select a Cyclo® 6000 when replacing Cyclo® series 3000 and 4000 models.

CYCLO Frame Size Cross Reference

| SERIES | | |
|--------|------|------|
| 3000 | 4000 | 6000 |
| | | 6060 |
| 3075 | 4075 | 6065 |
| | | 6070 |
| 3085 | 4085 | 6075 |
| | | 6080 |
| | | 6085 |
| 3090 | 4090 | 6090 |
| 3095 | 4095 | 6095 |
| 3097 | 4097 | 6095 |
| 3100 | 4100 | 6100 |
| 3105 | 4105 | 6105 |
| 310H | 410H | 610H |
| | | 6110 |
| | | 6115 |
| 3110 | 4110 | 6120 |
| 3115 | 4115 | 6125 |
| 311H | 4125 | 612H |
| 3140 | 4130 | 6130 |
| 3145 | 4135 | 6135 |
| | | 6140 |
| 3155 | 4145 | 6145 |
| 315H | 4155 | 614H |
| 3160 | 4160 | 6160 |
| 3165 | 4165 | 6165 |
| 316H | 416H | 616H |
| 3170 | 4170 | 6170 |
| 3175 | 4175 | 6175 |
| 3180 | 4180 | 6180 |
| 3185 | 4185 | 6185 |
| 3190 | 4190 | 6190 |
| 3195 | 4195 | 6195 |
| 3205 | 4205 | 6205 |
| 3215 | 4215 | 6215 |
| 3225 | 4225 | 6225 |
| 3235 | 4235 | 6235 |
| 3245 | 4245 | 6245 |
| 3255 | 4255 | 6255 |
| 3265 | 4265 | 6265 |
| 3275 | 4275 | 6275 |

Table of Contents

1. General Information

2. Gearmotors


- How to Select.....2.2
- AGMA Load Classifications.....2.4
- Configure a Model Number (Nomenclature).....2.6
- Selection Tables
 - *1/8 HP - 75 HP.....2.8
- Dimensions:
 - *Greased - Universal Foot Mount (CNHM).....2.102
 - *Oil Lubricated - Horizontal Foot Mount (CHHM).....2.110
 - *Greased - Universal V-Flange Mount (CNVM).....2.132
 - *Oil Lubricated - Vertical V-Flange Mount (CVVM).....2.140
 - *Greased - Universal F-Flange Mount (CNFM).....2.162
 - *Oil Lubricated - Horizontal F-Flange Mount (CHFM).....2.170

3. Options

- Vertical F-Flange Mount, Overhead Drive (XXDVX).....3.2
- Slide Rail.....3.4
- Low Speed Shaft Specifications.....3.5
- Food and Industry Packages.....3.6

4. Technical Information


- Overhung Loads - Slow Speed Shaft.....4.2
- R1 High Capacity Bearings.....4.4
- R2 Ductile Iron Housing+High Cap. Bearings4.5
- Axial Load Calculations.....4.6
- Overhung Loads - High Speed Shaft.....4.7
- Lubrication.....4.10
- Motor Conduit Information.....4.16
- Fractional Motor Performance Data, 60Hz.....4.21
- Motor Performance Data (EP) 1HP+, 60Hz.....4.23
- CE Motor Performance Data, 50Hz.....4.25
- Notes on Inverter Operation.....4.27
- Motor Wiring Diagrams.....4.28
- Motor Thermal Ratings.....4.30
- Brakemotor Specifications.....4.31
- Brakemotor Wiring Diagrams.....4.36
- Brake Rectifiers and Power Modules.....4.41
- Warranty.....4.42

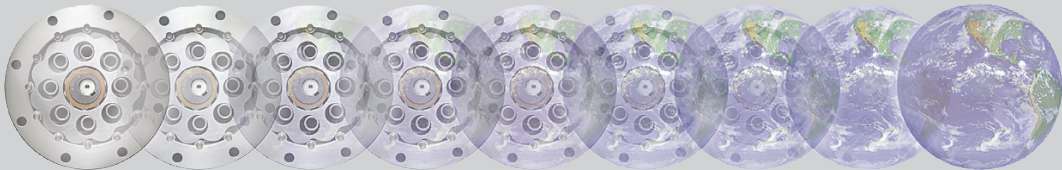

► **Wide variety of inputs available, including C-Face, Free-Shaft, Gearmotor and Brakemotor**

Consistent, Reliable Performance
All rotating components are fully hardened, vacuum degassed bearing grade steel

Custom output shaft diameters and stainless steel available as options, contact Sumitomo Customer Service for more information.

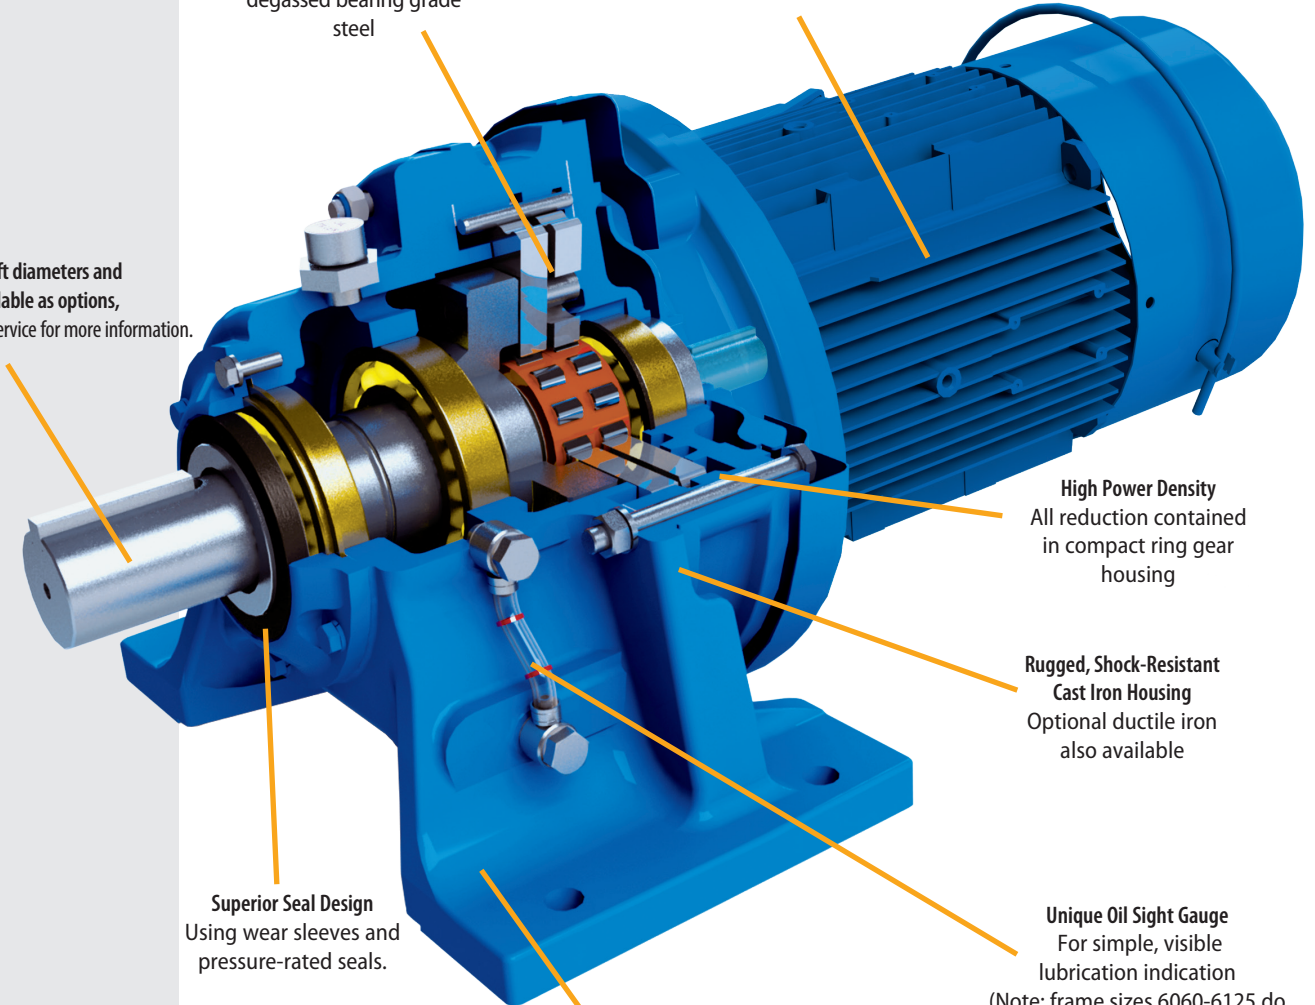

High Power Density
All reduction contained in compact ring gear housing

Rugged, Shock-Resistant Cast Iron Housing
Optional ductile iron also available

Unique Oil Sight Gauge
For simple, visible lubrication indication
(Note: frame sizes 6060-6125 do not feature the oil sight gauge due to grease lubrication)

Superior Seal Design
Using wear sleeves and pressure-rated seals.

Optional FDA Paint
Perfect for food grade applications, see Options page 3.6

Unmatched Reliability, Exceptional Performance

► Cyclo[®] speed gearmotors are **designed to withstand shockloads exceeding 500% of their ratings**



Product Description

Sumitomo Cyclo[®] speed reducers and gearmotors are the premier in-line drives. The revolutionary Cyclo[®] design provides quiet, efficient and reliable performance exceeding that of involute tooth gear designs. Unlike geared designs, the Cyclo[®]'s reduction components operate in compression rather than shear, which results in exceptionally rugged and shock resistant performance. The Cyclo[®] technology coupled with innovative product options and accessories offer the most extensive range of application solutions available.

Features & Benefits


- **Cycloidal speed reduction technology**
 - ~ Quiet, efficient and reliable operation with high torque density and compact size
- **Maintenance free for greased units 6060-6125**
- **Modular design**
 - ~ Interchangeable cast iron housings in foot, flanged or face mount configurations
- **Universal mounting arrangements**
 - ~ Available free-shaft, quill hollow shaft, C-face, shovel base, and top-mount inputs
- **Internal components manufactured from hardened, vacuum-degassed, bearing grade steel**
 - ~ Minimal vibration, low noise, low backlash and extended operational life
- **The best product warranty**
 - ~ The 24 month warranty backs up the superb Cyclo[®] product reputation

General Specifications Summary

| | |
|-------------------------|---|
| Sizes: | 23 sizes (5lbs to 5,000lbs) |
| Torque Rating: | 55 to 603,000 lb in |
| HP Rating: | 0.125 to 75 HP for integral gearmotor 0.10 to 235 HP for reducer only |
| Ratio Range: | 3:1 to 119:1 (single) 121:1 to 7,569:1 (double) 8,041:1 to 658,503:1 (triple) |
| Mounting: | Foot, Flange, Face Mount |
| Motor Standards: | NEMA, IEC, JIS, UL, CSA, CE |

► Sumitomo's Cyclo 6000 is extremely torque dense and is an inline gearmotor

- Connection free design
- Rugged forged output shaft
- Direct acting brake option
- Unmatched durability
- Foot and Flange Styles

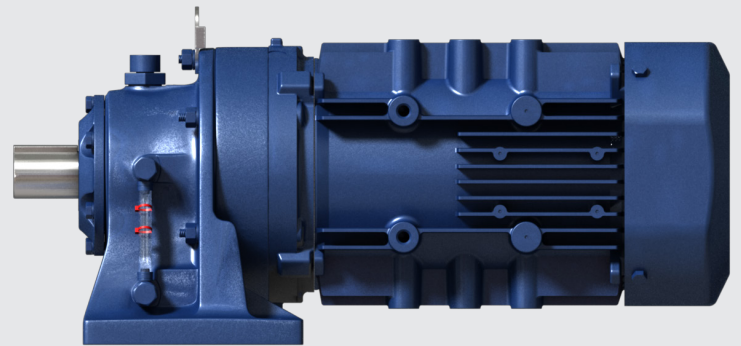

For additional CYCLO[®] 6000 information, please visit www.sumitomodrive.com



► Applications

- Conveyors
- Food Machinery
- Mixers
- Automotive Plants
- Recycling Machines
- Poultry Plants
- Sawmills and Wood Mills
- Wastewater Treatment
- Steel Mills
- Construction Equipment
- Paper Mills
- Processing Plants

Product Range (Standard Motor and Reducer Combinations)

Reduction Ratios 3 - 119

Combinations with 1450 and 1750 RPM motor

| Input Type | Planetary | | Cyclo | | | | | | | | | | | | | | | | | | |
|---------------------|------------|-------|-------|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|---|
| | Ratio | | 3 | 5 | 6 | 8 | 11 | 13 | 15 | 17 | 21 | 25 | 29 | 35 | 43 | 51 | 59 | 71 | 87 | 119 | |
| Actual Output RPM | 1450 | 50 Hz | 483 | 290 | 242 | 181 | 132 | 112 | 96.7 | 85.3 | 69.0 | 58.0 | 50.0 | 41.4 | 33.7 | 28.4 | 24.6 | 20.4 | 16.7 | 12.2 | |
| | 1750 | 60 Hz | 583 | 350 | 292 | 219 | 159 | 135 | 117 | 103 | 83.3 | 70.0 | 60.3 | 50.0 | 40.7 | 34.3 | 29.7 | 24.6 | 20.1 | 14.7 | |
| Motor Power HP (kW) | 1/8 (0.1) | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| | 1/4 (0.2) | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| | 1/3 (0.25) | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| | 1/2 (0.4) | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| | 3/4 (0.55) | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| | 1 (0.75) | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 1.5 (1.1) | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 2 (1.5) | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 3 (2.2) | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 5 (3.7) | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 7.5 (5.5) | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 10 (7.5) | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 15 (11) | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 20 (15) | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 25 (18.5) | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 30 (22) | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 40 (30) | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 50 (37) | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| 60 (45) | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| 75 (55) | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |

- Standard efficiency motor
- Premium efficiency or IE3 motor

Reduction Ratios 104 - 7569

Combinations with 1450 and 1750 RPM motor

| Input Type | Planetary | | Cyclo | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|------------|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|
| | Ratio | | 104 | 121 | 143 | 165 | 195 | 231 | 273 | 319 | 377 | 473 | 559 | 649 | 731 | 841 | 1003 | 1247 | 1479 | 1849 | 2065 | 2537 | 3045 | 3481 | 4437 | 5133 | 6177 | 7569 | | |
| Actual Output RPM | 1450 | 50 Hz | 13.9 | 12.0 | 10.1 | 8.79 | 7.44 | 6.28 | 5.31 | 4.55 | 3.85 | 3.07 | 2.59 | 2.23 | 1.98 | 1.72 | 1.45 | 1.16 | 0.98 | 0.754 | 0.702 | 0.572 | 0.476 | 0.417 | 0.327 | 0.282 | 0.235 | 0.192 | | |
| | 1750 | 60 Hz | 16.8 | 14.5 | 12.2 | 10.6 | 8.97 | 7.58 | 6.41 | 5.49 | 4.64 | 3.70 | 3.13 | 2.70 | 2.39 | 2.08 | 1.74 | 1.40 | 1.18 | 0.946 | 0.847 | 0.690 | 0.575 | 0.503 | 0.394 | 0.341 | 0.283 | 0.231 | | |
| Motor Power HP (kW) | 1/8 (0.1) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 1/4 (0.2) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 1/3 (0.25) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 1/2 (0.4) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 3/4 (0.55) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 1 (0.75) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 1.5 (1.1) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 2 (1.5) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 3 (2.2) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 5 (3.7) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 7.5 (5.5) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 10.5 (7.5) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 15 (11) | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 20 (15) | | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 25 (18.5) | | | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 30 (22) | | | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| | 40 (30) | | | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 50 (37) | | | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | |
| 60 (45) | | | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | |
| 75 (55) | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | |

- Standard efficiency motor
- Premium efficiency or IE3 motor

How do I select a Cyclo® gearmotor?

Selection is based on the motor horsepower and/or torque requirements at the output shaft. The Cyclo® gearmotor has particularly high efficiencies over a wide range of reduction ratios, which frequently permits the use of reduced input power requirements (smaller HP motor) without sacrificing output shaft torque. The selection procedures in this catalog will guide you in choosing the most efficient gearmotor for your application.

What information do I need to get started in the selection process?

To select the proper gearmotor for your application, you will need to know:

- Application: type of driven machine
- Hours of operation per day
- Motor horsepower (HP) and speed (RPM)
- Mounting position

If there are any special environmental factors or operation requirements, they must also be noted. This information will be important in determining the Service Factor of your application.

What are Service Classes and how are they used?

In general, gearmotors are rated for the specific conditions and operating requirements of the application by the use of AGMA-defined Service Classes. There are three AGMA Service Classifications for gearmotors: uniform (I), moderate shock (II) and heavy shock (III) (pages 2.4-2.5) The Service Classes are used in the product selection process to adjust for the specific conditions and operating requirements of your application.

What do I do if my application has particularly severe operating conditions?

The standard ratings for Cyclo® are based on 10-hour daily service under conditions of uniform loads (equivalent to AGMA service Class I). By following the product selection process, you will determine and apply the Service Factors to compensate for longer periods of operation and/or severe operating conditions.

How can I be sure that the gearmotor can withstand periodic excessive overloads?

Cyclo® Gearmotors provide 500% momentary intermittent shock load capacity. Planetary gearmotors can accommodate 300% momentary shock loads. For applications with shock loads greater than 500%, consult an SMA Application Engineer.

What are the standard input speeds?


In general terms, the speeds are 1750 and 1165 RPM at 60Hz, and 1450 and 980 RPM at 50Hz. When non-standard input speeds are used, the horsepower and torque ratings also vary.

What thermal capacity limitations does the Cyclo® have?

The Cyclo® gearmotor, by virtue of its smooth, almost frictionless operation (unlike traditional helical gears), has a thermal rating that far exceeds its mechanical capacity and all but eliminates the conventional limitations due to heat under normal ambient conditions.

What inverter turn-down ratio is available?


A 10:1 ratio is standard for motor without brake. Breakmotors are more limited with 4:1 or better depending on power. A 1000:1 ratio is available in a C-face configuration.

Common Configurations

Single Reduction,
Horizontal Foot Mount
Brakemotor



Single Reduction, Flange Mount



Single Reduction, V-Flange Mount



Double Reduction

Enhanced Performance (EP) Motor FAQs (1HP+)

What efficiency level are these Enhanced Performance (EP) motors?

The EP motor (applies to 1HP and above) is a Premium efficiency class, or International Efficiency 3 (IE3) design. Our integral fractional (less than 1HP) motors are not EP and are classified as standard efficiency IE1 motors.

What standards do these motors meet?

All Sumitomo motors are compliant with the Energy Policy and Conservation Act (EPAAct), as recently amended by the Department of Energy with a new ruling.

EP Sumitomo motors met the efficiency levels promoted by the Consortium for Energy Efficiency (CEE) and exceed the Canadian efficiency levels specified by NRCAN.

The IE3 efficiency ratings conform to both the IEC Standard 60034-30:2009 and eco-design directive 2005/32/EC.

Will Sumitomo motors work with inverters?

All current EP motors feature corona resistant magnet wire that extends the life of the insulation and enables the motors to resist the voltage spikes common with IGBT variable frequency drives.

What agency listings apply?

All EP motors in this product line are UL recognized, CSA certified and CE marked.

Can the motor be nameplated to operate at 50 hertz?

The motor can be nameplated and will operate at 50 hertz, but depending on the export destination, it may not meet that country's energy efficiency requirements. For areas requiring IE3 performance at 50 hertz, like Asia and Europe, other 50 hertz specific versions can be provided.

Is the selection procedure the same as previous gearmotors?

Similar, the difference is restricted to applications with a large number of across the line starts and stops. Because the EP motors have more inertia and higher inrush current than previous integral motors, a supplemental service factor is applied to these applications using EP motors. The selection procedure for fractional HP units is unchanged.

Are the brakes the same?

The brakes are the same direct acting, fast response types used previously. For motors 1 HP and above they are a new larger model that has been redesigned to match the new motor profiles. Because the EP motor inertia is significantly higher, it may be necessary to adjust external trigger points or limit switches. Since the brake assembly shapes are different, old and new parts are not interchangeable.

What is the standard insulation system?

The motors continue with the Class F system, which limits the temperature rise to a Class B rise, where it bounds the allowable temperature rise to 80°C. It utilizes an insulation system capable of handling a 105°C rise to significantly extend insulation life.

Are EP motors interchangeable with old AF-motors?

The new EP motors without brake have the same 10:1 constant torque speed range as the AF-motor. Motors are dimensionally and performance-wise different so VFD re-programming will be required. For EP brakemotor with use on VFDs, the applicable speed range may be limited. Please consult the factory for options for EP brakemotors.

Will old motors continue to be available?

EP motors will eventually replace the older IE1 motors (does not apply to fractional HP). 1HP+ Older motors do not meet the federally mandated efficiency requirements that went into effect on June 1, 2016. Non-compliant motors after that date cannot be manufactured or imported into the United States.

Should I be concerned if I am replacing an older motor with the new EP motor?

For most applications, the use of the new EP motor will result in a more efficient, cooler-running and energy-saving motor. However, for applications with certain performance constraints, you may need to review the impact of the following:

- larger dimension and weight
- larger moment of inertia
- higher starting current and torque.


If taking an old IE1 motor off a gearmotor and replacing it with the same HP new EP motor, the EP motor will bolt to the old gearmotor. The motor flange diameters, pilot diameters, bolt patterns and shaft diameters all match. Motor body dimensions and weight will change.

Standard Motor Specifications


| | Standard Specifications | Standard Specifications with Built-In Brake | |
|-------------------------------|--|---|---|
| 3 Phase Integral Motor | Capacity Range: | 1/8 ~ 75HP (0.1 ~ 55 kW), 4P | 1 ~ 40HP (0.75 ~ 30 kW), 4P, FB Brake |
| | Power Supply: | Motor Power: 230/460V, 60Hz, 3Phase 575V, 60Hz, 3Phase | Brake Power: 1 ~ 15HP (0.75 ~ 11kW): 230/460V, 60Hz, 1Ph 575V, 60Hz, 1Ph 20 ~ 40HP (15 ~ 30kW): 200 ~ 240V, 60Hz, 1Ph 380 ~ 480V 60Hz, 1Ph 575V, 60Hz, 1Ph |
| | Motor Standard: | NEMA | NEMA |
| | Efficiency: | Premium Efficiency (IE3) (1 HP+) | Premium Efficiency (IE3) (1 HP+) |
| | Protection: | IP55 | IP55 (1 ~ 15HP) IP54 (20 ~ 60HP) |
| | Certification: | CE Mark, UL Recognition, CSA Approval | CE Mark, UL Recognition, CSA Approval |
| | Conduit Box: | Diecast Aluminum, NPT Conduit Thread | Diecast Aluminum, NPT Conduit Thread |
| | Inverter Operation: | 10:1 Constant Torque Speed Range Insulation Meets NEMA MG1, Part 31 | 4:1 Constant Torque Speed Range or better. Insulation Meets NEMA MG1, Part 31 |
| | Capacity Range: | 0.75 ~ 55 kW (1 ~ 75HP), 4P | 0.75 ~ 30 kW (1 ~ 40HP), 4P, FB Brake 37 ~ 45 kW (50 ~ 60HP), 4P, ESB Brake |
| | Power Supply: | Motor Power: 0.75 ~ 4kW (1 ~ 6HP): 220/380V, 50Hz, 3Phase 230/400V, 50Hz, 3Phase 240/415V, 50Hz, 3Phase 5.5 ~ 55kW (1 ~ 75HP): 380V, 50Hz, 3Phase 400V, 50Hz, 3Phase 415V, 50Hz, 3Phase | Brake Power: 0.75 ~ 4kW (1 ~ 6HP): 220 ~ 380V, 50Hz, 1Ph 5.5 ~ 30kW (1 ~ 40HP): 380 ~ 415V, 50Hz, 1Ph 37 ~ 45kW (50 ~ 60HP): 200 ~ 220V, 50Hz, 1Ph |
| Motor Standard: | IEC | IEC | |
| Efficiency: | IE3 | IE3 | |
| Protection: | IP55 | IP44 | |
| Certification: | CE Mark, (UL Recognition Pending) 0.75 ~ 37kW (1 ~ 50HP): Diecast Al, Metric Conduit Thread | CE Mark, (UL Recognition Pending) | |
| Conduit Box: | 45 ~ 55kW (60 ~ 75HP): Cast Iron, Metric Conduit Thread | Diecast Aluminum, Metric Conduit Thread | |
| Inverter Operation: | 5:1 Constant Torque Speed Range or better. Insulation Meets NEMA MG1, Part 31 | 5:1 Constant Torque Speed Range or better. Insulation Meets NEMA MG1, Part 31 | |
| Enclosure: | Totally Enclosed Fan Cooled Type | Totally Enclosed Fan Cooled Type | |
| Motor Type: | Induction Motor, Squirrel Cage Rotor | Induction Motor, Squirrel Cage Rotor | |
| Frame Material: | 1/8 ~ 20HP (0.1 ~ 15kW), 4P: diecast Al 25HP ~ 75HP (18.5 ~ 55kW), 4P: cast iron | 1 ~ 20HP (0.75 ~ 15kW), 4P: diecast Al 25HP ~ 60HP (18.5 ~ 45kW), 4P: cast iron | |
| Bearings: | Deep Groove, Ball Bearing, CM Clearance | Deep Groove, Ball Bearing, CM Clearance | |
| Insulation: | Class F | Motor: Class F Brake: Class F | |
| Time Rating: | Continuous | Continuous | |
| Cyclo® 6000 Reducer | Reduction: | Involute crowned tooth prole for ratios 3:1 and 5:1, planetary arrangement. Internal planetary gear mechanism with trochoidal curved tooth prole for ratio 6:1 and higher. | |
| | Lubrication: | Grease or oil lubricated models available. | |
| | Seals: | Nitrile Material, dual lipped, double output seals available. | |
| | Material: | Rugged cast iron and ductile housings | |
| | Paint Color: | Blue, Munsell color number 6.5PB 3.6/8.2 | |
| | Bearings: | Deep groove ball bearings, cylindrical roller or spherical roller bearings. | |
| Note: | Listed ratings may be altered if models normally designed for oil lubrication are grease lubricated. | | |
| Ambient Conditions | Installation Location: | Indoor (Minimal dust and humidity) | |
| | Ambient Temperature: | 14° ~ 104° F (-10° ~ 40° C) | |
| | Ambient Humidity: | Under 85% | |
| | Elevation: | Under 3300 feet (1000 meters) | |
| | Atmosphere: | Well ventilated location, free of corrosive gases, explosive gases, vapors, and dust | |

Housing Styles & Mounting Positions


**CHH
(CNH)**




**CHF
(CNF)**




**CHV
(CNV)**




**CVH
(CNH)**




**CVF
(CNF)**




**CVV
(CNV)**




**CWH
(CNH)**



**CWF
(CNF)**




**CWV
(CNV)**




Input Side Hollow Shaft


**CHHX
(CNHX)**



**CHFX
(CNFX)**




**CVVX
(CNVX)**




With C-Face Adapter


**CHHJ
(CNHJ)**



**CHFJ
(CNFJ)**



**CVVJ
(CNVJ)**



Optional Ratios

Standard Reduction Ratios

| Single Reduction | | | | | | | | |
|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 3* | 5* | 6 | 8 | 11 | 13 | 15 | 17 | 21 |
| 25 | 29 | 35 | 43 | 51 | 59 | 71 | 87 | 119 |
| Double Reduction | | | | | | | | |
| 104 (13x8) | 121 (11x11) | 143 (13x11) | 165 (15x11) | 195 (15x13) | 231 (21x11) | 273 (21x13) | 319 (29x11) | 377 (29x13) |
| 473 (43x11) | 559 (43x13) | 649 (59x11) | 731 (43x17) | 841 (29x29) | 1003 (59x17) | 1247 (43x29) | 1479 (87x17) | 1849 (43x43) |
| 2065 (59x35) | 2537 (59x43) | 3045 (87x35) | 3481 (59x59) | 4437 (87x51) | 5133 (87x59) | 6177 (87x71) | 7569 (87x87) | |

* Note: Ratios 3 and 5 are planetary.

Optional Reduction Ratios

The following reduction ratios may also be available for certain specifications; please consult factory. The output shaft RPM listed in the table below represents coupling the reducer with a four-pole motor, 60 Hz, input speed 1750 RPM.

| | | | | | | | | | | | | | | | |
|-------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Reduction Ratio | 88 (11x8) | 90 (15x6) | 102 (17x6) | 120 (15x8) | 126 (21x6) | 136 (17x8) | 150 (25x6) | 168 (21x8) | 169 (13x13) | 174 (29x6) | 187 (17x11) | 200 (25x8) | 210 (35x6) | 221 (17x13) | 225 (15x15) |
| Output Speed RPM | 19.9 | 19.4 | 17.2 | 14.6 | 13.9 | 13.9 | 11.7 | 10.4 | 10.4 | 10.1 | 9.36 | 8.75 | 8.33 | 7.92 | 7.78 |
| Reduction Ratio | 232 (29x8) | 255 (17x15) | 258 (43x6) | 275 (25x11) | 280 (35x8) | 289 (17x17) | 306 (51x6) | 315 (21x15) | 325 (25x13) | 344 (43x8) | 354 (59x6) | 357 (21x17) | 375 (25x15) | 385 (35x11) | 408 (51x8) |
| Output Speed RPM | 7.54 | 6.86 | 6.87 | 6.36 | 6.25 | 6.06 | 5.72 | 5.56 | 5.38 | 5.09 | 4.94 | 4.90 | 4.67 | 4.55 | 4.29 |
| Reduction Ratio | 425 (25x17) | 426 (71x6) | 435 (29x15) | 441 (21x21) | 455 (35x13) | 472 (59x8) | 493 (29x17) | 522 (87x6) | 525 (35x15) | 561 (51x11) | 568 (71x8) | 595 (35x17) | 609 (29x21) | 625 (25x25) | 645 (43x15) |
| Output Speed RPM | 4.12 | 4.11 | 4.02 | 3.97 | 3.85 | 3.71 | 3.55 | 3.35 | 3.33 | 3.12 | 3.08 | 2.94 | 2.87 | 2.80 | 2.71 |
| Reduction Ratio | 663 (51x13) | 696 (87x8) | 725 (29x25) | 735 (35x21) | 765 (51x15) | 767 (59x13) | 781 (71x11) | 867 (51x17) | 875 (35x25) | 885 (59x15) | 903 (43x21) | 923 (71x13) | 957 (87x11) | 1015 (35x29) | 1065 (71x15) |
| Output Speed RPM | 2.64 | 2.51 | 2.41 | 2.38 | 2.29 | 2.28 | 2.24 | 2.02 | 2.00 | 1.98 | 1.94 | 1.90 | 1.83 | 1.72 | 1.64 |
| Reduction Ratio | 1071 (51x21) | 1075 (43x25) | 1131 (87x13) | 1207 (71x17) | 1225 (35x35) | 1239 (59x21) | 1275 (51x25) | 1305 (87x15) | 1475 (59x25) | 1491 (71x21) | 1505 (43x35) | 1711 (59x29) | 1775 (71x25) | 1785 (51x35) | 1827 (87x21) |
| Output Speed RPM | 1.63 | 1.63 | 1.55 | 1.45 | 1.43 | 1.41 | 1.37 | 1.34 | 1.19 | 1.17 | 1.16 | 1.02 | 0.99 | 0.98 | 0.96 |
| Reduction Ratio | 2059 (71x29) | 2175 (87x25) | 2193 (51x43) | 2485 (71x35) | 2523 (87x29) | 2601 (51x51) | 3009 (59x51) | 3053 (71x43) | 3621 (71x51) | 3741 (87x43) | 4189 (71x59) | 5041 (71x71) | | | |
| Output Speed RPM | 0.85 | 0.80 | 0.80 | 0.70 | 0.69 | 0.67 | 0.58 | 0.57 | 0.48 | 0.47 | 0.42 | 0.35 | | | |

All ratios listed include double reduction Cyclo® inputs. Consult factory for available frame sizes and ratings.

This page intentionally left blank

2

How to Select

Cyclo® 6000

Selection
Tables



How to select a Gearmotor

Step 1: Collect data about your application

Before starting you need to know the:

- **Application (e.g. Conveyor, Mixer, etc.)**
- **Hours of Operation per day**
- **Motor Horsepower (HP) and Speed (RPM)**
- **Desired Output Speed**
- **Mounting Position and Style**
- **Overhung or Thrust Loads**
- **Shaft Dimensions, inch or metric**
- **Electrical Specifications**
- **Ambient Conditions**

Step 2: Select a Frame Size

2A: Find the Load Classification of your application in the AGMA Load Classification Tables on pages 2.4 and 2.5.

2B: Go to the Gearmotor Selection Table (starts on page 2.9) that corresponds to the desired Motor HP. Find the Output Speed closest to the desired output speed.

2C: Locate the Service Class in the Gearmotor Selection Table for your application and select the HP Symbol and Frame Size SELECTION that matches the HP, Output Speed, and Service Class.

Step 3: Select a Housing Style and Mounting Position

Select a housing style and mounting position from chart on page 1.8

Step 4: Verify Dimensions

Use the Dimensions information on pages 2.102 thru 2.191 to verify that the selected Frame Size is appropriate.

Step 5: Choose Options and Modifications

The following options may apply:

- **Specify Voltage** (Consult factory when application requires 575 Volt or CSA unit; dimensions may be different than those specified in Section 4).
- **Inverter Duty**
- **Special Environments**
- **Special Paint**



For available options, please visit our Configurator at www.sumitomodrive.com/configurator

Note: If desired lubrication deviates from standard, please consult factory for new power ratings. Standard Lubrication can be found in Section 4 Technical Information.

Step 6: Configure a Model Number

Go to page 2.6 to configure a model number.

Note: You will use the information you gather from the procedure on this page to Configure a Model Number.

Example page 2.3



Gearmotors

Selection Tables

Dimension Pages:

| | |
|--------------------|-------------|
| Foot Mount (H) | 4.2 - 4.29 |
| V-Flange Mount (V) | 4.30 - 4.43 |
| F-Flange Mount (F) | 4.44 - 4.69 |

| | | | |
|-----------------|-----|------|------|
| Frequency | Hz | 50 | 60 |
| Number of Poles | P | 4 | |
| Input Speed | RPM | 1450 | 1750 |

1HP
(0.75kW)

Select a Frame Size

- Housing Style & Mounting Position
- Motor HP
- Output Speed
- Service Class
- SELECTION Frame Size and HP

| 50Hz | | | | 60Hz | | | | Selection | | | VFD |
|--------------------|-------------------------------|----------------------|--------------------------------------|--------------------|-------------------------------|----------------------|--------------------------------------|------------------|-----------------|-------|-----|
| Output Speed (RPM) | Output Torque in-lbs (N·m) | Service Factor SF | Solid Shaft Overhung Load lbs (N) | Output Speed (RPM) | Output Torque in-lbs (N·m) | Service Factor SF | Solid Shaft Overhung Load lbs (N) | Motor Power Code | Base Frame Size | Ratio | |
| 242 | 250 (28.2) | 1.04 I | 427 (1900) | 292 | 206 (23.3) | 1.04 I | 402 (1790) | 1 | 6085 | 6 | ● |
| | | 1.53 II | 638 (2840) | | | 1.53 II | 600 (2670) | | 6090 | 6 | ● |
| | | 2.03 III | 638 (2840) | | | 2.03 III | 600 (2670) | | 6095 | 6 | ● |
| 181 | 332 (37.5) | 1.04 I | 461 (2050) | 219 | 275 (31.1) | 1.04 I | 434 (1930) | 1 | 6085 | 8 | ● |
| | | 1.53 II | 710 (3160) | | | 1.53 II | 670 (2980) | | 6090 | 8 | ● |
| | | 2.03 III | 710 (3160) | | | 2.03 III | 670 (2980) | | 6095 | 8 | ● |
| 132 | 457 (51.6) | 1.04 I | 506 (2250) | 159 | 379 (42.8) | 1.04 I | 479 (2130) | 1 | 6085 | 11 | ● |
| | | 1.53 II | 751 (3340) | | | 1.53 II | 751 (3340) | | 6090 | 11 | ● |
| | | 2.03 III | 751 (3340) | | | 2.03 III | 751 (3340) | | 6095 | 11 | ● |
| 112 | 540 (61.0) | 1.04 I | 542 (2410) | 135 | 447 (50.5) | 1.04 I | 513 (2280) | 1 | 6085 | 13 | ● |
| | | 1.53 II | 751 (3340) | | | 1.53 II | 751 (3340) | | 6090 | 13 | ● |
| | | 2.03 III | 751 (3340) | | | 2.03 III | 751 (3340) | | 6095 | 13 | ● |
| 96.7 | 623 (70.4) | 1.04 I | 560 (2490) | 117 | 516 (58.3) | 1.04 I | 528 (2350) | 1 | 6085 | 15 | ● |
| | | 1.53 II | 751 (3340) | | | 1.53 II | 751 (3340) | | 6090 | 15 | ● |
| | | 2.03 III | 751 (3340) | | | 2.03 III | 751 (3340) | | 6095 | 15 | ● |

For special circumstances in selecting a **Frame Size** such as:

- Overhung Load
- Thrust Loads
- Radial Loads
- Shock Loading

Consult Technical Information, see section 4

If Overhung Load is present, any Overhung Load must be checked against the capacity of the selection.

Step 2A - AGMA Load Classifications: Gearmotors

Select Service factor by Method A or B or C:

Method A - Gearmotor Classification by LOAD

| DURATION OF SERVICE | GEARMOTOR CLASS | | |
|------------------------------|-----------------|---------------------|------------------|
| | UNIFORM LOAD | MODERATE SHOCK LOAD | HEAVY SHOCK LOAD |
| Intermittent 3 hours per day | Class I | Class I | Class II |
| Up to 10 hours per day | Class I | Class II | Class III |
| 24 hours per day | Class II | Class III | — |

Class I = Steady loads not exceeding normal motor rating, 8 to 10 hours a day. Moderate shock loads where service is intermittent (AGMA Service Factor: 1.0).

Class II = Steady loads not exceeding normal motor rating and 24 hours a day service. Moderate shock loads for 8 hours a day (AGMA Service Factor: 1.4).

Class III = Moderate shock loads for 24 hours a day or heavy shock loads for 8 hours a day (AGMA Service Factor: 2.0)

Note: Selections without an AGMA Class designation are torque based selections generally used for intermittent service.

Method B - Recommended Service Factors for Frequent Start-Stop Applications for EP Motors

For frequent start-stop applications with motor operated across the line, use the table below to determine the recommended service factor, and check the Motor Thermal Rating (Table 4.30) in Section 4. For determination of moment of inertia, see page 4.30.

| Number of start-stops (Times/hour) | ~ 10 hours/day | | | ~24 hours/day | | |
|---------------------------------------|----------------|-----|------|---------------|------|------|
| | I | II | III | I | II | III |
| 1 | 1 | 1.1 | 1.35 | 1.2 | 1.25 | 1.5 |
| ~3 | 1 | 1.2 | 1.45 | 1.2 | 1.35 | 1.55 |
| ~10 | 1 | 1.3 | 1.5 | 1.2 | 1.45 | 1.65 |
| ~60 | 1 | 1.4 | 1.6 | 1.2 | 1.65 | 1.8 |

$$\text{Inertia (Moment of Inertia } WR^2) \text{ Ratio} = \frac{\text{Total Moment of Inertia (} WR^2) \text{ as seen from motor shaft}}{\text{Moment of Inertia (} WR^2) \text{ of motor}}$$

I = Allowable Inertia (WR^2) Ratio: Inertia Ratio \leq 0.3

II = Allowable Inertia (WR^2) Ratio: 0.3 < Inertia Ratio \leq 3.0

III = Allowable Inertia (WR^2) Ratio: 3.0 < Inertia Ratio \leq 10.0

- Note:**
1. The number of start-stops includes brake or clutch operation times.
 2. Consult us when starting under loaded conditions such as torque or radial load.
 3. Consult us when start-stop frequency or Moment of Inertia Ratio exceeds that shown above.

Specification Inspection Items

- if there is a shoulder bolt or knockpin used on mating surface of reducer
- change in case material
- if using high frequency brake

Method C - Load Classification by INDUSTRY

| Application | Class | | Application | Class | | Application | Class | | Application | Class | |
|---------------------------------|----------------------|----------------|-----------------------------------|----------------------|----------------|---|----------------------|----------------|--|----------------------|----------------|
| | Up to 10 Hr. Per Day | 24 Hr. Per Day | | Up to 10 Hr. Per Day | 24 Hr. Per Day | | Up to 10 Hr. Per Day | 24 Hr. Per Day | | Up to 10 Hr. Per Day | 24 Hr. Per Day |
| Brewing & Distilling | | | Lumber Industry | | | Oil Well Pumping | | | Sheeter | II | II |
| Bottling Machinery | I | II | Barkers-Spindle Feed | Consult Factory | | Paraffin Filter Press | II | II | Tire Building Machines | Consult Factory | |
| Brew Kettles, Cont. Duty | - | II | Barkers-Main Drive | Consult Factory | | Rotary Kilns | II | II | Tire, Tube Press | | |
| Can Filling Machines | I | II | Carriage Drive | Consult Factory | | Paper Mills | | | Openers | Consult Factory | |
| Cookers-Cont. Duty | - | II | Conveyors | | | Agitators (Mixers) | II | II | Tubers & Stainers | II | II |
| Mash Tubs-Cont. Duty | - | II | Burner | II | III | Barker-Auxiliaries-Hyd. | Consult Factory | | Sewage Disposal | | |
| Scale Hoppers-Frequent Starts | II | II | Main or Heavy Duty | II | III | Barker, Mechanical | Consult Factory | | Aerators | Consult Factory | |
| Clay Working Industry | | | Main Log | III | III | Hyd. | Consult Factory | | Bar Screens | I | II |
| Brick Press | III | III | Re-Saw Merry-Go-Round | II | III | Bleacher | Consult Factory | | Chemical Feeders | I | II |
| Briquette Machines | III | III | Slab | II | III | Calenders | Consult Factory | | Collectors | I | II |
| Clay Working Machinery | II | II | Transfer | II | III | Beater & Pulper | - | II | Dewatering Screens | II | II |
| Pug Mills | II | II | Chains-Floor | II | III | Bleacher | - | II | Grit Collectors | I | II |
| Distilling (See Brewing) | | | Chains-Green | II | III | Calenders-Super | - | II | Scum Breakers | II | II |
| Dredges | | | Cut-Off Saws-Chain | II | III | Converting Mach.-Except Cutters-Platers | - | II | Slow or Rapid Mixers | II | II |
| Cable Reels | II | - | Cut-Off Saws-Drag | II | III | Conveyors | - | II | Sludge Collectors | I | II |
| Conveyors | II | II | Debarking Drums | Consult Factory | | Couch | - | II | Thickeners | II | II |
| Cutter Head Drives | III | III | Feeds-Edger | II | III | Cutters, Platers | - | III | Vacuum Filters | II | II |
| Jig Drives | III | III | Feeds-Gang | III | III | Cylinders | - | II | Textile Industry | | |
| Maneuvering Winches | II | - | Feeds-Trimmer | II | III | Dryers | - | II | Batchers | II | II |
| Pumps | II | II | Log Deck | III | III | Felt Stretchers | - | II | Calenders | II | II |
| Screen Drives | III | III | Log Hauls-Incline, Well Type | III | III | Felt Whippers | - | III | Card Machines | II | II |
| Stackers | II | II | Log Turning Devices | III | III | Jordans | - | II | Cloth Finishing Machines (Calenders, Dryers, Pads, Tenders, Washers) | II | II |
| Utility Winches | II | - | Planer Feed | II | III | Log Haul | - | III | Dry Cans | II | II |
| Food Industry | | | Planer Tilting Hoists | II | III | Presses | - | II | Dyeing Machinery | II | II |
| Beet Slicers | II | II | Rolls-Live-Off Bearing-Roll Cases | III | III | Pulp Machine Reels | - | II | Knitting Machinery | Consult Factory | |
| Bottlings, Can Filling Mach. | I | II | Sorting Table | II | III | Stock Chests | - | II | Looms, Mangles, Nappers | II | II |
| Cereal Cookers | I | II | Tipple Hoist | II | III | Suction Rolls | - | II | Range Drives | Consult Factory | |
| Dough Mixers | II | II | Transfers-Chain | II | III | Washers & Thickeners | - | II | Soapers, Spinners | II | II |
| Meat Grinders | II | II | Transfers-Craneway | II | III | Winders | - | II | Tenter Frames | II | II |
| | | | Tray Drives | II | III | Rubber Industry | | | Winders | II | II |
| | | | Oil Industry | | | Mixer | III | III | Yarn Preparatory Machinery (Cards, Spinners, Slashers) | II | II |
| | | | Chillers | II | II | Rubber Calender | II | II | | | |
| | | | | | | Rubber Mill (2 or more) | II | II | | | |

...table continued on next page.

Method C continued - Load Classification by APPLICATION

| Application | Class | | Application | Class | | Application | Class | | Application | Class | |
|--|----------------------|----------------|--|----------------------|----------------|--|----------------------|----------------|---|----------------------|----------------|
| | Up to 10 Hr. Per Day | 24 Hr. Per Day | | Up to 10 Hr. Per Day | 24 Hr. Per Day | | Up to 10 Hr. Per Day | 24 Hr. Per Day | | Up to 10 Hr. Per Day | 24 Hr. Per Day |
| Agitators Pure Liquids Liquids and Solids Liquids - Variable Density Semi-liquids - Variable Density | I | II | Jig Drives Maneuvering Winches Pumps Screen Drive Stackers Utility Winches | III | III | Tray Drives Veneer Lathe Drives | II | III | Pullers Barge Haul | III | III |
| Blowers Centrifugal Lobe Vane | I | II | Elevators Bucket - Uniform Load Bucket - Heavy Load Bucket - Continuous Centrifugal Discharge Escalators Freight Gravity Discharge Man Lifts Passenger Service - Hand Lift | I | II | Machine Tools Bending Roll Notching Press - Belt Driven Plate Planer Punch Press - Gear Driven Tapping Machines Other Machine Tools Main Drives Auxiliary Drives | II | II | Pumps Centrifugal Proportioning Reciprocating Single Acting 3 or more Cylinders Double Acting 2 or more Cylinders Single Acting 1 or 2 Cylinders Double Acting Single Cylinder Rotary - Gear Type - Lobe, Vane | I | II |
| Brewing and Distilling Bottling Machinery Brew Kettles - Continuous Duty Cookers - Continuous Duty Mash Tubs - Continuous Duty Scale Hopper Frequent Starts | I | II | Fans Centrifugal Cooling Towers Induced Draft Forced Draft Induced Draft Large (Mine, etc.) Light (Small Diameter) | I | II | Metal Mills Bridle Roll Drives Draw Bench - Carriage Draw Bench - Main Drive Forming Machines Pinch Dryer & Scrubber Rolls, Reversing Slitters Table Conveyors Non-Reversing Reversing Winding Reels - Strip Wire Drawing & Flattening Machine Wire Winding Machine | III | III | Rubber Industry Mixer Rubber Calender Rubber Mill (2 or more) Sheeter Tire Building Machines Tire & Tube Press Openers Tubers & Strainers | III | III |
| Can Filling Machines | I | II | Feeders Apron Belt Disc Reciprocating Screw | II | II | Mills, Rotary Type Ball Cement Kilns Dryers & Coolers Kilns Pebble Rod Tumbling Barrels | III | III | Sewage Disposal Equipment Aerators Bar Screens Chemical Feeders Collectors, Circuline or Straightline Dewatering Screens Grit Collectors Scum Breakers Slow or Rapid Mixers Sludge Collectors Thickeners Vacuum Filters | Consult Factory | I |
| Cane Knives | II | II | Food Industry Beet Slicer Cereal Cooker Dough Mixer Meat Grinders | II | II | Mixers Concrete Mixers, Continuous Concrete Mixers, Intermittent Constant Density Variable Density | II | II | Screens Air Washing Rotary - Stone or Gravel Traveling Water Intake | I | II |
| Car Dumpers | III | - | Generators - (Not Welding) | I | II | Oil Industry Chillers Oil Well Pumping Paraffin Filter Press Rotary Kilns | II | II | Slab Pushers Steering Gear Stokers | II | II |
| Car Pullers - Intermittent Duty | I | - | Hammer Mills | III | III | Paper Mills Aerators Agitators (Mixers) Barker Auxiliaries, Hydraulic Barker, Mechanical Barking Drum Beater & Pulper Bleacher Calenders Calenders - Super Converting Machines, except Cutters, Platers Conveyors Conveyors, Log Couch Cutters, Platers Cylinders Dryers Felt Stretcher Felt Whipper Jordans Presses Pulp Machines, Reel Stock Chests Suction Roll Washers and Thickeners Winders | II | II | Textile Industry Batchers Calenders Card Machines Cloth Finishing Machines (Washers, Pads, Tenters) (Dryers, Calenders, etc.) Dry Cans Dryers Dyeing Machinery Knitting Machines (Looms, etc.) Looms Mangles Nappers Pads Range Drives Slashers Soapers Spinnners Tenter Frames Washers Winders (Other than Batchers) Yarn Preparatory Machines (Cards, Spinners, Slashers, etc.) | II | II |
| Clarifiers | I | II | Laundry Washers Reversing | II | II | Printing Presses | I | II | Windlass | II | II |
| Classifiers | II | II | Laundry Tumblers | II | II | | | | | | |
| Clay Working Machinery Brick Press Briquette Machine Clay Working Machinery Pug Mill | III | III | Line Shafts Heavy Shock Load Moderate Shock Load Uniform Load | III | III | | | | | | |
| Compressors Centrifugal Lobe Reciprocating Multi-Cylinder Single Cylinder | I | II | Lumber Industry Barkers - Spindle Feed Barkers - Main Drive Carriage Drive Conveyors - Burner Conveyors - Main or Heavy Duty Conveyors - Main Log Conveyors - Merry-Go-Round Conveyors - Slab Conveyors - Transfer Conveyors - Waste Chains - Floor Chains - Green Cut-Off Saws - Chain Cut-Off Saws - Drag Debarking Drums Feeds - Edger Feeds - Gang Feeds - Trimmer Log Deck Log Hauls - Incline Well Type Log Turning Devices Planer Feed Planer Tilting Hoists Rolls - Live - Off Brg. - Roll Cases Sorting Table Tippie Hoist Transfers - Chain Transfers - Craneway | II | II | | | | | | |
| Conveyors - Uniformly Loaded or Fed Apron Assembly Belt Bucket Chain Flight Oven Screw | I | II | | | | | | | | | |
| Conveyors - Heavy Duty Not Uniformly Fed Apron Assembly Belt Bucket Chain Flight Live Roll (Package) Oven Reciprocating Screw Shaker | II | II | | | | | | | | | |
| Cranes and Hoists Main Hoists Heavy Duty Medium Duty Reversing Skip Hoists Trolley Drive Bridge Drive | III | III | | | | | | | | | |
| Crushers Ore Stone | III | III | | | | | | | | | |
| Dredges Cable Reels Conveyors Cutter Head Drives | II | - | | | | | | | | | |


Cyclo® 6000

AGMA Tables

Configure a Model Number

Output Shaft Orientation

| Type | Code |
|-------------------------|------|
| Horizontal [1] | H |
| Vertical [1] | V |
| Vertical Up [1] | W |
| Universal Direction [2] | N |

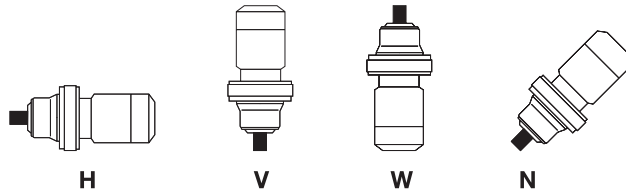


Notes:

- [1] H, V, W, units cannot change orientation in the field.
- [2]: Universal Direction (N) units are maintenance-free greased.


Housing Style

| Type | Code |
|----------|------|
| Foot | H |
| Flange | F |
| V-Flange | V |

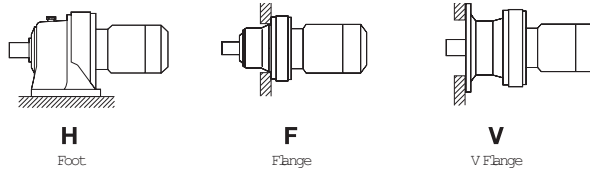

Type of Input

| Motor Connection | Code |
|--------------------|------|
| Integral Gearmotor | M |
| C-Face Adaptor | JM |
| Hollow Input Shaft | XM |

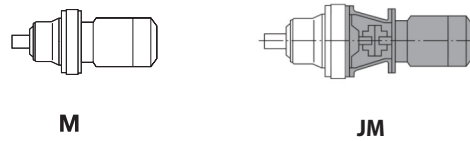

Modification (Special)

| | Code |
|----------|------|
| Special | S |
| Standard | - |

Motor Capacity

| 4P | HP | | | | | | | | Symbol | | | | | | | | | | | | |
|----|-----|-----|-----|-----|-----|---|----|---|--------|---|---|-----|----|----|----|----|----|----|----|----|----|
| | 1/8 | 1/4 | 1/3 | 1/2 | 3/4 | 1 | 1H | 2 | 3 | 4 | 5 | 7.5 | 10 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | 75 |
| | 01 | 02 | 03 | 05 | 08 | 1 | 1H | 2 | 3 | 4 | 5 | 8 | 10 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | 75 |

Note: For standard fractional motors (non inverter duty), no specification code suffix is required.

Shaft Specification

| Input Shaft | Code |
|---|------|
| Metric JIS | - |
| Inch | Y |
| AGMA I | YA |
| AGMA II | YB |
| AGMA III | YC |
| Standard Metric DIN "G" (up to size 6125) | G |
| Optional Metric DIN "E" (up to size 6145) | E |

Frame Size (from Selection Tables)

Brake

| | Code |
|------------|------|
| With Brake | B |
| No Brake | |

C H H M **10** - **6165** **YB** - **EP** - **29**

Frame size

Brake Ratio

Modification (Special feature)

Input connection

Mounting style

Output shaft orientation

Gearmotor Specification

Shaft specification

C = Ratios 6:1 and greater (Cyclo Gearmotor product code)
 P = Ratios 3:1 and 5:1 (Cyclo 6000 planetary product code)

Example:

CHHM10 – 6165YB – 29

C – Cyclo 6000
H – Horizontal O/P
H – Foot Mount
M – Gearmotor
6165 – Frame Size
YB – Inch Shaft, AGMA Class II
29 – Ratio

Cyclo® 6000


Nomenclature

Specification Codes

| Type | Suffix |
|---|-----------|
| AF Motor (Inverter Duty, 1/8 HP to 3/4 HP) | AV |
| Three-Phase Motor Premium Efficiency (1+ HP), IE3 | EP |
| High Capacity Bearing, page 4.4 | R1 |
| High Capacity Bearings + Ductile Casing, page 4.5 | R2 |
| *DC Motor | DV |
| *CHH Type | |
| Oil Sight Mount Ceiling | H1 |
| Oil Sight Mount Left Wall | H2 |
| Oil Sight Mount Right Wall | H3 |
| *Low Backlash | LB |
| *Single Phase Motor | SG |
| *Servo Motor | SV |
| *Torque Limiter | TL |


*For technical information please contact customer service.
 Note: When there are multiple suffices, sequence them alphabetically. Ex.: EPTL

Nominal Ratio

| Selection Tables | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---------------|--------|----------------|--|------------|--|---------------|-----------|----------------|---------------------------|-------|------------------|--------|------------|------|-------------|-----|------------|-------|--|--|------------|--|-----------------|--|--|--|--|--|
| Dimension Pages: Foot Mount (H) 4.2 - 4.29 V-Flange Mount (V) 4.30 - 4.43 F-Flange Mount (F) 4.44 - 4.69 | | | |  | | <table border="1"> <tr> <td>Frequency</td> <td>Hz</td> <td>50</td> <td>60</td> </tr> <tr> <td>Number of Poles</td> <td>P</td> <td colspan="2">4</td> </tr> <tr> <td>Input Speed</td> <td>RPM</td> <td>1450</td> <td>1750</td> </tr> </table> | | Frequency | Hz | 50 | 60 | Number of Poles | P | 4 | | Input Speed | RPM | 1450 | 1750 | <table border="1"> <tr> <td colspan="2">1HP</td> </tr> <tr> <td colspan="2">(0.75kW)</td> </tr> </table> | | 1HP | | (0.75kW) | | | | | |
| Frequency | Hz | 50 | 60 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Number of Poles | P | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Input Speed | RPM | 1450 | 1750 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1HP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (0.75kW) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50Hz | | | | 60Hz | | | | Selection | | | | | | | | | | | | | | | | | | | | | |
| Output Speed (RPM) | Output Torque | | Service Factor | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD | | | | | | | | | | | | | | |
| | in-lbs | (N-m) | | SF | AGMA Class | | lbs | (N) | | in-lbs | (N-m) | | SF | AGMA Class | | lbs | (N) | Frame Size | Ratio | | | | | | | | | | |
| 242 | 250 | (28.2) | 1.04 | I | 427 | (1900) | 292 | 206 | (23.3) | 1.04 | I | 402 | (1790) | 1 | 6085 | 6 | • | | | | | | | | | | | | |
| | | | 1.53 | II | 638 | (2840) | | | | 1.53 | II | 600 | (2670) | 1 | 6090 | 6 | • | | | | | | | | | | | | |
| | | | 2.03 | III | 638 | (2840) | | | | 2.03 | III | 600 | (2670) | 1 | 6095 | 6 | • | | | | | | | | | | | | |
| 181 | 332 | (37.5) | 1.04 | I | 461 | (2050) | 219 | 275 | (31.1) | 1.04 | I | 434 | (1930) | 1 | 6085 | 8 | • | | | | | | | | | | | | |
| | | | 1.53 | II | 710 | (3160) | | | | 1.53 | II | 670 | (2980) | 1 | 6090 | 8 | • | | | | | | | | | | | | |

Selection Tables

1/8 HP
0.1 kW

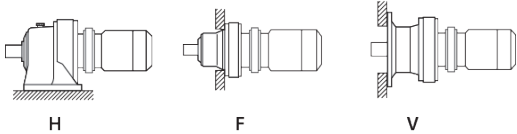

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 242 | 33 | (3.75) | 2.00 | III | 181 | (804) | 292 | 28 | (3.11) | 2.00 | III | 170 | (756) | 01 | 6060 | 6 | AV |
| | | | 2.86 | III | 181 | (804) | | | | 2.86 | III | 170 | (756) | 01 | 6065 | 6 | AV |
| 181 | 44 | (5.01) | 2.00 | III | 207 | (921) | 219 | 37 | (4.15) | 2.00 | III | 195 | (866) | 01 | 6060 | 8 | AV |
| | | | 2.86 | III | 207 | (921) | | | | 2.86 | III | 195 | (866) | 01 | 6065 | 8 | AV |
| 132 | 61 | (6.88) | 2.00 | III | 265 | (1180) | 159 | 51 | (5.70) | 2.00 | III | 265 | (1180) | 01 | 6060 | 11 | AV |
| | | | 2.86 | III | 265 | (1180) | | | | 2.86 | III | 265 | (1180) | 01 | 6065 | 11 | AV |
| 112 | 72 | (8.13) | 2.00 | III | 265 | (1180) | 135 | 60 | (6.74) | 2.00 | III | 265 | (1180) | 01 | 6060 | 13 | AV |
| | | | 2.86 | III | 265 | (1180) | | | | 2.86 | III | 265 | (1180) | 01 | 6065 | 13 | AV |
| 96.7 | 83 | (9.39) | 2.00 | III | 265 | (1180) | 117 | 69 | (7.78) | 2.00 | III | 265 | (1180) | 01 | 6060 | 15 | AV |
| | | | 2.86 | III | 265 | (1180) | | | | 2.86 | III | 265 | (1180) | 01 | 6065 | 15 | AV |
| 85.3 | 94 | (10.6) | 2.00 | III | 265 | (1180) | 103 | 78 | (8.81) | 2.00 | III | 265 | (1180) | 01 | 6060 | 17 | AV |
| | | | 2.82 | III | 265 | (1180) | | | | 2.86 | III | 265 | (1180) | 01 | 6065 | 17 | AV |
| 69.0 | 116 | (13.1) | 1.83 | III | 265 | (1180) | 83.3 | 96 | (10.9) | 2.00 | III | 265 | (1180) | 01 | 6060 | 21 | AV |
| | | | 2.28 | III | 265 | (1180) | | | | 2.34 | III | 265 | (1180) | 01 | 6065 | 21 | AV |
| 58.0 | 138 | (15.6) | 1.10 | I | 265 | (1180) | 70.0 | 115 | (13.0) | 1.10 | I | 265 | (1180) | 01 | 6060 | 25 | AV |
| | | | 1.66 | III | 265 | (1180) | | | | 1.66 | III | 265 | (1180) | 01 | 6065 | 25 | AV |
| | | | 2.30 | III | 398 | (1770) | | | | 2.30 | III | 398 | (1770) | 01 | 6070 | 25 | AV |
| | | | 2.94 | III | 398 | (1770) | | | | 2.94 | III | 398 | (1770) | 01 | 6075 | 25 | AV |
| 50.0 | 161 | (18.1) | 1.10 | I | 265 | (1180) | 60.3 | 133 | (15.0) | 1.10 | I | 265 | (1180) | 01 | 6060 | 29 | AV |
| | | | 1.65 | III | 265 | (1180) | | | | 1.66 | III | 265 | (1180) | 01 | 6065 | 29 | AV |
| | | | 2.26 | III | 398 | (1770) | | | | 2.26 | III | 398 | (1770) | 01 | 6070 | 29 | AV |
| | | | 2.86 | III | 398 | (1770) | | | | 2.86 | III | 398 | (1770) | 01 | 6075 | 29 | AV |
| 41.4 | 194 | (21.9) | 1.10 | I | 265 | (1180) | 50.0 | 161 | (18.1) | 1.10 | I | 265 | (1180) | 01 | 6060 | 35 | AV |
| | | | 1.37 | II | 265 | (1180) | | | | 1.43 | II | 265 | (1180) | 01 | 6065 | 35 | AV |
| | | | 2.05 | III | 398 | (1770) | | | | 2.11 | III | 398 | (1770) | 01 | 6070 | 35 | AV |
| | | | 2.72 | III | 398 | (1770) | | | | 2.79 | III | 398 | (1770) | 01 | 6075 | 35 | AV |
| | | | 2.90 | III | 576 | (2560) | | | | 3.29 | III | 576 | (2560) | 01 | 6080 | 35 | AV |
| 33.7 | 238 | (26.9) | 1.12 | I | 265 | (1180) | 40.7 | 197 | (22.3) | 1.13 | I | 265 | (1180) | 01 | 6065 | 43 | AV |
| | | | 1.67 | III | 398 | (1770) | | | | 1.70 | III | 398 | (1770) | 01 | 6070 | 43 | AV |
| | | | 2.23 | III | 398 | (1770) | | | | 2.26 | III | 398 | (1770) | 01 | 6075 | 43 | AV |
| | | | 2.50 | III | 576 | (2560) | | | | 2.50 | III | 576 | (2560) | 01 | 6080 | 43 | AV |
| | | | 2.94 | III | 576 | (2560) | | | | 2.94 | III | 576 | (2560) | 01 | 6085 | 43 | AV |
| 28.4 | 282 | (31.9) | 1.00 | I | 398 | (1770) | 34.3 | 234 | (26.4) | 1.00 | I | 398 | (1770) | 01 | 6070 | 51 | AV |
| | | | 1.43 | II | 398 | (1770) | | | | 1.43 | II | 398 | (1770) | 01 | 6075 | 51 | AV |
| | | | 1.92 | III | 576 | (2560) | | | | 1.92 | III | 576 | (2560) | 01 | 6080 | 51 | AV |
| | | | 2.41 | III | 576 | (2560) | | | | 2.41 | III | 576 | (2560) | 01 | 6085 | 51 | AV |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/8 HP
0.1 kW

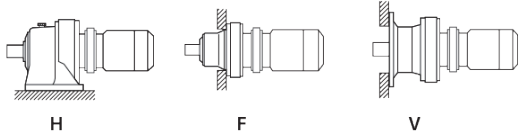

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|---------------|-------------------------------|------------|---------------------------|--------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 24.6 | 327 | (36.9) | 1.00 | I | 398 | (1770) | 29.7 | 271 | (30.6) | 1.00 | I | 398 | (1770) | 01 | 6070 | 59 | AV |
| | | | 1.36 | II | 398 | (1770) | | | | 1.36 | II | 398 | (1770) | 01 | 6075 | 59 | AV |
| | | | 1.85 | III | 576 | (2560) | | | | 1.85 | III | 576 | (2560) | 01 | 6080 | 59 | AV |
| | | | 2.34 | III | 576 | (2560) | | | | 2.34 | III | 576 | (2560) | 01 | 6085 | 59 | AV |
| 20.4 | 393 | (44.4) | 1.20 | I | 576 | (2560) | 24.6 | 326 | (36.8) | 1.20 | I | 576 | (2560) | 01 | 6080 | 71 | AV |
| | | | 1.65 | III | 576 | (2560) | | | | 1.87 | III | 576 | (2560) | 01 | 6085 | 71 | AV |
| | | | 2.52 | III | 751 | (3340) | | | | 2.52 | III | 751 | (3340) | 01 | 6090 | 71 | AV |
| | | | 2.78 | III | 751 | (3340) | | | | 3.01 | III | 751 | (3340) | 01 | 6095 | 71 | AV |
| 16.7 | 482 | (54.4) | 1.21 | I | 576 | (2560) | 20.1 | 399 | (45.1) | 1.21 | I | 576 | (2560) | 01 | 6085 | 87 | AV |
| | | | 2.11 | III | 751 | (3340) | | | | 2.11 | III | 751 | (3340) | 01 | 6090 | 87 | AV |
| | | | 2.63 | III | 751 | (3340) | | | | 3.01 | III | 751 | (3340) | 01 | 6095 | 87 | AV |
| | | | * | - | 265 | (1180) | | | | * | - | 75 | (336) | 01 | 6060DA | 104 | AV |
| 13.9 | 546 | (61.6) | * | - | 265 | (1180) | 16.8 | 452 | (51.1) | * | - | 75 | (336) | 01 | 6065DA | 104 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | 01 | 6070DA | 104 | AV |
| | | | * | - | 398 | (1770) | | | | 1.17 | I | 398 | (1770) | 01 | 6075DA | 104 | AV |
| | | | 2.43 | III | 751 | (3340) | | | | 2.94 | III | 751 | (3340) | 01 | 6090DA | 104 | AV |
| | | | 2.93 | III | 751 | (3340) | | | | 3.54 | III | 751 | (3340) | 01 | 6095DA | 104 | AV |
| | | | 1.25 | I | 751 | (3340) | | | | 1.51 | II | 751 | (3340) | 01 | 6090 | 119 | AV |
| 12.2 | 659 | (74.5) | 1.45 | II | 751 | (3340) | 14.7 | 546 | (61.7) | 1.25 | I | 751 | (3340) | 01 | 6095 | 119 | AV |
| | | | 1.25 | I | 751 | (3340) | | | | 1.51 | II | 751 | (3340) | 01 | 6095 | 119 | AV |
| 12.0 | 635 | (71.7) | * | - | 265 | (1180) | 14.5 | 526 | (59.4) | * | - | 265 | (1180) | 01 | 6060DA | 121 | AV |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | 01 | 6065DA | 121 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | 01 | 6070DA | 121 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | 01 | 6075DA | 121 | AV |
| | | | 2.09 | III | 751 | (3340) | | | | 2.52 | III | 751 | (3340) | 01 | 6090DA | 121 | AV |
| | | | 2.24 | III | 751 | (3340) | | | | 2.70 | III | 751 | (3340) | 01 | 6095DA | 121 | AV |
| 10.1 | 750 | (84.8) | * | - | 265 | (1180) | 12.2 | 622 | (70.2) | * | - | 265 | (1180) | 01 | 6060DA | 143 | AV |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | 01 | 6065DA | 143 | AV |
| | | | * | - | 266 | (1190) | | | | * | - | 398 | (1770) | 01 | 6070DA | 143 | AV |
| | | | * | - | 266 | (1190) | | | | * | - | 398 | (1770) | 01 | 6075DA | 143 | AV |
| | | | 1.77 | III | 751 | (3340) | | | | 2.14 | III | 751 | (3340) | 01 | 6090DA | 143 | AV |
| | | | 2.16 | III | 751 | (3340) | | | | 2.61 | III | 751 | (3340) | 01 | 6095DA | 143 | AV |
| 8.79 | 866 | (97.8) | 2.95 | III | 1210 | (5400) | 3.56 | III | 1210 | (5400) | 01 | 6100DA | 143 | AV | | | |
| | | | * | - | 265 | (1180) | 10.6 | 717 | (81.0) | * | - | 265 | (1180) | 01 | 6060DA | 165 | AV |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | 01 | 6065DA | 165 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 311 | (1380) | 01 | 6070DA | 165 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 311 | (1380) | 01 | 6075DA | 165 | AV |
| | | | 1.53 | II | 751 | (3340) | | | | 1.85 | III | 751 | (3340) | 01 | 6090DA | 165 | AV |
| 2.04 | III | 751 | (3340) | 2.47 | III | 751 | | | | (3340) | 01 | 6095DA | 165 | AV | | | |
| 2.56 | III | 1210 | (5400) | 3.08 | III | 1210 | (5400) | 01 | 6100DA | 165 | AV | | | | | | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/8 HP
0.1 kW

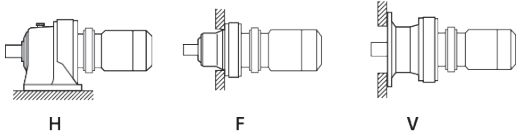

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 7.44 | 1020 | (116) | * | - | 265 | (1180) | 8.97 | 848 | (95.8) | * | - | 265 | (1180) | 01 | 6060DA | 195 | AV |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | 01 | 6065DA | 195 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | 01 | 6070DA | 195 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | 01 | 6075DA | 195 | AV |
| | | | 1.30 | II | 751 | (3340) | | | | 1.57 | II | 751 | (3340) | 01 | 6090DA | 195 | AV |
| | | | 1.73 | III | 751 | (3340) | | | | 2.09 | III | 751 | (3340) | 01 | 6095DA | 195 | AV |
| | | | 2.16 | III | 1210 | (5400) | | | | 2.61 | III | 1210 | (5400) | 01 | 6100DA | 195 | AV |
| | | | 2.60 | III | 1210 | (5400) | | | | 3.13 | III | 1210 | (5400) | 01 | 6105DA | 195 | AV |
| 6.28 | 1210 | (137) | * | - | 265 | (1180) | 7.58 | 1000 | (113) | * | - | 265 | (1180) | 01 | 6060DA | 231 | AV |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | 01 | 6065DA | 231 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | 01 | 6070DA | 231 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | 01 | 6075DA | 231 | AV |
| | | | 1.10 | I | 751 | (3340) | | | | 1.32 | II | 751 | (3340) | 01 | 6090DA | 231 | AV |
| | | | 1.46 | II | 751 | (3340) | | | | 1.76 | III | 751 | (3340) | 01 | 6095DA | 231 | AV |
| | | | 1.83 | III | 1210 | (5400) | | | | 2.20 | III | 1210 | (5400) | 01 | 6100DA | 231 | AV |
| | | | 2.19 | III | 1210 | (5400) | | | | 2.64 | III | 1210 | (5400) | 01 | 6105DA | 231 | AV |
| 5.31 | 1430 | (162) | * | - | 265 | (1180) | 6.41 | 1190 | (134) | * | - | 265 | (1180) | 01 | 6060DA | 273 | AV |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | 01 | 6065DA | 273 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | 01 | 6070DA | 273 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | 01 | 6075DA | 273 | AV |
| | | | 1.24 | I | 751 | (3340) | | | | 1.49 | II | 751 | (3340) | 01 | 6095DA | 273 | AV |
| | | | 1.54 | II | 1210 | (5400) | | | | 1.86 | III | 1210 | (5400) | 01 | 6100DA | 273 | AV |
| | | | 1.85 | III | 1210 | (5400) | | | | 2.24 | III | 1210 | (5400) | 01 | 6105DA | 273 | AV |
| 4.55 | 1670 | (189) | * | - | 265 | (1180) | 5.49 | 1390 | (157) | * | - | 265 | (1180) | 01 | 6060DA | 319 | AV |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | 01 | 6065DA | 319 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | 01 | 6070DA | 319 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | 01 | 6075DA | 319 | AV |
| | | | * | - | 723 | (3220) | | | | * | - | 737 | (3280) | 01 | 6090DA | 319 | AV |
| | | | 1.06 | I | 723 | (3220) | | | | 1.28 | I | 737 | (3280) | 01 | 6095DA | 319 | AV |
| | | | 1.32 | II | 1210 | (5400) | | | | 1.60 | III | 1210 | (5400) | 01 | 6100DA | 319 | AV |
| | | | 1.59 | II | 1210 | (5400) | | | | 1.91 | III | 1210 | (5400) | 01 | 6105DA | 319 | AV |
| | | | 2.75 | III | 2210 | (9810) | | | | 3.32 | III | 2210 | (9810) | 01 | 6120DB | 319 | AV |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/8 HP
0.1 kW

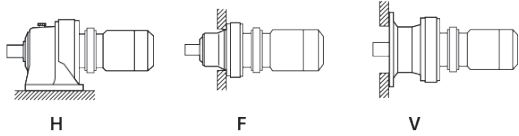

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | | 60 Hz | | | | | | | Selection | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|------------|-------|--------------------|----|--------|-----|----|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] | | | | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | | | | | |
| 3.85 | 1980 | (223) | * | - | 265 | (1180) | 4.64 | 1640 | (185) | * | - | 265 | (1180) | 01 | 6060DA | 377 | AV | | | | |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | | | | | 01 | 6065DA | 377 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | | | | | 01 | 6070DA | 377 | AV |
| | | | * | - | 398 | (1770) | | | | * | - | 398 | (1770) | | | | | 01 | 6075DA | 377 | AV |
| | | | * | - | 708 | (3150) | | | | * | - | 725 | (3230) | | | | | 01 | 6090DA | 377 | AV |
| | | | * | - | 708 | (3150) | | | | 1.08 | I | 725 | (3230) | | | | | 01 | 6095DA | 377 | AV |
| | | | 1.12 | I | 1210 | (5400) | | | | 1.35 | II | 1210 | (5400) | | | | | 01 | 6100DA | 377 | AV |
| | | | 1.34 | II | 1210 | (5400) | | | | 1.62 | III | 1210 | (5400) | | | | | 01 | 6105DA | 377 | AV |
| | | | 2.33 | III | 2210 | (9810) | | | | 2.81 | III | 2210 | (9810) | | | | | 01 | 6120DB | 377 | AV |
| 2.82 | III | 2210 | (9810) | 3.40 | III | 2210 | (9810) | 01 | 6125DB | 377 | AV | | | | | | | | | | |
| 3.07 | 2480 | (280) | * | - | 265 | (1180) | 3.70 | 2060 | (232) | * | - | 265 | (1180) | 01 | 6060DA | 473 | AV | | | | |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | | | | | 01 | 6065DA | 473 | AV |
| | | | * | - | 358 | (1590) | | | | * | - | 359 | (1600) | | | | | 01 | 6070DA | 473 | AV |
| | | | * | - | 358 | (1590) | | | | * | - | 359 | (1600) | | | | | 01 | 6075DA | 473 | AV |
| | | | * | - | 684 | (3040) | | | | * | - | 708 | (3150) | | | | | 01 | 6090DA | 473 | AV |
| | | | * | - | 684 | (3040) | | | | * | - | 708 | (3150) | | | | | 01 | 6095DA | 473 | AV |
| | | | 1.07 | I | 1210 | (5400) | | | | 1.29 | I | 1210 | (5400) | | | | | 01 | 6105DA | 473 | AV |
| | | | 1.87 | III | 2210 | (9810) | | | | 2.26 | III | 2210 | (9810) | | | | | 01 | 6120DB | 473 | AV |
| | | | 2.25 | III | 2210 | (9810) | | | | 2.71 | III | 2210 | (9810) | | | | | 01 | 6125DB | 473 | AV |
| 2.59 | 2930 | (331) | * | - | 265 | (1180) | 3.13 | 2430 | (275) | * | - | 265 | (1180) | 01 | 6065DA | 559 | AV | | | | |
| | | | * | - | 357 | (1590) | | | | * | - | 358 | (1590) | | | | | 01 | 6070DA | 559 | AV |
| | | | * | - | 357 | (1590) | | | | * | - | 358 | (1590) | | | | | 01 | 6075DA | 559 | AV |
| | | | * | - | 656 | (2920) | | | | * | - | 687 | (3060) | | | | | 01 | 6090DA | 559 | AV |
| | | | * | - | 656 | (2920) | | | | * | - | 687 | (3060) | | | | | 01 | 6095DA | 559 | AV |
| | | | * | - | 984 | (4380) | | | | * | - | 1210 | (5400) | | | | | 01 | 6100DA | 559 | AV |
| | | | * | - | 984 | (4380) | | | | 1.09 | I | 1210 | (5400) | | | | | 01 | 6105DA | 559 | AV |
| | | | 1.58 | II | 2210 | (9810) | | | | 1.91 | III | 2210 | (9810) | | | | | 01 | 6120DB | 559 | AV |
| | | | 1.90 | III | 2210 | (9810) | | | | 2.29 | III | 2210 | (9810) | | | | | 01 | 6125DB | 559 | AV |
| 2.23 | 3400 | (385) | * | - | 332 | (1470) | 2.70 | 2820 | (319) | * | - | 332 | (1480) | 01 | 6070DA | 649 | AV | | | | |
| | | | * | - | 332 | (1470) | | | | * | - | 332 | (1480) | | | | | 01 | 6075DA | 649 | AV |
| | | | * | - | 436 | (1940) | | | | * | - | 662 | (2950) | | | | | 01 | 6090DA | 649 | AV |
| | | | * | - | 506 | (2250) | | | | * | - | 986 | (4390) | | | | | 01 | 6100DA | 649 | AV |
| | | | * | - | 506 | (2250) | | | | * | - | 986 | (4390) | | | | | 01 | 6105DA | 649 | AV |
| | | | 1.36 | II | 2210 | (9810) | | | | 1.65 | III | 2210 | (9810) | | | | | 01 | 6120DB | 649 | AV |
| | | | 1.64 | III | 2210 | (9810) | | | | 1.98 | III | 2210 | (9810) | | | | | 01 | 6125DB | 649 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/8 HP
0.1 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|--------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 1.98 | 3840 | (433) | * | - | 265 | (1180) | 2.39 | 3180 | (359) | * | - | 265 | (1180) | 01 | 6060DA | 731 | AV |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | 01 | 6065DA | 731 | AV |
| | | | * | - | 354 | (1570) | | | | * | - | 356 | (1580) | 01 | 6070DA | 731 | AV |
| | | | * | - | 354 | (1570) | | | | * | - | 356 | (1580) | 01 | 6075DA | 731 | AV |
| | | | * | - | 434 | (1930) | | | | * | - | 487 | (2170) | 01 | 6090DA | 731 | AV |
| | | | * | - | 434 | (1930) | | | | * | - | 487 | (2170) | 01 | 6095DA | 731 | AV |
| | | | * | - | 558 | (2480) | | | | * | - | 627 | (2790) | 01 | 6100DA | 731 | AV |
| | | | * | - | 558 | (2480) | | | | * | - | 627 | (2790) | 01 | 6105DA | 731 | AV |
| | | | 1.21 | I | 2210 | (9810) | | | | 1.46 | II | 2210 | (9810) | 01 | 6120DB | 731 | AV |
| | | | 1.45 | II | 2210 | (9810) | | | | 1.75 | III | 2210 | (9810) | 01 | 6125DB | 731 | AV |
| 1.72 | 4410 | (499) | * | - | 265 | (1180) | 2.08 | 3660 | (413) | * | - | 265 | (1180) | 01 | 6060DA | 841 | AV |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | 01 | 6065DA | 841 | AV |
| | | | * | - | 384 | (1710) | | | | * | - | 392 | (1740) | 01 | 6070DA | 841 | AV |
| | | | * | - | 384 | (1710) | | | | * | - | 392 | (1740) | 01 | 6075DA | 841 | AV |
| | | | * | - | 420 | (1870) | | | | * | - | 425 | (1890) | 01 | 6090DA | 841 | AV |
| | | | * | - | 420 | (1870) | | | | * | - | 425 | (1890) | 01 | 6095DA | 841 | AV |
| | | | * | - | 623 | (2770) | | | | * | - | 629 | (2800) | 01 | 6100DA | 841 | AV |
| | | | * | - | 623 | (2770) | | | | * | - | 629 | (2800) | 01 | 6105DA | 841 | AV |
| | | | 1.04 | I | 2210 | (9810) | | | | 1.26 | I | 2210 | (9810) | 01 | 6120DB | 841 | AV |
| | | | 1.26 | I | 2210 | (9810) | | | | 1.53 | II | 2210 | (9810) | 01 | 6125DB | 841 | AV |
| 1.45 | 5260 | (595) | * | - | 327 | (1460) | 1.74 | 4360 | (493) | * | - | 330 | (1470) | 01 | 6070DA | 1003 | AV |
| | | | * | - | 327 | (1460) | | | | * | - | 330 | (1470) | 01 | 6075DA | 1003 | AV |
| | | | * | - | 431 | (1920) | | | | * | - | 433 | (1930) | 01 | 6090DA | 1003 | AV |
| | | | * | - | 499 | (2220) | | | | * | - | 502 | (2230) | 01 | 6100DA | 1003 | AV |
| | | | * | - | 499 | (2220) | | | | * | - | 502 | (2230) | 01 | 6105DA | 1003 | AV |
| | | | 1.06 | I | 2210 | (9810) | | | | 1.28 | I | 2210 | (9810) | 01 | 6125DB | 1003 | AV |
| 1.16 | 6540 | (739) | * | - | 265 | (1180) | 1.40 | 5420 | (612) | * | - | 265 | (1180) | 01 | 6060DA | 1247 | AV |
| | | | * | - | 265 | (1180) | | | | * | - | 265 | (1180) | 01 | 6065DA | 1247 | AV |
| | | | * | - | 339 | (1510) | | | | * | - | 346 | (1540) | 01 | 6070DA | 1247 | AV |
| | | | * | - | 339 | (1510) | | | | * | - | 346 | (1540) | 01 | 6075DA | 1247 | AV |
| | | | * | - | 423 | (1880) | | | | * | - | 427 | (1900) | 01 | 6090DA | 1247 | AV |
| | | | * | - | 423 | (1880) | | | | * | - | 427 | (1900) | 01 | 6095DA | 1247 | AV |
| | | | * | - | 544 | (2420) | | | | * | - | 549 | (2440) | 01 | 6100DA | 1247 | AV |
| | | | * | - | 544 | (2420) | | | | * | - | 549 | (2440) | 01 | 6105DA | 1247 | AV |
| | | | * | - | 2210 | (9810) | | | | * | - | 2210 | (9810) | 01 | 6120DB | 1247 | AV |
| | | | * | - | 2210 | (9810) | | | | 1.03 | I | 2210 | (9810) | 01 | 6125DB | 1247 | AV |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/8 HP
0.1 kW

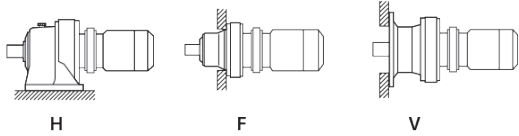

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 0.980 | 7760 | (877) | * - | - | 433 | (1920) | 1.18 | 6430 | (726) | * - | - | 435 | (1940) | 01 | 6090DA | 1479 | AV |
| | | | * - | - | 433 | (1920) | | | | * - | - | 435 | (1940) | 01 | 6095DA | 1479 | AV |
| | | | * - | - | 480 | (2130) | | | | * - | - | 483 | (2150) | 01 | 6100DA | 1479 | AV |
| | | | * - | - | 480 | (2130) | | | | * - | - | 483 | (2150) | 01 | 6105DA | 1479 | AV |
| | | | * - | - | 2030 | (9030) | | | | * - | - | 2100 | (9350) | 01 | 6120DB | 1479 | AV |
| | | | * - | - | 2030 | (9030) | | | | * - | - | 2100 | (9350) | 01 | 6125DB | 1479 | AV |
| 0.784 | 9700 | (1100) | * - | - | 265 | (1180) | 0.946 | 8040 | (908) | * - | - | 265 | (1180) | 01 | 6060DA | 1849 | AV |
| | | | * - | - | 265 | (1180) | | | | * - | - | 265 | (1180) | 01 | 6065DA | 1849 | AV |
| | | | * - | - | 310 | (1380) | | | | * - | - | 327 | (1450) | 01 | 6070DA | 1849 | AV |
| | | | * - | - | 310 | (1380) | | | | * - | - | 327 | (1450) | 01 | 6075DA | 1849 | AV |
| | | | * - | - | 410 | (1820) | | | | * - | - | 417 | (1850) | 01 | 6090DA | 1849 | AV |
| | | | * - | - | 410 | (1820) | | | | * - | - | 417 | (1850) | 01 | 6095DA | 1849 | AV |
| | | | * - | - | 528 | (2350) | | | | * - | - | 536 | (2380) | 01 | 6100DA | 1849 | AV |
| | | | * - | - | 528 | (2350) | | | | * - | - | 536 | (2380) | 01 | 6105DA | 1849 | AV |
| | | | * - | - | 1380 | (6120) | | | | * - | - | 2210 | (9810) | 01 | 6120DB | 1849 | AV |
| | | | * - | - | 1380 | (6120) | | | | * - | - | 2210 | (9810) | 01 | 6125DB | 1849 | AV |
| | | | 0.702 | 10800 | (1220) | * - | | | | - | 304 | (1350) | 0.847 | 8980 | (1010) | * - | - |
| * - | - | 304 | | | | (1350) | * - | - | 314 | (1400) | 01 | 6075DA | | | | 2065 | AV |
| * - | - | 414 | | | | (1840) | * - | - | 419 | (1870) | 01 | 6090DA | | | | 2065 | AV |
| * - | - | 480 | | | | (2140) | * - | - | 486 | (2160) | 01 | 6100DA | | | | 2065 | AV |
| * - | - | 480 | | | | (2140) | * - | - | 486 | (2160) | 01 | 6105DA | | | | 2065 | AV |
| * - | - | 1290 | | | | (5740) | * - | - | 1330 | (5930) | 01 | 6120DB | | | | 2065 | AV |
| * - | - | 1290 | | | | (5740) | * - | - | 1330 | (5930) | 01 | 6125DB | | | | 2065 | AV |
| 0.572 | 13300 | (1500) | * - | - | 287 | (1280) | 0.690 | 11000 | (1250) | * - | - | 303 | (1350) | 01 | 6070DA | 2537 | AV |
| | | | * - | - | 287 | (1280) | | | | * - | - | 303 | (1350) | 01 | 6075DA | 2537 | AV |
| | | | * - | - | 407 | (1810) | | | | * - | - | 413 | (1840) | 01 | 6090DA | 2537 | AV |
| | | | * - | - | 472 | (2100) | | | | * - | - | 480 | (2130) | 01 | 6100DA | 2537 | AV |
| | | | * - | - | 472 | (2100) | | | | * - | - | 480 | (2130) | 01 | 6105DA | 2537 | AV |
| | | | * - | - | 1290 | (5730) | | | | * - | - | 1290 | (5740) | 01 | 6120DB | 2537 | AV |
| | | | * - | - | 1290 | (5730) | | | | * - | - | 1290 | (5740) | 01 | 6125DB | 2537 | AV |
| 0.476 | 16000 | (1800) | * - | - | 416 | (1850) | 0.575 | 13200 | (1500) | * - | - | 421 | (1870) | 01 | 6090DA | 3045 | AV |
| | | | * - | - | 416 | (1850) | | | | * - | - | 421 | (1870) | 01 | 6095DA | 3045 | AV |
| | | | * - | - | 461 | (2050) | | | | * - | - | 467 | (2080) | 01 | 6100DA | 3045 | AV |
| | | | * - | - | 461 | (2050) | | | | * - | - | 467 | (2080) | 01 | 6105DA | 3045 | AV |
| | | | * - | - | 1150 | (5100) | | | | * - | - | 1150 | (5110) | 01 | 6120DB | 3045 | AV |
| | | | * - | - | 1150 | (5100) | | | | * - | - | 1150 | (5110) | 01 | 6125DB | 3045 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/8 HP
0.1 kW

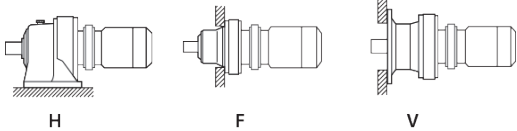

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 0.417 | 18300 | (2060) | * | - | 393 | (1750) | 0.503 | 15100 | (1710) | * | - | 402 | (1790) | 01 | 6090DA | 3481 | AV |
| | | | * | - | 455 | (2030) | | | | * | - | 466 | (2070) | 01 | 6100DA | 3481 | AV |
| | | | * | - | 455 | (2030) | | | | * | - | 466 | (2070) | 01 | 6105DA | 3481 | AV |
| | | | * | - | 1280 | (5710) | | | | * | - | 1290 | (5730) | 01 | 6120DB | 3481 | AV |
| | | | * | - | 1280 | (5710) | | | | * | - | 1290 | (5730) | 01 | 6125DB | 3481 | AV |
| 0.327 | 23300 | (2630) | * | - | 401 | (1790) | 0.394 | 19300 | (2180) | * | - | 409 | (1820) | 01 | 6090DA | 4437 | AV |
| | | | * | - | 401 | (1790) | | | | * | - | 409 | (1820) | 01 | 6095DA | 4437 | AV |
| | | | * | - | 445 | (1980) | | | | * | - | 454 | (2020) | 01 | 6100DA | 4437 | AV |
| | | | * | - | 445 | (1980) | | | | * | - | 454 | (2020) | 01 | 6105DA | 4437 | AV |
| | | | * | - | 1140 | (5080) | | | | * | - | 1140 | (5090) | 01 | 6120DB | 4437 | AV |
| | | | * | - | 1140 | (5080) | | | | * | - | 1140 | (5090) | 01 | 6125DB | 4437 | AV |
| 0.282 | 26900 | (3040) | * | - | 394 | (1750) | 0.341 | 22300 | (2520) | * | - | 403 | (1790) | 01 | 6090DA | 5133 | AV |
| | | | * | - | 394 | (1750) | | | | * | - | 403 | (1790) | 01 | 6095DA | 5133 | AV |
| | | | * | - | 438 | (1950) | | | | * | - | 448 | (1990) | 01 | 6100DA | 5133 | AV |
| | | | * | - | 438 | (1950) | | | | * | - | 448 | (1990) | 01 | 6105DA | 5133 | AV |
| | | | * | - | 1140 | (5070) | | | | * | - | 1140 | (5090) | 01 | 6120DB | 5133 | AV |
| | | | * | - | 1140 | (5070) | | | | * | - | 1140 | (5090) | 01 | 6125DB | 5133 | AV |
| 0.235 | 32400 | (3660) | * | - | 1140 | (5060) | 0.283 | 26900 | (3030) | * | - | 1140 | (5070) | 01 | 6120DB | 6177 | AV |
| | | | * | - | 1140 | (5060) | | | | * | - | 1140 | (5070) | 01 | 6125DB | 6177 | AV |
| 0.192 | 39700 | (4490) | * | - | 1130 | (5040) | 0.231 | 32900 | (3720) | * | - | 1140 | (5060) | 01 | 6120DB | 7569 | AV |
| | | | * | - | 1130 | (5040) | | | | * | - | 1140 | (5060) | 01 | 6125DB | 7569 | AV |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/4 HP
0.2 kW

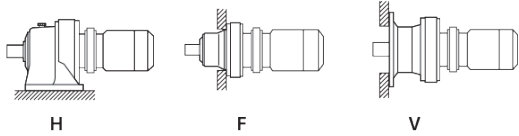

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 242 | 67 | (7.51) | 1.00 | I | 179 | (798) | 292 | 55 | (6.22) | 1.00 | I | 169 | (751) | 02 | 6060 | 6 | AV |
| | | | 1.43 | II | 179 | (798) | | | | 1.43 | II | 169 | (751) | 02 | 6065 | 6 | AV |
| | | | 1.73 | III | 313 | (1390) | | | | 1.73 | III | 294 | (1310) | 02 | 6070 | 6 | AV |
| | | | 2.03 | III | 313 | (1390) | | | | 2.03 | III | 294 | (1310) | 02 | 6075 | 6 | AV |
| | | | 2.96 | III | 435 | (1930) | | | | 2.96 | III | 409 | (1820) | 02 | 6080 | 6 | AV |
| 181 | 89 | (10.0) | 1.00 | I | 205 | (912) | 219 | 73 | (8.29) | 1.00 | I | 193 | (859) | 02 | 6060 | 8 | AV |
| | | | 1.43 | II | 205 | (912) | | | | 1.43 | II | 193 | (859) | 02 | 6065 | 8 | AV |
| | | | 1.73 | III | 347 | (1540) | | | | 1.73 | III | 326 | (1450) | 02 | 6070 | 8 | AV |
| | | | 2.03 | III | 347 | (1540) | | | | 2.03 | III | 326 | (1450) | 02 | 6075 | 8 | AV |
| | | | 2.96 | III | 471 | (2100) | | | | 2.96 | III | 443 | (1970) | 02 | 6080 | 8 | AV |
| 132 | 122 | (13.8) | 1.00 | I | 265 | (1180) | 159 | 101 | (11.4) | 1.00 | I | 262 | (1170) | 02 | 6060 | 11 | AV |
| | | | 1.43 | II | 265 | (1180) | | | | 1.43 | II | 262 | (1170) | 02 | 6065 | 11 | AV |
| | | | 1.73 | III | 388 | (1730) | | | | 1.73 | III | 366 | (1630) | 02 | 6070 | 11 | AV |
| | | | 2.03 | III | 388 | (1730) | | | | 2.03 | III | 366 | (1630) | 02 | 6075 | 11 | AV |
| | | | 2.96 | III | 522 | (2320) | | | | 2.96 | III | 490 | (2180) | 02 | 6080 | 11 | AV |
| 112 | 144 | (16.3) | 1.00 | I | 265 | (1180) | 135 | 119 | (13.5) | 1.00 | I | 265 | (1180) | 02 | 6060 | 13 | AV |
| | | | 1.43 | II | 265 | (1180) | | | | 1.43 | II | 265 | (1180) | 02 | 6065 | 13 | AV |
| | | | 1.73 | III | 398 | (1770) | | | | 1.73 | III | 387 | (1720) | 02 | 6070 | 13 | AV |
| | | | 2.03 | III | 398 | (1770) | | | | 2.03 | III | 387 | (1720) | 02 | 6075 | 13 | AV |
| | | | 2.96 | III | 561 | (2500) | | | | 2.96 | III | 527 | (2350) | 02 | 6080 | 13 | AV |
| 96.7 | 166 | (18.8) | 1.00 | I | 265 | (1180) | 117 | 138 | (15.6) | 1.00 | I | 265 | (1180) | 02 | 6060 | 15 | AV |
| | | | 1.43 | II | 265 | (1180) | | | | 1.43 | II | 265 | (1180) | 02 | 6065 | 15 | AV |
| | | | 1.73 | III | 398 | (1770) | | | | 1.73 | III | 389 | (1730) | 02 | 6070 | 15 | AV |
| | | | 2.03 | III | 398 | (1770) | | | | 2.03 | III | 389 | (1730) | 02 | 6075 | 15 | AV |
| | | | 2.96 | III | 576 | (2560) | | | | 2.96 | III | 545 | (2420) | 02 | 6080 | 15 | AV |
| 85.3 | 188 | (21.3) | 1.00 | I | 265 | (1180) | 103 | 156 | (17.6) | 1.00 | I | 265 | (1180) | 02 | 6060 | 17 | AV |
| | | | 1.41 | II | 265 | (1180) | | | | 1.43 | II | 265 | (1180) | 02 | 6065 | 17 | AV |
| | | | 1.73 | III | 398 | (1770) | | | | 1.73 | III | 398 | (1770) | 02 | 6070 | 17 | AV |
| | | | 2.03 | III | 398 | (1770) | | | | 2.03 | III | 398 | (1770) | 02 | 6075 | 17 | AV |
| | | | 2.96 | III | 576 | (2560) | | | | 2.96 | III | 572 | (2540) | 02 | 6080 | 17 | AV |
| 69.0 | 233 | (26.3) | 1.14 | I | 265 | (1180) | 83.3 | 193 | (21.8) | 1.17 | I | 265 | (1180) | 02 | 6065 | 21 | AV |
| | | | 1.60 | III | 398 | (1770) | | | | 1.60 | III | 398 | (1770) | 02 | 6070 | 21 | AV |
| | | | 2.03 | III | 398 | (1770) | | | | 2.03 | III | 398 | (1770) | 02 | 6075 | 21 | AV |
| | | | 2.39 | III | 576 | (2560) | | | | 2.39 | III | 557 | (2480) | 02 | 6080 | 21 | AV |
| | | | 2.75 | III | 576 | (2560) | | | | 2.75 | III | 557 | (2480) | 02 | 6085 | 21 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/4 HP
0.2 kW

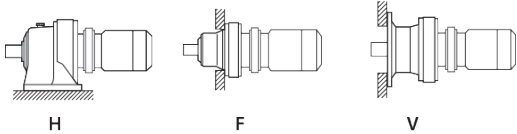

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 58.0 | 277 | (31.3) | * | - | 265 | (1180) | 70.0 | 229 | (25.9) | * | - | 265 | (1180) | 02 | 6065 | 25 | AV |
| | | | 1.15 | I | 398 | (1770) | | | | 1.15 | I | 398 | (1770) | 02 | 6070 | 25 | AV |
| | | | 1.47 | II | 398 | (1770) | | | | 1.47 | II | 398 | (1770) | 02 | 6075 | 25 | AV |
| | | | 1.70 | III | 576 | (2560) | | | | 1.70 | III | 573 | (2550) | 02 | 6080 | 25 | AV |
| | | | 2.37 | III | 576 | (2560) | | | | 2.37 | III | 573 | (2550) | 02 | 6085 | 25 | AV |
| 50.0 | 321 | (36.3) | * | - | 265 | (1180) | 60.3 | 266 | (30.1) | * | - | 265 | (1180) | 02 | 6065 | 29 | AV |
| | | | 1.13 | I | 398 | (1770) | | | | 1.13 | I | 398 | (1770) | 02 | 6070 | 29 | AV |
| | | | 1.43 | II | 398 | (1770) | | | | 1.43 | II | 398 | (1770) | 02 | 6075 | 29 | AV |
| | | | 1.70 | III | 576 | (2560) | | | | 1.70 | III | 576 | (2560) | 02 | 6080 | 29 | AV |
| | | | 2.34 | III | 576 | (2560) | | | | 2.34 | III | 576 | (2560) | 02 | 6085 | 29 | AV |
| 41.4 | 388 | (43.8) | 1.03 | I | 398 | (1770) | 50.0 | 321 | (36.3) | 1.05 | I | 398 | (1770) | 02 | 6070 | 35 | AV |
| | | | 1.36 | II | 398 | (1770) | | | | 1.39 | II | 398 | (1770) | 02 | 6075 | 35 | AV |
| | | | 1.45 | II | 576 | (2560) | | | | 1.64 | III | 576 | (2560) | 02 | 6080 | 35 | AV |
| | | | 1.64 | III | 576 | (2560) | | | | 1.85 | III | 576 | (2560) | 02 | 6085 | 35 | AV |
| | | | 3.06 | III | 751 | (3340) | | | | 3.06 | III | 751 | (3340) | 02 | 6090 | 35 | AV |
| 33.7 | 476 | (53.8) | 1.12 | I | 398 | (1770) | 40.7 | 395 | (44.6) | 1.13 | I | 398 | (1770) | 02 | 6075 | 43 | AV |
| | | | 1.25 | I | 576 | (2560) | | | | 1.25 | I | 576 | (2560) | 02 | 6080 | 43 | AV |
| | | | 1.47 | II | 576 | (2560) | | | | 1.47 | II | 576 | (2560) | 02 | 6085 | 43 | AV |
| | | | 2.18 | III | 751 | (3340) | | | | 2.18 | III | 751 | (3340) | 02 | 6090 | 43 | AV |
| 28.4 | 565 | (63.8) | 1.21 | I | 576 | (2560) | 34.3 | 468 | (52.9) | 1.21 | I | 576 | (2560) | 02 | 6085 | 51 | AV |
| | | | 1.66 | III | 751 | (3340) | | | | 1.66 | III | 751 | (3340) | 02 | 6090 | 51 | AV |
| | | | 2.04 | III | 751 | (3340) | | | | 2.11 | III | 751 | (3340) | 02 | 6095 | 51 | AV |
| | | | 2.80 | III | 1210 | (5400) | | | | 2.80 | III | 1210 | (5400) | 02 | 6100 | 51 | AV |
| 24.6 | 653 | (73.8) | 1.17 | I | 576 | (2560) | 29.7 | 541 | (61.2) | 1.17 | I | 576 | (2560) | 02 | 6085 | 59 | AV |
| | | | 1.54 | II | 751 | (3340) | | | | 1.54 | II | 751 | (3340) | 02 | 6090 | 59 | AV |
| | | | 1.68 | III | 751 | (3340) | | | | 1.86 | III | 751 | (3340) | 02 | 6095 | 59 | AV |
| | | | 2.58 | III | 1210 | (5400) | | | | 2.58 | III | 1210 | (5400) | 02 | 6100 | 59 | AV |
| 20.4 | 786 | (88.8) | * | - | 535 | (2380) | 24.6 | 652 | (73.6) | * | - | 564 | (2510) | 02 | 6085 | 71 | AV |
| | | | 1.26 | I | 751 | (3340) | | | | 1.26 | I | 751 | (3340) | 02 | 6090 | 71 | AV |
| | | | 1.39 | II | 751 | (3340) | | | | 1.51 | II | 751 | (3340) | 02 | 6095 | 71 | AV |
| | | | 2.18 | III | 1210 | (5400) | | | | 2.18 | III | 1210 | (5400) | 02 | 6100 | 71 | AV |
| | | | 2.53 | III | 1210 | (5400) | | | | 2.81 | III | 1210 | (5400) | 02 | 6105 | 71 | AV |
| 16.7 | 964 | (109) | 1.06 | I | 751 | (3340) | 20.1 | 798 | (90.2) | 1.06 | I | 751 | (3340) | 02 | 6090 | 87 | AV |
| | | | 1.32 | II | 751 | (3340) | | | | 1.51 | II | 751 | (3340) | 02 | 6095 | 87 | AV |
| | | | 2.17 | III | 1210 | (5400) | | | | 2.17 | III | 1210 | (5400) | 02 | 6100 | 87 | AV |
| | | | 2.51 | III | 1210 | (5400) | | | | 2.83 | III | 1210 | (5400) | 02 | 6105 | 87 | AV |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/4 HP
0.2 kW

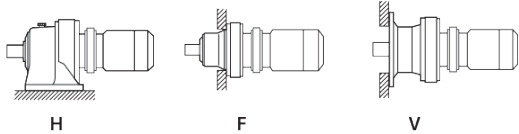

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 13.9 | 1090 | (123) | * | - | 398 | (1770) | 16.8 | 904 | (102) | * | - | 398 | (1770) | 02 | 6075DA | 104 | AV |
| | | | 1.22 | I | 751 | (3340) | | | | 1.47 | II | 751 | (3340) | 02 | 6090DA | 104 | AV |
| | | | 1.47 | II | 751 | (3340) | | | | 1.77 | III | 751 | (3340) | 02 | 6095DA | 104 | AV |
| | | | 2.03 | III | 1210 | (5400) | | | | 2.03 | III | 1210 | (5400) | 02 | 6100DA | 104 | AV |
| | | | 2.03 | III | 1210 | (5400) | | | | 2.03 | III | 1210 | (5400) | 02 | 6105DA | 104 | AV |
| 12.2 | 1320 | (149) | 1.05 | I | 1210 | (5400) | 14.7 | 1090 | (123) | 1.05 | I | 1210 | (5400) | 02 | 6100 | 119 | AV |
| | | | 1.43 | II | 1210 | (5400) | | | | 1.43 | II | 1210 | (5400) | 02 | 6105 | 119 | AV |
| 12.0 | 1270 | (143) | 1.05 | I | 751 | (3340) | 14.5 | 1050 | (119) | 1.26 | I | 751 | (3340) | 02 | 6090DA | 121 | AV |
| | | | 1.12 | I | 751 | (3340) | | | | 1.35 | II | 751 | (3340) | 02 | 6095DA | 121 | AV |
| | | | 1.74 | III | 1210 | (5400) | | | | 2.03 | III | 1210 | (5400) | 02 | 6100DA | 121 | AV |
| | | | 2.03 | III | 1210 | (5400) | | | | 2.03 | III | 1210 | (5400) | 02 | 6105DA | 121 | AV |
| | | | 3.66 | III | 2210 | (9810) | | | | 4.42 | III | 2210 | (9810) | 02 | 6120DB | 121 | AV |
| 10.1 | 1500 | (170) | 1.08 | I | 751 | (3340) | 12.2 | 1240 | (140) | 1.30 | II | 751 | (3340) | 02 | 6095DA | 143 | AV |
| | | | 1.47 | II | 1210 | (5400) | | | | 1.78 | III | 1210 | (5400) | 02 | 6100DA | 143 | AV |
| | | | 1.77 | III | 1210 | (5400) | | | | 2.03 | III | 1210 | (5400) | 02 | 6105DA | 143 | AV |
| | | | 3.10 | III | 2210 | (9810) | | | | 3.74 | III | 2210 | (9810) | 02 | 6120DB | 143 | AV |
| 8.79 | 1730 | (196) | * | - | 751 | (3340) | 10.6 | 1430 | (162) | * | - | 751 | (3340) | 02 | 6090DA | 165 | AV |
| | | | 1.02 | I | 751 | (3340) | | | | 1.23 | I | 751 | (3340) | 02 | 6095DA | 165 | AV |
| | | | 1.28 | I | 1210 | (5400) | | | | 1.54 | II | 1210 | (5400) | 02 | 6100DA | 165 | AV |
| | | | 1.53 | II | 1210 | (5400) | | | | 1.85 | III | 1210 | (5400) | 02 | 6105DA | 165 | AV |
| | | | 2.68 | III | 2210 | (9810) | | | | 3.24 | III | 2210 | (9810) | 02 | 6120DB | 165 | AV |
| 7.44 | 2050 | (231) | * | - | 751 | (3340) | 8.97 | 1700 | (192) | * | - | 751 | (3340) | 02 | 6090DA | 195 | AV |
| | | | * | - | 751 | (3340) | | | | 1.04 | I | 751 | (3340) | 02 | 6095DA | 195 | AV |
| | | | 1.08 | I | 1210 | (5400) | | | | 1.31 | II | 1210 | (5400) | 02 | 6100DA | 195 | AV |
| | | | 1.30 | II | 1210 | (5400) | | | | 1.57 | II | 1210 | (5400) | 02 | 6105DA | 195 | AV |
| | | | 2.27 | III | 2210 | (9810) | | | | 2.74 | III | 2210 | (9810) | 02 | 6120DB | 195 | AV |
| | | | 2.73 | III | 2210 | (9810) | | | | 3.29 | III | 2210 | (9810) | 02 | 6125DB | 195 | AV |
| 6.28 | 2420 | (274) | * | - | 714 | (3180) | 7.58 | 2010 | (227) | * | - | 738 | (3280) | 02 | 6090DA | 231 | AV |
| | | | * | - | 714 | (3180) | | | | * | - | 738 | (3280) | 02 | 6095DA | 231 | AV |
| | | | 1.10 | I | 1210 | (5400) | | | | 1.32 | II | 1210 | (5400) | 02 | 6105DA | 231 | AV |
| | | | 1.91 | III | 2210 | (9810) | | | | 2.30 | III | 2210 | (9810) | 02 | 6120DB | 231 | AV |
| | | | 2.30 | III | 2210 | (9810) | | | | 2.78 | III | 2210 | (9810) | 02 | 6125DB | 231 | AV |
| | | | 2.85 | III | 3310 | (14700) | | | | 3.44 | III | 3310 | (14700) | 02 | 6130DC | 231 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/4 HP
0.2 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 5.31 | 2860 | (324) | * | - | 686 | (3050) | 6.41 | 2370 | (268) | * | - | 717 | (3190) | 02 | 6090DA | 273 | AV |
| | | | * | - | 686 | (3050) | | | | * | - | 717 | (3190) | 02 | 6095DA | 273 | AV |
| | | | * | - | 1210 | (5400) | | | | * | - | 1210 | (5400) | 02 | 6100DA | 273 | AV |
| | | | * | - | 1210 | (5400) | | | | 1.12 | I | 1210 | (5400) | 02 | 6105DA | 273 | AV |
| | | | 1.61 | III | 2210 | (9810) | | | | 1.95 | III | 2210 | (9810) | 02 | 6120DB | 273 | AV |
| | | | 1.95 | III | 2210 | (9810) | | | | 2.35 | III | 2210 | (9810) | 02 | 6125DB | 273 | AV |
| | | | 2.03 | III | 3310 | (14700) | | | | 2.03 | III | 3310 | (14700) | 02 | 6130DA | 273 | AV |
| | | | 2.41 | III | 3310 | (14700) | | | | 2.91 | III | 3310 | (14700) | 02 | 6130DC | 273 | AV |
| | | | 2.90 | III | 3310 | (14700) | | | | 3.51 | III | 3310 | (14700) | 02 | 6135DC | 273 | AV |
| 4.55 | 3350 | (378) | * | - | 427 | (1900) | 5.49 | 2770 | (313) | * | - | 661 | (2940) | 02 | 6095DA | 319 | AV |
| | | | * | - | 633 | (2820) | | | | * | - | 1210 | (5400) | 02 | 6100DA | 319 | AV |
| | | | * | - | 633 | (2820) | | | | * | - | 1210 | (5400) | 02 | 6105DA | 319 | AV |
| | | | 1.38 | II | 2210 | (9810) | | | | 1.66 | III | 2210 | (9810) | 02 | 6120DB | 319 | AV |
| | | | 1.67 | III | 2210 | (9810) | | | | 2.01 | III | 2210 | (9810) | 02 | 6125DB | 319 | AV |
| | | | 2.03 | III | 3310 | (14700) | | | | 2.03 | III | 3310 | (14700) | 02 | 6130DA | 319 | AV |
| | | | 2.06 | III | 3310 | (14700) | | | | 2.49 | III | 3310 | (14700) | 02 | 6130DC | 319 | AV |
| | | | 2.49 | III | 3310 | (14700) | | | | 3.00 | III | 3310 | (14700) | 02 | 6135DC | 319 | AV |
| 3.85 | 3960 | (447) | * | - | 424 | (1880) | 4.64 | 3280 | (370) | * | - | 294 | (1310) | 02 | 6095DA | 377 | AV |
| | | | * | - | 628 | (2790) | | | | * | - | 435 | (1940) | 02 | 6100DA | 377 | AV |
| | | | * | - | 628 | (2790) | | | | * | - | 435 | (1940) | 02 | 6105DA | 377 | AV |
| | | | 1.16 | I | 2210 | (9810) | | | | 1.40 | II | 2210 | (9810) | 02 | 6120DB | 377 | AV |
| | | | 1.41 | II | 2210 | (9810) | | | | 1.70 | III | 2210 | (9810) | 02 | 6125DB | 377 | AV |
| | | | 1.75 | III | 3310 | (14700) | | | | 2.03 | III | 3310 | (14700) | 02 | 6130DA | 377 | AV |
| | | | 2.10 | III | 3310 | (14700) | | | | 2.54 | III | 3310 | (14700) | 02 | 6135DC | 377 | AV |
| | | | 2.74 | III | 3600 | (16000) | | | | 3.31 | III | 3600 | (16000) | 02 | 6140DB | 377 | AV |
| 3.07 | 4960 | (561) | * | - | 553 | (2460) | 3.70 | 4110 | (465) | * | - | 557 | (2480) | 02 | 6100DA | 473 | AV |
| | | | * | - | 553 | (2460) | | | | * | - | 557 | (2480) | 02 | 6105DA | 473 | AV |
| | | | 1.12 | I | 2210 | (9810) | | | | 1.36 | II | 2210 | (9810) | 02 | 6125DB | 473 | AV |
| | | | 1.39 | II | 3310 | (14700) | | | | 1.68 | III | 3310 | (14700) | 02 | 6130DA | 473 | AV |
| | | | 1.68 | III | 3310 | (14700) | | | | 2.02 | III | 3310 | (14700) | 02 | 6135DC | 473 | AV |
| | | | 2.18 | III | 3600 | (16000) | | | | 2.64 | III | 3600 | (16000) | 02 | 6140DB | 473 | AV |
| | | | 2.44 | III | 3600 | (16000) | | | | 2.95 | III | 3600 | (16000) | 02 | 6145DB | 473 | AV |
| 2.59 | 5870 | (663) | * | - | 548 | (2440) | 3.13 | 4860 | (549) | * | - | 553 | (2460) | 02 | 6105DA | 559 | AV |
| | | | * | - | 2210 | (9810) | | | | * | - | 2210 | (9810) | 02 | 6120DB | 559 | AV |
| | | | * | - | 2210 | (9810) | | | | 1.15 | I | 2210 | (9810) | 02 | 6125DB | 559 | AV |
| | | | 1.18 | I | 3310 | (14700) | | | | 1.42 | II | 3310 | (14700) | 02 | 6130DA | 559 | AV |
| | | | 1.42 | II | 3310 | (14700) | | | | 1.71 | III | 3310 | (14700) | 02 | 6135DC | 559 | AV |
| | | | 1.85 | III | 3600 | (16000) | | | | 2.23 | III | 3600 | (16000) | 02 | 6140DB | 559 | AV |
| | | | 2.07 | III | 3600 | (16000) | | | | 2.50 | III | 3600 | (16000) | 02 | 6145DB | 559 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/4 HP
0.2 kW

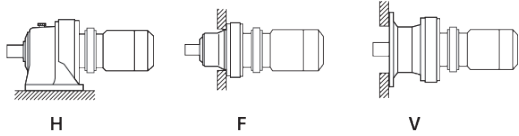

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|---------------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 2.23 | 6810 | (769) | * | - | 2210 | (9810) | 2.70 | 5640 | (638) | * | - | 2210 | (9810) | 02 | 6120DB | 649 | AV |
| | | | * | - | 2210 | (9810) | | | | * | - | 2210 | (9810) | 02 | 6125DB | 649 | AV |
| | | | 1.19 | I | 3310 | (14700) | | | | 1.43 | II | 3310 | (14700) | 02 | 6130DA | 649 | AV |
| | | | 1.36 | II | 3310 | (14700) | | | | 1.65 | III | 3310 | (14700) | 02 | 6135DC | 649 | AV |
| | | | 1.59 | II | 3600 | (16000) | | | | 1.92 | III | 3600 | (16000) | 02 | 6140DB | 649 | AV |
| | | | 1.78 | III | 3600 | (16000) | | | | 2.15 | III | 3600 | (16000) | 02 | 6145DB | 649 | AV |
| 1.98 | 7670 | (867) | * | - | 2210 | (9810) | 2.39 | 6360 | (718) | * | - | 2210 | (9810) | 02 | 6120DA | 731 | AV |
| | | | * | - | 2210 | (9810) | | | | * | - | 2210 | (9810) | 02 | 6125DB | 731 | AV |
| | | | 1.08 | I | 3310 | (14700) | | | | 1.31 | II | 3310 | (14700) | 02 | 6135DC | 731 | AV |
| | | | 1.41 | II | 3600 | (16000) | | | | 1.71 | III | 3600 | (16000) | 02 | 6140DB | 731 | AV |
| | | | 1.58 | II | 3600 | (16000) | | | | 1.91 | III | 3600 | (16000) | 02 | 6145DB | 731 | AV |
| 1.72 | 8820 | (997) | * | - | 1710 | (7590) | 2.08 | 7310 | (826) | * | - | 2210 | (9810) | 02 | 6120DA | 841 | AV |
| | | | * | - | 1710 | (7590) | | | | * | - | 2210 | (9810) | 02 | 6125DB | 841 | AV |
| | | | * | - | 3310 | (14700) | | | | * | - | 3310 | (14700) | 02 | 6130DC | 841 | AV |
| | | | * | - | 3310 | (14700) | | | | 1.14 | I | 3310 | (14700) | 02 | 6135DC | 841 | AV |
| | | | 1.23 | I | 3600 | (16000) | | | | 1.48 | II | 3600 | (16000) | 02 | 6140DB | 841 | AV |
| | | | 1.37 | II | 3600 | (16000) | | | | 1.66 | III | 3600 | (16000) | 02 | 6145DB | 841 | AV |
| 1.45 | 10500 | (1190) | * | - | 683 | (3040) | 1.74 | 8720 | (985) | * | - | 1730 | (7700) | 02 | 6120DA | 1003 | AV |
| | | | * | - | 1290 | (5750) | | | | * | - | 1730 | (7700) | 02 | 6125DB | 1003 | AV |
| | | | * | - | 3310 | (14700) | | | | * | - | 3310 | (14700) | 02 | 6130DC | 1003 | AV |
| | | | * | - | 3310 | (14700) | | | | 1.07 | I | 3310 | (14700) | 02 | 6135DC | 1003 | AV |
| | | | 1.03 | I | 3600 | (16000) | | | | 1.24 | I | 3600 | (16000) | 02 | 6140DB | 1003 | AV |
| | | | 1.15 | I | 3600 | (16000) | | | | 1.39 | II | 3600 | (16000) | 02 | 6145DB | 1003 | AV |
| 1.16 | 13100 | (1480) | * | - | 1370 | (6100) | 1.40 | 10800 | (1220) | * | - | 1370 | (6110) | 02 | 6125DB | 1247 | AV |
| | | | * | - | 3210 | (14300) | | | | * | - | 3310 | (14700) | 02 | 6130DC | 1247 | AV |
| | | | * | - | 3210 | (14300) | | | | * | - | 3310 | (14700) | 02 | 6135DC | 1247 | AV |
| | | | * | - | 3410 | (15200) | | | | 1.00 | I | 3600 | (16000) | 02 | 6140DB | 1247 | AV |
| | | | * | - | 3410 | (15200) | | | | 1.12 | I | 3600 | (16000) | 02 | 6145DB | 1247 | AV |
| | | | 0.980 | 15500 | (1750) | * | | | | - | 3290 | (14600) | 1.18 | 12900 | (1450) | * | - |
| * | - | 3290 | (14600) | * | - | 3310 | (14700) | 02 | 6135DC | 1479 | AV | | | | | | |
| * | - | 3600 | (16000) | * | - | 3600 | (16000) | 02 | 6140DB | 1479 | AV | | | | | | |
| * | - | 3600 | (16000) | * | - | 3600 | (16000) | 02 | 6145DB | 1479 | AV | | | | | | |
| 0.784 | 19400 | (2190) | * | - | 2880 | (12800) | 0.946 | 16100 | (1820) | * | - | 3060 | (13600) | 02 | 6130DC | 1849 | AV |
| | | | * | - | 2880 | (12800) | | | | * | - | 3060 | (13600) | 02 | 6135DC | 1849 | AV |
| | | | * | - | 2170 | (9650) | | | | * | - | 2950 | (13100) | 02 | 6140DB | 1849 | AV |
| | | | * | - | 2170 | (9650) | | | | * | - | 2950 | (13100) | 02 | 6145DB | 1849 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/4 HP
0.2 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 0.702 | 21700 | (2450) | * - | - | 1970 | (8760) | 0.847 | 18000 | (2030) | * - | - | 3130 | (13900) | 02 | 6130DC | 2065 | AV |
| | | | * - | - | 1970 | (8760) | | | | * - | - | 3130 | (13900) | | 6135DC | 2065 | AV |
| | | | * - | - | 2180 | (9700) | | | | * - | - | 3600 | (16000) | | 6140DB | 2065 | AV |
| | | | * - | - | 2180 | (9700) | | | | * - | - | 3600 | (16000) | | 6145DB | 2065 | AV |
| 0.572 | 26600 | (3010) | * - | - | 1970 | (8750) | 0.690 | 22100 | (2490) | * - | - | 1970 | (8750) | 02 | 6130DC | 2537 | AV |
| | | | * - | - | 1970 | (8750) | | | | * - | - | 1970 | (8750) | | 6135DC | 2537 | AV |
| | | | * - | - | 1320 | (5870) | | | | * - | - | 1740 | (7750) | | 6140DB | 2537 | AV |
| | | | * - | - | 1320 | (5870) | | | | * - | - | 1740 | (7750) | | 6145DB | 2537 | AV |
| 0.476 | 32000 | (3610) | * - | - | 1980 | (8820) | 0.575 | 26500 | (2990) | * - | - | 1980 | (8820) | 02 | 6130DC | 3045 | AV |
| | | | * - | - | 1980 | (8820) | | | | * - | - | 1980 | (8820) | | 6135DC | 3045 | AV |
| | | | * - | - | 1330 | (5900) | | | | * - | - | 1330 | (5920) | | 6140DB | 3045 | AV |
| | | | * - | - | 1330 | (5900) | | | | * - | - | 1330 | (5920) | | 6145DB | 3045 | AV |
| 0.417 | 36500 | (4130) | * - | - | 1960 | (8720) | 0.503 | 30300 | (3420) | * - | - | 1960 | (8740) | 02 | 6130DC | 3481 | AV |
| | | | * - | - | 1960 | (8720) | | | | * - | - | 1960 | (8740) | | 6135DC | 3481 | AV |
| | | | * - | - | 1310 | (5820) | | | | * - | - | 1320 | (5860) | | 6140DB | 3481 | AV |
| | | | * - | - | 1310 | (5820) | | | | * - | - | 1320 | (5860) | | 6145DB | 3481 | AV |
| 0.327 | 46600 | (5260) | * - | - | 1980 | (8800) | 0.394 | 38600 | (4360) | * - | - | 1980 | (8810) | 02 | 6135DC | 4437 | AV |
| | | | * - | - | 1310 | (5850) | | | | * - | - | 1320 | (5870) | | 6140DB | 4437 | AV |
| | | | * - | - | 1310 | (5850) | | | | * - | - | 1320 | (5870) | | 6145DB | 4437 | AV |
| 0.282 | 53900 | (6090) | * - | - | 1970 | (8780) | 0.341 | 44600 | (5040) | * - | - | 1980 | (8800) | 02 | 6130DC | 5133 | AV |
| | | | * - | - | 1970 | (8780) | | | | * - | - | 1980 | (8800) | | 6135DC | 5133 | AV |
| | | | * - | - | 1310 | (5820) | | | | * - | - | 1320 | (5860) | | 6140DB | 5133 | AV |
| | | | * - | - | 1310 | (5820) | | | | * - | - | 1320 | (5860) | | 6145DB | 5133 | AV |
| 0.235 | 64800 | (7320) | * - | - | 1970 | (8770) | 0.283 | 53700 | (6070) | * - | - | 1980 | (8790) | 02 | 6130DC | 6177 | AV |
| | | | * - | - | 1970 | (8770) | | | | * - | - | 1980 | (8790) | | 6135DC | 6177 | AV |
| | | | * - | - | 1300 | (5780) | | | | * - | - | 1310 | (5820) | | 6140DB | 6177 | AV |
| | | | * - | - | 1300 | (5780) | | | | * - | - | 1310 | (5820) | | 6145DB | 6177 | AV |
| 0.192 | 79400 | (8970) | * - | - | 1970 | (8750) | 0.231 | 65800 | (7430) | * - | - | 1970 | (8770) | 02 | 6130DC | 7569 | AV |
| | | | * - | - | 1970 | (8750) | | | | * - | - | 1970 | (8770) | | 6135DC | 7569 | AV |
| | | | * - | - | 1290 | (5740) | | | | * - | - | 1300 | (5790) | | 6140DB | 7569 | AV |
| | | | * - | - | 1290 | (5740) | | | | * - | - | 1300 | (5790) | | 6145DB | 7569 | AV |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/3 HP
0.25 kW

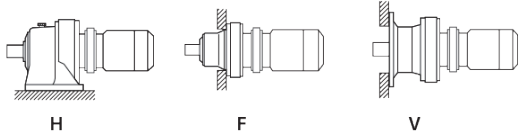

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 242 | 83 | (9.39) | 1.15 | I | 179 | (795) | 292 | 69 | (7.78) | 1.15 | I | 168 | (749) | 03 | 6065 | 6 | AV |
| | | | 1.39 | II | 312 | (1390) | | | | 1.39 | II | 293 | (1310) | 03 | 6070 | 6 | AV |
| | | | 1.63 | III | 312 | (1390) | | | | 1.63 | III | 293 | (1310) | 03 | 6075 | 6 | AV |
| | | | 2.37 | III | 434 | (1930) | | | | 2.37 | III | 408 | (1810) | 03 | 6080 | 6 | AV |
| 181 | 111 | (12.5) | 1.15 | I | 204 | (908) | 219 | 92 | (10.4) | 1.15 | I | 192 | (855) | 03 | 6065 | 8 | AV |
| | | | 1.39 | II | 345 | (1530) | | | | 1.39 | II | 325 | (1450) | 03 | 6070 | 8 | AV |
| | | | 1.63 | III | 345 | (1530) | | | | 1.63 | III | 325 | (1450) | 03 | 6075 | 8 | AV |
| | | | 2.37 | III | 471 | (2090) | | | | 2.37 | III | 442 | (1970) | 03 | 6080 | 8 | AV |
| 132 | 152 | (17.2) | 1.15 | I | 265 | (1180) | 159 | 126 | (14.3) | 1.15 | I | 261 | (1160) | 03 | 6065 | 11 | AV |
| | | | 1.39 | II | 386 | (1720) | | | | 1.39 | II | 364 | (1620) | 03 | 6070 | 11 | AV |
| | | | 1.63 | III | 386 | (1720) | | | | 1.63 | III | 364 | (1620) | 03 | 6075 | 11 | AV |
| | | | 2.37 | III | 520 | (2310) | | | | 2.37 | III | 489 | (2180) | 03 | 6080 | 11 | AV |
| 112 | 180 | (20.3) | 1.15 | I | 265 | (1180) | 135 | 149 | (16.8) | 1.15 | I | 265 | (1180) | 03 | 6065 | 13 | AV |
| | | | 1.39 | II | 398 | (1770) | | | | 1.39 | II | 384 | (1710) | 03 | 6070 | 13 | AV |
| | | | 1.63 | III | 398 | (1770) | | | | 1.63 | III | 384 | (1710) | 03 | 6075 | 13 | AV |
| | | | 2.37 | III | 559 | (2490) | | | | 2.37 | III | 526 | (2340) | 03 | 6080 | 13 | AV |
| 96.7 | 208 | (23.5) | 1.15 | I | 265 | (1180) | 117 | 172 | (19.4) | 1.15 | I | 265 | (1180) | 03 | 6065 | 15 | AV |
| | | | 1.39 | II | 398 | (1770) | | | | 1.39 | II | 386 | (1720) | 03 | 6070 | 15 | AV |
| | | | 1.63 | III | 398 | (1770) | | | | 1.63 | III | 386 | (1720) | 03 | 6075 | 15 | AV |
| | | | 2.37 | III | 576 | (2560) | | | | 2.37 | III | 544 | (2420) | 03 | 6080 | 15 | AV |
| 85.3 | 235 | (26.6) | 1.13 | I | 265 | (1180) | 103 | 195 | (22.0) | 1.15 | I | 265 | (1180) | 03 | 6065 | 17 | AV |
| | | | 1.39 | II | 398 | (1770) | | | | 1.39 | II | 398 | (1770) | 03 | 6070 | 17 | AV |
| | | | 1.63 | III | 398 | (1770) | | | | 1.63 | III | 398 | (1770) | 03 | 6075 | 17 | AV |
| | | | 2.37 | III | 576 | (2560) | | | | 2.37 | III | 570 | (2540) | 03 | 6080 | 17 | AV |
| 69.0 | 291 | (32.8) | * | - | 265 | (1180) | 83.3 | 241 | (27.2) | * | - | 265 | (1180) | 03 | 6065 | 21 | AV |
| | | | 1.28 | I | 398 | (1770) | | | | 1.28 | I | 398 | (1770) | 03 | 6070 | 21 | AV |
| | | | 1.63 | III | 398 | (1770) | | | | 1.63 | III | 398 | (1770) | 03 | 6075 | 21 | AV |
| | | | 1.91 | III | 576 | (2560) | | | | 1.91 | III | 556 | (2470) | 03 | 6080 | 21 | AV |
| | | | 2.20 | III | 576 | (2560) | | | | 2.20 | III | 556 | (2470) | 03 | 6085 | 21 | AV |
| 58.0 | 346 | (39.1) | 1.18 | I | 398 | (1770) | 70.0 | 287 | (32.4) | 1.18 | I | 398 | (1770) | 03 | 6075 | 25 | AV |
| | | | 1.36 | II | 576 | (2560) | | | | 1.36 | II | 572 | (2540) | 03 | 6080 | 25 | AV |
| | | | 1.90 | III | 576 | (2560) | | | | 1.90 | III | 572 | (2540) | 03 | 6085 | 25 | AV |
| | | | 2.68 | III | 751 | (3340) | | | | 2.68 | III | 751 | (3340) | 03 | 6090 | 25 | AV |
| 50.0 | 401 | (45.4) | 1.15 | I | 398 | (1770) | 60.3 | 333 | (37.6) | 1.15 | I | 398 | (1770) | 03 | 6075 | 29 | AV |
| | | | 1.36 | II | 576 | (2560) | | | | 1.36 | II | 576 | (2560) | 03 | 6080 | 29 | AV |
| | | | 1.87 | III | 576 | (2560) | | | | 1.87 | III | 576 | (2560) | 03 | 6085 | 29 | AV |
| | | | 2.50 | III | 751 | (3340) | | | | 2.50 | III | 751 | (3340) | 03 | 6090 | 29 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/3 HP
0.25 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 41.4 | 485 | (54.7) | 1.09 | I | 398 | (1770) | 50.0 | 401 | (45.4) | 1.12 | I | 398 | (1770) | 03 | 6075 | 35 | AV |
| | | | 1.16 | I | 576 | (2560) | | | | 1.31 | II | 576 | (2560) | 03 | 6080 | 35 | AV |
| | | | 1.31 | II | 576 | (2560) | | | | 1.48 | II | 576 | (2560) | 03 | 6085 | 35 | AV |
| | | | 2.45 | III | 751 | (3340) | | | | 2.45 | III | 751 | (3340) | 03 | 6090 | 35 | AV |
| 33.7 | 595 | (67.3) | * | - | 336 | (1500) | 40.7 | 493 | (55.7) | * | - | 392 | (1740) | 03 | 6075 | 43 | AV |
| | | | 1.00 | I | 576 | (2560) | | | | 1.00 | I | 576 | (2560) | 03 | 6080 | 43 | AV |
| | | | 1.18 | I | 576 | (2560) | | | | 1.18 | I | 576 | (2560) | 03 | 6085 | 43 | AV |
| | | | 1.74 | III | 751 | (3340) | | | | 1.74 | III | 751 | (3340) | 03 | 6090 | 43 | AV |
| | | | 2.41 | III | 751 | (3340) | | | | 2.41 | III | 751 | (3340) | 03 | 6095 | 43 | AV |
| 28.4 | 706 | (79.8) | * | - | 559 | (2490) | 34.3 | 585 | (66.1) | * | - | 576 | (2560) | 03 | 6085 | 51 | AV |
| | | | 1.33 | II | 751 | (3340) | | | | 1.33 | II | 751 | (3340) | 03 | 6090 | 51 | AV |
| | | | 1.63 | III | 751 | (3340) | | | | 1.69 | III | 751 | (3340) | 03 | 6095 | 51 | AV |
| | | | 2.24 | III | 1210 | (5400) | | | | 2.24 | III | 1210 | (5400) | 03 | 6100 | 51 | AV |
| 24.6 | 817 | (92.3) | * | - | 538 | (2390) | 29.7 | 677 | (76.5) | * | - | 571 | (2540) | 03 | 6085 | 59 | AV |
| | | | 1.24 | I | 751 | (3340) | | | | 1.24 | I | 751 | (3340) | 03 | 6090 | 59 | AV |
| | | | 1.34 | II | 751 | (3340) | | | | 1.49 | II | 751 | (3340) | 03 | 6095 | 59 | AV |
| | | | 2.06 | III | 1210 | (5400) | | | | 2.06 | III | 1210 | (5400) | 03 | 6100 | 59 | AV |
| | | | 2.72 | III | 1210 | (5400) | | | | 2.83 | III | 1210 | (5400) | 03 | 6105 | 59 | AV |
| 20.4 | 983 | (111) | 1.01 | I | 751 | (3340) | 24.6 | 814 | (92.0) | 1.01 | I | 751 | (3340) | 03 | 6090 | 71 | AV |
| | | | 1.11 | I | 751 | (3340) | | | | 1.21 | I | 751 | (3340) | 03 | 6095 | 71 | AV |
| | | | 1.74 | III | 1210 | (5400) | | | | 1.74 | III | 1210 | (5400) | 03 | 6100 | 71 | AV |
| | | | 2.02 | III | 1210 | (5400) | | | | 2.24 | III | 1210 | (5400) | 03 | 6105 | 71 | AV |
| 16.7 | 1200 | (136) | 1.05 | I | 751 | (3340) | 20.1 | 998 | (113) | 1.21 | I | 751 | (3340) | 03 | 6095 | 87 | AV |
| | | | 1.73 | III | 1210 | (5400) | | | | 1.73 | III | 1210 | (5400) | 03 | 6100 | 87 | AV |
| | | | 2.01 | III | 1210 | (5400) | | | | 2.26 | III | 1210 | (5400) | 03 | 6105 | 87 | AV |
| 13.9 | 1360 | (154) | 1.17 | I | 751 | (3340) | 16.8 | 1130 | (128) | 1.42 | II | 751 | (3340) | 03 | 6095DA | 104 | AV |
| | | | 1.62 | III | 1210 | (5400) | | | | 1.63 | III | 1210 | (5400) | 03 | 6100DA | 104 | AV |
| | | | 1.63 | III | 1210 | (5400) | | | | 1.63 | III | 1210 | (5400) | 03 | 6105DA | 104 | AV |
| 12.2 | 1650 | (186) | 1.15 | I | 1210 | (5400) | 14.7 | 1370 | (154) | 1.15 | I | 1210 | (5400) | 03 | 6105 | 119 | AV |
| 12.0 | 1590 | (179) | * | - | 751 | (3340) | 14.5 | 1310 | (149) | 1.08 | I | 751 | (3340) | 03 | 6095DA | 121 | AV |
| | | | 1.39 | II | 1210 | (5400) | | | | 1.63 | III | 1210 | (5400) | 03 | 6100DA | 121 | AV |
| | | | 1.63 | III | 1210 | (5400) | | | | 1.63 | III | 1210 | (5400) | 03 | 6105DA | 121 | AV |
| | | | 2.93 | III | 2210 | (9810) | | | | 3.53 | III | 2210 | (9810) | 03 | 6120DB | 121 | AV |
| 10.1 | 1880 | (212) | * | - | 751 | (3340) | 12.2 | 1550 | (176) | * | - | 751 | (3340) | 03 | 6090DA | 143 | AV |
| | | | * | - | 751 | (3340) | | | | 1.04 | I | 751 | (3340) | 03 | 6095DA | 143 | AV |
| | | | 1.18 | I | 1210 | (5400) | | | | 1.42 | II | 1210 | (5400) | 03 | 6100DA | 143 | AV |
| | | | 1.42 | II | 1210 | (5400) | | | | 1.63 | III | 1210 | (5400) | 03 | 6105DA | 143 | AV |
| | | | 2.48 | III | 2210 | (9810) | | | | 2.99 | III | 2210 | (9810) | 03 | 6120DB | 143 | AV |
| | | | 2.97 | III | 2210 | (9810) | | | | 3.59 | III | 2210 | (9810) | 03 | 6125DB | 143 | AV |

Gearmotors
Selection
Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/3 HP
0.25 kW

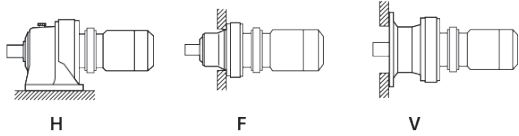

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 8.79 | 2160 | (245) | * | - | 751 | (3340) | 10.6 | 1790 | (203) | * | - | 751 | (3340) | 03 | 6095DA | 165 | AV |
| | | | 1.02 | I | 1210 | (5400) | | | | 1.23 | I | 1210 | (5400) | 03 | 6100DA | 165 | AV |
| | | | 1.23 | I | 1210 | (5400) | | | | 1.48 | II | 1210 | (5400) | 03 | 6105DA | 165 | AV |
| | | | 2.15 | III | 2210 | (9810) | | | | 2.59 | III | 2210 | (9810) | 03 | 6120DB | 165 | AV |
| | | | 2.58 | III | 2210 | (9810) | | | | 3.11 | III | 2210 | (9810) | 03 | 6125DB | 165 | AV |
| 7.44 | 2560 | (289) | * | - | 751 | (3340) | 8.97 | 2120 | (239) | * | - | 751 | (3340) | 03 | 6095DA | 195 | AV |
| | | | 1.04 | I | 1210 | (5400) | | | | 1.25 | I | 1210 | (5400) | 03 | 6105DA | 195 | AV |
| | | | 1.82 | III | 2210 | (9810) | | | | 2.19 | III | 2210 | (9810) | 03 | 6120DB | 195 | AV |
| | | | 2.18 | III | 2210 | (9810) | | | | 2.63 | III | 2210 | (9810) | 03 | 6125DB | 195 | AV |
| | | | 2.70 | III | 3310 | (14700) | | | | 3.26 | III | 3310 | (14700) | 03 | 6130DC | 195 | AV |
| 6.28 | 3030 | (342) | * | - | 1110 | (4940) | 7.58 | 2510 | (284) | * | - | 1210 | (5400) | 03 | 6100DA | 231 | AV |
| | | | * | - | 1110 | (4940) | | | | 1.06 | I | 1210 | (5400) | 03 | 6105DA | 231 | AV |
| | | | 1.52 | II | 2210 | (9810) | | | | 1.84 | III | 2210 | (9810) | 03 | 6120DB | 231 | AV |
| | | | 1.84 | III | 2210 | (9810) | | | | 2.22 | III | 2210 | (9810) | 03 | 6125DB | 231 | AV |
| | | | 2.28 | III | 3310 | (14700) | | | | 2.75 | III | 3310 | (14700) | 03 | 6130DC | 231 | AV |
| 5.31 | 3580 | (405) | * | - | 695 | (3090) | 6.41 | 2970 | (335) | * | - | 1210 | (5400) | 03 | 6105DA | 273 | AV |
| | | | 1.29 | I | 2210 | (9810) | | | | 1.56 | II | 2210 | (9810) | 03 | 6120DB | 273 | AV |
| | | | 1.56 | II | 2210 | (9810) | | | | 1.88 | III | 2210 | (9810) | 03 | 6125DB | 273 | AV |
| | | | 1.93 | III | 3310 | (14700) | | | | 2.33 | III | 3310 | (14700) | 03 | 6130DC | 273 | AV |
| 4.55 | 4180 | (473) | 1.10 | I | 2210 | (9810) | 5.49 | 3470 | (392) | 1.33 | II | 2210 | (9810) | 03 | 6120DB | 319 | AV |
| | | | 1.33 | II | 2210 | (9810) | | | | 1.61 | III | 2210 | (9810) | 03 | 6125DB | 319 | AV |
| | | | 1.65 | III | 3310 | (14700) | | | | 1.99 | III | 3310 | (14700) | 03 | 6130DC | 319 | AV |
| | | | 2.59 | III | 3600 | (16000) | | | | 3.13 | III | 3600 | (16000) | 03 | 6140DB | 319 | AV |
| | | | 2.90 | III | 3600 | (16000) | | | | 3.50 | III | 3600 | (16000) | 03 | 6145DB | 319 | AV |
| 3.85 | 4940 | (559) | 1.13 | I | 2210 | (9810) | 4.64 | 4100 | (463) | 1.36 | II | 2210 | (9810) | 03 | 6125DB | 377 | AV |
| | | | 1.40 | II | 3310 | (14700) | | | | 1.69 | III | 3310 | (14700) | 03 | 6130DC | 377 | AV |
| | | | 2.19 | III | 3600 | (16000) | | | | 2.65 | III | 3600 | (16000) | 03 | 6140DB | 377 | AV |
| | | | 2.45 | III | 3600 | (16000) | | | | 2.96 | III | 3600 | (16000) | 03 | 6145DB | 377 | AV |
| 3.07 | 6200 | (701) | * | - | 2210 | (9810) | 3.70 | 5140 | (581) | * | - | 2210 | (9810) | 03 | 6120DB | 473 | AV |
| | | | * | - | 2210 | (9810) | | | | 1.08 | I | 2210 | (9810) | 03 | 6125DB | 473 | AV |
| | | | 1.11 | I | 3310 | (14700) | | | | 1.34 | II | 3310 | (14700) | 03 | 6130DC | 473 | AV |
| | | | 1.75 | III | 3600 | (16000) | | | | 2.11 | III | 3600 | (16000) | 03 | 6140DB | 473 | AV |
| | | | 1.95 | III | 3600 | (16000) | | | | 2.36 | III | 3600 | (16000) | 03 | 6145DB | 473 | AV |
| 2.59 | 7330 | (828) | * | - | 2210 | (9810) | 3.13 | 6070 | (686) | * | - | 2210 | (9810) | 03 | 6125DB | 559 | AV |
| | | | * | - | 3310 | (14700) | | | | 1.14 | I | 3310 | (14700) | 03 | 6130DC | 559 | AV |
| | | | 1.48 | II | 3600 | (16000) | | | | 1.78 | III | 3600 | (16000) | 03 | 6140DB | 559 | AV |
| | | | 1.65 | III | 3600 | (16000) | | | | 2.00 | III | 3600 | (16000) | 03 | 6145DB | 559 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/3 HP
0.25 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|---------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 2.23 | 8510 | (962) | * | - | 3310 | (14700) | 2.70 | 7050 | (797) | 1.14 | I | 3310 | (14700) | 03 | 6130DC | 649 | AV |
| | | | 1.27 | I | 3600 | (16000) | | | | 03 | 6140DB | 649 | AV | | | | |
| | | | 1.42 | II | 3600 | (16000) | | | | 03 | 6145DB | 649 | AV | | | | |
| 1.98 | 9590 | (1080) | * | - | 3310 | (14700) | 2.39 | 7940 | (898) | * | - | 3310 | (14700) | 03 | 6130DC | 731 | AV |
| | | | 1.13 | I | 3600 | (16000) | | | | 03 | 6140DB | 731 | AV | | | | |
| | | | 1.26 | I | 3600 | (16000) | | | | 03 | 6145DB | 731 | AV | | | | |
| 1.72 | 11000 | (1250) | * | - | 3310 | (14700) | 2.08 | 9140 | (1030) | * | - | 3310 | (14700) | 03 | 6130DC | 841 | AV |
| | | | 1.10 | I | 3600 | (16000) | | | | 03 | 6145DB | 841 | AV | | | | |
| 1.45 | 13200 | (1490) | * | - | 3310 | (14700) | 1.74 | 10900 | (1230) | * | - | 3310 | (14700) | 03 | 6130DC | 1003 | AV |
| | | | * | - | 3600 | (16000) | | | | 03 | 6140DB | 1003 | AV | | | | |
| | | | * | - | 3600 | (16000) | | | | 03 | 6145DB | 1003 | AV | | | | |
| 1.16 | 16400 | (1850) | * | - | 2890 | (12900) | 1.40 | 13600 | (1530) | * | - | 3340 | (14900) | 03 | 6145DB | 1247 | AV |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/2 HP
0.4 kW

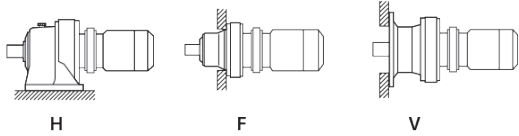

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 242 | 133 | (15.0) | 1.02 | I | 308 | (1370) | 292 | 110 | (12.4) | 1.02 | I | 290 | (1290) | 05 | 6075 | 6 | C.F. |
| | | | 1.48 | II | 432 | (1920) | | | | 1.48 | II | 406 | (1810) | 05 | 6080 | 6 | AV |
| | | | 1.94 | III | 432 | (1920) | | | | 1.94 | III | 406 | (1810) | 05 | 6085 | 6 | AV |
| | | | 2.87 | III | 644 | (2860) | | | | 2.87 | III | 606 | (2690) | 05 | 6090 | 6 | AV |
| 181 | 177 | (20.0) | 1.02 | I | 339 | (1510) | 219 | 147 | (16.6) | 1.02 | I | 320 | (1430) | 05 | 6075 | 8 | C.F. |
| | | | 1.48 | II | 468 | (2080) | | | | 1.48 | II | 440 | (1960) | 05 | 6080 | 8 | AV |
| | | | 1.94 | III | 468 | (2080) | | | | 1.94 | III | 440 | (1960) | 05 | 6085 | 8 | AV |
| | | | 2.87 | III | 718 | (3190) | | | | 2.87 | III | 675 | (3000) | 05 | 6090 | 8 | AV |
| 132 | 244 | (27.5) | 1.02 | I | 378 | (1680) | 159 | 202 | (22.8) | 1.02 | I | 357 | (1590) | 05 | 6075 | 11 | C.F. |
| | | | 1.48 | II | 516 | (2300) | | | | 1.48 | II | 486 | (2160) | 05 | 6080 | 11 | AV |
| | | | 1.94 | III | 516 | (2300) | | | | 1.94 | III | 486 | (2160) | 05 | 6085 | 11 | AV |
| | | | 2.87 | III | 751 | (3340) | | | | 2.87 | III | 751 | (3340) | 05 | 6090 | 11 | AV |
| 112 | 288 | (32.5) | 1.02 | I | 398 | (1770) | 135 | 239 | (27.0) | 1.02 | I | 377 | (1680) | 05 | 6075 | 13 | C.F. |
| | | | 1.48 | II | 555 | (2470) | | | | 1.48 | II | 522 | (2320) | 05 | 6080 | 13 | AV |
| | | | 1.94 | III | 555 | (2470) | | | | 1.94 | III | 522 | (2320) | 05 | 6085 | 13 | AV |
| | | | 2.87 | III | 751 | (3340) | | | | 2.87 | III | 751 | (3340) | 05 | 6090 | 13 | AV |
| 96.7 | 332 | (37.5) | 1.02 | I | 398 | (1770) | 117 | 275 | (31.1) | 1.02 | I | 377 | (1680) | 05 | 6075 | 15 | C.F. |
| | | | 1.48 | II | 572 | (2550) | | | | 1.48 | II | 539 | (2400) | 05 | 6080 | 15 | AV |
| | | | 1.94 | III | 572 | (2550) | | | | 1.94 | III | 539 | (2400) | 05 | 6085 | 15 | AV |
| | | | 2.87 | III | 751 | (3340) | | | | 2.87 | III | 751 | (3340) | 05 | 6090 | 15 | AV |
| 85.3 | 377 | (42.5) | 1.02 | I | 398 | (1770) | 103 | 312 | (35.3) | 1.02 | I | 397 | (1770) | 05 | 6075 | 17 | C.F. |
| | | | 1.48 | II | 576 | (2560) | | | | 1.48 | II | 565 | (2510) | 05 | 6080 | 17 | AV |
| | | | 1.94 | III | 576 | (2560) | | | | 1.94 | III | 565 | (2510) | 05 | 6085 | 17 | AV |
| | | | 2.87 | III | 751 | (3340) | | | | 2.87 | III | 751 | (3340) | 05 | 6090 | 17 | AV |
| 69.0 | 465 | (52.6) | 1.02 | I | 398 | (1770) | 83.3 | 385 | (43.5) | 1.02 | I | 397 | (1770) | 05 | 6075 | 21 | C.F. |
| | | | 1.20 | I | 576 | (2560) | | | | 1.20 | I | 551 | (2450) | 05 | 6080 | 21 | AV |
| | | | 1.38 | II | 576 | (2560) | | | | 1.38 | II | 551 | (2450) | 05 | 6085 | 21 | AV |
| | | | 1.89 | III | 751 | (3340) | | | | 1.89 | III | 751 | (3340) | 05 | 6090 | 21 | AV |
| 58.0 | 554 | (62.6) | 1.19 | I | 576 | (2560) | 70.0 | 459 | (51.8) | 1.19 | I | 566 | (2520) | 05 | 6085 | 25 | AV |
| | | | 1.68 | III | 751 | (3340) | | | | 1.68 | III | 751 | (3340) | 05 | 6090 | 25 | AV |
| | | | 2.17 | III | 751 | (3340) | | | | 2.17 | III | 751 | (3340) | 05 | 6095 | 25 | AV |
| 50.0 | 642 | (72.6) | 1.17 | I | 576 | (2560) | 60.3 | 532 | (60.1) | 1.17 | I | 576 | (2560) | 05 | 6085 | 29 | AV |
| | | | 1.56 | II | 751 | (3340) | | | | 1.56 | II | 751 | (3340) | 05 | 6090 | 29 | AV |
| | | | 1.96 | III | 751 | (3340) | | | | 1.96 | III | 751 | (3340) | 05 | 6095 | 29 | AV |
| 41.4 | 775 | (87.6) | * | - | 576 | (2560) | 50.0 | 642 | (72.6) | * | - | 576 | (2560) | 05 | 6085 | 35 | AV |
| | | | 1.53 | II | 751 | (3340) | | | | 1.53 | II | 751 | (3340) | 05 | 6090 | 35 | AV |
| | | | 1.89 | III | 751 | (3340) | | | | 1.89 | III | 751 | (3340) | 05 | 6095 | 35 | AV |
| | | | 2.44 | III | 1210 | (5400) | | | | 2.44 | III | 1210 | (5400) | 05 | 6100 | 35 | AV |
| | | | 3.00 | III | 1210 | (5400) | | | | 3.00 | III | 1210 | (5400) | 05 | 6105 | 35 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/2 HP
0.4 kW

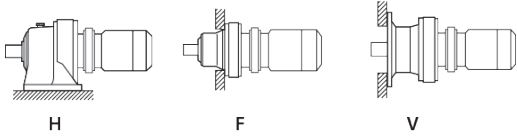

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 33.7 | 953 | (108) | 1.09 | I | 751 | (3340) | 40.7 | 789 | (89.2) | 1.09 | I | 751 | (3340) | 05 | 6090 | 43 | AV |
| | | | 1.51 | II | 751 | (3340) | | | | 1.51 | II | 751 | (3340) | 05 | 6095 | 43 | AV |
| | | | 1.95 | III | 1210 | (5400) | | | | 1.95 | III | 1210 | (5400) | 05 | 6100 | 43 | AV |
| | | | 2.71 | III | 1210 | (5400) | | | | 2.71 | III | 1210 | (5400) | 05 | 6105 | 43 | AV |
| 28.4 | 1130 | (128) | 1.02 | I | 747 | (3320) | 34.3 | 936 | (106) | 1.05 | I | 751 | (3340) | 05 | 6095 | 51 | AV |
| | | | 1.40 | II | 1210 | (5400) | | | | 1.40 | II | 1210 | (5400) | 05 | 6100 | 51 | AV |
| | | | 1.94 | III | 1210 | (5400) | | | | 1.94 | III | 1210 | (5400) | 05 | 6105 | 51 | AV |
| | | | 2.36 | III | 1710 | (7610) | | | | 2.36 | III | 1710 | (7610) | 05 | 6110 | 51 | AV |
| | | | 2.78 | III | 1710 | (7610) | | | | 2.78 | III | 1710 | (7610) | 05 | 6115 | 51 | AV |
| 24.6 | 1310 | (148) | * | - | 741 | (3300) | 29.7 | 1080 | (122) | * | - | 751 | (3340) | 05 | 6095 | 59 | AV |
| | | | 1.29 | I | 1210 | (5400) | | | | 1.29 | I | 1210 | (5400) | 05 | 6100 | 59 | AV |
| | | | 1.70 | III | 1210 | (5400) | | | | 1.77 | III | 1210 | (5400) | 05 | 6105 | 59 | AV |
| | | | 2.15 | III | 1710 | (7610) | | | | 2.15 | III | 1710 | (7610) | 05 | 6110 | 59 | AV |
| | | | 2.53 | III | 1710 | (7610) | | | | 2.53 | III | 1710 | (7610) | 05 | 6115 | 59 | AV |
| 20.4 | 1570 | (178) | 1.09 | I | 1210 | (5400) | 24.6 | 1300 | (147) | 1.09 | I | 1210 | (5400) | 05 | 6100 | 71 | AV |
| | | | 1.26 | I | 1210 | (5400) | | | | 1.40 | II | 1210 | (5400) | 05 | 6105 | 71 | AV |
| | | | 1.67 | III | 1710 | (7610) | | | | 1.67 | III | 1710 | (7610) | 05 | 6110 | 71 | AV |
| | | | 1.89 | III | 1710 | (7610) | | | | 1.89 | III | 1710 | (7610) | 05 | 6115 | 71 | AV |
| | | | 2.39 | III | 2210 | (9810) | | | | 2.39 | III | 2210 | (9810) | 05 | 6120 | 71 | AV |
| | | | 2.84 | III | 2210 | (9810) | | | | 3.00 | III | 2210 | (9810) | 05 | 6125 | 71 | AV |
| 16.7 | 1930 | (218) | 1.08 | I | 1210 | (5400) | 20.1 | 1600 | (180) | 1.08 | I | 1210 | (5400) | 05 | 6100 | 87 | AV |
| | | | 1.26 | I | 1210 | (5400) | | | | 1.41 | II | 1210 | (5400) | 05 | 6105 | 87 | AV |
| | | | 1.65 | III | 1710 | (7610) | | | | 1.65 | III | 1710 | (7610) | 05 | 6110 | 87 | AV |
| | | | 1.89 | III | 1710 | (7610) | | | | 1.89 | III | 1710 | (7610) | 05 | 6115 | 87 | AV |
| | | | 2.36 | III | 2210 | (9810) | | | | 2.36 | III | 2210 | (9810) | 05 | 6120 | 87 | AV |
| | | | 2.57 | III | 2210 | (9810) | | | | 2.83 | III | 2210 | (9810) | 05 | 6125 | 87 | AV |
| 13.9 | 2180 | (247) | * | - | 751 | (3340) | 16.8 | 1810 | (204) | * | - | 751 | (3340) | 05 | 6090DA | 104 | C.F. |
| | | | * | - | 751 | (3340) | | | | * | - | 751 | (3340) | 05 | 6095DA | 104 | C.F. |
| | | | 1.01 | I | 1210 | (5400) | | | | 1.02 | I | 1210 | (5400) | 05 | 6100DA | 104 | C.F. |
| | | | 2.13 | III | 2210 | (9810) | | | | 2.57 | III | 2210 | (9810) | 05 | 6120DB | 104 | AV |
| | | | 2.55 | III | 2210 | (9810) | | | | 3.08 | III | 2210 | (9810) | 05 | 6125DB | 104 | AV |
| 12.0 | 2540 | (287) | * | - | 751 | (3340) | 14.5 | 2100 | (238) | * | - | 751 | (3340) | 05 | 6090DA | 121 | C.F. |
| | | | * | - | 751 | (3340) | | | | * | - | 751 | (3340) | 05 | 6095DA | 121 | C.F. |
| | | | 1.02 | I | 1210 | (5400) | | | | 1.02 | I | 1210 | (5400) | 05 | 6105DA | 121 | C.F. |
| | | | 1.83 | III | 2210 | (9810) | | | | 2.21 | III | 2210 | (9810) | 05 | 6120DB | 121 | AV |
| | | | 2.17 | III | 2210 | (9810) | | | | 2.62 | III | 2210 | (9810) | 05 | 6125DB | 121 | AV |
| | | | 2.72 | III | 3310 | (14700) | | | | 3.28 | III | 3310 | (14700) | 05 | 6130DC | 121 | C.F. |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/2 HP
0.4 kW

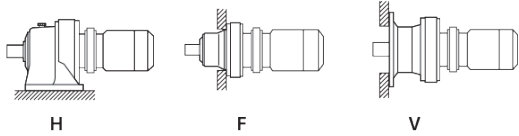

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 10.1 | 3000 | (339) | * | - | 751 | (3340) | 12.2 | 2490 | (281) | * | - | 751 | (3340) | 05 | 6095DA | 143 | C.F. |
| | | | * | - | 1210 | (5400) | | | | * | - | 1210 | (5400) | 05 | 6100DA | 143 | C.F. |
| | | | * | - | 1210 | (5400) | | | | 1.02 | I | 1210 | (5400) | 05 | 6105DA | 143 | C.F. |
| | | | 1.55 | II | 2210 | (9810) | | | | 1.87 | III | 2210 | (9810) | 05 | 6120DB | 143 | AV |
| | | | 1.86 | III | 2210 | (9810) | | | | 2.24 | III | 2210 | (9810) | 05 | 6125DB | 143 | AV |
| | | | 2.30 | III | 3310 | (14700) | | | | 2.78 | III | 3310 | (14700) | 05 | 6130DC | 143 | C.F. |
| | | | 2.77 | III | 3310 | (14700) | | | | 3.35 | III | 3310 | (14700) | 05 | 6135DC | 143 | C.F. |
| 8.79 | 3460 | (391) | * | - | 744 | (3310) | 10.6 | 2870 | (324) | * | - | 1210 | (5400) | 05 | 6100DA | 165 | C.F. |
| | | | * | - | 744 | (3310) | | | | * | - | 1210 | (5400) | 05 | 6105DA | 165 | C.F. |
| | | | 1.34 | II | 2210 | (9810) | | | | 1.62 | III | 2210 | (9810) | 05 | 6120DB | 165 | AV |
| | | | 1.61 | III | 2210 | (9810) | | | | 1.94 | III | 2210 | (9810) | 05 | 6125DB | 165 | AV |
| | | | 1.99 | III | 3310 | (14700) | | | | 2.41 | III | 3310 | (14700) | 05 | 6130DC | 165 | C.F. |
| | | | 2.40 | III | 3310 | (14700) | | | | 2.90 | III | 3310 | (14700) | 05 | 6135DC | 165 | C.F. |
| 7.44 | 4090 | (462) | * | - | 732 | (3250) | 8.97 | 3390 | (383) | * | - | 746 | (3320) | 05 | 6100DA | 195 | C.F. |
| | | | * | - | 732 | (3250) | | | | * | - | 746 | (3320) | 05 | 6105DA | 195 | C.F. |
| | | | 1.14 | I | 2210 | (9810) | | | | 1.37 | II | 2210 | (9810) | 05 | 6120DB | 195 | AV |
| | | | 1.36 | II | 2210 | (9810) | | | | 1.64 | III | 2210 | (9810) | 05 | 6125DB | 195 | AV |
| | | | 1.69 | III | 3310 | (14700) | | | | 2.04 | III | 3310 | (14700) | 05 | 6130DC | 195 | C.F. |
| | | | 2.03 | III | 3310 | (14700) | | | | 2.45 | III | 3310 | (14700) | 05 | 6135DC | 195 | C.F. |
| | | | 2.65 | III | 3600 | (16000) | | | | 3.20 | III | 3600 | (16000) | 05 | 6140DB | 195 | AV |
| | | | 2.94 | III | 3600 | (16000) | | | | 3.54 | III | 3600 | (16000) | 05 | 6145DB | 195 | AV |
| 6.28 | 4850 | (548) | * | - | 678 | (3020) | 7.58 | 4020 | (454) | * | - | 689 | (3070) | 05 | 6105DA | 231 | C.F. |
| | | | 1.15 | I | 2210 | (9810) | | | | 1.39 | II | 2210 | (9810) | 05 | 6125DB | 231 | AV |
| | | | 1.42 | II | 3310 | (14700) | | | | 1.72 | III | 3310 | (14700) | 05 | 6130DC | 231 | C.F. |
| | | | 1.72 | III | 3310 | (14700) | | | | 2.07 | III | 3310 | (14700) | 05 | 6135DC | 231 | C.F. |
| | | | 2.24 | III | 3600 | (16000) | | | | 2.70 | III | 3600 | (16000) | 05 | 6140DB | 231 | AV |
| | | | 2.44 | III | 3600 | (16000) | | | | 2.95 | III | 3600 | (16000) | 05 | 6145DB | 231 | AV |
| 5.31 | 5730 | (647) | * | - | 2210 | (9810) | 6.41 | 4750 | (536) | * | - | 2210 | (9810) | 05 | 6120DB | 273 | AV |
| | | | * | - | 2210 | (9810) | | | | 1.17 | I | 2210 | (9810) | 05 | 6125DB | 273 | AV |
| | | | 1.21 | I | 3310 | (14700) | | | | 1.45 | II | 3310 | (14700) | 05 | 6130DC | 273 | C.F. |
| | | | 1.45 | II | 3310 | (14700) | | | | 1.75 | III | 3310 | (14700) | 05 | 6135DC | 273 | C.F. |
| | | | 1.89 | III | 3600 | (16000) | | | | 2.28 | III | 3600 | (16000) | 05 | 6140DB | 273 | AV |
| | | | 2.07 | III | 3600 | (16000) | | | | 2.49 | III | 3600 | (16000) | 05 | 6145DB | 273 | AV |
| | | | 2.71 | III | 4960 | (22100) | | | | 3.27 | III | 4960 | (22100) | 05 | 6160DC | 273 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/2 HP
0.4 kW

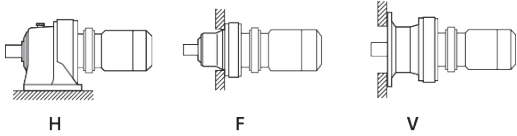

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|---------------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 4.55 | 6690 | (756) | * | - | 2210 | (9810) | 5.49 | 5550 | (627) | * | - | 2210 | (9810) | 05 | 6120DB | 319 | AV |
| | | | * | - | 2210 | (9810) | | | | 1.01 | I | 2210 | (9810) | 05 | 6125DB | 319 | AV |
| | | | 1.03 | I | 3310 | (14700) | | | | 1.24 | I | 3310 | (14700) | 05 | 6130DC | 319 | C.F. |
| | | | 1.24 | I | 3310 | (14700) | | | | 1.50 | II | 3310 | (14700) | 05 | 6135DC | 319 | C.F. |
| | | | 1.62 | III | 3600 | (16000) | | | | 1.95 | III | 3600 | (16000) | 05 | 6140DB | 319 | AV |
| | | | 1.81 | III | 3600 | (16000) | | | | 2.19 | III | 3600 | (16000) | 05 | 6145DB | 319 | AV |
| | | | 2.32 | III | 4960 | (22100) | | | | 2.80 | III | 4960 | (22100) | 05 | 6160DC | 319 | AV |
| | | | 2.78 | III | 4960 | (22100) | | | | 3.35 | III | 4960 | (22100) | 05 | 6165DC | 319 | AV |
| 3.85 | 7910 | (894) | * | - | 2210 | (9810) | 4.64 | 6560 | (741) | * | - | 2210 | (9810) | 05 | 6120DB | 377 | AV |
| | | | * | - | 2210 | (9810) | | | | * | - | 2210 | (9810) | 05 | 6125DB | 377 | AV |
| | | | 1.05 | I | 3310 | (14700) | | | | 1.27 | I | 3310 | (14700) | 05 | 6135DC | 377 | C.F. |
| | | | 1.37 | II | 3600 | (16000) | | | | 1.65 | III | 3600 | (16000) | 05 | 6140DB | 377 | AV |
| | | | 1.53 | II | 3600 | (16000) | | | | 1.85 | III | 3600 | (16000) | 05 | 6145DB | 377 | AV |
| | | | 1.96 | III | 4960 | (22100) | | | | 2.37 | III | 4960 | (22100) | 05 | 6160DC | 377 | AV |
| | | | 2.35 | III | 4960 | (22100) | | | | 2.84 | III | 4960 | (22100) | 05 | 6165DC | 377 | AV |
| | | | 2.83 | III | 6630 | (29500) | | | | 3.42 | III | 6630 | (29500) | 05 | 6170DC | 377 | AV |
| 3.07 | 9930 | (1120) | * | - | 1380 | (6120) | 3.70 | 8220 | (929) | * | - | 2210 | (9810) | 05 | 6125DB | 473 | AV |
| | | | * | - | 3310 | (14700) | | | | * | - | 3310 | (14700) | 05 | 6130DC | 473 | C.F. |
| | | | * | - | 3310 | (14700) | | | | 1.01 | I | 3310 | (14700) | 05 | 6135DC | 473 | C.F. |
| | | | 1.09 | I | 3600 | (16000) | | | | 1.32 | II | 3600 | (16000) | 05 | 6140DB | 473 | AV |
| | | | 1.22 | I | 3600 | (16000) | | | | 1.47 | II | 3600 | (16000) | 05 | 6145DB | 473 | AV |
| | | | 1.55 | II | 4960 | (22100) | | | | 1.87 | III | 4960 | (22100) | 05 | 6160DC | 473 | AV |
| | | | 1.87 | III | 4960 | (22100) | | | | 2.26 | III | 4960 | (22100) | 05 | 6165DC | 473 | AV |
| | | | 2.26 | III | 6630 | (29500) | | | | 2.72 | III | 6630 | (29500) | 05 | 6170DC | 473 | AV |
| 2.81 | III | 6630 | (29500) | 3.39 | III | 6630 | (29500) | 05 | 6175DC | 473 | AV | | | | | | |
| 2.59 | 11700 | (1330) | * | - | 3280 | (14600) | 3.13 | 9720 | (1100) | * | - | 3310 | (14700) | 05 | 6130DC | 559 | C.F. |
| | | | * | - | 3280 | (14600) | | | | * | - | 3310 | (14700) | 05 | 6135DC | 559 | C.F. |
| | | | 1.03 | I | 3570 | (15900) | | | | 1.25 | I | 3600 | (16000) | 05 | 6145DB | 559 | AV |
| | | | 1.31 | II | 4960 | (22100) | | | | 1.58 | II | 4960 | (22100) | 05 | 6160DC | 559 | AV |
| | | | 1.58 | II | 4960 | (22100) | | | | 1.91 | III | 4960 | (22100) | 05 | 6165DC | 559 | AV |
| | | | 1.91 | III | 6630 | (29500) | | | | 2.30 | III | 6630 | (29500) | 05 | 6170DC | 559 | AV |
| | | | 2.38 | III | 6630 | (29500) | | | | 2.87 | III | 6630 | (29500) | 05 | 6175DC | 559 | AV |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1/2 HP
0.4 kW

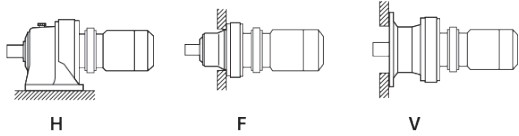

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 2.23 | 13600 | (1540) | * | - | 3310 | (14700) | 2.70 | 11300 | (1280) | * | - | 3310 | (14700) | 05 | 6130DC | 649 | C.F. |
| | | | * | - | 3310 | (14700) | | | | * | - | 3310 | (14700) | 05 | 6135DC | 649 | C.F. |
| | | | * | - | 3600 | (16000) | | | | * | - | 3600 | (16000) | 05 | 6140DB | 649 | AV |
| | | | * | - | 3600 | (16000) | | | | 1.07 | I | 3600 | (16000) | 05 | 6145DB | 649 | AV |
| | | | 1.14 | I | 4960 | (22100) | | | | 1.38 | II | 4960 | (22100) | 05 | 6160DC | 649 | AV |
| | | | 1.36 | II | 4960 | (22100) | | | | 1.65 | III | 4960 | (22100) | 05 | 6165DC | 649 | AV |
| | | | 1.64 | III | 6630 | (29500) | | | | 1.98 | III | 6630 | (29500) | 05 | 6170DC | 649 | AV |
| | | | 2.05 | III | 6630 | (29500) | | | | 2.47 | III | 6630 | (29500) | 05 | 6175DC | 649 | AV |
| 1.98 | 15300 | (1730) | * | - | 3090 | (13800) | 2.39 | 12700 | (1440) | * | - | 3230 | (14400) | 05 | 6135DC | 731 | AV |
| | | | * | - | 3070 | (13700) | | | | * | - | 3450 | (15400) | 05 | 6140DB | 731 | AV |
| | | | * | - | 3070 | (13700) | | | | * | - | 3450 | (15400) | 05 | 6145DB | 731 | AV |
| | | | 1.00 | I | 4960 | (22100) | | | | 1.21 | I | 4960 | (22100) | 05 | 6160DC | 731 | AV |
| | | | 1.21 | I | 4960 | (22100) | | | | 1.46 | II | 4960 | (22100) | 05 | 6165DC | 731 | AV |
| | | | 1.46 | II | 6630 | (29500) | | | | 1.76 | III | 6630 | (29500) | 05 | 6170DC | 731 | AV |
| | | | 1.82 | III | 6630 | (29500) | | | | 2.19 | III | 6630 | (29500) | 05 | 6175DC | 731 | AV |
| 1.72 | 17600 | (1990) | * | - | 2640 | (11700) | 2.08 | 14600 | (1650) | * | - | 3210 | (14300) | 05 | 6140DB | 841 | AV |
| | | | * | - | 2640 | (11700) | | | | * | - | 3210 | (14300) | 05 | 6145DB | 841 | AV |
| | | | 1.05 | I | 4960 | (22100) | | | | 1.27 | I | 4960 | (22100) | 05 | 6165DC | 841 | C.F. |
| | | | 1.27 | I | 6630 | (29500) | | | | 1.53 | II | 6630 | (29500) | 05 | 6170DC | 841 | C.F. |
| | | | 1.58 | II | 6630 | (29500) | | | | 1.91 | III | 6630 | (29500) | 05 | 6175DC | 841 | C.F. |
| 1.45 | 21000 | (2380) | * | - | 2730 | (12100) | 1.74 | 17400 | (1970) | * | - | 3600 | (16000) | 05 | 6145DB | 1003 | AV |
| | | | * | - | 4960 | (22100) | | | | * | - | 4960 | (22100) | 05 | 6160DC | 1003 | AV |
| | | | * | - | 4960 | (22100) | | | | 1.07 | I | 4960 | (22100) | 05 | 6165DC | 1003 | AV |
| | | | 1.06 | I | 6630 | (29500) | | | | 1.28 | I | 6630 | (29500) | 05 | 6170DC | 1003 | AV |
| | | | 1.32 | II | 6630 | (29500) | | | | 1.60 | III | 6630 | (29500) | 05 | 6175DC | 1003 | AV |
| 1.16 | 26200 | (2960) | * | - | 4910 | (21800) | 1.40 | 21700 | (2450) | * | - | 4960 | (22100) | 05 | 6160DC | 1247 | C.F. |
| | | | * | - | 4910 | (21800) | | | | * | - | 4960 | (22100) | 05 | 6165DC | 1247 | C.F. |
| | | | 1.07 | I | 6630 | (29500) | | | | 1.29 | I | 6630 | (29500) | 05 | 6175DC | 1247 | C.F. |
| 0.980 | 31000 | (3510) | * | - | 4400 | (19600) | 1.18 | 25700 | (2910) | * | - | 4610 | (20500) | 05 | 6160DC | 1479 | AV |
| | | | * | - | 4400 | (19600) | | | | * | - | 4610 | (20500) | 05 | 6165DC | 1479 | AV |
| | | | * | - | 6630 | (29500) | | | | * | - | 6630 | (29500) | 05 | 6170DC | 1479 | AV |
| | | | * | - | 6630 | (29500) | | | | 1.08 | I | 6630 | (29500) | 05 | 6175DC | 1479 | AV |
| 0.784 | 38800 | (4380) | * | - | 3060 | (13600) | 0.946 | 32200 | (3630) | * | - | 4650 | (20700) | 05 | 6165DC | 1849 | AV |
| | | | * | - | 6630 | (29500) | | | | * | - | 6630 | (29500) | 05 | 6170DC | 1849 | AV |
| | | | * | - | 6630 | (29500) | | | | * | - | 6630 | (29500) | 05 | 6175DC | 1849 | AV |
| 0.702 | 43300 | (4900) | * | - | 6560 | (29200) | 0.847 | 35900 | (4060) | * | - | 6630 | (29500) | 05 | 6170DC | 2065 | AV |
| | | | * | - | 6560 | (29200) | | | | * | - | 6630 | (29500) | 05 | 6175DC | 2065 | AV |
| 0.572 | 53200 | (6020) | * | - | 5390 | (24000) | 0.690 | 44100 | (4980) | * | - | 6530 | (29100) | 05 | 6175DC | 2537 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3/4 HP
0.55 kW

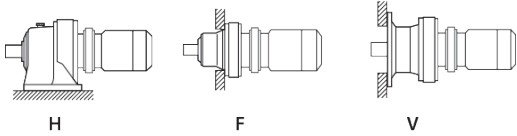

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|-------------|--------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 242 | 183 | (20.6) | 1.08 | I | 430 | (1910) | 292 | 151 | (17.1) | 1.08 | I | 404 | (1800) | 08 | 6080 | 6 | C.F. |
| | | | 1.41 | II | 430 | (1910) | | | | 1.41 | II | 404 | (1800) | | 6085 | 6 | C.F. |
| | | | 2.08 | III | 642 | (2850) | | | | 2.08 | III | 604 | (2690) | | 6090 | 6 | AV |
| | | | 2.75 | III | 642 | (2850) | | | | 2.75 | III | 604 | (2690) | | 6095 | 6 | AV |
| 181 | 244 | (27.5) | 1.08 | I | 465 | (2070) | 219 | 202 | (22.8) | 1.08 | I | 438 | (1950) | 08 | 6080 | 8 | C.F. |
| | | | 1.41 | II | 465 | (2070) | | | | 1.41 | II | 438 | (1950) | | 6085 | 8 | C.F. |
| | | | 2.08 | III | 715 | (3180) | | | | 2.08 | III | 673 | (2990) | | 6090 | 8 | AV |
| | | | 2.75 | III | 715 | (3180) | | | | 2.75 | III | 673 | (2990) | | 6095 | 8 | AV |
| 132 | 335 | (37.9) | 1.08 | I | 512 | (2280) | 159 | 278 | (31.4) | 1.08 | I | 483 | (2150) | 08 | 6080 | 11 | C.F. |
| | | | 1.41 | II | 512 | (2280) | | | | 1.41 | II | 483 | (2150) | | 6085 | 11 | C.F. |
| | | | 2.08 | III | 751 | (3340) | | | | 2.08 | III | 751 | (3340) | | 6090 | 11 | AV |
| | | | 2.75 | III | 751 | (3340) | | | | 2.75 | III | 751 | (3340) | | 6095 | 11 | AV |
| 112 | 396 | (44.7) | 1.08 | I | 550 | (2450) | 135 | 328 | (37.1) | 1.08 | I | 518 | (2310) | 08 | 6080 | 13 | C.F. |
| | | | 1.41 | II | 550 | (2450) | | | | 1.41 | II | 518 | (2310) | | 6085 | 13 | C.F. |
| | | | 2.08 | III | 751 | (3340) | | | | 2.08 | III | 751 | (3340) | | 6090 | 13 | AV |
| | | | 2.75 | III | 751 | (3340) | | | | 2.75 | III | 751 | (3340) | | 6095 | 13 | AV |
| 96.7 | 457 | (51.6) | 1.08 | I | 567 | (2520) | 117 | 379 | (42.8) | 1.08 | I | 535 | (2380) | 08 | 6080 | 15 | C.F. |
| | | | 1.41 | II | 567 | (2520) | | | | 1.41 | II | 535 | (2380) | | 6085 | 15 | C.F. |
| | | | 2.08 | III | 751 | (3340) | | | | 2.08 | III | 751 | (3340) | | 6090 | 15 | AV |
| | | | 2.75 | III | 751 | (3340) | | | | 2.75 | III | 751 | (3340) | | 6095 | 15 | AV |
| 85.3 | 518 | (58.5) | 1.08 | I | 576 | (2560) | 103 | 429 | (48.5) | 1.08 | I | 560 | (2490) | 08 | 6080 | 17 | C.F. |
| | | | 1.41 | II | 576 | (2560) | | | | 1.41 | II | 560 | (2490) | | 6085 | 17 | C.F. |
| | | | 2.08 | III | 751 | (3340) | | | | 2.08 | III | 751 | (3340) | | 6090 | 17 | AV |
| | | | 2.75 | III | 751 | (3340) | | | | 2.75 | III | 751 | (3340) | | 6095 | 17 | AV |
| 69.0 | 640 | (72.3) | 1.00 | I | 576 | (2560) | 83.3 | 530 | (59.9) | 1.00 | I | 545 | (2430) | 08 | 6085 | 21 | C.F. |
| | | | 1.38 | II | 751 | (3340) | | | | 1.38 | II | 751 | (3340) | | 6090 | 21 | AV |
| | | | 2.74 | III | 751 | (3340) | | | | 2.75 | III | 751 | (3340) | | 6095 | 21 | AV |
| | | | 58.0 | 761 | (86.0) | * | | | | - | 565 | (2510) | 70.0 | | 631 | (71.3) | * |
| 1.22 | I | 751 | (3340) | | | 1.22 | I | 751 | (3340) | 6090 | 25 | AV | | | | | |
| 1.58 | II | 751 | (3340) | | | 1.58 | II | 751 | (3340) | 6095 | 25 | AV | | | | | |
| 2.31 | III | 1210 | (5400) | | | 2.31 | III | 1210 | (5400) | 6100 | 25 | AV | | | | | |
| 50.0 | 883 | (99.8) | * | - | 518 | (2300) | 60.3 | 732 | (82.7) | * | - | 557 | (2480) | 08 | 6085 | 29 | C.F. |
| | | | 1.14 | I | 751 | (3340) | | | | 1.14 | I | 751 | (3340) | | 6090 | 29 | AV |
| | | | 1.42 | II | 751 | (3340) | | | | 1.42 | II | 751 | (3340) | | 6095 | 29 | AV |
| | | | 2.20 | III | 1210 | (5400) | | | | 2.20 | III | 1210 | (5400) | | 6100 | 29 | AV |
| | | | 2.89 | III | 1210 | (5400) | | | | 2.89 | III | 1210 | (5400) | | 6105 | 29 | AV |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3/4 HP
0.55 kW

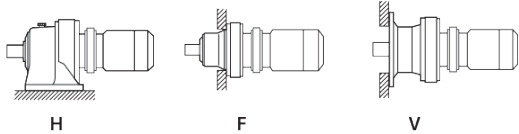

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 41.4 | 1070 | (120) | 1.11 | I | 751 | (3340) | 50.0 | 883 | (99.8) | 1.11 | I | 751 | (3340) | 08 | 6090 | 35 | AV |
| | | | 1.38 | II | 751 | (3340) | | | | 1.38 | II | 751 | (3340) | 08 | 6095 | 35 | AV |
| | | | 1.77 | III | 1210 | (5400) | | | | 1.77 | III | 1210 | (5400) | 08 | 6100 | 35 | AV |
| | | | 2.18 | III | 1210 | (5400) | | | | 2.18 | III | 1210 | (5400) | 08 | 6105 | 35 | AV |
| | | | 2.73 | III | 1690 | (7510) | | | | 2.73 | III | 1690 | (7530) | 08 | 6110 | 35 | AV |
| 33.7 | 1310 | (148) | 1.10 | I | 746 | (3320) | 40.7 | 1090 | (123) | 1.10 | I | 751 | (3340) | 08 | 6095 | 43 | AV |
| | | | 1.42 | II | 1210 | (5400) | | | | 1.42 | II | 1210 | (5400) | 08 | 6100 | 43 | AV |
| | | | 1.97 | III | 1210 | (5400) | | | | 1.97 | III | 1210 | (5400) | 08 | 6105 | 43 | AV |
| | | | 2.36 | III | 1710 | (7610) | | | | 2.36 | III | 1710 | (7610) | 08 | 6110 | 43 | AV |
| | | | 2.75 | III | 1710 | (7610) | | | | 2.75 | III | 1710 | (7610) | 08 | 6115 | 43 | AV |
| 28.4 | 1550 | (176) | 1.02 | I | 1210 | (5400) | 34.3 | 1290 | (145) | 1.02 | I | 1210 | (5400) | 08 | 6100 | 51 | AV |
| | | | 1.41 | II | 1210 | (5400) | | | | 1.41 | II | 1210 | (5400) | 08 | 6105 | 51 | AV |
| | | | 1.72 | III | 1710 | (7610) | | | | 1.72 | III | 1710 | (7610) | 08 | 6110 | 51 | AV |
| | | | 2.02 | III | 1710 | (7610) | | | | 2.02 | III | 1710 | (7610) | 08 | 6115 | 51 | AV |
| | | | 2.96 | III | 2210 | (9810) | | | | 3.12 | III | 2210 | (9810) | 08 | 6120 | 51 | AV |
| 24.6 | 1800 | (203) | 1.24 | I | 1210 | (5400) | 29.7 | 1490 | (168) | 1.29 | I | 1210 | (5400) | 08 | 6105 | 59 | AV |
| | | | 1.56 | II | 1710 | (7610) | | | | 1.56 | II | 1710 | (7610) | 08 | 6110 | 59 | AV |
| | | | 1.84 | III | 1710 | (7610) | | | | 1.84 | III | 1710 | (7610) | 08 | 6115 | 59 | AV |
| | | | 2.37 | III | 2210 | (9810) | | | | 2.37 | III | 2210 | (9810) | 08 | 6120 | 59 | AV |
| | | | 2.95 | III | 2210 | (9810) | | | | 2.95 | III | 2210 | (9810) | 08 | 6125 | 59 | AV |
| 20.4 | 2160 | (244) | * | - | 1210 | (5380) | 24.6 | 1790 | (202) | 1.02 | I | 1210 | (5400) | 08 | 6105 | 71 | AV |
| | | | 1.22 | I | 1710 | (7610) | | | | 1.22 | I | 1710 | (7610) | 08 | 6110 | 71 | AV |
| | | | 1.38 | II | 1710 | (7610) | | | | 1.38 | II | 1710 | (7610) | 08 | 6115 | 71 | AV |
| | | | 1.74 | III | 2210 | (9810) | | | | 1.74 | III | 2210 | (9810) | 08 | 6120 | 71 | AV |
| | | | 2.07 | III | 2210 | (9810) | | | | 2.18 | III | 2210 | (9810) | 08 | 6125 | 71 | AV |
| 16.7 | 2650 | (299) | * | - | 1080 | (4800) | 20.1 | 2200 | (248) | 1.03 | I | 1210 | (5400) | 08 | 6105 | 87 | AV |
| | | | 1.20 | I | 1710 | (7610) | | | | 1.20 | I | 1710 | (7610) | 08 | 6110 | 87 | AV |
| | | | 1.38 | II | 1710 | (7610) | | | | 1.38 | II | 1710 | (7610) | 08 | 6115 | 87 | AV |
| | | | 1.72 | III | 2210 | (9810) | | | | 1.72 | III | 2210 | (9810) | 08 | 6120 | 87 | AV |
| | | | 1.87 | III | 2210 | (9810) | | | | 2.05 | III | 2210 | (9810) | 08 | 6125 | 87 | AV |
| | | | 2.58 | III | 3310 | (14700) | | | | 2.58 | III | 3200 | (14200) | 08 | 6130 | 87 | AV |
| 13.9 | 3000 | (339) | 1.55 | II | 2210 | (9810) | 16.8 | 2490 | (281) | 1.87 | III | 2210 | (9810) | 08 | 6120DB | 104 | AV |
| | | | 1.86 | III | 2210 | (9810) | | | | 2.24 | III | 2210 | (9810) | 08 | 6125DB | 104 | AV |
| | | | 2.30 | III | 3310 | (14700) | | | | 2.78 | III | 3310 | (14700) | 08 | 6130DC | 104 | C.F. |
| | | | 2.75 | III | 3600 | (16000) | | | | 2.75 | III | 3600 | (16000) | 08 | 6140DB | 104 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3/4 HP
0.55 kW

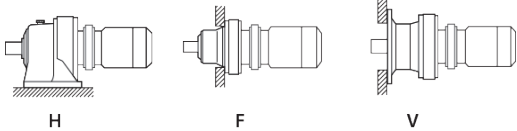

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 12.0 | 3490 | (394) | 1.33 | II | 2210 | (9810) | 14.5 | 2890 | (327) | 1.61 | III | 2210 | (9810) | 08 | 6120DB | 121 | AV |
| | | | 1.58 | II | 2210 | (9810) | | | | 1.90 | III | 2210 | (9810) | 08 | 6125DB | 121 | AV |
| | | | 1.98 | III | 3310 | (14700) | | | | 2.39 | III | 3310 | (14700) | 08 | 6130DC | 121 | C.F. |
| | | | 2.38 | III | 3310 | (14700) | | | | 2.88 | III | 3310 | (14700) | 08 | 6135DC | 121 | C.F. |
| | | | 2.75 | III | 3600 | (16000) | | | | 2.75 | III | 3600 | (16000) | 08 | 6140DB | 121 | AV |
| 10.1 | 4130 | (466) | 1.13 | I | 2210 | (9810) | 12.2 | 3420 | (386) | 1.36 | II | 2210 | (9810) | 08 | 6120DB | 143 | AV |
| | | | 1.35 | II | 2210 | (9810) | | | | 1.63 | III | 2210 | (9810) | 08 | 6125DB | 143 | AV |
| | | | 1.67 | III | 3310 | (14700) | | | | 2.02 | III | 3310 | (14700) | 08 | 6130DC | 143 | C.F. |
| | | | 2.02 | III | 3310 | (14700) | | | | 2.43 | III | 3310 | (14700) | 08 | 6135DC | 143 | C.F. |
| | | | 2.63 | III | 3600 | (16000) | | | | 2.75 | III | 3600 | (16000) | 08 | 6140DB | 143 | AV |
| | | | 2.75 | III | 3600 | (16000) | | | | 2.75 | III | 3600 | (16000) | 08 | 6145DB | 143 | AV |
| 8.79 | 4760 | (538) | 1.17 | I | 2210 | (9810) | 10.6 | 3940 | (446) | 1.41 | II | 2210 | (9810) | 08 | 6125DB | 165 | AV |
| | | | 1.45 | II | 3310 | (14700) | | | | 1.75 | III | 3310 | (14700) | 08 | 6130DC | 165 | C.F. |
| | | | 1.75 | III | 3310 | (14700) | | | | 2.11 | III | 3310 | (14700) | 08 | 6135DC | 165 | C.F. |
| | | | 2.28 | III | 3600 | (16000) | | | | 2.75 | III | 3600 | (16000) | 08 | 6140DB | 165 | AV |
| | | | 2.52 | III | 3600 | (16000) | | | | 2.75 | III | 3600 | (16000) | 08 | 6145DB | 165 | AV |
| | | | 3.26 | III | 4960 | (22100) | | | | 3.94 | III | 4960 | (22100) | 08 | 6160DC | 165 | C.F. |
| 7.44 | 5630 | (636) | * | - | 2210 | (9810) | 8.97 | 4660 | (527) | 1.00 | I | 2210 | (9810) | 08 | 6120DB | 195 | AV |
| | | | * | - | 2210 | (9810) | | | | 1.20 | I | 2210 | (9810) | 08 | 6125DB | 195 | AV |
| | | | 1.23 | I | 3310 | (14700) | | | | 1.48 | II | 3310 | (14700) | 08 | 6130DC | 195 | AV |
| | | | 1.48 | II | 3310 | (14700) | | | | 1.78 | III | 3310 | (14700) | 08 | 6135DC | 195 | AV |
| | | | 1.93 | III | 3600 | (16000) | | | | 2.33 | III | 3600 | (16000) | 08 | 6140DB | 195 | AV |
| | | | 2.14 | III | 3600 | (16000) | | | | 2.58 | III | 3600 | (16000) | 08 | 6145DB | 195 | AV |
| | | | 2.76 | III | 4960 | (22100) | | | | 3.33 | III | 4960 | (22100) | 08 | 6160DC | 195 | AV |
| | | | 3.30 | III | 4960 | (22100) | | | | 3.99 | III | 4960 | (22100) | 08 | 6165DC | 195 | AV |
| | | | 6.28 | 6670 | (753) | * | | | | - | 2210 | (9810) | 7.58 | 5520 | (624) | * | - |
| * | - | 2210 | | | | (9810) | 1.01 | I | 2210 | (9810) | 08 | 6125DB | | | | 231 | AV |
| 1.04 | I | 3310 | | | | (14700) | 1.25 | I | 3310 | (14700) | 08 | 6130DC | | | | 231 | C.F. |
| 1.25 | I | 3310 | | | | (14700) | 1.51 | II | 3310 | (14700) | 08 | 6135DC | | | | 231 | C.F. |
| 1.63 | III | 3600 | | | | (16000) | 1.96 | III | 3600 | (16000) | 08 | 6140DB | | | | 231 | AV |
| 1.78 | III | 3600 | | | | (16000) | 2.14 | III | 3600 | (16000) | 08 | 6145DB | | | | 231 | AV |
| 2.33 | III | 4960 | | | | (22100) | 2.81 | III | 4960 | (22100) | 08 | 6160DC | | | | 231 | C.F. |
| 2.79 | III | 4960 | | | | (22100) | 3.37 | III | 4960 | (22100) | 08 | 6165DC | | | | 231 | C.F. |
| 5.31 | 7880 | (890) | 1.06 | I | 3310 | (14700) | 6.41 | 6530 | (737) | 1.27 | I | 3310 | (14700) | 08 | 6135DC | 273 | AV |
| | | | 1.38 | II | 3600 | (16000) | | | | 1.66 | III | 3600 | (16000) | 08 | 6140DB | 273 | AV |
| | | | 1.50 | II | 3600 | (16000) | | | | 1.81 | III | 3600 | (16000) | 08 | 6145DB | 273 | AV |
| | | | 1.97 | III | 4960 | (22100) | | | | 2.38 | III | 4960 | (22100) | 08 | 6160DC | 273 | AV |
| | | | 2.36 | III | 4960 | (22100) | | | | 2.85 | III | 4960 | (22100) | 08 | 6165DC | 273 | AV |
| | | | 2.84 | III | 6630 | (29500) | | | | 3.43 | III | 6630 | (29500) | 08 | 6170DC | 273 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3/4 HP
0.55 kW

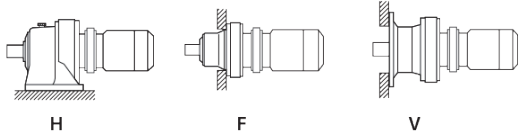

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 4.55 | 9200 | (1040) | * | - | 878 | (3910) | 5.49 | 7630 | (862) | * | - | 2210 | (9810) | 08 | 6125DB | 319 | AV |
| | | | * | - | 3310 | (14700) | | | | * | - | 3310 | (14700) | 08 | 6130DC | 319 | C.F. |
| | | | * | - | 3310 | (14700) | | | | 1.09 | I | 3310 | (14700) | 08 | 6135DC | 319 | C.F. |
| | | | 1.18 | I | 3600 | (16000) | | | | 1.42 | II | 3600 | (16000) | 08 | 6140DB | 319 | AV |
| | | | 1.32 | II | 3600 | (16000) | | | | 1.59 | II | 3600 | (16000) | 08 | 6145DB | 319 | AV |
| | | | 1.69 | III | 4960 | (22100) | | | | 2.04 | III | 4960 | (22100) | 08 | 6160DC | 319 | C.F. |
| | | | 2.02 | III | 4960 | (22100) | | | | 2.44 | III | 4960 | (22100) | 08 | 6165DC | 319 | C.F. |
| | | | 2.43 | III | 6630 | (29500) | | | | 2.94 | III | 6630 | (29500) | 08 | 6170DC | 319 | C.F. |
| | | | 3.03 | III | 6630 | (29500) | | | | 3.66 | III | 6630 | (29500) | 08 | 6175DC | 319 | C.F. |
| 3.85 | 10900 | (1230) | * | - | 3310 | (14700) | 4.64 | 9010 | (1020) | * | - | 3310 | (14700) | 08 | 6130DC | 377 | AV |
| | | | * | - | 3310 | (14700) | | | | * | - | 3310 | (14700) | 08 | 6135DC | 377 | AV |
| | | | 1.00 | I | 3600 | (16000) | | | | 1.20 | I | 3600 | (16000) | 08 | 6140DB | 377 | AV |
| | | | 1.11 | I | 3600 | (16000) | | | | 1.35 | II | 3600 | (16000) | 08 | 6145DB | 377 | AV |
| | | | 1.43 | II | 4960 | (22100) | | | | 1.72 | III | 4960 | (22100) | 08 | 6160DC | 377 | AV |
| | | | 1.71 | III | 4960 | (22100) | | | | 2.06 | III | 4960 | (22100) | 08 | 6165DC | 377 | AV |
| | | | 2.06 | III | 6630 | (29500) | | | | 2.48 | III | 6630 | (29500) | 08 | 6170DC | 377 | AV |
| | | | 2.56 | III | 6630 | (29500) | | | | 3.09 | III | 6630 | (29500) | 08 | 6175DC | 377 | AV |
| 3.07 | 13600 | (1540) | * | - | 3180 | (14200) | 3.70 | 11300 | (1280) | * | - | 3310 | (14700) | 08 | 6135DC | 473 | C.F. |
| | | | * | - | 3330 | (14800) | | | | * | - | 3590 | (16000) | 08 | 6140DB | 473 | AV |
| | | | * | - | 3330 | (14800) | | | | 1.07 | I | 3590 | (16000) | 08 | 6145DB | 473 | AV |
| | | | 1.13 | I | 4960 | (22100) | | | | 1.36 | II | 4960 | (22100) | 08 | 6160DC | 473 | C.F. |
| | | | 1.36 | II | 4960 | (22100) | | | | 1.64 | III | 4960 | (22100) | 08 | 6165DC | 473 | C.F. |
| | | | 1.64 | III | 6630 | (29500) | | | | 1.98 | III | 6630 | (29500) | 08 | 6170DC | 473 | C.F. |
| | | | 2.04 | III | 6630 | (29500) | | | | 2.47 | III | 6630 | (29500) | 08 | 6175DC | 473 | C.F. |
| 2.59 | 16100 | (1820) | * | - | 2930 | (13100) | 3.13 | 13400 | (1510) | * | - | 3370 | (15000) | 08 | 6140DB | 559 | AV |
| | | | * | - | 2930 | (13100) | | | | * | - | 3370 | (15000) | 08 | 6145DB | 559 | AV |
| | | | 1.15 | I | 4960 | (22100) | | | | 1.39 | II | 4960 | (22100) | 08 | 6165DC | 559 | AV |
| | | | 1.39 | II | 6630 | (29500) | | | | 1.68 | III | 6630 | (29500) | 08 | 6170DC | 559 | AV |
| | | | 1.73 | III | 6630 | (29500) | | | | 2.09 | III | 6630 | (29500) | 08 | 6175DC | 559 | AV |
| 2.23 | 18700 | (2120) | * | - | 3600 | (16000) | 2.70 | 15500 | (1750) | * | - | 3600 | (16000) | 08 | 6145DB | 649 | AV |
| | | | * | - | 4960 | (22100) | | | | 1.00 | I | 4960 | (22100) | 08 | 6160DC | 649 | C.F. |
| | | | * | - | 4960 | (22100) | | | | 1.20 | I | 4960 | (22100) | 08 | 6165DC | 649 | C.F. |
| | | | 1.20 | I | 6630 | (29500) | | | | 1.44 | II | 6630 | (29500) | 08 | 6170DC | 649 | C.F. |
| | | | 1.49 | II | 6630 | (29500) | | | | 1.80 | III | 6630 | (29500) | 08 | 6175DC | 649 | C.F. |
| 1.98 | 21100 | (2380) | * | - | 4960 | (22100) | 2.39 | 17500 | (1970) | * | - | 4960 | (22100) | 08 | 6160DC | 731 | AV |
| | | | * | - | 4960 | (22100) | | | | 1.06 | I | 4960 | (22100) | 08 | 6165DC | 731 | AV |
| | | | 1.06 | I | 6630 | (29500) | | | | 1.28 | I | 6630 | (29500) | 08 | 6170DC | 731 | AV |
| | | | 1.32 | II | 6630 | (29500) | | | | 1.60 | III | 6630 | (29500) | 08 | 6175DC | 731 | AV |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3/4 HP
0.55 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in•lbs | (N•m) | SF | AGMA Class | lbs | (N) | | in•lbs | (N•m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 1.72 | 24300 | (2740) | * | - | 4960 | (22100) | 2.08 | 20100 | (2270) | * | - | 4960 | (22100) | 08 | 6160DC | 841 | AV |
| | | | * | - | 4960 | (22100) | | | | * | - | 4960 | (22100) | | 6165DC | 841 | AV |
| | | | 1.15 | I | 6630 | (29500) | | | | 1.39 | II | 6630 | (29500) | | 6175DC | 841 | AV |
| 1.45 | 28900 | (3270) | * | - | 4960 | (22100) | 1.74 | 24000 | (2710) | * | - | 4960 | (22100) | 08 | 6165DC | 1003 | AV |
| | | | * | - | 6630 | (29500) | | | | * | - | 6630 | (29500) | | 6170DC | 1003 | AV |
| | | | * | - | 6630 | (29500) | | | | 1.16 | I | 6630 | (29500) | | 6175DC | 1003 | AV |
| 1.16 | 36000 | (4070) | * | - | 6630 | (29500) | 1.40 | 29800 | (3370) | * | - | 6630 | (29500) | 08 | 6170DC | 1247 | AV |
| | | | * | - | 6630 | (29500) | | | | * | - | 6630 | (29500) | | 6175DC | 1247 | AV |
| 0.980 | 42700 | (4820) | * | - | 6480 | (28800) | 1.18 | 35400 | (4000) | * | - | 6630 | (29500) | 08 | 6175DC | 1479 | AV |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1 HP
0.75 kW

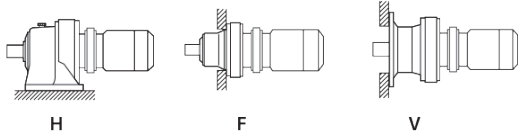

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 242 | 249 | (28.2) | 1.04 | I | 427 | (1900) | 292 | 206 | (23.3) | 1.04 | I | 402 | (1790) | 1 | 6085 | 6 | |
| | | | 1.53 | II | 639 | (2840) | | | | 1.53 | II | 601 | (2670) | 1 | 6090 | 6 | |
| | | | 2.02 | III | 639 | (2840) | | | | 2.02 | III | 601 | (2670) | 1 | 6095 | 6 | |
| 181 | 332 | (37.5) | 1.04 | I | 461 | (2050) | 219 | 275 | (31.1) | 1.04 | I | 435 | (1930) | 1 | 6085 | 8 | |
| | | | 1.53 | II | 711 | (3160) | | | | 1.53 | II | 669 | (2980) | 1 | 6090 | 8 | |
| | | | 2.02 | III | 711 | (3160) | | | | 2.02 | III | 669 | (2980) | 1 | 6095 | 8 | |
| 132 | 457 | (51.6) | 1.04 | I | 507 | (2250) | 159 | 379 | (42.8) | 1.04 | I | 478 | (2130) | 1 | 6085 | 11 | |
| | | | 1.53 | II | 751 | (3340) | | | | 1.53 | II | 751 | (3340) | 1 | 6090 | 11 | |
| | | | 2.02 | III | 751 | (3340) | | | | 2.02 | III | 751 | (3340) | 1 | 6095 | 11 | |
| 112 | 540 | (61.0) | 1.04 | I | 543 | (2410) | 135 | 447 | (50.5) | 1.04 | I | 513 | (2280) | 1 | 6085 | 13 | |
| | | | 1.53 | II | 751 | (3340) | | | | 1.53 | II | 751 | (3340) | 1 | 6090 | 13 | |
| | | | 2.02 | III | 751 | (3340) | | | | 2.02 | III | 751 | (3340) | 1 | 6095 | 13 | |
| 96.7 | 623 | (70.4) | 1.04 | I | 559 | (2490) | 117 | 516 | (58.3) | 1.04 | I | 528 | (2350) | 1 | 6085 | 15 | |
| | | | 1.53 | II | 751 | (3340) | | | | 1.53 | II | 751 | (3340) | 1 | 6090 | 15 | |
| | | | 2.02 | III | 751 | (3340) | | | | 2.02 | III | 751 | (3340) | 1 | 6095 | 15 | |
| 85.3 | 706 | (79.8) | 1.04 | I | 576 | (2560) | 103 | 585 | (66.1) | 1.04 | I | 552 | (2460) | 1 | 6085 | 17 | |
| | | | 1.53 | II | 751 | (3340) | | | | 1.53 | II | 751 | (3340) | 1 | 6090 | 17 | |
| | | | 2.02 | III | 751 | (3340) | | | | 2.02 | III | 751 | (3340) | 1 | 6095 | 17 | |
| | | | 2.65 | III | 1210 | (5400) | | | | 2.65 | III | 1210 | (5400) | 1 | 6100 | 17 | |
| 69.0 | 872 | (98.5) | 1.01 | I | 751 | (3340) | 83.3 | 723 | (81.7) | 1.01 | I | 751 | (3340) | 1 | 6090 | 21 | |
| | | | 2.01 | III | 751 | (3340) | | | | 2.02 | III | 751 | (3340) | 1 | 6095 | 21 | |
| | | | 2.54 | III | 1210 | (5400) | | | | 2.57 | III | 1210 | (5400) | 1 | 6100 | 21 | |
| 58.0 | 1040 | (117) | 1.16 | I | 751 | (3340) | 70.0 | 860 | (97.2) | 1.16 | I | 751 | (3340) | 1 | 6095 | 25 | |
| | | | 1.69 | III | 1210 | (5400) | | | | 1.69 | III | 1210 | (5400) | 1 | 6100 | 25 | |
| | | | 2.23 | III | 1210 | (5400) | | | | 2.23 | III | 1210 | (5400) | 1 | 6105 | 25 | |
| | | | 2.55 | III | 1630 | (7240) | | | | 2.55 | III | 1530 | (6810) | 1 | 6110 | 25 | |
| | | | 2.96 | III | 1630 | (7240) | | | | 2.96 | III | 1530 | (6810) | 1 | 6115 | 25 | |
| 50.0 | 1200 | (136) | 1.04 | I | 746 | (3320) | 60.3 | 998 | (113) | 1.04 | I | 751 | (3340) | 1 | 6095 | 29 | |
| | | | 1.61 | III | 1210 | (5400) | | | | 1.61 | III | 1210 | (5400) | 1 | 6100 | 29 | |
| | | | 2.12 | III | 1210 | (5400) | | | | 2.12 | III | 1210 | (5400) | 1 | 6105 | 29 | |
| | | | 2.54 | III | 1670 | (7410) | | | | 2.54 | III | 1570 | (7000) | 1 | 6110 | 29 | |
| | | | 2.96 | III | 1670 | (7410) | | | | 2.96 | III | 1570 | (7000) | 1 | 6115 | 29 | |
| 41.4 | 1450 | (164) | 1.01 | I | 736 | (3270) | 50.0 | 1200 | (136) | 1.01 | I | 748 | (3330) | 1 | 6095 | 35 | |
| | | | 1.30 | II | 1210 | (5400) | | | | 1.30 | II | 1210 | (5400) | 1 | 6100 | 35 | |
| | | | 1.60 | III | 1210 | (5400) | | | | 1.60 | III | 1210 | (5400) | 1 | 6105 | 35 | |
| | | | 2.00 | III | 1680 | (7470) | | | | 2.00 | III | 1680 | (7490) | 1 | 6110 | 35 | |
| | | | 2.41 | III | 1680 | (7470) | | | | 2.41 | III | 1680 | (7490) | 1 | 6115 | 35 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1 HP
0.75 kW

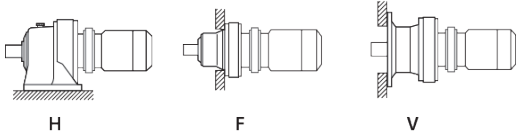

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 33.7 | 1790 | (202) | 0.80 | - | 722 | (3210) | 40.7 | 1480 | (167) | 0.80 | - | 738 | (3280) | 1 | 6095 | 43 | |
| | | | 1.04 | I | 1210 | (5400) | | | | 1.04 | I | 1210 | (5400) | 1 | 6100 | 43 | |
| | | | 1.45 | II | 1210 | (5400) | | | | 1.45 | II | 1210 | (5400) | 1 | 6105 | 43 | |
| | | | 1.73 | III | 1710 | (7610) | | | | 1.73 | III | 1710 | (7610) | 1 | 6110 | 43 | |
| | | | 2.02 | III | 1710 | (7610) | | | | 2.02 | III | 1710 | (7610) | 1 | 6115 | 43 | |
| | | | 2.55 | III | 2210 | (9810) | | | | 2.55 | III | 2170 | (9640) | 1 | 6120 | 43 | |
| 28.4 | 2120 | (239) | 1.03 | I | 1210 | (5400) | 34.3 | 1760 | (198) | 1.03 | I | 1210 | (5390) | 1 | 6105 | 51 | |
| | | | 1.26 | I | 1710 | (7610) | | | | 1.26 | I | 1710 | (7610) | 1 | 6110 | 51 | |
| | | | 1.48 | II | 1710 | (7610) | | | | 1.48 | II | 1710 | (7610) | 1 | 6115 | 51 | |
| | | | 2.17 | III | 2210 | (9810) | | | | 2.29 | III | 2210 | (9810) | 1 | 6120 | 51 | |
| | | | 2.63 | III | 2210 | (9810) | | | | 3.04 | III | 2210 | (9810) | 1 | 6125 | 51 | |
| 24.6 | 2450 | (277) | 0.91 | - | 1210 | (5400) | 29.7 | 2030 | (229) | 0.94 | - | 1210 | (5370) | 1 | 6105 | 59 | |
| | | | 1.15 | I | 1710 | (7610) | | | | 1.15 | I | 1710 | (7610) | 1 | 6110 | 59 | |
| | | | 1.35 | II | 1710 | (7610) | | | | 1.35 | II | 1710 | (7610) | 1 | 6115 | 59 | |
| | | | 1.74 | III | 2210 | (9810) | | | | 1.74 | III | 2210 | (9810) | 1 | 6120 | 59 | |
| | | | 2.16 | III | 2210 | (9810) | | | | 2.16 | III | 2210 | (9810) | 1 | 6125 | 59 | |
| | | | 2.82 | III | 2970 | (13200) | | | | 2.91 | III | 2790 | (12400) | 1 | 6130 | 59 | |
| 20.4 | 2950 | (333) | 1.01 | I | 1710 | (7610) | 24.6 | 2440 | (276) | 1.01 | I | 1710 | (7610) | 1 | 6115 | 71 | |
| | | | 1.28 | I | 2210 | (9810) | | | | 1.28 | I | 2210 | (9810) | 1 | 6120 | 71 | |
| | | | 1.52 | II | 2210 | (9810) | | | | 1.60 | III | 2210 | (9810) | 1 | 6125 | 71 | |
| | | | 2.34 | III | 3140 | (14000) | | | | 2.44 | III | 2950 | (13100) | 1 | 6130 | 71 | |
| | | | 2.70 | III | 3140 | (14000) | | | | 2.89 | III | 2950 | (13100) | 1 | 6135 | 71 | |
| 16.7 | 3610 | (408) | 1.01 | I | 1700 | (7550) | 20.1 | 2990 | (338) | 1.01 | I | 1710 | (7610) | 1 | 6115 | 87 | |
| | | | 1.26 | I | 2210 | (9810) | | | | 1.26 | I | 2210 | (9810) | 1 | 6120 | 87 | |
| | | | 1.37 | II | 2210 | (9810) | | | | 1.51 | II | 2210 | (9810) | 1 | 6125 | 87 | |
| | | | 1.89 | III | 3310 | (14700) | | | | 1.89 | III | 3190 | (14200) | 1 | 6130 | 87 | |
| | | | 2.20 | III | 3310 | (14700) | | | | 2.55 | III | 3190 | (14200) | 1 | 6135 | 87 | |
| | | | 2.64 | III | 3600 | (16000) | | | | 2.64 | III | 3600 | (16000) | 1 | 6140 | 87 | |
| | | | 2.88 | III | 3600 | (16000) | | | | 3.31 | III | 3600 | (16000) | 1 | 6145 | 87 | |
| 13.9 | 4090 | (462) | 1.14 | I | 2210 | (9810) | 16.8 | 3390 | (383) | 1.37 | II | 2210 | (9810) | 1 | 6120DB | 104 | |
| | | | 1.36 | II | 2210 | (9810) | | | | 1.64 | III | 2210 | (9810) | 1 | 6125DB | 104 | |
| | | | 1.69 | III | 3310 | (14700) | | | | 2.04 | III | 3310 | (14700) | 1 | 6130DC | 104 | |
| | | | 2.03 | III | 3310 | (14700) | | | | 2.45 | III | 3310 | (14700) | 1 | 6135DC | 104 | |
| 12.0 | 4760 | (538) | 1.16 | I | 2210 | (9810) | 14.5 | 3940 | (446) | 1.40 | II | 2210 | (9810) | 1 | 6125DB | 121 | |
| | | | 1.45 | II | 3310 | (14700) | | | | 1.75 | III | 3310 | (14700) | 1 | 6130DC | 121 | |
| | | | 1.75 | III | 3310 | (14700) | | | | 2.11 | III | 3310 | (14700) | 1 | 6135DC | 121 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1 HP
0.75 kW

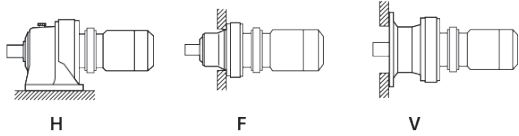

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|---------|-------------------------------|---------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 10.1 | 4650 | (525) | * | - | 2210 | (9810) | 12.2 | 4660 | (527) | 1.00 | I | 2210 | (9810) | 1 | 6120DB | 143 | |
| | 5630 | (636) | 0.99 | - | 2210 | (9810) | | 1.20 | I | 2210 | (9810) | 1 | 6125DB | 143 | | | |
| | | | 1.23 | I | 3310 | (14700) | | 1.48 | II | 3310 | (14700) | 1 | 6130DC | 143 | | | |
| | | | 1.48 | II | 3310 | (14700) | | 1.78 | III | 3310 | (14700) | 1 | 6135DC | 143 | | | |
| | | | 1.93 | III | 3600 | (16000) | | 2.02 | III | 3600 | (16000) | 1 | 6140DB | 143 | | | |
| | | | 2.02 | III | 3600 | (16000) | | 2.02 | III | 3600 | (16000) | 1 | 6145DB | 143 | | | |
| | | | 2.76 | III | 4960 | (22100) | | 3.33 | III | 4960 | (22100) | 1 | 6160DC | 143 | | | |
| 8.79 | 4650 | (525) | * | - | 2210 | (9810) | 10.6 | 4650 | (525) | * | - | 2210 | (9810) | 1 | 6120DB | 165 | |
| | 6490 | (734) | 0.86 | - | 2210 | (9810) | | 1.04 | I | 2210 | (9810) | 1 | 6125DB | 165 | | | |
| | | | 1.06 | I | 3310 | (14700) | | 1.28 | I | 3310 | (14700) | 1 | 6130DC | 165 | | | |
| | | | 1.28 | I | 3310 | (14700) | | 1.55 | II | 3310 | (14700) | 1 | 6135DC | 165 | | | |
| | | | 1.67 | III | 3600 | (16000) | | 2.02 | III | 3600 | (16000) | 1 | 6140DB | 165 | | | |
| | | | 1.85 | III | 3600 | (16000) | | 2.02 | III | 3600 | (16000) | 1 | 6145DB | 165 | | | |
| | | | 2.39 | III | 4960 | (22100) | | 2.89 | III | 4960 | (22100) | 1 | 6160DC | 165 | | | |
| | | 2.86 | III | 4960 | (22100) | 3.46 | III | 4960 | (22100) | 1 | 6165DC | 165 | | | | | |
| 7.44 | 5580 | (630) | * | - | 2210 | (9810) | 8.97 | 5580 | (630) | * | - | 2210 | (9810) | 1 | 6125DB | 195 | |
| | 7670 | (867) | 1.08 | I | 3310 | (14700) | | 1.31 | II | 3310 | (14700) | 1 | 6135DC | 195 | | | |
| | | | 1.41 | II | 3600 | (16000) | | 1.71 | III | 3600 | (16000) | 1 | 6140DB | 195 | | | |
| | | | 1.57 | II | 3600 | (16000) | | 1.89 | III | 3600 | (16000) | 1 | 6145DB | 195 | | | |
| | | | 2.02 | III | 4960 | (22100) | | 2.44 | III | 4960 | (22100) | 1 | 6160DC | 195 | | | |
| | | | 2.42 | III | 4960 | (22100) | | 2.92 | III | 4960 | (22100) | 1 | 6165DC | 195 | | | |
| | | | 2.92 | III | 6630 | (29500) | | 3.52 | III | 6630 | (29500) | 1 | 6170DC | 195 | | | |
| 6.28 | 5580 | (630) | * | - | 2210 | (9810) | 7.58 | 5580 | (630) | * | - | 2210 | (9810) | 1 | 6125DB | 231 | |
| | 6900 | (780) | * | - | 3310 | (14700) | | 6900 | (780) | * | - | 3310 | (14700) | 1 | 6130DC | 231 | |
| | 9090 | (1030) | 0.92 | - | 3310 | (14700) | | 7530 | (851) | 1.10 | I | 3310 | (14700) | 1 | 6135DC | 231 | |
| | | | 1.19 | I | 3600 | (16000) | | 1.44 | II | 3600 | (16000) | 1 | 6140DB | 231 | | | |
| | | | 1.30 | II | 3600 | (16000) | | 1.57 | II | 3600 | (16000) | 1 | 6145DB | 231 | | | |
| | | | 1.71 | III | 4960 | (22100) | | 2.06 | III | 4960 | (22100) | 1 | 6160DC | 231 | | | |
| | | | 2.04 | III | 4960 | (22100) | | 2.47 | III | 4960 | (22100) | 1 | 6165DC | 231 | | | |
| | | 2.46 | III | 6630 | (29500) | 2.97 | III | 6630 | (29500) | 1 | 6170DC | 231 | | | | | |
| 5.31 | 6900 | (780) | * | - | 3310 | (14700) | 6.41 | 6900 | (780) | * | - | 3310 | (14700) | 1 | 6130DC | 273 | |
| | 8320 | (940) | * | - | 3310 | (14700) | | 8320 | (940) | * | - | 3310 | (14700) | 1 | 6135DC | 273 | |
| | 10700 | (1210) | 1.01 | I | 3600 | (16000) | | 8900 | (1010) | 1.22 | I | 3600 | (16000) | 1 | 6140DB | 273 | |
| | | | 1.10 | I | 3600 | (16000) | | 1.33 | II | 3600 | (16000) | 1 | 6145DB | 273 | | | |
| | | | 1.45 | II | 4960 | (22100) | | 1.75 | III | 4960 | (22100) | 1 | 6160DC | 273 | | | |
| | | | 1.73 | III | 4960 | (22100) | | 2.09 | III | 4960 | (22100) | 1 | 6165DC | 273 | | | |
| | | | 2.08 | III | 6630 | (29500) | | 2.52 | III | 6630 | (29500) | 1 | 6170DC | 273 | | | |
| | | 2.60 | III | 6630 | (29500) | 3.13 | III | 6630 | (29500) | 1 | 6175DC | 273 | | | | | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1 HP
0.75 kW

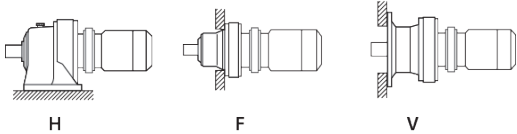

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 4.55 | 8320 | (940) | * | - | 3310 | (14700) | 5.49 | 8320 | (940) | * | - | 3310 | (14700) | 1 | 6135DC | 319 | |
| | | 12600 | (1420) | 0.97 | - | 3490 | | | (15500) | 10400 | (1180) | 1.17 | I | 3600 | (16000) | 1 | |
| | | | 1.24 | I | 4960 | (22100) | | | | 1.49 | II | 4960 | (22100) | 1 | 6160DC | 319 | |
| | | | 1.48 | II | 4960 | (22100) | | | | 1.79 | III | 4960 | (22100) | 1 | 6165DC | 319 | |
| | | | 1.78 | III | 6630 | (29500) | | | | 2.15 | III | 6630 | (29500) | 1 | 6170DC | 319 | |
| | | | 2.22 | III | 6630 | (29500) | | | | 2.68 | III | 6630 | (29500) | 1 | 6175DC | 319 | |
| | | | 2.86 | III | 9380 | (41700) | | | | 3.45 | III | 9380 | (41700) | 1 | 6180DB | 319 | |
| 3.85 | 10800 | (1230) | * | - | 3600 | (16000) | 4.64 | 10800 | (1230) | * | - | 3600 | (16000) | 1 | 6140DB | 377 | |
| | | 12100 | (1370) | * | - | 3540 | | | (15800) | 12300 | (1390) | 0.99 | - | 3520 | (15700) | 1 | |
| | 14800 | (1680) | 1.05 | I | 4960 | (22100) | | | | 1.26 | I | 4960 | (22100) | 1 | 6160DC | 377 | |
| | | | 1.25 | I | 4960 | (22100) | | | | 1.51 | II | 4960 | (22100) | 1 | 6165DC | 377 | |
| | | | 1.51 | II | 6630 | (29500) | | | | 1.82 | III | 6630 | (29500) | 1 | 6170DC | 377 | |
| | | | 1.88 | III | 6630 | (29500) | | | | 2.27 | III | 6630 | (29500) | 1 | 6175DC | 377 | |
| | | | 2.42 | III | 9380 | (41700) | | | | 2.92 | III | 9380 | (41700) | 1 | 6180DB | 377 | |
| | | 2.98 | III | 9380 | (41700) | | | 3.60 | III | 9380 | (41700) | 1 | 6185DB | 377 | | | |
| 3.07 | 12100 | (1370) | * | - | 3520 | (15700) | 3.70 | 12100 | (1370) | * | - | 3520 | (15700) | 1 | 6145DB | 473 | |
| | | 15400 | (1740) | * | - | 4960 | | | (22100) | 15400 | (1740) | 1.00 | I | 4960 | (22100) | 1 | |
| | 18600 | (2100) | 1.00 | I | 4960 | (22100) | | | | 1.21 | I | 4960 | (22100) | 1 | 6165DC | 473 | |
| | | | 1.20 | I | 6630 | (29500) | | | | 1.45 | II | 6630 | (29500) | 1 | 6170DC | 473 | |
| | | | 1.50 | II | 6630 | (29500) | | | | 1.81 | III | 6630 | (29500) | 1 | 6175DC | 473 | |
| | | | 1.93 | III | 9380 | (41700) | | | | 2.33 | III | 9380 | (41700) | 1 | 6180DB | 473 | |
| | | | 2.38 | III | 9380 | (41700) | | | | 2.87 | III | 9380 | (41700) | 1 | 6185DB | 473 | |
| 2.59 | 15400 | (1740) | * | - | 4960 | (22100) | 3.13 | 15400 | (1740) | * | - | 4960 | (22100) | 1 | 6160DC | 559 | |
| | | 22000 | (2490) | 0.85 | - | 4960 | | | (22100) | 18200 | (2060) | 1.02 | I | 4960 | (22100) | 1 | |
| | | | 1.02 | I | 6630 | (29500) | | | | 1.23 | I | 6630 | (29500) | 1 | 6170DC | 559 | |
| | | | 1.27 | I | 6630 | (29500) | | | | 1.53 | II | 6630 | (29500) | 1 | 6175DC | 559 | |
| | | | 1.63 | III | 9380 | (41700) | | | | 1.97 | III | 9380 | (41700) | 1 | 6180DB | 559 | |
| | | | 2.01 | III | 9380 | (41700) | | | | 2.43 | III | 9380 | (41700) | 1 | 6185DB | 559 | |
| | | | 2.57 | III | 13300 | (59000) | | | | 3.10 | III | 13300 | (59000) | 1 | 6190DA | 559 | |
| 2.23 | 18600 | (2100) | * | - | 4960 | (22100) | 2.70 | 18600 | (2100) | * | - | 4960 | (22100) | 1 | 6165DC | 649 | |
| | | 25500 | (2890) | 1.09 | I | 6630 | | | (29500) | 21200 | (2390) | 1.32 | II | 6630 | (29500) | 1 | |
| | | | 1.40 | II | 9380 | (41700) | | | | 1.69 | III | 9380 | (41700) | 1 | 6180DB | 649 | |
| | | | 1.73 | III | 9380 | (41700) | | | | 2.09 | III | 9380 | (41700) | 1 | 6185DB | 649 | |
| | | | 2.21 | III | 13300 | (59000) | | | | 2.67 | III | 13300 | (59000) | 1 | 6190DA | 649 | |
| | | | 2.76 | III | 13300 | (59000) | | | | 3.33 | III | 13300 | (59000) | 1 | 6195DA | 649 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1 HP
0.75 kW

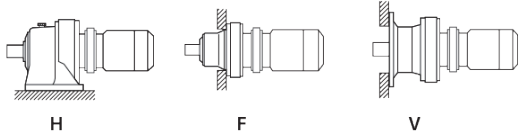

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 1.98 | 18600 | (2100) | * | - | 4960 | (22100) | 2.39 | 18600 | (2100) | * | - | 4960 | (22100) | 1 | 6165DC | 731 | |
| | 22400 | (2530) | * | - | 6630 | (29500) | | 22400 | (2530) | * | - | 6630 | (29500) | 1 | 6170DA | 731 | |
| | 28800 | (3250) | 0.97 | - | 6630 | (29500) | | 23800 | (2690) | 1.17 | I | 6630 | (29500) | 1 | 6175DC | 731 | |
| | | | 1.25 | I | 9380 | (41700) | | | | 1.51 | II | 9380 | (41700) | 1 | 6180DB | 731 | |
| | | | 1.54 | II | 9380 | (41700) | | | | 1.86 | III | 9380 | (41700) | 1 | 6185DB | 731 | |
| | | | 1.96 | III | 13300 | (59000) | | | | 2.37 | III | 13300 | (59000) | 1 | 6190DA | 731 | |
| | | | 2.45 | III | 13300 | (59000) | | | | 2.96 | III | 13300 | (59000) | 1 | 6195DA | 731 | |
| 1.72 | 22400 | (2530) | * | - | 6630 | (29500) | 2.08 | 22400 | (2530) | * | - | 6630 | (29500) | 1 | 6170DA | 841 | |
| | 33100 | (3740) | 0.84 | - | 6630 | (29500) | | 27400 | (3100) | 1.02 | I | 6630 | (29500) | 1 | 6175DC | 841 | |
| | | | 1.08 | I | 9380 | (41700) | | | | 1.31 | II | 9380 | (41700) | 1 | 6180DB | 841 | |
| | | | 1.34 | II | 9380 | (41700) | | | | 1.61 | III | 9380 | (41700) | 1 | 6185DB | 841 | |
| | | | 1.71 | III | 13300 | (59000) | | | | 2.06 | III | 13300 | (59000) | 1 | 6190DA | 841 | |
| | | | 2.13 | III | 13300 | (59000) | | | | 2.57 | III | 13300 | (59000) | 1 | 6195DA | 841 | |
| 1.45 | 27900 | (3150) | * | - | 6630 | (29500) | 1.74 | 27900 | (3150) | * | - | 6630 | (29500) | 1 | 6175DC | 1003 | |
| | 39500 | (4460) | 1.12 | I | 9380 | (41700) | | 32700 | (3690) | 1.35 | II | 9380 | (41700) | 1 | 6185DB | 1003 | |
| | | | 1.43 | II | 13300 | (59000) | | | | 1.73 | III | 13300 | (59000) | 1 | 6190DA | 1003 | |
| | | | 1.79 | III | 13300 | (59000) | | | | 2.15 | III | 13300 | (59000) | 1 | 6195DA | 1003 | |
| 1.16 | 35900 | (4060) | * | - | 9380 | (41700) | 1.40 | 35900 | (4060) | * | - | 9380 | (41700) | 1 | 6180DB | 1247 | |
| | 49100 | (5540) | 0.90 | - | 9380 | (41700) | | 40700 | (4590) | 1.09 | I | 9380 | (41700) | 1 | 6185DB | 1247 | |
| | | | 1.15 | I | 13300 | (59000) | | | | 1.39 | II | 13300 | (59000) | 1 | 6190DA | 1247 | |
| | | | 1.44 | II | 13300 | (59000) | | | | 1.73 | III | 13300 | (59000) | 1 | 6195DA | 1247 | |
| 0.980 | 35900 | (4060) | * | - | 9380 | (41700) | 1.18 | 35900 | (4060) | * | - | 9380 | (41700) | 1 | 6180DB | 1479 | |
| | 44300 | (5000) | * | - | 9380 | (41700) | | 44300 | (5000) | * | - | 9380 | (41700) | 1 | 6185DB | 1479 | |
| | 58200 | (6580) | 1.21 | I | 13200 | (58800) | | 48200 | (5450) | 1.46 | II | 13300 | (59000) | 1 | 6195DA | 1479 | |
| 0.784 | 44300 | (5000) | * | - | 9380 | (41700) | 0.946 | 44300 | (5000) | * | - | 9380 | (41700) | 1 | 6185DB | 1849 | |
| | 56500 | (6380) | * | - | 13300 | (59000) | | 56500 | (6380) | * | - | 13300 | (59000) | 1 | 6190DA | 1849 | |
| | 72800 | (8220) | 0.97 | - | 13200 | (58900) | | 60300 | (6810) | 1.17 | I | 13300 | (59000) | 1 | 6195DA | 1849 | |
| 0.702 | 44300 | (5000) | * | - | 9350 | (41600) | 0.847 | 44300 | (5000) | * | - | 9350 | (41600) | 1 | 6185DB | 2065 | |
| | 56500 | (6380) | * | - | 13200 | (58600) | | 56500 | (6380) | * | - | 13200 | (58600) | 1 | 6190DA | 2065 | |
| | 81300 | (9180) | 0.87 | - | 13000 | (57800) | | 67300 | (7610) | 1.05 | I | 13100 | (58200) | 1 | 6195DA | 2065 | |
| 0.572 | 56500 | (6380) | * | - | 13200 | (58600) | 0.690 | 56500 | (6380) | * | - | 13200 | (58600) | 1 | 6190DA | 2537 | |
| | 70500 | (7960) | * | - | 13100 | (58100) | | 70500 | (7960) | * | - | 13100 | (58100) | 1 | 6195DA | 2537 | |
| | 82300 | (9300) | * | - | 18900 | (84100) | | 82700 | (9350) | 1.00 | I | 18900 | (84100) | 1 | 6205DA | 2537 | |
| 0.476 | 56500 | (6380) | * | - | 13200 | (58900) | 0.575 | 56500 | (6380) | * | - | 13200 | (58900) | 1 | 6190DA | 3045 | |
| | 70500 | (7960) | * | - | 13100 | (58400) | | 70500 | (7960) | * | - | 13100 | (58400) | 1 | 6195DA | 3045 | |
| | 77500 | (8760) | * | - | 18900 | (84100) | | 77500 | (8760) | * | - | 18900 | (84100) | 1 | 6205DA | 3045 | |
| 0.417 | 56500 | (6380) | * | - | 13200 | (58600) | 0.503 | 56500 | (6380) | * | - | 13200 | (58600) | 1 | 6190DA | 3481 | |
| | 70500 | (7960) | * | - | 13100 | (58100) | | 70500 | (7960) | * | - | 13100 | (58100) | 1 | 6195DA | 3481 | |
| | 82300 | (9300) | * | - | 18900 | (84100) | | 82300 | (9300) | * | - | 18900 | (84100) | 1 | 6205DA | 3481 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1 HP
0.75 kW

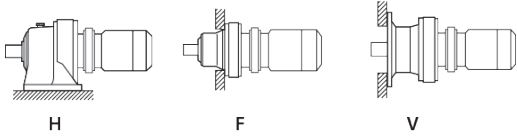

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in•lbs | (N•m) | SF | AGMA Class | lbs | (N) | | in•lbs | (N•m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 0.327 | 56500 | (6380) | * | - | 13200 | (58900) | 0.394 | 56500 | (6380) | * | - | 13200 | (58900) | 1 | 6190DA | 4437 | |
| | 70500 | (7960) | * | - | 13100 | (58400) | | 70500 | (7960) | * | - | 13100 | (58400) | 1 | 6195DA | 4437 | |
| | 77500 | (8760) | * | - | 18900 | (84100) | | 77500 | (8760) | * | - | 18900 | (84100) | 1 | 6205DA | 4437 | |
| 0.282 | 56500 | (6380) | * | - | 13200 | (58900) | 0.341 | 56500 | (6380) | * | - | 13200 | (58900) | 1 | 6190DA | 5133 | |
| | 70500 | (7960) | * | - | 13100 | (58400) | | 70500 | (7960) | * | - | 13100 | (58400) | 1 | 6195DA | 5133 | |
| | 82300 | (9300) | * | - | 18900 | (84100) | | 82300 | (9300) | * | - | 18900 | (84100) | 1 | 6205DA | 5133 | |
| 0.235 | 56500 | (6380) | * | - | 13200 | (58900) | 0.283 | 56500 | (6380) | * | - | 13200 | (58900) | 1 | 6190DA | 6177 | |
| | 70500 | (7960) | * | - | 13100 | (58400) | | 70500 | (7960) | * | - | 13100 | (58400) | 1 | 6195DA | 6177 | |
| | 77500 | (8760) | * | - | 18900 | (84100) | | 77500 | (8760) | * | - | 18900 | (84100) | 1 | 6205DA | 6177 | |
| 0.192 | 56500 | (6380) | * | - | 13200 | (58900) | 0.231 | 56500 | (6380) | * | - | 13200 | (58900) | 1 | 6190DA | 7569 | |
| | 70500 | (7960) | * | - | 13100 | (58400) | | 70500 | (7960) | * | - | 13100 | (58400) | 1 | 6195DA | 7569 | |
| | 77500 | (8760) | * | - | 18900 | (84100) | | 77500 | (8760) | * | - | 18900 | (84100) | 1 | 6205DA | 7569 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1.5 HP
1.1 kW

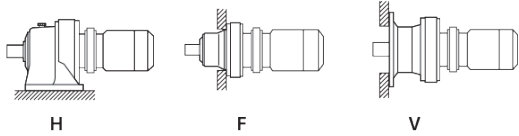

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 483 | 183 | (20.6) | 2.14 | III | 731 | (3250) | 583 | 151 | (17.1) | 2.14 | III | 688 | (3060) | 1H | 6100 | 3 | |
| 290 | 305 | (34.4) | 2.14 | III | 866 | (3850) | 350 | 252 | (28.5) | 2.14 | III | 814 | (3620) | 1H | 6100 | 5 | |
| 242 | 365 | (41.3) | 1.04 | I | 633 | (2820) | 292 | 303 | (34.2) | 1.04 | I | 596 | (2650) | 1H | 6090 | 6 | |
| | | | 1.38 | II | 633 | (2820) | | | | 1.38 | II | 596 | (2650) | 1H | 6095 | 6 | |
| | | | 2.13 | III | 932 | (4140) | | | | 2.13 | III | 876 | (3900) | 1H | 6100 | 6 | |
| | | | 2.89 | III | 932 | (4140) | | | | 2.89 | III | 876 | (3900) | 1H | 6105 | 6 | |
| 181 | 487 | (55.1) | 1.04 | I | 703 | (3130) | 219 | 404 | (45.6) | 1.04 | I | 663 | (2950) | 1H | 6090 | 8 | |
| | | | 1.38 | II | 703 | (3130) | | | | 1.38 | II | 663 | (2950) | 1H | 6095 | 8 | |
| | | | 2.13 | III | 1040 | (4620) | | | | 2.13 | III | 978 | (4350) | 1H | 6100 | 8 | |
| | | | 2.89 | III | 1040 | (4620) | | | | 2.89 | III | 978 | (4350) | 1H | 6105 | 8 | |
| 132 | 670 | (75.7) | 1.04 | I | 751 | (3340) | 159 | 555 | (62.7) | 1.04 | I | 751 | (3340) | 1H | 6090 | 11 | |
| | | | 1.38 | II | 751 | (3340) | | | | 1.38 | II | 751 | (3340) | 1H | 6095 | 11 | |
| | | | 2.13 | III | 1180 | (5250) | | | | 2.13 | III | 1110 | (4950) | 1H | 6100 | 11 | |
| | | | 2.89 | III | 1180 | (5250) | | | | 2.89 | III | 1110 | (4950) | 1H | 6105 | 11 | |
| 112 | 792 | (89.5) | 1.04 | I | 751 | (3340) | 135 | 656 | (74.1) | 1.04 | I | 751 | (3340) | 1H | 6090 | 13 | |
| | | | 1.38 | II | 751 | (3340) | | | | 1.38 | II | 751 | (3340) | 1H | 6095 | 13 | |
| | | | 2.13 | III | 1210 | (5400) | | | | 2.13 | III | 1160 | (5140) | 1H | 6100 | 13 | |
| | | | 2.89 | III | 1210 | (5400) | | | | 2.89 | III | 1160 | (5140) | 1H | 6105 | 13 | |
| 96.7 | 914 | (103) | 1.04 | I | 751 | (3340) | 117 | 757 | (85.5) | 1.04 | I | 751 | (3340) | 1H | 6090 | 15 | |
| | | | 1.38 | II | 751 | (3340) | | | | 1.38 | II | 751 | (3340) | 1H | 6095 | 15 | |
| | | | 2.13 | III | 1210 | (5400) | | | | 2.13 | III | 1210 | (5400) | 1H | 6100 | 15 | |
| | | | 2.89 | III | 1210 | (5400) | | | | 2.89 | III | 1210 | (5400) | 1H | 6105 | 15 | |
| 85.3 | 1040 | (117) | 1.04 | I | 751 | (3340) | 103 | 858 | (96.9) | 1.04 | I | 751 | (3340) | 1H | 6090 | 17 | |
| | | | 1.38 | II | 751 | (3340) | | | | 1.38 | II | 751 | (3340) | 1H | 6095 | 17 | |
| | | | 1.81 | III | 1210 | (5400) | | | | 1.81 | III | 1210 | (5400) | 1H | 6100 | 17 | |
| | | | 2.23 | III | 1210 | (5400) | | | | 2.23 | III | 1210 | (5400) | 1H | 6105 | 17 | |
| | | | 2.89 | III | 1500 | (6660) | | | | 2.89 | III | 1410 | (6270) | 1H | 6110 | 17 | |
| 69.0 | 1280 | (145) | 1.37 | II | 751 | (3340) | 83.3 | 1060 | (120) | 1.38 | II | 751 | (3340) | 1H | 6095 | 21 | |
| | | | 1.73 | III | 1210 | (5400) | | | | 1.75 | III | 1210 | (5400) | 1H | 6100 | 21 | |
| | | | 2.08 | III | 1210 | (5400) | | | | 2.12 | III | 1210 | (5400) | 1H | 6105 | 21 | |
| | | | 2.48 | III | 1590 | (7080) | | | | 2.48 | III | 1500 | (6670) | 1H | 6110 | 21 | |
| | | | 2.83 | III | 1590 | (7080) | | | | 2.83 | III | 1500 | (6670) | 1H | 6115 | 21 | |
| 58.0 | 1520 | (172) | 1.15 | I | 1210 | (5400) | 70.0 | 1260 | (143) | 1.15 | I | 1210 | (5400) | 1H | 6100 | 25 | |
| | | | 1.52 | II | 1210 | (5400) | | | | 1.52 | II | 1210 | (5400) | 1H | 6105 | 25 | |
| | | | 1.74 | III | 1620 | (7180) | | | | 1.74 | III | 1520 | (6770) | 1H | 6110 | 25 | |
| | | | 2.02 | III | 1620 | (7180) | | | | 2.02 | III | 1520 | (6770) | 1H | 6115 | 25 | |
| | | | 2.81 | III | 1960 | (8700) | | | | 2.81 | III | 1840 | (8190) | 1H | 6120 | 25 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1.5 HP
1.1 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 50.0 | 1770 | (200) | 1.10 | I | 1210 | (5400) | 60.3 | 1460 | (165) | 1.10 | I | 1210 | (5400) | 1H | 6100 | 29 | |
| | | | 1.45 | II | 1210 | (5400) | | | | 1.45 | II | 1210 | (5400) | 1H | 6105 | 29 | |
| | | | 1.73 | III | 1650 | (7350) | | | | 1.73 | III | 1560 | (6960) | 1H | 6110 | 29 | |
| | | | 2.02 | III | 1650 | (7350) | | | | 2.02 | III | 1560 | (6960) | 1H | 6115 | 29 | |
| | | | 2.61 | III | 2030 | (9050) | | | | 2.72 | III | 1910 | (8510) | 1H | 6120 | 29 | |
| 41.4 | 2130 | (241) | 1.09 | I | 1210 | (5400) | 50.0 | 1770 | (200) | 1.09 | I | 1210 | (5400) | 1H | 6105 | 35 | |
| | | | 1.37 | II | 1660 | (7400) | | | | 1.37 | II | 1670 | (7430) | 1H | 6110 | 35 | |
| | | | 1.64 | III | 1660 | (7400) | | | | 1.64 | III | 1670 | (7430) | 1H | 6115 | 35 | |
| | | | 2.16 | III | 2150 | (9560) | | | | 2.27 | III | 2020 | (9000) | 1H | 6120 | 35 | |
| | | | 2.61 | III | 2150 | (9560) | | | | 2.89 | III | 2020 | (9000) | 1H | 6125 | 35 | |
| 33.7 | 2620 | (296) | 0.99 | - | 1210 | (5400) | 40.7 | 2170 | (245) | 0.99 | - | 1210 | (5380) | 1H | 6105 | 43 | |
| | | | 1.18 | I | 1710 | (7610) | | | | 1.18 | I | 1710 | (7610) | 1H | 6110 | 43 | |
| | | | 1.38 | II | 1710 | (7610) | | | | 1.38 | II | 1710 | (7610) | 1H | 6115 | 43 | |
| | | | 1.74 | III | 2210 | (9810) | | | | 1.74 | III | 2150 | (9580) | 1H | 6120 | 43 | |
| | | | 2.13 | III | 2210 | (9810) | | | | 2.16 | III | 2150 | (9580) | 1H | 6125 | 43 | |
| | | | 2.64 | III | 2690 | (12000) | | | | 2.72 | III | 2530 | (11300) | 1H | 6130 | 43 | |
| 28.4 | 3110 | (351) | 1.01 | I | 1710 | (7600) | 34.3 | 2570 | (291) | 1.01 | I | 1710 | (7610) | 1H | 6115 | 51 | |
| | | | 1.48 | II | 2210 | (9810) | | | | 1.56 | II | 2210 | (9810) | 1H | 6120 | 51 | |
| | | | 1.79 | III | 2210 | (9810) | | | | 2.07 | III | 2210 | (9810) | 1H | 6125 | 51 | |
| | | | 2.22 | III | 2810 | (12500) | | | | 2.31 | III | 2640 | (11800) | 1H | 6130 | 51 | |
| | | | 2.32 | III | 2810 | (12500) | | | | 2.66 | III | 2640 | (11800) | 1H | 6135 | 51 | |
| 24.6 | 3590 | (406) | 0.92 | - | 1700 | (7570) | 29.7 | 2980 | (336) | 0.92 | - | 1710 | (7610) | 1H | 6115 | 59 | |
| | | | 1.19 | I | 2210 | (9810) | | | | 1.19 | I | 2210 | (9810) | 1H | 6120 | 59 | |
| | | | 1.47 | II | 2210 | (9810) | | | | 1.47 | II | 2210 | (9810) | 1H | 6125 | 59 | |
| | | | 1.92 | III | 2950 | (13100) | | | | 1.99 | III | 2770 | (12300) | 1H | 6130 | 59 | |
| | | | 2.22 | III | 2950 | (13100) | | | | 2.29 | III | 2770 | (12300) | 1H | 6135 | 59 | |
| | | | 2.69 | III | 3600 | (16000) | | | | 2.69 | III | 3600 | (16000) | 1H | 6140 | 59 | |
| | | | 2.89 | III | 3600 | (16000) | | | | 3.32 | III | 3600 | (16000) | 1H | 6145 | 59 | |
| 20.4 | 4330 | (489) | 1.03 | I | 2210 | (9810) | 24.6 | 3580 | (405) | 1.09 | I | 2210 | (9810) | 1H | 6125 | 71 | |
| | | | 1.60 | III | 3110 | (13900) | | | | 1.66 | III | 2930 | (13100) | 1H | 6130 | 71 | |
| | | | 1.84 | III | 3110 | (13900) | | | | 1.97 | III | 2930 | (13100) | 1H | 6135 | 71 | |
| | | | 2.21 | III | 3600 | (16000) | | | | 2.21 | III | 3600 | (16000) | 1H | 6140 | 71 | |
| | | | 2.38 | III | 3600 | (16000) | | | | 2.75 | III | 3600 | (16000) | 1H | 6145 | 71 | |
| 16.7 | 5300 | (599) | 0.93 | - | 2160 | (9620) | 20.1 | 4390 | (496) | 1.03 | I | 2210 | (9810) | 1H | 6125 | 87 | |
| | | | 1.29 | I | 3310 | (14700) | | | | 1.29 | I | 3160 | (14100) | 1H | 6130 | 87 | |
| | | | 1.50 | II | 3310 | (14700) | | | | 1.74 | III | 3160 | (14100) | 1H | 6135 | 87 | |
| | | | 1.80 | III | 3600 | (16000) | | | | 1.80 | III | 3600 | (16000) | 1H | 6140 | 87 | |
| | | | 1.96 | III | 3600 | (16000) | | | | 2.25 | III | 3600 | (16000) | 1H | 6145 | 87 | |
| | | | 2.93 | III | 4960 | (22100) | | | | 3.15 | III | 4960 | (22100) | 1H | 6160 | 87 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1.5 HP
1.1 kW

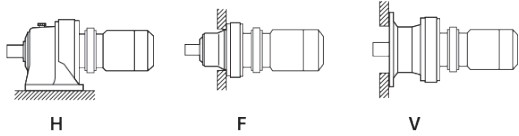

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 13.9 | 4650 | (525) | * | - | 2210 | (9810) | 16.8 | 4650 | (525) | * | - | 2210 | (9810) | 1H | 6120DB | 104 | |
| | 6000 | (678) | 0.93 | - | 2210 | (9810) | | 4970 | (562) | 1.12 | I | 2210 | (9810) | 1H | 6125DB | 104 | |
| | | | 1.15 | I | 3310 | (14700) | | | | 1.39 | II | 3310 | (14700) | 1H | 6130DC | 104 | |
| | | | 1.39 | II | 3310 | (14700) | | | | 1.67 | III | 3310 | (14700) | 1H | 6135DC | 104 | |
| | | | 2.59 | III | 4960 | (22100) | | | | 3.12 | III | 4960 | (22100) | 1H | 6160DC | 104 | C.F. |
| 12.0 | 4650 | (525) | * | - | 2210 | (9810) | 14.5 | 4650 | (525) | * | - | 2210 | (9810) | 1H | 6120DB | 121 | |
| | 5510 | (622) | * | - | 2210 | (9810) | | 5510 | (622) | * | - | 2210 | (9810) | 1H | 6125DB | 121 | |
| | 6980 | (789) | 1.19 | I | 3310 | (14700) | | 5790 | (654) | 1.44 | II | 3310 | (14700) | 1H | 6135DC | 121 | |
| | | | 2.22 | III | 4960 | (22100) | | | | 2.68 | III | 4960 | (22100) | 1H | 6160DC | 121 | |
| | | | 2.66 | III | 4960 | (22100) | | | | 3.21 | III | 4960 | (22100) | 1H | 6165DC | 121 | |
| 10.1 | 5580 | (630) | * | - | 2210 | (9810) | 12.2 | 5580 | (630) | * | - | 2210 | (9810) | 1H | 6125DB | 143 | |
| | 8250 | (932) | 1.01 | I | 3310 | (14700) | | 6840 | (773) | 1.22 | I | 3310 | (14700) | 1H | 6135DC | 143 | |
| | | | 1.31 | II | 3600 | (16000) | | | | 1.38 | II | 3600 | (16000) | 1H | 6140DB | 143 | |
| | | | 1.38 | II | 3600 | (16000) | | | | 1.38 | II | 3600 | (16000) | 1H | 6145DB | 143 | |
| | | | 1.88 | III | 4960 | (22100) | | | | 2.27 | III | 4960 | (22100) | 1H | 6160DC | 143 | |
| | | | 2.25 | III | 4960 | (22100) | | | | 2.72 | III | 4960 | (22100) | 1H | 6165DC | 143 | |
| | | | 2.71 | III | 6630 | (29500) | | | | 3.27 | III | 6630 | (29500) | 1H | 6170DC | 143 | |
| 8.79 | 5580 | (630) | * | - | 2210 | (9810) | 10.6 | 5580 | (630) | * | - | 2210 | (9810) | 1H | 6125DB | 165 | |
| | 6900 | (780) | * | - | 3310 | (14700) | | 6900 | (780) | * | - | 3310 | (14700) | 1H | 6130DC | 165 | |
| | 9520 | (1080) | 0.87 | - | 3310 | (14700) | | 7890 | (891) | 1.05 | I | 3310 | (14700) | 1H | 6135DC | 165 | |
| | | | 1.14 | I | 3600 | (16000) | | | | 1.37 | II | 3600 | (16000) | 1H | 6140DB | 165 | |
| | | | 1.26 | I | 3600 | (16000) | | | | 1.38 | II | 3600 | (16000) | 1H | 6145DB | 165 | |
| | | | 1.63 | III | 4960 | (22100) | | | | 1.97 | III | 4960 | (22100) | 1H | 6160DC | 165 | |
| | | | 1.95 | III | 4960 | (22100) | | | | 2.36 | III | 4960 | (22100) | 1H | 6165DC | 165 | |
| | | | 2.35 | III | 6630 | (29500) | | | | 2.84 | III | 6630 | (29500) | 1H | 6170DC | 165 | |
| | | 2.93 | III | 6630 | (29500) | | | 3.53 | III | 6630 | (29500) | 1H | 6175DC | 165 | | | |
| 7.44 | 6900 | (780) | * | - | 3310 | (14700) | 8.97 | 6900 | (780) | * | - | 3310 | (14700) | 1H | 6130DC | 195 | |
| | 8320 | (940) | * | - | 3310 | (14700) | | 8320 | (940) | * | - | 3310 | (14700) | 1H | 6135DC | 195 | |
| | 11300 | (1270) | 1.07 | I | 3600 | (16000) | | 9320 | (1050) | 1.29 | I | 3600 | (16000) | 1H | 6145DB | 195 | |
| | | | 1.38 | II | 4960 | (22100) | | | | 1.67 | III | 4960 | (22100) | 1H | 6160DC | 195 | |
| | | | 1.65 | III | 4960 | (22100) | | | | 1.99 | III | 4960 | (22100) | 1H | 6165DC | 195 | |
| | | | 1.99 | III | 6630 | (29500) | | | | 2.40 | III | 6630 | (29500) | 1H | 6170DC | 195 | |
| | | | 2.48 | III | 6630 | (29500) | | | | 2.99 | III | 6630 | (29500) | 1H | 6175DC | 195 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1.5 HP
1.1 kW

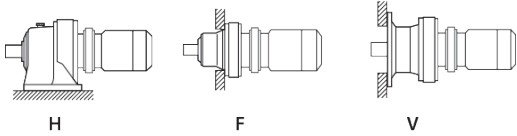

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|---------|-------------------------------|---------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 6.28 | 8320 | (940) | * | - | 3310 | (14700) | 7.58 | 8320 | (940) | * | - | 3310 | (14700) | 1H | 6135DC | 231 | C.F. |
| | 10800 | (1230) | * | - | 3600 | (16000) | | 11000 | (1250) | 0.98 | - | 3600 | (16000) | 1H | 6140DB | 231 | |
| | 13300 | (1510) | 0.89 | - | 3480 | (15500) | | 1.07 | I | 3600 | (16000) | 1H | 6145DB | 231 | | | |
| | 1.17 | I | 4960 | (22100) | 1.41 | II | | 4960 | (22100) | 1H | 6160DC | 231 | | | | | |
| | 1.39 | II | 4960 | (22100) | 1.68 | III | | 4960 | (22100) | 1H | 6165DC | 231 | | | | | |
| | 1.68 | III | 6630 | (29500) | 2.03 | III | | 6630 | (29500) | 1H | 6170DC | 231 | | | | | |
| | 2.09 | III | 6630 | (29500) | 2.52 | III | | 6630 | (29500) | 1H | 6175DC | 231 | | | | | |
| | 2.69 | III | 9380 | (41700) | 3.25 | III | | 9380 | (41700) | 1H | 6180DB | 231 | | | | | |
| 5.31 | 10800 | (1230) | * | - | 3600 | (16000) | 6.41 | 10800 | (1230) | * | - | 3600 | (16000) | 1H | 6140DB | 273 | C.F. |
| | 11800 | (1340) | * | - | 3600 | (16000) | | 11800 | (1340) | * | - | 3600 | (16000) | 1H | 6145DB | 273 | |
| | 15800 | (1780) | 1.18 | I | 4960 | (22100) | | 13100 | (1470) | 1.42 | II | 4960 | (22100) | 1H | 6165DC | 273 | |
| | 1.42 | II | 6630 | (29500) | 1.72 | III | | 6630 | (29500) | 1H | 6170DC | 273 | | | | | |
| | 1.77 | III | 6630 | (29500) | 2.14 | III | | 6630 | (29500) | 1H | 6175DC | 273 | | | | | |
| | 2.28 | III | 9380 | (41700) | 2.75 | III | | 9380 | (41700) | 1H | 6180DB | 273 | | | | | |
| | 2.81 | III | 9380 | (41700) | 3.39 | III | | 9380 | (41700) | 1H | 6185DB | 273 | | | | | |
| | 4.55 | 10800 | (1230) | * | - | 3600 | | (16000) | 5.49 | 10800 | (1230) | * | - | 3600 | (16000) | 1H | |
| 12100 | | (1370) | * | - | 3540 | (15800) | 12100 | (1370) | | * | - | 3540 | (15800) | 1H | 6145DB | 319 | |
| 18400 | | (2080) | 1.01 | I | 4960 | (22100) | 15300 | (1720) | | 1.22 | I | 4960 | (22100) | 1H | 6165DC | 319 | |
| 1.22 | | I | 6630 | (29500) | 1.47 | II | 6630 | (29500) | | 1H | 6170DC | 319 | | | | | |
| 1.51 | | II | 6630 | (29500) | 1.83 | III | 6630 | (29500) | | 1H | 6175DC | 319 | | | | | |
| 1.95 | | III | 9380 | (41700) | 2.35 | III | 9380 | (41700) | | 1H | 6180DB | 319 | | | | | |
| 2.40 | | III | 9380 | (41700) | 2.90 | III | 9380 | (41700) | | 1H | 6185DB | 319 | | | | | |
| 3.85 | | 15500 | (1760) | * | - | 4960 | (22100) | 4.64 | | 15500 | (1760) | * | - | 4960 | (22100) | 1H | 6160DC |
| | 18600 | (2100) | * | - | 4960 | (22100) | 18000 | | (2040) | 1.03 | I | 4960 | (22100) | 1H | 6165DC | 377 | |
| | 21800 | (2460) | 1.03 | I | 6630 | (29500) | 1.24 | | I | 6630 | (29500) | 1H | 6170DC | 377 | | | |
| | 1.28 | I | 6630 | (29500) | 1.55 | II | 6630 | | (29500) | 1H | 6175DC | 377 | | | | | |
| | 1.65 | III | 9380 | (41700) | 1.99 | III | 9380 | | (41700) | 1H | 6180DB | 377 | | | | | |
| | 2.03 | III | 9380 | (41700) | 2.45 | III | 9380 | | (41700) | 1H | 6185DB | 377 | | | | | |
| | 2.60 | III | 13300 | (59000) | 3.13 | III | 13300 | | (59000) | 1H | 6190DA | 377 | | | | | |
| | 3.07 | 18600 | (2100) | * | - | 4960 | (22100) | | 3.70 | 18600 | (2100) | * | - | 4960 | (22100) | 1H | 6165DC |
| 22400 | | (2530) | * | - | 6630 | (29500) | 22600 | (2560) | | 0.99 | - | 6630 | (29500) | 1H | 6170DC | 473 | |
| 27300 | | (3080) | 1.02 | I | 6630 | (29500) | 1.23 | I | | 6630 | (29500) | 1H | 6175DC | 473 | | | |
| 1.32 | | II | 9380 | (41700) | 1.59 | II | 9380 | (41700) | | 1H | 6180DB | 473 | | | | | |
| 1.62 | | III | 9380 | (41700) | 1.96 | III | 9380 | (41700) | | 1H | 6185DB | 473 | | | | | |
| 2.07 | | III | 13300 | (59000) | 2.50 | III | 13300 | (59000) | | 1H | 6190DA | 473 | | | | | |
| 2.58 | | III | 13300 | (59000) | 3.11 | III | 13300 | (59000) | | 1H | 6195DA | 473 | | | | | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

1.5 HP
1.1 kW

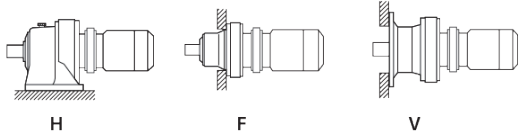

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|---------|-------------------------------|---------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 2.59 | 18600 | (2100) | * | - | 4960 | (22100) | 3.13 | 18600 | (2100) | * | - | 4960 | (22100) | 1H | 6165DC | 559 | |
| | 22400 | (2530) | * | - | 6630 | (29500) | | 22400 | (2530) | * | - | 6630 | (29500) | 1H | 6170DC | 559 | |
| | 27900 | (3150) | * | - | 6630 | (29500) | | 26700 | (3020) | 1.04 | I | 6630 | (29500) | 1H | 6175DC | 559 | |
| | 32300 | (3640) | 1.11 | I | 9380 | (41700) | | 1.34 | II | 9380 | (41700) | 1H | 6180DB | 559 | | | |
| | | | 1.37 | II | 9380 | (41700) | | 1.66 | III | 9380 | (41700) | 1H | 6185DB | 559 | | | |
| | | | 1.75 | III | 13300 | (59000) | | 2.11 | III | 13300 | (59000) | 1H | 6190DA | 559 | | | |
| | | 2.18 | III | 13300 | (59000) | 2.64 | III | 13300 | (59000) | 1H | 6195DA | 559 | | | | | |
| 2.23 | 22400 | (2530) | * | - | 6630 | (29500) | 2.70 | 22400 | (2530) | * | - | 6630 | (29500) | 1H | 6170DC | 649 | |
| | 27900 | (3150) | * | - | 6630 | (29500) | | 27900 | (3150) | * | - | 6630 | (29500) | 1H | 6175DC | 649 | |
| | 37500 | (4230) | 1.18 | I | 9380 | (41700) | | 31000 | (3510) | 1.43 | II | 9380 | (41700) | 1H | 6185DB | 649 | |
| | | | 1.51 | II | 13300 | (59000) | | 1.82 | III | 13300 | (59000) | 1H | 6190DA | 649 | | | |
| | | 1.88 | III | 13300 | (59000) | 2.27 | III | 13300 | (59000) | 1H | 6195DA | 649 | | | | | |
| 1.98 | 27900 | (3150) | * | - | 6630 | (29500) | 2.39 | 27900 | (3150) | * | - | 6630 | (29500) | 1H | 6175DC | 731 | |
| | 42200 | (4770) | 1.05 | I | 9380 | (41700) | | 35000 | (3950) | 1.27 | I | 9380 | (41700) | 1H | 6185DB | 731 | |
| | | | 1.34 | II | 13300 | (59000) | | 1.62 | III | 13300 | (59000) | 1H | 6190DA | 731 | | | |
| | | | 1.67 | III | 13300 | (59000) | | 2.02 | III | 13300 | (59000) | 1H | 6195DA | 731 | | | |
| 1.72 | 27900 | (3150) | * | - | 6630 | (29500) | 2.08 | 27900 | (3150) | * | - | 6630 | (29500) | 1H | 6175DC | 841 | |
| | 35900 | (4050) | * | - | 9380 | (41700) | | 35900 | (4050) | * | - | 9380 | (41700) | 1H | 6180DB | 841 | |
| | 44300 | (5000) | * | - | 9380 | (41700) | | 40200 | (4540) | 1.10 | I | 9380 | (41700) | 1H | 6185DB | 841 | |
| | 48500 | (5480) | 1.16 | I | 13300 | (59000) | | 1.40 | II | 13300 | (59000) | 1H | 6190DA | 841 | | | |
| | | | 1.45 | II | 13300 | (59000) | | 1.75 | III | 13300 | (59000) | 1H | 6195DA | 841 | | | |
| 1.45 | 35900 | (4050) | * | - | 9380 | (41700) | 1.74 | 35900 | (4050) | * | - | 9380 | (41700) | 1H | 6180DB | 1003 | |
| | 44300 | (5000) | * | - | 9350 | (41600) | | 44300 | (5000) | * | - | 9350 | (41600) | 1H | 6185DB | 1003 | |
| | 57900 | (6540) | 1.22 | I | 13200 | (58500) | | 48000 | (5420) | 1.47 | II | 13200 | (58800) | 1H | 6195DA | 1003 | |
| 1.16 | 44300 | (5000) | * | - | 9380 | (41700) | 1.40 | 44300 | (5000) | * | - | 9380 | (41700) | 1H | 6185DB | 1247 | |
| | 56500 | (6380) | * | - | 13300 | (59000) | | 56500 | (6380) | * | - | 13300 | (59000) | 1H | 6190DA | 1247 | |
| | 72000 | (8130) | 0.98 | - | 13200 | (58900) | | 59600 | (6740) | 1.18 | I | 13300 | (59000) | 1H | 6195DA | 1247 | |
| 0.980 | 56500 | (6380) | * | - | 13200 | (58900) | 1.18 | 56500 | (6380) | * | - | 13200 | (58900) | 1H | 6190DA | 1479 | |
| | 70500 | (7960) | * | - | 13100 | (58400) | | 70700 | (7990) | 1.00 | I | 13100 | (58400) | 1H | 6195DA | 1479 | |
| 0.784 | 70500 | (7960) | * | - | 13300 | (59000) | 0.946 | 88400 | (9990) | 0.80 | - | 13100 | (58400) | 1H | 6195DA | 1849 | |
| 0.702 | 70500 | (7960) | * | - | 13100 | (58100) | 0.847 | 98700 | (11200) | 0.71 | - | 12900 | (57200) | 1H | 6195DA | 2065 | |

Gearmotors
Selection
Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

2 HP
1.5 kW

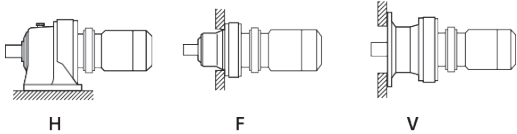

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 483 | 249 | (28.2) | 1.57 | II | 722 | (3210) | 583 | 206 | (23.3) | 1.57 | II | 681 | (3030) | 2 | 6100 | 3 | |
| | | | 2.12 | III | 722 | (3210) | | | | 2.12 | III | 681 | (3030) | | 6105 | | |
| 290 | 415 | (46.9) | 1.57 | II | 857 | (3810) | 350 | 344 | (38.9) | 1.57 | II | 807 | (3590) | 2 | 6100 | 5 | |
| | | | 2.12 | III | 857 | (3810) | | | | 2.12 | III | 807 | (3590) | | 6105 | | |
| 242 | 498 | (56.3) | 1.01 | I | 626 | (2790) | 292 | 413 | (46.7) | 1.01 | I | 591 | (2630) | 2 | 6095 | 6 | |
| | | | 1.56 | II | 928 | (4130) | | | | 1.56 | II | 873 | (3880) | | 6100 | | |
| | | | 2.12 | III | 928 | (4130) | | | | 2.12 | III | 873 | (3880) | | 6105 | | |
| | | | 2.37 | III | 1050 | (4670) | | | | 2.37 | III | 987 | (4390) | | 6110 | | |
| | | | 2.61 | III | 1050 | (4670) | | | | 2.61 | III | 987 | (4390) | | 6115 | | |
| 181 | 665 | (75.1) | 1.01 | I | 694 | (3090) | 219 | 551 | (62.2) | 1.01 | I | 656 | (2920) | 2 | 6095 | 8 | |
| | | | 1.56 | II | 1030 | (4600) | | | | 1.56 | II | 974 | (4330) | | 6100 | | |
| | | | 2.12 | III | 1030 | (4600) | | | | 2.12 | III | 974 | (4330) | | 6105 | | |
| | | | 2.37 | III | 1170 | (5210) | | | | 2.37 | III | 1100 | (4900) | | 6110 | | |
| | | | 2.61 | III | 1170 | (5210) | | | | 2.61 | III | 1100 | (4900) | | 6115 | | |
| 132 | 914 | (103) | 1.01 | I | 751 | (3340) | 159 | 757 | (85.5) | 1.01 | I | 742 | (3300) | 2 | 6095 | 11 | |
| | | | 1.56 | II | 1170 | (5220) | | | | 1.56 | II | 1110 | (4920) | | 6100 | | |
| | | | 2.12 | III | 1170 | (5220) | | | | 2.12 | III | 1110 | (4920) | | 6105 | | |
| | | | 2.37 | III | 1340 | (5950) | | | | 2.37 | III | 1260 | (5600) | | 6110 | | |
| | | | 2.61 | III | 1340 | (5950) | | | | 2.61 | III | 1260 | (5600) | | 6115 | | |
| 112 | 1080 | (122) | 1.01 | I | 751 | (3340) | 135 | 895 | (101) | 1.01 | I | 741 | (3300) | 2 | 6095 | 13 | |
| | | | 1.56 | II | 1210 | (5400) | | | | 1.56 | II | 1150 | (5110) | | 6100 | | |
| | | | 2.12 | III | 1210 | (5400) | | | | 2.12 | III | 1150 | (5110) | | 6105 | | |
| | | | 2.37 | III | 1380 | (6150) | | | | 2.37 | III | 1300 | (5790) | | 6110 | | |
| | | | 2.60 | III | 1380 | (6150) | | | | 2.60 | III | 1300 | (5790) | | 6115 | | |
| 96.7 | 1250 | (141) | 1.01 | I | 751 | (3340) | 117 | 1030 | (117) | 1.01 | I | 738 | (3280) | 2 | 6095 | 15 | |
| | | | 1.56 | II | 1210 | (5400) | | | | 1.56 | II | 1210 | (5400) | | 6100 | | |
| | | | 2.12 | III | 1210 | (5400) | | | | 2.12 | III | 1210 | (5400) | | 6105 | | |
| | | | 2.37 | III | 1480 | (6560) | | | | 2.37 | III | 1390 | (6180) | | 6110 | | |
| | | | 2.60 | III | 1480 | (6560) | | | | 2.60 | III | 1390 | (6180) | | 6115 | | |
| 85.3 | 1410 | (160) | 1.01 | I | 751 | (3340) | 103 | 1170 | (132) | 1.01 | I | 740 | (3290) | 2 | 6095 | 17 | |
| | | | 1.32 | II | 1210 | (5400) | | | | 1.32 | II | 1210 | (5400) | | 6100 | | |
| | | | 1.64 | III | 1210 | (5400) | | | | 1.64 | III | 1210 | (5400) | | 6105 | | |
| | | | 2.12 | III | 1490 | (6620) | | | | 2.12 | III | 1400 | (6240) | | 6110 | | |
| | | | 2.60 | III | 1490 | (6620) | | | | 2.60 | III | 1400 | (6240) | | 6115 | | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

2 HP
1.5 kW

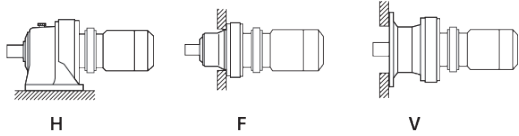

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 69.0 | 1740 | (197) | 1.00 | I | 751 | (3340) | 83.3 | 1450 | (163) | 1.01 | I | 733 | (3260) | 2 | 6095 | 21 | |
| | | | 1.27 | I | 1210 | (5400) | | | | 1.28 | I | 1210 | (5400) | | | | |
| | | | 1.52 | II | 1210 | (5400) | | | | 1.56 | II | 1210 | (5400) | | | | |
| | | | 1.82 | III | 1580 | (7020) | | | | 1.82 | III | 1490 | (6620) | | | | |
| | | | 2.07 | III | 1580 | (7020) | | | | 2.07 | III | 1490 | (6620) | | | | |
| | | | 2.64 | III | 1860 | (8260) | | | | 2.64 | III | 1750 | (7780) | | | | |
| 58.0 | 2080 | (235) | 1.12 | I | 1210 | (5400) | 70.0 | 1720 | (194) | 1.12 | I | 1210 | (5400) | 2 | 6105 | 25 | |
| | | | 1.28 | I | 1600 | (7120) | | | | 1.28 | I | 1510 | (6720) | | | | |
| | | | 1.48 | II | 1600 | (7120) | | | | 1.48 | II | 1510 | (6720) | | | | |
| | | | 2.06 | III | 1950 | (8650) | | | | 2.06 | III | 1830 | (8150) | | | | |
| | | | 2.64 | III | 1950 | (8650) | | | | 2.64 | III | 1830 | (8150) | | | | |
| | | | 50.0 | 2410 | (272) | 1.06 | | | | I | 1210 | (5400) | 60.3 | | | | 2000 |
| 1.27 | I | 1640 | | | | (7290) | 1.27 | I | 1550 | (6900) | | | | | | | |
| 1.48 | II | 1640 | | | | (7290) | 1.48 | II | 1550 | (6900) | | | | | | | |
| 1.91 | III | 2020 | | | | (8990) | 2.00 | III | 1900 | (8470) | | | | | | | |
| 2.31 | III | 2020 | | | | (8990) | 2.51 | III | 1900 | (8470) | | | | | | | |
| 2.87 | III | 2370 | | | | (10500) | 2.99 | III | 2230 | (9920) | | | | | | | |
| 41.4 | 2910 | (328) | 0.80 | - | 1080 | (4820) | 50.0 | 2410 | (272) | 0.80 | - | 1200 | (5330) | 2 | 6105 | 35 | |
| | | | 1.00 | I | 1640 | (7310) | | | | 1.00 | I | 1660 | (7360) | | | | |
| | | | 1.21 | I | 1640 | (7310) | | | | 1.21 | I | 1660 | (7360) | | | | |
| | | | 1.58 | II | 2130 | (9490) | | | | 1.66 | III | 2010 | (8940) | | | | |
| | | | 1.92 | III | 2130 | (9490) | | | | 2.12 | III | 2010 | (8940) | | | | |
| | | | 2.37 | III | 2490 | (11100) | | | | 2.47 | III | 2340 | (10400) | | | | |
| | | | 2.74 | III | 2490 | (11100) | | | | 2.83 | III | 2340 | (10400) | | | | |
| | | | 33.7 | 3570 | (404) | 1.01 | | | | I | 1700 | (7540) | 40.7 | | | | 2960 |
| 1.28 | I | 2210 | | | | (9810) | 1.28 | I | 2140 | (9510) | | | | | | | |
| 1.56 | II | 2210 | | | | (9810) | 1.59 | II | 2140 | (9510) | | | | | | | |
| 1.93 | III | 2670 | | | | (11900) | 2.00 | III | 2520 | (11200) | | | | | | | |
| 2.23 | III | 2670 | | | | (11900) | 2.51 | III | 2520 | (11200) | | | | | | | |
| 2.63 | III | 3600 | | | | (16000) | 2.63 | III | 3580 | (15900) | | | | | | | |
| 28.4 | 4240 | (479) | 1.09 | I | 2210 | (9810) | 34.3 | 3510 | (397) | 1.14 | I | 2210 | (9810) | 2 | 6120 | 51 | |
| | | | 1.32 | II | 2210 | (9810) | | | | 1.52 | II | 2210 | (9810) | | | | |
| | | | 1.63 | III | 2790 | (12400) | | | | 1.69 | III | 2630 | (11700) | | | | |
| | | | 1.70 | III | 2790 | (12400) | | | | 1.95 | III | 2630 | (11700) | | | | |
| | | | 2.29 | III | 3600 | (16000) | | | | 2.29 | III | 3600 | (16000) | | | | |
| | | | 2.47 | III | 3600 | (16000) | | | | 2.81 | III | 3600 | (16000) | | | | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

2 HP
1.5 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|------|--------------------|---------------|-------|-------------------------------|--------------|---------------------------|--------|------------------|------------|-------|--------------------|--------|------|----|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] | | | |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | | | | |
| 24.6 | 4900 (554) | | 1.08 | I | 2210 (9810) | 29.7 | 4060 (459) | | 1.08 | I | 2210 (9810) | 2 | 6125 | 59 | | | | | | |
| | | | 1.41 | II | 2920 (13000) | | | | 1.46 | II | 2750 (12200) | | | | | | | 2 | 6130 | 59 |
| | | | 1.63 | III | 2920 (13000) | | | | 1.68 | III | 2750 (12200) | | | | | | | 2 | 6135 | 59 |
| | | | 1.97 | III | 3600 (16000) | | | | 1.97 | III | 3600 (16000) | | | | | | | 2 | 6140 | 59 |
| | | | 2.12 | III | 3600 (16000) | | | | 2.44 | III | 3600 (16000) | | | | | | | 2 | 6145 | 59 |
| | | | 2.95 | III | 4960 (22100) | | | | 2.95 | III | 4960 (22100) | | | | | | | 2 | 6160 | 59 |
| 20.4 | 5900 (666) | | 1.17 | I | 3090 (13700) | 24.6 | 4890 (552) | | 1.22 | I | 2910 (12900) | 2 | 6130 | 71 | | | | | | |
| | | | 1.35 | II | 3090 (13700) | | | | 1.45 | II | 2910 (12900) | | | | | | | 2 | 6135 | 71 |
| | | | 1.62 | III | 3600 (16000) | | | | 1.62 | III | 3600 (16000) | | | | | | | 2 | 6140 | 71 |
| | | | 1.75 | III | 3600 (16000) | | | | 2.02 | III | 3600 (16000) | | | | | | | 2 | 6145 | 71 |
| | | | 2.31 | III | 4960 (22100) | | | | 2.31 | III | 4960 (22100) | | | | | | | 2 | 6160 | 71 |
| 16.7 | 7230 (817) | | 1.10 | I | 3310 (14700) | 20.1 | 5990 (677) | | 1.27 | I | 3130 (13900) | 2 | 6135 | 87 | | | | | | |
| | | | 1.32 | II | 3600 (16000) | | | | 1.32 | II | 3600 (16000) | | | | | | | 2 | 6140 | 87 |
| | | | 1.44 | II | 3600 (16000) | | | | 1.65 | III | 3600 (16000) | | | | | | | 2 | 6145 | 87 |
| | | | 2.15 | III | 4960 (22100) | | | | 2.31 | III | 4960 (22100) | | | | | | | 2 | 6160 | 87 |
| | | | 2.51 | III | 4960 (22100) | | | | 2.60 | III | 4960 (22100) | | | | | | | 2 | 6165 | 87 |
| 13.9 | 5580 (630) | | * | - | 2210 (9810) | 16.8 | 5580 (630) | | * | - | 2210 (9810) | 2 | 6125DB | 104 | | | | | | |
| | 8180 (925) | | 1.02 | I | 3310 (14700) | | 1.23 | | I | 3310 (14700) | 2 | | | | | | | 6135DC | 104 | |
| | | | 1.48 | II | 3600 (16000) | | 1.79 | | III | 3600 (16000) | 2 | | | | | | | 6145DC | 104 | |
| | | | 1.90 | III | 4960 (22100) | | 2.29 | | III | 4960 (22100) | 2 | | | | | | | 6160DC | 104 | |
| | | | 2.27 | III | 4960 (22100) | | 2.74 | | III | 4960 (22100) | 2 | | | | | | | 6165DC | 104 | |
| | | | 2.73 | III | 6630 (29500) | | 3.30 | | III | 6630 (29500) | 2 | | | | | | | 6170DC | 104 | |
| 12.0 | 6900 (780) | | * | - | 3310 (14700) | 14.5 | 6900 (780) | | * | - | 3310 (14700) | 2 | 6130DC | 121 | | | | | | |
| | 8320 (940) | | * | - | 3310 (14700) | | 1.05 | | I | 3310 (14700) | 2 | | | | | | | 6135DC | 121 | |
| | 9520 (1080) | | 1.20 | I | 3600 (16000) | | 1.45 | | II | 3600 (16000) | 2 | | | | | | | 6145DC | 121 | |
| | | | 1.63 | III | 4960 (22100) | | 1.97 | | III | 4960 (22100) | 2 | | | | | | | 6160DC | 121 | |
| | | | 1.95 | III | 4960 (22100) | | 2.36 | | III | 4960 (22100) | 2 | | | | | | | 6165DC | 121 | |
| | | | 2.35 | III | 6630 (29500) | | 2.84 | | III | 6630 (29500) | 2 | | | | | | | 6170DC | 121 | |
| 10.1 | 6900 (780) | | * | - | 3310 (14700) | 12.2 | 6900 (780) | | * | - | 3310 (14700) | 2 | 6130DC | 143 | | | | | | |
| | 8320 (940) | | * | - | 3310 (14700) | | 1.01 | | I | 3600 (16000) | 2 | | | | | | | 6145DB | 143 | |
| | 11300 (1270) | | 1.01 | I | 3600 (16000) | | 1.30 | | II | 3600 (16000) | 2 | | | | | | | 6145DC | 143 | |
| | | | 1.08 | I | 3600 (16000) | | 1.67 | | III | 4960 (22100) | 2 | | | | | | | 6160DC | 143 | |
| | | | 1.38 | II | 4960 (22100) | | 1.99 | | III | 4960 (22100) | 2 | | | | | | | 6165DC | 143 | |
| | | | 1.65 | III | 4960 (22100) | | 2.40 | | III | 6630 (29500) | 2 | | | | | | | 6170DC | 143 | |
| | | | 1.99 | III | 6630 (29500) | | 2.99 | | III | 6630 (29500) | 2 | | | | | | | 6175DC | 143 | |
| | | | 2.48 | III | 6630 (29500) | | | | | | | | | | | | | | | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

2 HP
1.5 kW

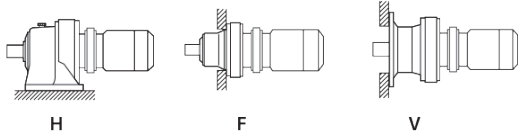

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|---------|------------------|---------------|---------------|--------------------|---------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | | |
| 8.79 | 8320 | (940) | * | - | 3310 | (14700) | 10.6 | 8320 | (940) | * | - | 3310 | (14700) | 2 | 6135DC | 165 | C.F. | |
| | | 12000 | (1360) | * | - | 3600 | | | (16000) | 10800 | (1220) | 1.01 | I | 3600 | (16000) | 2 | | 6145DB |
| | 13000 | (1470) | | * | - | 3600 | | (16000) | | | 1.12 | I | 3600 | (16000) | 2 | 6145DC | | 165 |
| | | | | 1.20 | I | 4960 | | (22100) | | | 1.44 | II | 4960 | (22100) | 2 | 6160DC | | 165 |
| | | | | 1.43 | II | 4960 | | (22100) | | | 1.73 | III | 4960 | (22100) | 2 | 6165DC | | 165 |
| | | | | 1.72 | III | 6630 | | (29500) | | | 2.08 | III | 6630 | (29500) | 2 | 6170DC | | 165 |
| | | | | 2.15 | III | 6630 | | (29500) | | | 2.59 | III | 6630 | (29500) | 2 | 6175DC | | 165 |
| | | | | 2.77 | III | 9380 | | (41700) | | | 3.34 | III | 9380 | (41700) | 2 | 6180DB | | 165 |
| 7.44 | 10800 | (1230) | * | - | 3600 | (16000) | 8.97 | 10800 | (1230) | * | - | 3600 | (16000) | 2 | 6140DB | 195 | C.F. | |
| | | 12000 | (1360) | * | - | 3600 | | | (16000) | 12700 | (1440) | 1.22 | I | 4960 | (22100) | 2 | | 6160DC |
| | 15300 | (1730) | | 1.01 | I | 4960 | | (22100) | | | 1.46 | II | 4960 | (22100) | 2 | 6165DC | | 195 |
| | | | | 1.21 | I | 4960 | | (22100) | | | 1.76 | III | 6630 | (29500) | 2 | 6170DC | | 195 |
| | | | | 1.46 | II | 6630 | | (29500) | | | 2.19 | III | 6630 | (29500) | 2 | 6175DC | | 195 |
| | | | | 1.82 | III | 6630 | | (29500) | | | 2.83 | III | 9380 | (41700) | 2 | 6180DB | | 195 |
| | | | | 2.34 | III | 9380 | | (41700) | | | 3.43 | III | 9380 | (41700) | 2 | 6185DB | | 195 |
| | | | | 2.84 | III | 9380 | | (41700) | | | | | | | | | | |
| 6.28 | 11800 | (1340) | * | - | 3600 | (16000) | 7.58 | 11800 | (1340) | * | - | 3600 | (16000) | 2 | 6145DB | 231 | C.F. | |
| | | 18200 | (2050) | 1.02 | I | 4960 | | | (22100) | 15100 | (1700) | 1.23 | I | 4960 | (22100) | 2 | | 6165DC |
| | | | | 1.23 | I | 6630 | | (29500) | | | 1.49 | II | 6630 | (29500) | 2 | 6170DC | | 231 |
| | | | | 1.53 | II | 6630 | | (29500) | | | 1.85 | III | 6630 | (29500) | 2 | 6175DC | | 231 |
| | | | | 1.97 | III | 9380 | | (41700) | | | 2.38 | III | 9380 | (41700) | 2 | 6180DB | | 231 |
| | | | | 2.43 | III | 9380 | | (41700) | | | 2.94 | III | 9380 | (41700) | 2 | 6185DB | | 231 |
| 5.31 | 15500 | (1760) | * | - | 4960 | (22100) | 6.41 | 15500 | (1760) | * | - | 4960 | (22100) | 2 | 6160DC | 273 | C.F. | |
| | | 18600 | (2100) | * | - | 4960 | | | (22100) | 17800 | (2010) | 1.04 | I | 4960 | (22100) | 2 | | 6165DC |
| | 21500 | (2430) | | 1.04 | I | 6630 | | (29500) | | | 1.26 | I | 6630 | (29500) | 2 | 6170DC | | 273 |
| | | | | 1.30 | II | 6630 | | (29500) | | | 1.57 | II | 6630 | (29500) | 2 | 6175DC | | 273 |
| | | | | 1.67 | III | 9380 | | (41700) | | | 2.01 | III | 9380 | (41700) | 2 | 6180DB | | 273 |
| | | | | 2.06 | III | 9380 | | (41700) | | | 2.12 | III | 9380 | (41700) | 2 | 6185DA | | 273 |
| | | | | 2.06 | III | 9380 | | (41700) | | | 2.49 | III | 9380 | (41700) | 2 | 6185DB | | 273 |
| | | | | 2.63 | III | 13300 | | (59000) | | | 3.17 | III | 13300 | (59000) | 2 | 6190DA | | 273 |
| 4.55 | 15500 | (1760) | * | - | 4960 | (22100) | 5.49 | 15500 | (1760) | * | - | 4960 | (22100) | 2 | 6160DC | 319 | C.F. | |
| | | 18600 | (2100) | * | - | 4960 | | | (22100) | 18600 | (2100) | * | - | 4960 | (22100) | 2 | | 6165DC |
| | 25100 | (2840) | | 1.11 | I | 6630 | | (29500) | | | 1.34 | II | 6630 | (29500) | 2 | 6175DC | | 319 |
| | | | | 1.43 | II | 9380 | | (41700) | | | 1.72 | III | 9380 | (41700) | 2 | 6180DB | | 319 |
| | | | | 1.76 | III | 9380 | | (41700) | | | 2.12 | III | 9380 | (41700) | 2 | 6185DA | | 319 |
| | | | | 2.25 | III | 13300 | | (59000) | | | 2.71 | III | 13300 | (59000) | 2 | 6190DA | | 319 |
| | 2.81 | III | 13300 | (59000) | | | 3.39 | III | 13300 | (59000) | 2 | 6195DA | 319 | | | | | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

2 HP
1.5 kW

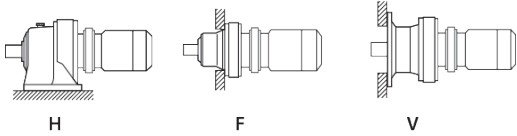

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 3.85 | 18600 | (2100) | * | - | 4960 | (22100) | 4.64 | 18600 | (2100) | * | - | 4960 | (22100) | 2 | 6165DC | 377 | |
| | 22400 | (2530) | * | - | 6630 | (29500) | | 22400 | (2530) | * | - | 6630 | (29500) | 2 | 6170DA | 377 | |
| | 29700 | (3350) | 0.94 | - | 6630 | (29500) | | 24600 | (2780) | 1.13 | I | 6630 | (29500) | 2 | 6175DC | 377 | |
| | | | 1.21 | I | 9380 | (41700) | | | | 1.46 | II | 9380 | (41700) | 2 | 6180DB | 377 | |
| | | | 1.49 | II | 9380 | (41700) | | | | 1.80 | III | 9380 | (41700) | 2 | 6185DA | 377 | |
| | | | 1.90 | III | 13300 | (59000) | | | | 2.30 | III | 13300 | (59000) | 2 | 6190DA | 377 | |
| | | | 2.37 | III | 13300 | (59000) | | | | 2.87 | III | 13300 | (59000) | 2 | 6195DA | 377 | |
| 3.07 | 27900 | (3150) | * | - | 6630 | (29500) | 3.70 | 27900 | (3150) | * | - | 6630 | (29500) | 2 | 6175DC | 473 | |
| | 37200 | (4210) | 1.19 | I | 9380 | (41700) | | 30800 | (3480) | 1.43 | II | 9380 | (41700) | 2 | 6185DA | 473 | |
| | | | 1.52 | II | 13300 | (59000) | | | | 1.83 | III | 13300 | (59000) | 2 | 6190DA | 473 | |
| | | | 1.89 | III | 13300 | (59000) | | | | 2.28 | III | 13300 | (59000) | 2 | 6195DA | 473 | |
| 2.59 | 27900 | (3150) | * | - | 6630 | (29500) | 3.13 | 27900 | (3150) | * | - | 6630 | (29500) | 2 | 6175DC | 559 | |
| | 35900 | (4060) | * | - | 9380 | (41700) | | 36400 | (4120) | 0.99 | - | 9380 | (41700) | 2 | 6180DB | 559 | |
| | 44000 | (4970) | 1.01 | I | 9380 | (41700) | | | | 1.21 | I | 9380 | (41700) | 2 | 6185DA | 559 | |
| | | | 1.28 | I | 13300 | (59000) | | | | 1.55 | II | 13300 | (59000) | 2 | 6190DA | 559 | |
| | | | 1.60 | III | 13300 | (59000) | | | | 1.93 | III | 13300 | (59000) | 2 | 6195DA | 559 | |
| 2.23 | 35900 | (4050) | * | - | 9380 | (41700) | 2.70 | 35900 | (4050) | * | - | 9380 | (41700) | 2 | 6180DB | 649 | C.F. |
| | 44300 | (5000) | * | - | 9350 | (41600) | | 42300 | (4780) | 1.05 | I | 9370 | (41700) | 2 | 6185DA | 649 | |
| | 51100 | (5770) | 1.11 | I | 13200 | (58700) | | | | 1.33 | II | 13300 | (59000) | 2 | 6190DA | 649 | |
| | | | 1.38 | II | 13200 | (58700) | | | | 1.66 | III | 13300 | (59000) | 2 | 6195DA | 649 | |
| 1.98 | 35900 | (4060) | * | - | 9380 | (41700) | 2.39 | 35900 | (4060) | * | - | 9380 | (41700) | 2 | 6180DB | 731 | |
| | 44300 | (5000) | * | - | 9380 | (41700) | | 44300 | (5000) | * | - | 9380 | (41700) | 2 | 6185DA | 731 | |
| | 57500 | (6500) | 1.22 | I | 13300 | (59000) | | 47700 | (5390) | 1.48 | II | 13300 | (59000) | 2 | 6195DA | 731 | |
| 1.72 | 44300 | (5000) | * | - | 9380 | (41700) | 2.08 | 44300 | (5000) | * | - | 9380 | (41700) | 2 | 6185DA | 841 | |
| | 66200 | (7480) | 1.06 | I | 13300 | (59000) | | 54800 | (6200) | 1.28 | I | 13300 | (59000) | 2 | 6195DA | 841 | |
| 1.45 | 56500 | (6380) | * | - | 13200 | (58600) | 1.74 | 56500 | (6380) | * | - | 13200 | (58600) | 2 | 6190DA | 1003 | |
| | 70500 | (7960) | * | - | 13100 | (58100) | | 65400 | (7390) | 1.08 | I | 13100 | (58300) | 2 | 6195DA | 1003 | |
| 1.16 | 70500 | (7960) | * | - | 13300 | (59000) | 1.40 | 70500 | (7960) | * | - | 13300 | (59000) | 2 | 6195DA | 1247 | |
| 0.980 | 77500 | (8760) | * | - | 18900 | (84100) | 1.18 | 74000 | (8360) | * | - | 18900 | (84100) | 2 | 6205DA | 1479 | |
| | 99700 | (11300) | * | - | 23400 | (104000) | | 96400 | (10900) | 1.03 | I | 23400 | (104000) | 2 | 6215DA | 1479 | |
| 0.784 | 82300 | (9300) | * | - | 18900 | (84100) | 0.946 | 82300 | (9300) | * | - | 18900 | (84100) | 2 | 6205DA | 1849 | |
| | 112000 | (12700) | * | - | 23400 | (104000) | | 112000 | (12700) | * | - | 23400 | (104000) | 2 | 6215DA | 1849 | |
| | 146000 | (16400) | 0.97 | - | 32600 | (145000) | | 121000 | (13600) | 1.17 | I | 32600 | (145000) | 2 | 6225DA | 1849 | |
| 0.702 | 82300 | (9300) | * | - | 18900 | (84100) | 0.847 | 82300 | (9300) | * | - | 18900 | (84100) | 2 | 6205DA | 2065 | |
| | 112000 | (12700) | * | - | 23400 | (104000) | | 112000 | (12700) | * | - | 23400 | (104000) | 2 | 6215DA | 2065 | |
| | 141000 | (15900) | * | - | 32600 | (145000) | | 135000 | (15200) | 1.04 | I | 32600 | (145000) | 2 | 6225DA | 2065 | |
| 0.572 | 112000 | (12700) | * | - | 23400 | (104000) | 0.690 | 112000 | (12700) | * | - | 23400 | (104000) | 2 | 6215DA | 2537 | |
| | 141000 | (15900) | * | - | 32600 | (145000) | | 141000 | (15900) | * | - | 32600 | (145000) | 2 | 6225DA | 2537 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

2 HP
1.5 kW

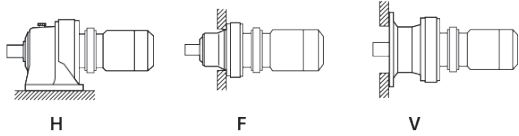

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | 60 Hz | | | | Selection | | | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|------------------|---------------|---------------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 0.476 | 99700 | (11300) | * | - | 23400 | (104000) | 0.575 | 99700 | (11300) | * | - | 23400 | (104000) | 2 | 6215DA | 3045 | |
| | 133000 | (15100) | * | - | 32600 | (145000) | | 133000 | (15100) | * | - | 32600 | (145000) | | 2 | 6225DA | |
| 0.417 | 112000 | (12700) | * | - | 23400 | (104000) | 0.503 | 112000 | (12700) | * | - | 23400 | (104000) | 2 | 6215DA | 3481 | |
| | 141000 | (15900) | * | - | 32600 | (145000) | | 141000 | (15900) | * | - | 32600 | (145000) | | 2 | 6225DA | |
| 0.327 | 99700 | (11300) | * | - | 23400 | (104000) | 0.394 | 99700 | (11300) | * | - | 23400 | (104000) | 2 | 6215DA | 4437 | |
| | 133000 | (15100) | * | - | 32600 | (145000) | | 133000 | (15100) | * | - | 32600 | (145000) | | 2 | 6225DA | |
| 0.282 | 112000 | (12700) | * | - | 23400 | (104000) | 0.341 | 112000 | (12700) | * | - | 23400 | (104000) | 2 | 6215DA | 5133 | |
| | 141000 | (15900) | * | - | 32600 | (145000) | | 141000 | (15900) | * | - | 32600 | (145000) | | 2 | 6225DA | |
| 0.235 | 99700 | (11300) | * | - | 23400 | (104000) | 0.283 | 99700 | (11300) | * | - | 23400 | (104000) | 2 | 6215DA | 6177 | |
| | 133000 | (15100) | * | - | 32600 | (145000) | | 133000 | (15100) | * | - | 32600 | (145000) | | 2 | 6225DA | |
| 0.192 | 99700 | (11300) | * | - | 23400 | (104000) | 0.231 | 99700 | (11300) | * | - | 23400 | (104000) | 2 | 6215DA | 7569 | |
| | 133000 | (15100) | * | - | 32600 | (145000) | | 133000 | (15100) | * | - | 32600 | (145000) | | 2 | 6225DA | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3 HP
2.2 kW

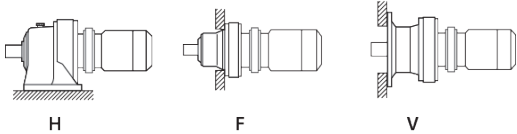

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|--------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 483 | 365 | (41.3) | 1.07 | I | 722 | (3210) | 583 | 303 | (34.2) | 1.07 | I | 681 | (3030) | 3 | 6100 | 3 | |
| | | | 1.45 | II | 722 | (3210) | | | | 1.45 | II | 681 | (3030) | | 6105 | | |
| 290 | 609 | (68.8) | 1.07 | I | 857 | (3810) | 350 | 505 | (57.0) | 1.07 | I | 807 | (3590) | 3 | 6100 | 5 | |
| | | | 1.45 | II | 857 | (3810) | | | | 1.45 | II | 807 | (3590) | | 6105 | | |
| 242 | 731 | (82.6) | 1.07 | I | 920 | (4090) | 292 | 606 | (68.4) | 1.07 | I | 867 | (3860) | 3 | 6100 | 6 | |
| | | | 1.45 | II | 920 | (4090) | | | | 1.45 | II | 867 | (3860) | | 6105 | | |
| | | | 1.61 | III | 1040 | (4640) | | | | 1.61 | III | 982 | (4370) | | 6110 | | |
| | | | 1.78 | III | 1040 | (4640) | | | | 1.78 | III | 982 | (4370) | | 6115 | | |
| | | | 2.30 | III | 1180 | (5260) | | | | 2.30 | III | 1110 | (4950) | | 6120 | | |
| 181 | 975 | (110) | 1.07 | I | 1020 | (4560) | 219 | 808 | (91.2) | 1.07 | I | 966 | (4300) | 3 | 6100 | 8 | |
| | | | 1.45 | II | 1020 | (4560) | | | | 1.45 | II | 966 | (4300) | | 6105 | | |
| | | | 1.61 | III | 1160 | (5170) | | | | 1.61 | III | 1090 | (4870) | | 6110 | | |
| | | | 1.78 | III | 1160 | (5170) | | | | 1.78 | III | 1090 | (4870) | | 6115 | | |
| | | | 2.30 | III | 1320 | (5870) | | | | 2.30 | III | 1240 | (5520) | | 6120 | | |
| 132 | 1340 | (151) | 1.07 | I | 1160 | (5170) | 159 | 1110 | (125) | 1.07 | I | 1100 | (4870) | 3 | 6100 | 11 | |
| | | | 1.45 | II | 1160 | (5170) | | | | 1.45 | II | 1100 | (4870) | | 6105 | | |
| | | | 1.61 | III | 1330 | (5900) | | | | 1.61 | III | 1250 | (5560) | | 6110 | | |
| | | | 1.78 | III | 1330 | (5900) | | | | 1.78 | III | 1250 | (5560) | | 6115 | | |
| | | | 2.30 | III | 1500 | (6670) | | | | 2.30 | III | 1410 | (6280) | | 6120 | | |
| 112 | 1580 | (179) | 1.07 | I | 1210 | (5360) | 135 | 1310 | (148) | 1.07 | I | 1140 | (5060) | 3 | 6100 | 13 | |
| | | | 1.45 | II | 1210 | (5360) | | | | 1.45 | II | 1140 | (5060) | | 6105 | | |
| | | | 1.61 | III | 1370 | (6090) | | | | 1.61 | III | 1290 | (5740) | | 6110 | | |
| | | | 1.77 | III | 1370 | (6090) | | | | 1.77 | III | 1290 | (5740) | | 6115 | | |
| | | | 2.30 | III | 1550 | (6890) | | | | 2.30 | III | 1460 | (6490) | | 6120 | | |
| 96.7 | 1830 | (206) | 1.07 | I | 1210 | (5400) | 117 | 1510 | (171) | 1.07 | I | 1200 | (5340) | 3 | 6100 | 15 | |
| | | | 1.45 | II | 1210 | (5400) | | | | 1.45 | II | 1200 | (5340) | | 6105 | | |
| | | | 1.61 | III | 1460 | (6490) | | | | 1.61 | III | 1380 | (6120) | | 6110 | | |
| | | | 1.77 | III | 1460 | (6490) | | | | 1.77 | III | 1380 | (6120) | | 6115 | | |
| | | | 2.30 | III | 1660 | (7390) | | | | 2.30 | III | 1560 | (6960) | | 6120 | | |
| 85.3 | 2070 | (234) | 1.12 | I | 1210 | (5400) | 103 | 1720 | (194) | 1.12 | I | 1210 | (5400) | 3 | 6105 | 17 | |
| | | | 1.44 | II | 1470 | (6550) | | | | 1.44 | II | 1390 | (6180) | | 6110 | | |
| | | | 1.77 | III | 1470 | (6550) | | | | 1.77 | III | 1390 | (6180) | | 6115 | | |
| | | | 2.22 | III | 1680 | (7460) | | | | 2.30 | III | 1580 | (7030) | | 6120 | | |
| | | | 2.57 | III | 1680 | (7460) | | | | 2.57 | III | 1580 | (7030) | | 6125 | | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3 HP
2.2 kW

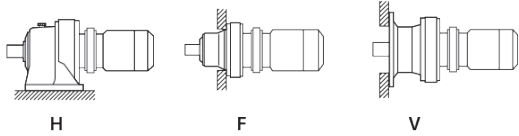

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|------------------|------------|-------|--------------------|------|----|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] | | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | | | |
| 69.0 | 2560 | (289) | 1.04 | I | 1210 | (5400) | 83.3 | 2120 | (240) | 1.06 | I | 1210 | (5400) | 3 | 6105 | 21 | | | |
| | | | 1.24 | I | 1560 | (6920) | | | | 1.24 | I | 1470 | (6540) | | | | 3 | 6110 | 21 |
| | | | 1.41 | II | 1560 | (6920) | | | | 1.41 | II | 1470 | (6540) | | | | 3 | 6115 | 21 |
| | | | 1.80 | III | 1840 | (8180) | | | | 1.80 | III | 1730 | (7710) | | | | 3 | 6120 | 21 |
| | | | 2.18 | III | 1840 | (8180) | | | | 2.22 | III | 1730 | (7710) | | | | 3 | 6125 | 21 |
| | | | 2.70 | III | 2150 | (9580) | | | | 2.79 | III | 2030 | (9020) | | | | 3 | 6130 | 21 |
| 58.0 | 3050 | (344) | 1.01 | I | 1580 | (7010) | 70.0 | 2520 | (285) | 1.01 | I | 1490 | (6620) | 3 | 6115 | 25 | | | |
| | | | 1.40 | II | 1920 | (8560) | | | | 1.40 | II | 1810 | (8070) | | | | 3 | 6120 | 25 |
| | | | 1.80 | III | 1920 | (8560) | | | | 1.80 | III | 1810 | (8070) | | | | 3 | 6125 | 25 |
| | | | 2.27 | III | 2240 | (9950) | | | | 2.35 | III | 2110 | (9370) | | | | 3 | 6130 | 25 |
| | | | 2.62 | III | 2240 | (9950) | | | | 2.71 | III | 2110 | (9370) | | | | 3 | 6135 | 25 |
| 50.0 | 3530 | (399) | 1.01 | I | 1610 | (7160) | 60.3 | 2930 | (331) | 1.01 | I | 1530 | (6800) | 3 | 6115 | 29 | | | |
| | | | 1.30 | II | 2000 | (8880) | | | | 1.36 | II | 1880 | (8380) | | | | 3 | 6120 | 29 |
| | | | 1.58 | II | 2000 | (8880) | | | | 1.71 | III | 1880 | (8380) | | | | 3 | 6125 | 29 |
| | | | 1.95 | III | 2350 | (10500) | | | | 2.04 | III | 2210 | (9850) | | | | 3 | 6130 | 29 |
| | | | 2.22 | III | 2350 | (10500) | | | | 2.56 | III | 2210 | (9850) | | | | 3 | 6135 | 29 |
| | | | 2.71 | III | 3380 | (15000) | | | | 2.71 | III | 3200 | (14200) | | | | 3 | 6140 | 29 |
| 41.4 | 4260 | (482) | 0.82 | - | 1120 | (4960) | 50.0 | 3530 | (399) | 0.82 | - | 1630 | (7230) | 3 | 6115 | 35 | | | |
| | | | 1.08 | I | 2100 | (9350) | | | | 1.13 | I | 1990 | (8830) | | | | 3 | 6120 | 35 |
| | | | 1.31 | II | 2100 | (9350) | | | | 1.45 | II | 1990 | (8830) | | | | 3 | 6125 | 35 |
| | | | 1.62 | III | 2470 | (11000) | | | | 1.69 | III | 2330 | (10300) | | | | 3 | 6130 | 35 |
| | | | 1.87 | III | 2470 | (11000) | | | | 1.93 | III | 2330 | (10300) | | | | 3 | 6135 | 35 |
| | | | 2.37 | III | 3600 | (16000) | | | | 2.37 | III | 3420 | (15200) | | | | 3 | 6140 | 35 |
| | | | 2.84 | III | 3600 | (16000) | | | | 3.42 | III | 3420 | (15200) | | | | 3 | 6145 | 35 |
| 33.7 | 5240 | (592) | 1.06 | I | 2210 | (9810) | 40.7 | 4340 | (490) | 1.08 | I | 2110 | (9380) | 3 | 6125 | 43 | | | |
| | | | 1.32 | II | 2650 | (11800) | | | | 1.36 | II | 2490 | (11100) | | | | 3 | 6130 | 43 |
| | | | 1.52 | II | 2650 | (11800) | | | | 1.71 | III | 2490 | (11100) | | | | 3 | 6135 | 43 |
| | | | 1.79 | III | 3600 | (16000) | | | | 1.79 | III | 3570 | (15900) | | | | 3 | 6140 | 43 |
| | | | 2.12 | III | 3600 | (16000) | | | | 2.45 | III | 3570 | (15900) | | | | 3 | 6145 | 43 |
| | | | 2.93 | III | 4620 | (20600) | | | | 3.39 | III | 4350 | (19300) | | | | 3 | 6160 | 43 |
| 28.4 | 6210 | (702) | 0.90 | - | 2210 | (9810) | 34.3 | 5150 | (582) | 1.04 | I | 2190 | (9760) | 3 | 6125 | 51 | | | |
| | | | 1.11 | I | 2750 | (12200) | | | | 1.16 | I | 2590 | (11500) | | | | 3 | 6130 | 51 |
| | | | 1.16 | I | 2750 | (12200) | | | | 1.33 | II | 2590 | (11500) | | | | 3 | 6135 | 51 |
| | | | 1.56 | II | 3600 | (16000) | | | | 1.56 | II | 3600 | (16000) | | | | 3 | 6140 | 51 |
| | | | 1.68 | III | 3600 | (16000) | | | | 1.92 | III | 3600 | (16000) | | | | 3 | 6145 | 51 |
| | | | 2.50 | III | 4800 | (21300) | | | | 2.62 | III | 4520 | (20100) | | | | 3 | 6160 | 51 |
| | | | 2.99 | III | 4800 | (21300) | | | | 3.42 | III | 4520 | (20100) | | | | 3 | 6165 | 51 |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3 HP
2.2 kW

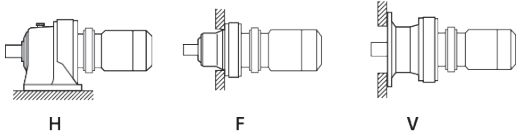

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 24.6 | 7190 | (812) | 1.11 | I | 2880 | (12800) | 29.7 | 5960 | (673) | 1.15 | I | 2720 | (12100) | 3 | 6135 | 59 | |
| | | | 1.35 | II | 3600 | (16000) | | | | 1.35 | II | 3600 | (16000) | 3 | 6140 | 59 | |
| | | | 1.45 | II | 3600 | (16000) | | | | 1.66 | III | 3600 | (16000) | 3 | 6145 | 59 | |
| | | | 2.01 | III | 4960 | (22100) | | | | 2.01 | III | 4960 | (22100) | 3 | 6160 | 59 | |
| | | | 2.59 | III | 4960 | (22100) | | | | 2.61 | III | 4960 | (22100) | 3 | 6165 | 59 | |
| 20.4 | 8650 | (977) | 0.92 | - | 3030 | (13500) | 24.6 | 7170 | (810) | 0.99 | - | 2870 | (12800) | 3 | 6135 | 71 | |
| | | | 1.11 | I | 3600 | (16000) | | | | 1.11 | I | 3600 | (16000) | 3 | 6140 | 71 | |
| | | | 1.19 | I | 3600 | (16000) | | | | 1.38 | II | 3600 | (16000) | 3 | 6145 | 71 | |
| | | | 1.58 | II | 4960 | (22100) | | | | 1.58 | II | 4960 | (22100) | 3 | 6160 | 71 | |
| | | | 2.15 | III | 4960 | (22100) | | | | 2.57 | III | 4960 | (22100) | 3 | 6165 | 71 | |
| 16.7 | 10600 | (1200) | 0.98 | - | 3600 | (16000) | 20.1 | 8780 | (992) | 1.13 | I | 3600 | (16000) | 3 | 6145 | 87 | |
| | | | 1.47 | II | 4960 | (22100) | | | | 1.58 | II | 4960 | (22100) | 3 | 6160 | 87 | |
| | | | 1.71 | III | 4960 | (22100) | | | | 1.77 | III | 4960 | (22100) | 3 | 6165 | 87 | |
| 13.9 | 6900 | (780) | * | - | 3310 | (14700) | 16.8 | 6900 | (780) | * | - | 3310 | (14700) | 3 | 6130DC | 104 | |
| | 8320 | (940) | * | - | 3310 | (14700) | | 8320 | (940) | * | - | 3310 | (14700) | 3 | 6135DC | 104 | |
| | 12000 | (1360) | 1.01 | I | 3600 | (16000) | | 9950 | (1120) | 1.22 | I | 3600 | (16000) | 3 | 6145DC | 104 | |
| | | | 1.29 | I | 4960 | (22100) | | | | 1.56 | II | 4960 | (22100) | 3 | 6160DC | 104 | |
| | | | 1.55 | II | 4960 | (22100) | | | | 1.87 | III | 4960 | (22100) | 3 | 6165DC | 104 | |
| | | | 1.86 | III | 6630 | (29500) | | | | 2.25 | III | 6610 | (29400) | 3 | 6170DC | 104 | |
| | | | 2.32 | III | 6630 | (29500) | | | | 2.80 | III | 6610 | (29400) | 3 | 6175DC | 104 | |
| | | 2.99 | III | 9270 | (41300) | | | 3.61 | III | 8720 | (38800) | 3 | 6180DB | 104 | | | |
| 12.0 | 8320 | (940) | * | - | 3310 | (14700) | 14.5 | 8320 | (940) | * | - | 3310 | (14700) | 3 | 6135DC | 121 | |
| | 11400 | (1290) | * | - | 3600 | (16000) | | 11600 | (1310) | 0.99 | - | 3600 | (16000) | 3 | 6145DC | 121 | |
| | 14000 | (1580) | 1.11 | I | 4960 | (22100) | | | | 1.34 | II | 4960 | (22100) | 3 | 6160DC | 121 | |
| | | | 1.33 | II | 4960 | (22100) | | | | 1.61 | III | 4960 | (22100) | 3 | 6165DC | 121 | |
| | | | 1.60 | III | 6630 | (29500) | | | | 1.94 | III | 6630 | (29500) | 3 | 6170DC | 121 | |
| | | | 2.00 | III | 6630 | (29500) | | | | 2.41 | III | 6630 | (29500) | 3 | 6175DC | 121 | |
| | | 2.57 | III | 9380 | (41700) | | | 3.11 | III | 9300 | (41300) | 3 | 6180DB | 121 | | | |
| 10.1 | 10800 | (1230) | * | - | 3600 | (16000) | 12.2 | 9420 | (1060) | * | - | 3600 | (16000) | 3 | 6140DB | 143 | |
| | 12100 | (1370) | * | - | 3580 | (15900) | | 12100 | (1370) | * | - | 3580 | (15900) | 3 | 6145DC | 143 | |
| | 16500 | (1860) | 1.13 | I | 4960 | (22100) | | 13700 | (1550) | 1.36 | II | 4960 | (22100) | 3 | 6165DC | 143 | |
| | | | 1.35 | II | 6630 | (29500) | | | | 1.64 | III | 6630 | (29500) | 3 | 6170DC | 143 | |
| | | | 1.69 | III | 6630 | (29500) | | | | 2.04 | III | 6630 | (29500) | 3 | 6175DC | 143 | |
| | | | 2.18 | III | 9380 | (41700) | | | | 2.63 | III | 9380 | (41700) | 3 | 6180DB | 143 | |
| | | 2.63 | III | 9380 | (41700) | | | 3.17 | III | 9380 | (41700) | 3 | 6185DB | 143 | | | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3 HP
2.2 kW

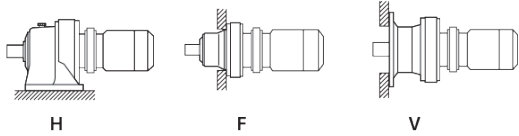

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 8.79 | 10800 | (1230) | * | - | 3600 | (16000) | 10.6 | 10800 | (1230) | * | - | 3600 | (16000) | 3 | 6140DB | 165 | |
| | 12000 | (1360) | * | - | 3600 | (16000) | | 12000 | (1360) | * | - | 3600 | (16000) | 3 | 6145DC | 165 | |
| | 15500 | (1760) | * | - | 4960 | (22100) | | 15800 | (1780) | 0.98 | - | 4960 | (22100) | 3 | 6160DC | 165 | |
| | 19000 | (2150) | 0.98 | - | 4960 | (22100) | | | | 1.18 | I | 4960 | (22100) | 3 | 6165DC | 165 | |
| | | | 1.18 | I | 6630 | (29500) | | | | 1.42 | II | 6630 | (29500) | 3 | 6170DC | 165 | |
| | | | 1.46 | II | 6630 | (29500) | | | | 1.77 | III | 6630 | (29500) | 3 | 6175DC | 165 | |
| | | | 1.89 | III | 9380 | (41700) | | | | 2.28 | III | 9380 | (41700) | 3 | 6180DB | 165 | |
| | | | 2.29 | III | 9380 | (41700) | | | | 2.76 | III | 9380 | (41700) | 3 | 6185DB | 165 | |
| | | 2.97 | III | 13300 | (59000) | | | 3.58 | III | 13300 | (59000) | 3 | 6190DB | 165 | | | |
| 7.44 | 15500 | (1760) | * | - | 4960 | (22100) | 8.97 | 15500 | (1760) | * | - | 4960 | (22100) | 3 | 6160DC | 195 | |
| | 18600 | (2100) | * | - | 4960 | (22100) | | 18600 | (2110) | 1.00 | I | 4960 | (22100) | 3 | 6165DC | 195 | |
| | 22500 | (2540) | 0.99 | - | 6630 | (29500) | | | | 1.20 | I | 6630 | (29500) | 3 | 6170DC | 195 | |
| | | | 1.24 | I | 6630 | (29500) | | | | 1.50 | II | 6630 | (29500) | 3 | 6175DC | 195 | |
| | | | 1.60 | III | 9380 | (41700) | | | | 1.93 | III | 9380 | (41700) | 3 | 6180DB | 195 | |
| | | | 1.94 | III | 9380 | (41700) | | | | 2.34 | III | 9380 | (41700) | 3 | 6185DB | 195 | |
| | | | 2.51 | III | 13300 | (59000) | | | | 2.69 | III | 13300 | (59000) | 3 | 6190DA | 195 | |
| | | | 2.51 | III | 13300 | (59000) | | | | 3.03 | III | 13300 | (59000) | 3 | 6190DB | 195 | |
| 6.28 | 15500 | (1760) | * | - | 4960 | (22100) | 7.58 | 15500 | (1760) | * | - | 4960 | (22100) | 3 | 6160DC | 231 | |
| | 18600 | (2100) | * | - | 4960 | (22100) | | 18600 | (2100) | * | - | 4960 | (22100) | 3 | 6165DC | 231 | |
| | 26700 | (3010) | 1.05 | I | 6630 | (29500) | | 22100 | (2500) | 1.26 | I | 6630 | (29500) | 3 | 6175DC | 231 | |
| | | | 1.34 | II | 9380 | (41700) | | | | 1.62 | III | 9380 | (41700) | 3 | 6180DB | 231 | |
| | | | 1.66 | III | 9380 | (41700) | | | | 2.00 | III | 9380 | (41700) | 3 | 6185DB | 231 | |
| | | | 2.12 | III | 13300 | (59000) | | | | 2.56 | III | 13300 | (59000) | 3 | 6190DA | 231 | |
| | | | 2.64 | III | 13300 | (59000) | | | | 2.69 | III | 13300 | (59000) | 3 | 6195DA | 231 | |
| | | | 2.64 | III | 13300 | (59000) | | | | 3.19 | III | 13300 | (59000) | 3 | 6195DB | 231 | |
| 5.31 | 18600 | (2100) | * | - | 4960 | (22100) | 6.41 | 18600 | (2100) | * | - | 4960 | (22100) | 3 | 6165DC | 273 | |
| | 22400 | (2530) | * | - | 6630 | (29500) | | 22400 | (2530) | * | - | 6630 | (29500) | 3 | 6170DC | 273 | |
| | 27900 | (3150) | * | - | 6630 | (29500) | | 26100 | (2950) | 1.07 | I | 6630 | (29500) | 3 | 6175DC | 273 | |
| | 31500 | (3560) | 1.14 | I | 9380 | (41700) | | | | 1.37 | II | 9380 | (41700) | 3 | 6180DB | 273 | |
| | | | 1.40 | II | 9380 | (41700) | | | | 1.70 | III | 9380 | (41700) | 3 | 6185DB | 273 | |
| | | | 1.79 | III | 13300 | (59000) | | | | 2.16 | III | 13300 | (59000) | 3 | 6190DA | 273 | |
| | | | 2.24 | III | 13300 | (59000) | | | | 2.69 | III | 13300 | (59000) | 3 | 6195DA | 273 | |
| | | | 2.61 | III | 18900 | (84100) | | | | 3.14 | III | 18900 | (84100) | 3 | 6205DB | 273 | |
| 4.55 | 22400 | (2530) | * | - | 6630 | (29500) | 5.49 | 22400 | (2530) | * | - | 6630 | (29500) | 3 | 6170DC | 319 | |
| | 27900 | (3150) | * | - | 6630 | (29500) | | 27900 | (3150) | * | - | 6630 | (29500) | 3 | 6175DC | 319 | |
| | 36800 | (4160) | 1.20 | I | 9380 | (41700) | | 30500 | (3450) | 1.45 | II | 9380 | (41700) | 3 | 6185DB | 319 | |
| | | | 1.53 | II | 13300 | (59000) | | | | 1.85 | III | 13300 | (59000) | 3 | 6190DA | 319 | |
| | | | 1.91 | III | 13300 | (59000) | | | | 2.31 | III | 13300 | (59000) | 3 | 6195DA | 319 | |
| | | | 2.22 | III | 18900 | (84100) | | | | 2.68 | III | 18900 | (84100) | 3 | 6205DB | 319 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3 HP
2.2 kW

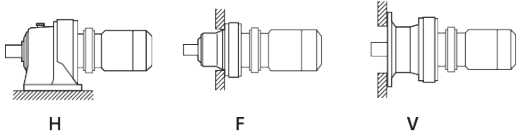

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|----------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 3.85 | 27900 | (3150) | * | - | 6630 | (29500) | 4.64 | 27900 | (3150) | * | - | 6630 | (29500) | 3 | 6175DC | 377 | |
| | 35900 | (4050) | * | - | 9380 | (41700) | | 36100 | (4070) | 0.99 | - | 9380 | (41700) | 3 | 6180DB | 377 | |
| | 43500 | (4920) | 1.02 | I | 9380 | (41700) | | | | 1.23 | I | 9380 | (41700) | 3 | 6185DB | 377 | |
| | | | 1.30 | II | 13300 | (59000) | | | | 1.57 | II | 13300 | (59000) | 3 | 6190DA | 377 | |
| | | | 1.62 | III | 13300 | (59000) | | | | 1.95 | III | 13300 | (59000) | 3 | 6195DA | 377 | |
| | | | 1.74 | III | 18900 | (84100) | | | | 1.97 | III | 18900 | (84100) | 3 | 6205DA | 377 | |
| | | | 1.88 | III | 18900 | (84100) | | | | 2.27 | III | 18900 | (84100) | 3 | 6205DB | 377 | |
| | | | 2.57 | III | 23400 | (104000) | | | | 3.11 | III | 23400 | (104000) | 3 | 6215DA | 377 | |
| 3.07 | 35900 | (4060) | * | - | 9380 | (41700) | 3.70 | 35900 | (4060) | * | - | 9380 | (41700) | 3 | 6180DB | 473 | |
| | 44300 | (5000) | * | - | 9380 | (41700) | | 45200 | (5110) | 0.98 | - | 9380 | (41700) | 3 | 6185DB | 473 | |
| | 54600 | (6170) | 1.03 | I | 13300 | (59000) | | | | 1.25 | I | 13300 | (59000) | 3 | 6190DA | 473 | |
| | | | 1.29 | I | 13300 | (59000) | | | | 1.56 | II | 13300 | (59000) | 3 | 6195DA | 473 | |
| | | | 1.51 | II | 18900 | (84100) | | | | 1.82 | III | 18900 | (84100) | 3 | 6205DB | 473 | |
| | | | 2.05 | III | 23400 | (104000) | | | | 2.48 | III | 23400 | (104000) | 3 | 6215DA | 473 | |
| | | | 2.59 | III | 32600 | (145000) | | | | 3.13 | III | 32600 | (145000) | 3 | 6225DA | 473 | |
| 2.59 | 44300 | (5000) | * | - | 9380 | (41700) | 3.13 | 44300 | (5000) | * | - | 9380 | (41700) | 3 | 6185DB | 559 | |
| | 64500 | (7290) | 1.09 | I | 13300 | (59000) | | 53500 | (6040) | 1.32 | II | 13300 | (59000) | 3 | 6195DA | 559 | |
| | | | 1.20 | I | 18900 | (84100) | | | | 1.36 | II | 18900 | (84100) | 3 | 6205DA | 559 | |
| | | | 1.28 | I | 18900 | (84100) | | | | 1.54 | II | 18900 | (84100) | 3 | 6205DB | 559 | |
| | | | 1.74 | III | 23400 | (104000) | | | | 2.09 | III | 23400 | (104000) | 3 | 6215DA | 559 | |
| | | | 2.19 | III | 32600 | (145000) | | | | 2.65 | III | 32600 | (145000) | 3 | 6225DA | 559 | |
| | | | 2.81 | III | 40100 | (179000) | | | | 3.39 | III | 40100 | (179000) | 3 | 6235DA | 559 | |
| 2.23 | 44300 | (5000) | * | - | 9350 | (41600) | 2.70 | 44300 | (5000) | * | - | 9350 | (41600) | 3 | 6185DB | 649 | |
| | 56500 | (6380) | * | - | 13200 | (58600) | | 56500 | (6380) | * | - | 13200 | (58600) | 3 | 6190DA | 649 | |
| | 70500 | (7960) | * | - | 13100 | (58100) | | 62100 | (7010) | 1.14 | I | 13100 | (58400) | 3 | 6195DA | 649 | |
| | 74900 | (8460) | 1.10 | I | 18900 | (84100) | | | | 1.33 | II | 18900 | (84100) | 3 | 6205DB | 649 | |
| | | | 1.49 | II | 23400 | (104000) | | | | 1.80 | III | 23400 | (104000) | 3 | 6215DA | 649 | |
| | | | 1.88 | III | 32600 | (145000) | | | | 2.26 | III | 32600 | (145000) | 3 | 6225DA | 649 | |
| | | | 2.42 | III | 40100 | (179000) | | | | 2.92 | III | 40100 | (179000) | 3 | 6235DA | 649 | |
| 1.98 | 56500 | (6380) | * | - | 13300 | (59000) | 2.39 | 56500 | (6380) | * | - | 13300 | (59000) | 3 | 6190DA | 731 | |
| | 70500 | (7960) | * | - | 13300 | (59000) | | 69900 | (7900) | 1.01 | I | 13300 | (59000) | 3 | 6195DA | 731 | |
| | 84400 | (9530) | 0.98 | - | 18900 | (84100) | | | | 1.15 | I | 18900 | (84100) | 3 | 6205DA | 731 | |
| | | | 0.98 | - | 18900 | (84100) | | | | 1.18 | I | 18900 | (84100) | 3 | 6205DB | 731 | |
| | | | 1.33 | II | 23400 | (104000) | | | | 1.60 | III | 23400 | (104000) | 3 | 6215DA | 731 | |
| | | | 1.68 | III | 32600 | (145000) | | | | 2.03 | III | 32600 | (145000) | 3 | 6225DA | 731 | |
| | | | 2.15 | III | 40100 | (179000) | | | | 2.60 | III | 40100 | (179000) | 3 | 6235DA | 731 | |
| | | | 2.71 | III | 46800 | (208000) | | | | 3.27 | III | 46800 | (208000) | 3 | 6245DA | 731 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3 HP
2.2 kW

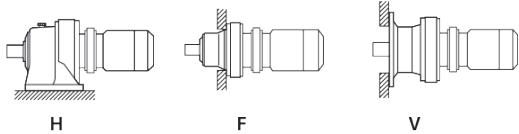

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|----------|-------------------------------|---------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 1.72 | 56500 | (6380) | * | - | 13300 | (59000) | 2.08 | 56500 | (6380) | * | - | 13300 | (59000) | 3 | 6190DA | 841 | |
| | 70500 | (7960) | * | - | 13300 | (59000) | | 70500 | (7960) | * | - | 13300 | (59000) | 3 | 6195DA | 841 | |
| | 81700 | (9230) | * | - | 18900 | (84100) | | 80400 | (9090) | 1.02 | I | 18900 | (84100) | 3 | 6205DA | 841 | |
| | 97100 | (11000) | 1.15 | I | 23400 | (104000) | | 1.39 | II | 23400 | (104000) | 3 | 6215DA | 841 | | | |
| | | | 1.37 | II | 32600 | (145000) | | 1.65 | III | 32600 | (145000) | 3 | 6225DA | 841 | | | |
| | | | 1.72 | III | 40100 | (179000) | | 2.08 | III | 40100 | (179000) | 3 | 6235DA | 841 | | | |
| | | 2.35 | III | 46800 | (208000) | 2.84 | III | 46800 | (208000) | 3 | 6245DA | 841 | | | | | |
| 1.45 | 70500 | (7960) | * | - | 13100 | (58100) | 1.74 | 70500 | (7960) | * | - | 13100 | (58100) | 3 | 6195DA | 1003 | |
| | 82300 | (9300) | * | - | 18900 | (84100) | | 80100 | (9060) | * | - | 18900 | (84100) | 3 | 6205DA | 1003 | |
| | 116000 | (13100) | 0.97 | - | 23400 | (104000) | | 95900 | (10800) | 1.17 | I | 23400 | (104000) | 3 | 6215DA | 1003 | |
| | | | 1.21 | I | 32600 | (145000) | | 1.46 | II | 32600 | (145000) | 3 | 6225DA | 1003 | | | |
| | | | 1.57 | II | 40100 | (179000) | | 1.89 | III | 40100 | (179000) | 3 | 6235DA | 1003 | C.F. | | |
| | | | 1.97 | III | 46800 | (208000) | | 2.38 | III | 46800 | (208000) | 3 | 6245DA | 1003 | C.F. | | |
| 1.16 | 82300 | (9300) | * | - | 18900 | (84100) | 1.40 | 82300 | (9300) | * | - | 18900 | (84100) | 3 | 6205DA | 1247 | |
| | 112000 | (12700) | * | - | 23400 | (104000) | | 112000 | (12700) | * | - | 23400 | (104000) | 3 | 6215DA | 1247 | |
| | 144000 | (16300) | 0.98 | - | 32600 | (145000) | | 119000 | (13500) | 1.19 | I | 32600 | (145000) | 3 | 6225DA | 1247 | |
| | | | 1.26 | I | 40100 | (179000) | | 1.52 | II | 40100 | (179000) | 3 | 6235DA | 1247 | | | |
| | | | 1.59 | II | 46800 | (208000) | | 1.91 | III | 46800 | (208000) | 3 | 6245DA | 1247 | | | |
| 0.980 | 99700 | (11300) | * | - | 23400 | (104000) | 1.18 | 99700 | (11300) | * | - | 23400 | (104000) | 3 | 6215DA | 1479 | |
| | 133000 | (15100) | * | - | 32600 | (145000) | | 133000 | (15100) | * | - | 32600 | (145000) | 3 | 6225DA | 1479 | |
| | 152000 | (17200) | * | - | 40100 | (179000) | | 141000 | (16000) | 1.07 | I | 40100 | (179000) | 3 | 6235DA | 1479 | C.F. |
| | 171000 | (19300) | 1.17 | I | 46800 | (208000) | | 1.42 | II | 46800 | (208000) | 3 | 6245DA | 1479 | C.F. | | |
| 0.784 | 142000 | (16000) | * | - | 32600 | (145000) | 0.946 | 142000 | (16000) | * | - | 32600 | (145000) | 3 | 6225DA | 1849 | |
| | 181000 | (20500) | * | - | 40100 | (179000) | | 177000 | (20000) | 1.03 | I | 40100 | (179000) | 3 | 6235DA | 1849 | |
| | 213000 | (24100) | 1.07 | I | 46800 | (208000) | | 1.29 | I | 46800 | (208000) | 3 | 6245DA | 1849 | | | |
| 0.702 | 141000 | (15900) | * | - | 32600 | (145000) | 0.847 | 141000 | (15900) | * | - | 32600 | (145000) | 3 | 6225DA | 2065 | |
| | 181000 | (20500) | * | - | 40100 | (179000) | | 181000 | (20500) | * | - | 40100 | (179000) | 3 | 6235DA | 2065 | |
| | 238000 | (26900) | 0.96 | - | 46800 | (208000) | | 197000 | (22300) | 1.16 | I | 46800 | (208000) | 3 | 6245DA | 2065 | |
| 0.572 | 181000 | (20500) | * | - | 40100 | (179000) | 0.690 | 181000 | (20500) | * | - | 40100 | (179000) | 3 | 6235DA | 2537 | |
| | 228000 | (25800) | * | - | 46800 | (208000) | | 228000 | (25800) | * | - | 46800 | (208000) | 3 | 6245DA | 2537 | |
| 0.476 | 152000 | (17200) | * | - | 40100 | (179000) | 0.575 | 152000 | (17200) | * | - | 40100 | (179000) | 3 | 6235DA | 3045 | |
| | 200000 | (22600) | * | - | 46800 | (208000) | | 200000 | (22600) | * | - | 46800 | (208000) | 3 | 6245DA | 3045 | |
| 0.417 | 181000 | (20500) | * | - | 40100 | (179000) | 0.503 | 181000 | (20500) | * | - | 40100 | (179000) | 3 | 6235DA | 3481 | |
| | 228000 | (25800) | * | - | 46800 | (208000) | | 228000 | (25800) | * | - | 46800 | (208000) | 3 | 6245DA | 3481 | |
| 0.327 | 152000 | (17200) | * | - | 40100 | (179000) | 0.394 | 152000 | (17200) | * | - | 40100 | (179000) | 3 | 6235DA | 4437 | |
| | 200000 | (22600) | * | - | 46800 | (208000) | | 200000 | (22600) | * | - | 46800 | (208000) | 3 | 6245DA | 4437 | |
| 0.282 | 181000 | (20500) | * | - | 40100 | (179000) | 0.341 | 181000 | (20500) | * | - | 40100 | (179000) | 3 | 6235DA | 5133 | |
| | 228000 | (25800) | * | - | 46800 | (208000) | | 228000 | (25800) | * | - | 46800 | (208000) | 3 | 6245DA | 5133 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

3 HP
2.2 kW

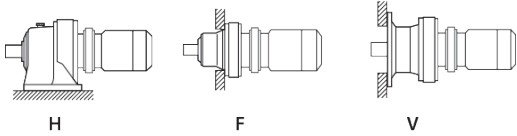

Dimension Pages:
 Foot Mount (H) 2.102 - 2.131
 V-Flange Mount (V) 2.132 - 2.161
 F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | 60 Hz | | | | Selection | | | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|------------------|---------------|---------------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in•lbs | (N•m) | SF | AGMA Class | lbs | (N) | | in•lbs | (N•m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 0.235 | 152000 | (17200) | * | - | 40100 | (179000) | 0.283 | 152000 | (17200) | * | - | 40100 | (179000) | 3 | 6235DA | 6177 | |
| | 200000 | (22600) | * | - | 46800 | (208000) | | 200000 | (22600) | * | - | 46800 | (208000) | | 3 | 6245DA | |
| 0.192 | 152000 | (17200) | * | - | 40100 | (179000) | 0.231 | 152000 | (17200) | * | - | 40100 | (179000) | 3 | 6235DA | 7569 | |
| | 200000 | (22600) | * | - | 46800 | (208000) | | 200000 | (22600) | * | - | 46800 | (208000) | | 3 | 6245DA | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

5 HP
3.7 kW

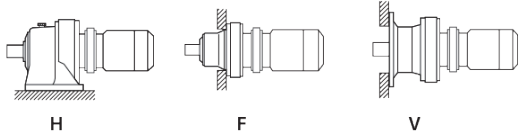

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 483 | 615 | (69.5) | 1.37 | II | 906 | (4030) | 583 | 509 | (57.5) | 1.37 | II | 863 | (3840) | 5 | 6120 | 3 | |
| | | | 1.68 | III | 906 | (4030) | | | | 1.57 | II | 863 | (3840) | 5 | 6125 | 3 | |
| | | | 2.54 | III | 1050 | (4690) | | | | 2.54 | III | 998 | (4440) | 5 | 6130 | 3 | |
| 290 | 1020 | (116) | 1.37 | II | 1070 | (4780) | 350 | 849 | (95.9) | 1.37 | II | 1020 | (4550) | 5 | 6120 | 5 | |
| | | | 1.68 | III | 1070 | (4780) | | | | 1.57 | II | 1020 | (4550) | 5 | 6125 | 5 | |
| | | | 2.54 | III | 1250 | (5560) | | | | 2.54 | III | 1180 | (5260) | 5 | 6130 | 5 | |
| 242 | 1230 | (139) | 1.06 | I | 1030 | (4580) | 292 | 1020 | (115) | 1.06 | I | 971 | (4320) | 5 | 6115 | 6 | |
| | | | 1.37 | II | 1170 | (5210) | | | | 1.37 | II | 1100 | (4910) | 5 | 6120 | 6 | |
| | | | 1.88 | III | 1170 | (5210) | | | | 1.57 | II | 1100 | (4910) | 5 | 6125 | 6 | |
| | | | 2.54 | III | 1380 | (6120) | | | | 2.54 | III | 1300 | (5760) | 5 | 6130 | 6 | |
| 181 | 1640 | (185) | 1.06 | I | 1140 | (5090) | 219 | 1360 | (153) | 1.06 | I | 1080 | (4800) | 5 | 6115 | 8 | |
| | | | 1.37 | II | 1300 | (5800) | | | | 1.37 | II | 1230 | (5470) | 5 | 6120 | 8 | |
| | | | 1.88 | III | 1300 | (5800) | | | | 1.88 | III | 1230 | (5470) | 5 | 6125 | 8 | |
| | | | 2.54 | III | 1530 | (6820) | | | | 2.54 | III | 1440 | (6420) | 5 | 6130 | 8 | |
| 132 | 2250 | (255) | 1.06 | I | 1300 | (5780) | 159 | 1870 | (211) | 1.06 | I | 1230 | (5460) | 5 | 6115 | 11 | |
| | | | 1.37 | II | 1480 | (6580) | | | | 1.37 | II | 1390 | (6200) | 5 | 6120 | 11 | |
| | | | 1.60 | III | 1480 | (6580) | | | | 1.60 | III | 1390 | (6200) | 5 | 6125 | 11 | |
| | | | 2.54 | III | 1750 | (7770) | | | | 2.54 | III | 1650 | (7320) | 5 | 6130 | 11 | |
| 112 | 2660 | (301) | 1.05 | I | 1340 | (5960) | 135 | 2210 | (249) | 1.05 | I | 1270 | (5640) | 5 | 6115 | 13 | |
| | | | 1.37 | II | 1520 | (6780) | | | | 1.37 | II | 1440 | (6400) | 5 | 6120 | 13 | |
| | | | 1.60 | III | 1520 | (6780) | | | | 1.60 | III | 1440 | (6400) | 5 | 6125 | 13 | |
| | | | 2.54 | III | 1820 | (8080) | | | | 2.54 | III | 1710 | (7620) | 5 | 6130 | 13 | |
| | | | 2.76 | III | 1820 | (8080) | | | | 3.05 | III | 1710 | (7620) | 5 | 6135 | 13 | |
| 96.7 | 3070 | (347) | 1.05 | I | 1420 | (6330) | 117 | 2550 | (288) | 1.05 | I | 1350 | (5990) | 5 | 6115 | 15 | |
| | | | 1.37 | II | 1630 | (7260) | | | | 1.37 | II | 1540 | (6860) | 5 | 6120 | 15 | |
| | | | 1.60 | III | 1630 | (7260) | | | | 1.60 | III | 1540 | (6860) | 5 | 6125 | 15 | |
| | | | 2.10 | III | 1850 | (8250) | | | | 2.10 | III | 1750 | (7770) | 5 | 6130 | 15 | |
| | | | 2.42 | III | 1850 | (8250) | | | | 2.42 | III | 1750 | (7770) | 5 | 6135 | 15 | |
| 85.3 | 3480 | (394) | 1.05 | I | 1430 | (6380) | 103 | 2890 | (326) | 1.05 | I | 1360 | (6040) | 5 | 6115 | 17 | |
| | | | 1.32 | II | 1650 | (7320) | | | | 1.37 | II | 1550 | (6920) | 5 | 6120 | 17 | |
| | | | 1.53 | II | 1650 | (7320) | | | | 1.53 | II | 1550 | (6920) | 5 | 6125 | 17 | |
| | | | 1.97 | III | 1990 | (8850) | | | | 1.97 | III | 1870 | (8340) | 5 | 6130 | 17 | |
| | | | 2.24 | III | 1990 | (8850) | | | | 2.24 | III | 1870 | (8340) | 5 | 6135 | 17 | |
| | | | 2.72 | III | 2930 | (13100) | | | | 2.72 | III | 2780 | (12300) | 5 | 6140 | 17 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

5 HP
3.7 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 69.0 | 4300 | (486) | 0.84 | - | 1130 | (5010) | 83.3 | 3570 | (403) | 0.84 | - | 1430 | (6350) | 5 | 6115 | 21 | |
| | | | 1.07 | I | 1800 | (8010) | | | | 1.07 | I | 1700 | (7570) | 5 | 6120 | 21 | |
| | | | 1.30 | II | 1800 | (8010) | | | | 1.32 | II | 1700 | (7570) | 5 | 6125 | 21 | |
| | | | 1.60 | III | 2120 | (9440) | | | | 1.66 | III | 2000 | (8900) | 5 | 6130 | 21 | |
| | | | 1.82 | III | 2120 | (9440) | | | | 2.04 | III | 2000 | (8900) | 5 | 6135 | 21 | |
| | | | 2.34 | III | 3140 | (14000) | | | | 2.34 | III | 2970 | (13200) | 5 | 6140 | 21 | |
| | | | 2.56 | III | 3140 | (14000) | | | | 2.96 | III | 2970 | (13200) | 5 | 6145 | 21 | |
| 58.0 | 5120 | (579) | 1.07 | I | 1880 | (8350) | 70.0 | 4240 | (480) | 1.07 | I | 1780 | (7900) | 5 | 6125 | 25 | |
| | | | 1.35 | II | 2200 | (9790) | | | | 1.39 | II | 2080 | (9240) | 5 | 6130 | 25 | |
| | | | 1.56 | II | 2200 | (9790) | | | | 1.61 | III | 2080 | (9240) | 5 | 6135 | 25 | |
| | | | 1.86 | III | 3290 | (14600) | | | | 1.86 | III | 3110 | (13800) | 5 | 6140 | 25 | |
| | | | 2.14 | III | 3290 | (14600) | | | | 2.14 | III | 3110 | (13800) | 5 | 6145 | 25 | |
| | | | 2.67 | III | 3870 | (17200) | | | | 2.67 | III | 3650 | (16200) | 5 | 6160 | 25 | |
| 50.0 | 5940 | (671) | 0.94 | - | 1940 | (8640) | 60.3 | 4920 | (556) | 1.02 | I | 1840 | (8180) | 5 | 6125 | 29 | |
| | | | 1.16 | I | 2310 | (10300) | | | | 1.21 | I | 2180 | (9700) | 5 | 6130 | 29 | |
| | | | 1.32 | II | 2310 | (10300) | | | | 1.52 | II | 2180 | (9700) | 5 | 6135 | 29 | |
| | | | 1.61 | III | 3360 | (14900) | | | | 1.61 | III | 3180 | (14200) | 5 | 6140 | 29 | |
| | | | 2.04 | III | 3360 | (14900) | | | | 2.04 | III | 3180 | (14200) | 5 | 6145 | 29 | |
| | | | 2.58 | III | 4040 | (18000) | | | | 2.84 | III | 3810 | (16900) | 5 | 6160 | 29 | |
| 41.4 | 7170 | (810) | 1.11 | I | 2420 | (10800) | 50.0 | 5940 | (671) | 1.15 | I | 2290 | (10200) | 5 | 6135 | 35 | |
| | | | 1.41 | II | 3590 | (16000) | | | | 1.41 | II | 3400 | (15100) | 5 | 6140 | 35 | |
| | | | 1.69 | III | 3590 | (16000) | | | | 2.04 | III | 3400 | (15100) | 5 | 6145 | 35 | |
| | | | 2.17 | III | 4280 | (19100) | | | | 2.61 | III | 4030 | (17900) | 5 | 6160 | 35 | |
| | | | 2.59 | III | 4280 | (19100) | | | | 3.08 | III | 4030 | (17900) | 5 | 6165 | 35 | |
| 33.7 | 8810 | (995) | 0.90 | - | 2580 | (11500) | 40.7 | 7300 | (825) | 1.02 | I | 2440 | (10900) | 5 | 6135 | 43 | |
| | | | 1.07 | I | 3600 | (16000) | | | | 1.07 | I | 3550 | (15800) | 5 | 6140 | 43 | |
| | | | 1.26 | I | 3600 | (16000) | | | | 1.46 | II | 3550 | (15800) | 5 | 6145 | 43 | |
| | | | 1.74 | III | 4570 | (20300) | | | | 2.01 | III | 4310 | (19200) | 5 | 6160 | 43 | |
| | | | 2.11 | III | 4570 | (20300) | | | | 2.14 | III | 4310 | (19200) | 5 | 6165 | 43 | |
| | | | 2.45 | III | 5170 | (23000) | | | | 2.64 | III | 4870 | (21700) | 5 | 6170 | 43 | |
| 28.4 | 10400 | (1180) | 1.00 | I | 3590 | (16000) | 34.3 | 8660 | (978) | 1.14 | I | 3600 | (16000) | 5 | 6145 | 51 | |
| | | | 1.49 | II | 4740 | (21100) | | | | 1.55 | II | 4470 | (19900) | 5 | 6160 | 51 | |
| | | | 1.78 | III | 4740 | (21100) | | | | 2.04 | III | 4470 | (19900) | 5 | 6165 | 51 | |
| | | | 2.07 | III | 5390 | (24000) | | | | 2.27 | III | 5070 | (22600) | 5 | 6170 | 51 | |
| | | | 2.67 | III | 5390 | (24000) | | | | 3.05 | III | 5070 | (22600) | 5 | 6175 | 51 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and lbs can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

5 HP
3.7 kW

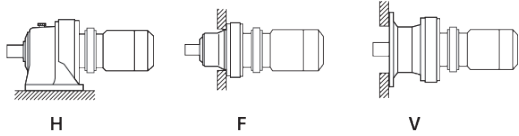

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | | | | |
|--------------------|---------------|-------|-------------------------------|--------------|---------------------------|------|--------------------|---------------|-------|-------------------------------|---------------|---------------------------|--------|------------------|------------|-------|--------------------|--------------|--|------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] | | | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | | | | |
| 24.6 | 12100 (1370) | | 0.86 | - | 3600 (16000) | 29.7 | 10000 (1130) | | | 0.99 | - | 3600 (16000) | 5 | 6145 | 59 | C.F. | | | | |
| | | | 1.19 | I | 4960 (22100) | | | | | 1.19 | I | 4960 (22100) | | | | | | | | |
| | | | 1.54 | II | 4960 (22100) | | | | | 1.55 | II | 4960 (22100) | | | | | | | | |
| | | | 1.79 | III | 5650 (25100) | | | | | 1.93 | III | 5320 (23700) | | | | | | | | |
| | | | 2.24 | III | 5650 (25100) | | | | | 2.24 | III | 5320 (23700) | | | | | | | | |
| | | | 2.64 | III | 7560 (33600) | | | | | 2.64 | III | 7110 (31600) | | | | | | | | |
| 20.4 | 14500 (1640) | | 1.28 | I | 4960 (22100) | 24.6 | 12100 (1360) | | | 1.53 | II | 4930 (21900) | 5 | 6165 | 71 | C.F. | | | | |
| | | | 1.49 | II | 5970 (26500) | | | | | 1.60 | III | 5620 (25000) | | | | | | | | |
| | | | 1.89 | III | 5970 (26500) | | | | | 1.93 | III | 5620 (25000) | | | | | | | | |
| | | | 2.38 | III | 8040 (35700) | | | | | 2.38 | III | 7560 (33600) | | | | | | | | |
| | | | 2.65 | III | 8040 (35700) | | | | | 2.65 | III | 7560 (33600) | | | | | | | | |
| | | | 16.7 | 17800 (2010) | | | | | | 1.02 | I | 4910 (21800) | | | | | 20.1 | 14800 (1670) | | 1.05 |
| | | | 1.23 | I | 6380 (28400) | | | | 1.30 | II | 6020 (26800) | 5 | 6170 | 87 | | | | | | |
| | | | 1.52 | II | 6380 (28400) | | | | 1.52 | II | 6020 (26800) | 5 | 6175 | 87 | | | | | | |
| | | | 1.93 | III | 8640 (38400) | | | | 1.93 | III | 8140 (36200) | 5 | 6180 | 87 | | | | | | |
| | | | 2.32 | III | 8640 (38400) | | | | 2.32 | III | 8140 (36200) | 5 | 6185 | 87 | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |
| 13.9 | 15500 (1760) | | * | - | 4960 (22100) | 16.8 | 15500 (1760) | | * | - | 4960 (22100) | 5 | 6160DC | 104 | C.F. | | | | | |
| | 18600 (2100) | | * | - | 4960 (22100) | | 16700 (1890) | | 1.11 | I | 4960 (22100) | | | | | 5 | 6165DC | 104 | | |
| | 20200 (2280) | | 1.11 | I | 6630 (29500) | | | | 1.34 | II | 6520 (29000) | | | | | 5 | 6170DC | 104 | | |
| | | | 1.38 | II | 6630 (29500) | | | | 1.67 | III | 6520 (29000) | | | | | 5 | 6175DC | 104 | | |
| | | | 1.78 | III | 9200 (40900) | | | | 2.15 | III | 8660 (38500) | | | | | 5 | 6180DB | 104 | | |
| | | | 2.15 | III | 9200 (40900) | | | | 2.59 | III | 8660 (38500) | | | | | 5 | 6185DB | 104 | | |
| | | | 2.80 | III | 12900 (57200) | | | | 3.05 | III | 12100 (53800) | | | | | 5 | 6190DB | 104 | | |
| | | | | | | | | | | | | | | | | | | | | |
| 12.0 | 18600 (2100) | | * | - | 4960 (22100) | 14.5 | 18600 (2100) | | * | - | 4960 (22100) | 5 | 6165DC | 121 | C.F. | | | | | |
| | 23500 (2650) | | 1.19 | I | 6630 (29500) | | 19500 (2200) | | 1.43 | II | 6630 (29500) | | | | | 5 | 6175DC | 121 | | |
| | | | 1.53 | II | 9380 (41700) | | | | 1.85 | III | 9220 (41000) | | | | | 5 | 6180DB | 121 | | |
| | | | 1.81 | III | 9380 (41700) | | | | 2.19 | III | 9220 (41000) | | | | | 5 | 6185DB | 121 | | |
| | | | 2.40 | III | 13300 (59000) | | | | 2.90 | III | 12900 (57300) | | | | | 5 | 6190DB | 121 | | |
| | | | 2.86 | III | 13300 (59000) | | | | 3.05 | III | 12900 (57300) | | | | | 5 | 6195DB | 121 | | |
| 10.1 | 22400 (2530) | | * | - | 6630 (29500) | 12.2 | 23000 (2600) | | 0.97 | - | 6630 (29500) | 5 | 6170DC | 143 | C.F. | | | | | |
| | 27800 (3140) | | 1.00 | I | 6630 (29500) | | | | 1.21 | I | 6630 (29500) | | | | | 5 | 6175DC | 143 | | |
| | | | 1.29 | I | 9380 (41700) | | | | 1.56 | II | 9380 (41700) | | | | | 5 | 6180DB | 143 | | |
| | | | 1.56 | II | 9380 (41700) | | | | 1.89 | III | 9380 (41700) | | | | | 5 | 6185DB | 143 | | |
| | | | 2.03 | III | 13300 (59000) | | | | 2.46 | III | 13300 (59000) | | | | | 5 | 6190DB | 143 | | |
| | | | 2.43 | III | 13300 (59000) | | | | 2.94 | III | 13300 (59000) | | | | | 5 | 6195DB | 143 | | |
| | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

5 HP
3.7 kW

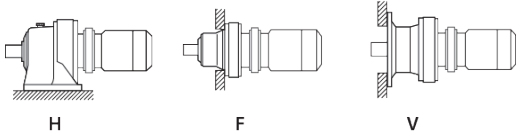

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 8.79 | 22400 | (2530) | * | - | 6630 | (29500) | 10.6 | 22400 | (2530) | * | - | 6630 | (29500) | 5 | 6170DC | 165 | |
| | 27900 | (3150) | * | - | 6630 | (29500) | | 26500 | (3000) | 1.05 | I | 6630 | (29500) | 5 | 6175DC | 165 | |
| | 32000 | (3620) | 1.12 | I | 9380 | (41700) | | 1.35 | II | 9380 | (41700) | 5 | 6180DB | 165 | | | |
| | | | 1.36 | II | 9380 | (41700) | | 1.64 | III | 9380 | (41700) | 5 | 6185DB | 165 | | | |
| | | | 1.76 | III | 13300 | (59000) | | 2.13 | III | 13300 | (59000) | 5 | 6190DB | 165 | | | |
| | | | 2.19 | III | 13300 | (59000) | | 2.64 | III | 13300 | (59000) | 5 | 6195DB | 165 | | | |
| | | | 2.56 | III | 18900 | (84100) | | 3.05 | III | 18900 | (84100) | 5 | 6205DB | 165 | | | |
| 7.44 | 27900 | (3150) | * | - | 6630 | (29500) | 8.97 | 27900 | (3150) | * | - | 6630 | (29500) | 5 | 6175DC | 195 | |
| | 37900 | (4280) | 1.15 | I | 9380 | (41700) | | 1.39 | II | 9380 | (41700) | 5 | 6185DB | 195 | | | |
| | | | 1.49 | II | 13300 | (59000) | | 1.60 | III | 13300 | (59000) | 5 | 6190DA | 195 | | | |
| | | | 1.49 | II | 13300 | (59000) | | 1.80 | III | 13300 | (59000) | 5 | 6190DB | 195 | | | |
| | | | 1.85 | III | 13300 | (59000) | | 2.23 | III | 13300 | (59000) | 5 | 6195DB | 195 | | | |
| | | | 2.17 | III | 18900 | (84100) | | 2.62 | III | 18900 | (84100) | 5 | 6205DB | 195 | | | |
| | | | 2.76 | III | 23400 | (104000) | | 3.05 | III | 23400 | (104000) | 5 | 6215DA | 195 | | | |
| | | | 2.85 | III | 23400 | (104000) | | 3.43 | III | 23400 | (104000) | 5 | 6215DB | 195 | | | |
| 6.28 | 35900 | (4050) | * | - | 9380 | (41700) | 7.58 | 37200 | (4200) | 0.97 | - | 9380 | (41700) | 5 | 6180DB | 231 | |
| | 44800 | (5070) | 0.99 | - | 9380 | (41700) | | | | 1.19 | I | 9380 | (41700) | 5 | 6185DB | 231 | |
| | | | 1.26 | I | 13300 | (59000) | | | | 1.52 | II | 13300 | (59000) | 5 | 6190DA | 231 | |
| | | | 1.57 | II | 13300 | (59000) | | | | 1.60 | III | 13300 | (59000) | 5 | 6195DA | 231 | |
| | | | 1.57 | II | 13300 | (59000) | | | | 1.90 | III | 13300 | (59000) | 5 | 6195DB | 231 | |
| | | | 1.83 | III | 18900 | (84100) | | | | 2.21 | III | 18900 | (84100) | 5 | 6205DB | 231 | |
| | | | 2.47 | III | 23400 | (104000) | | | | 2.98 | III | 23400 | (104000) | 5 | 6215DA | 231 | |
| | | | 2.92 | III | 31400 | (140000) | | | | 3.05 | III | 29700 | (132000) | 5 | 6225DA | 231 | |
| | | | 2.92 | III | 31400 | (140000) | | | | 3.53 | III | 29700 | (132000) | 5 | 6225DB | 231 | |
| | | | 5.31 | 35900 | (4050) | * | | | | - | 9380 | (41700) | 6.41 | 35900 | (4050) | * | |
| 44300 | (5000) | * | | - | 9380 | (41700) | 1.01 | I | 9380 | (41700) | 5 | 6185DB | | | | 273 | |
| | | 1.07 | | I | 13300 | (59000) | 1.29 | I | 13300 | (59000) | 5 | 6190DA | | | | 273 | |
| | | 1.33 | | II | 13300 | (59000) | 1.60 | III | 13300 | (59000) | 5 | 6195DA | | | | 273 | |
| | | 1.55 | | II | 18900 | (84100) | 1.87 | III | 18900 | (84100) | 5 | 6205DB | | | | 273 | |
| | | 2.09 | | III | 23400 | (104000) | 2.52 | III | 23400 | (104000) | 5 | 6215DA | | | | 273 | |
| | | 2.47 | | III | 32600 | (145000) | 2.98 | III | 31200 | (139000) | 5 | 6225DA | | | | 273 | |
| 4.55 | 44300 | (5000) | * | - | 9380 | (41700) | 5.49 | 44300 | (5000) | * | - | 9380 | (41700) | 5 | 6185DB | 319 | |
| | 61900 | (7000) | 1.14 | I | 13300 | (59000) | | | | 1.37 | II | 13300 | (59000) | 5 | 6195DA | 319 | |
| | | | 1.32 | II | 18900 | (84100) | | | | 1.59 | II | 18900 | (84100) | 5 | 6205DB | 319 | |
| | | | 1.81 | III | 23400 | (104000) | | | | 2.18 | III | 23400 | (104000) | 5 | 6215DA | 319 | |
| | | | 2.15 | III | 32600 | (145000) | | | | 2.59 | III | 32400 | (144000) | 5 | 6225DA | 319 | |
| | | | 2.70 | III | 40100 | (179000) | | | | 3.26 | III | 40100 | (179000) | 5 | 6235DA | 319 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

5 HP
3.7 kW

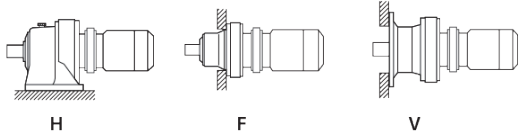

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | | |
|--------------------|----------------|---------|-------------------------------|------------|---------------------------|-------|--------------------|---------------|--------|-------------------------------|----------------|---------------------------|--------|------------------|----------------|-------|--------------------|------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | | |
| 3.85 | 56500 (6380) | (8270) | * | - | 13300 (59000) | 4.64 | 56500 (6380) | (6850) | * | - | 13300 (59000) | 5 | 6190DA | 377 | C.F. | | | |
| | | | 0.96 | - | 13200 (58900) | | | | 1.16 | I | 13300 (59000) | | | | | 5 | 6195DA | 377 |
| | 1.03 | I | 18900 (84100) | 1.17 | I | | 18900 (84100) | 5 | 6205DA | 377 | | | | | | | | |
| | 1.12 | I | 18900 (84100) | 1.35 | II | | 18900 (84100) | 5 | 6205DB | 377 | | | | | | | | |
| | 1.53 | II | 23400 (104000) | 1.85 | III | | 23400 (104000) | 5 | 6215DA | 377 | | | | | | | | |
| | 1.82 | III | 32600 (145000) | 2.20 | III | | 32600 (145000) | 5 | 6225DA | 377 | | | | | | | | |
| | 2.29 | III | 40100 (179000) | 2.76 | III | | 40100 (179000) | 5 | 6235DA | 377 | | | | | | | | |
| 3.07 | 70500 (7960) | (9300) | * | - | 13300 (59000) | 3.70 | 70500 (7960) | (8600) | * | - | 13300 (59000) | 5 | 6195DA | 473 | C.F. | | | |
| | | | 1.22 | I | 23400 (104000) | | | | 1.08 | I | 18900 (84100) | | | | | 5 | 6205DB | 473 |
| | 1.54 | II | 32600 (145000) | 1.47 | II | | 23400 (104000) | 5 | 6215DA | 473 | | | | | | | | |
| | 1.98 | III | 40100 (179000) | 1.86 | III | | 32600 (145000) | 5 | 6225DA | 473 | | | | | | | | |
| | 2.49 | III | 46800 (208000) | 2.38 | III | | 40100 (179000) | 5 | 6235DA | 473 | | | | | | | | |
| 2.59 | 109000 (12300) | (12300) | 1.03 | I | 23400 (104000) | 3.13 | 89900 (10200) | (10200) | 1.25 | I | 23400 (104000) | 5 | 6215DA | 559 | C.F. | | | |
| | | | 1.31 | II | 32600 (145000) | | | | 1.58 | II | 32600 (145000) | | | | | 5 | 6225DA | 559 |
| | | | 1.67 | III | 40100 (179000) | | | | 2.02 | III | 40100 (179000) | | | | | 5 | 6235DA | 559 |
| | | | 2.10 | III | 46800 (208000) | | | | 2.54 | III | 46800 (208000) | | | | | 5 | 6245DA | 559 |
| | | | 2.81 | III | 58000 (258000) | | | | 3.40 | III | 58000 (258000) | | | | | 5 | 6255DA | 559 |
| 2.23 | 112000 (12700) | (14200) | * | - | 23400 (104000) | 2.70 | 104000 (11800) | 1.07 | I | 23400 (104000) | 5 | 6215DA | 649 | C.F. | | | | |
| | | | 1.12 | I | 32600 (145000) | | | | 1.35 | II | | | | | 32600 (145000) | 5 | 6225DA | 649 |
| | 1.44 | II | 40100 (179000) | 1.74 | III | | 40100 (179000) | | 5 | 6235DA | | | | | 649 | | | |
| | 1.81 | III | 46800 (208000) | 2.19 | III | | 46800 (208000) | | 5 | 6245DA | | | | | 649 | | | |
| | 2.42 | III | 58000 (258000) | 2.93 | III | | 58000 (258000) | | 5 | 6255DA | | | | | 649 | | | |
| 1.98 | 112000 (12700) | (16000) | * | - | 23400 (104000) | 2.39 | 112000 (12700) | 1.20 | I | 23400 (104000) | 5 | 6215DA | 731 | C.F. | | | | |
| | | | 1.00 | I | 32600 (145000) | | | | 1.20 | I | | | | | 32600 (145000) | 5 | 6225DA | 731 |
| | 1.28 | I | 40100 (179000) | 1.54 | II | | 40100 (179000) | | 5 | 6235DA | | | | | 731 | | | |
| | 1.61 | III | 46800 (208000) | 1.94 | III | | 46800 (208000) | | 5 | 6245DA | | | | | 731 | | | |
| | 2.15 | III | 58000 (258000) | 2.60 | III | | 58000 (258000) | | 5 | 6255DA | | | | | 731 | | | |
| 1.72 | 112000 (12700) | (15000) | * | - | 23400 (104000) | 2.08 | 112000 (12700) | 0.98 | - | 23400 (104000) | 5 | 6215DA | 841 | C.F. | | | | |
| | | | 1.02 | I | 40100 (179000) | | | | 0.98 | - | | | | | 32600 (145000) | 5 | 6225DA | 841 |
| | 1.40 | II | 46800 (208000) | 1.24 | I | | 40100 (179000) | | 5 | 6235DA | | | | | 841 | | | |
| | 1.76 | III | 58000 (258000) | 1.69 | III | | 46800 (208000) | | 5 | 6245DA | | | | | 841 | | | |
| | 2.13 | III | 58000 (258000) | 2.13 | III | | 58000 (258000) | | 5 | 6255DA | | | | | 841 | | | |
| 1.45 | 141000 (15900) | (20500) | * | - | 32600 (145000) | 1.74 | 141000 (15900) | 1.12 | I | 32600 (145000) | 5 | 6225DA | 1003 | C.F. | | | | |
| | | | 1.17 | I | 46800 (208000) | | | | 1.12 | I | | | | | 40100 (179000) | 5 | 6235DA | 1003 |
| | 1.57 | II | 58000 (258000) | 1.42 | II | | 46800 (208000) | | 5 | 6245DA | | | | | 1003 | | | |
| | 1.89 | III | 58000 (258000) | 1.89 | III | | 58000 (258000) | | 5 | 6255DA | | | | | 1003 | | | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

5 HP
3.7 kW

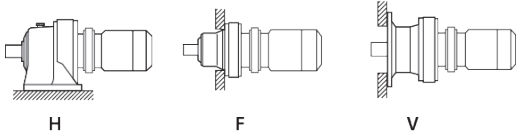

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 1.16 | 181000 | (20500) | * | - | 40100 | (179000) | 1.40 | 181000 | (20500) | * | - | 40100 | (179000) | 5 | 6235DA | 1247 | C.F. |
| | 228000 | (25800) | * | - | 46800 | (208000) | | 201000 | (22700) | 1.14 | I | 46800 | (208000) | 5 | 6245DA | 1247 | |
| | 242000 | (27300) | 1.26 | I | 58000 | (258000) | | | | 1.52 | II | 58000 | (258000) | 5 | 6255DA | 1247 | |
| 0.980 | 200000 | (22600) | * | - | 46800 | (208000) | 1.18 | 200000 | (22600) | * | - | 46800 | (208000) | 5 | 6245DA | 1479 | C.F. |
| | 287000 | (32400) | 0.96 | - | 58000 | (258000) | | 238000 | (26900) | 1.15 | I | 58000 | (258000) | 5 | 6255DA | 1479 | |
| 0.784 | 305000 | (34500) | * | - | 58000 | (258000) | 0.946 | 297000 | (33600) | 1.03 | I | 58000 | (258000) | 5 | 6255DA | 1849 | |
| 0.702 | 305000 | (34500) | * | - | 58000 | (258000) | 0.847 | 305000 | (34500) | * | - | 58000 | (258000) | 5 | 6255DA | 2065 | C.F. |
| 0.572 | 305000 | (34500) | * | - | 58000 | (258000) | 0.690 | 305000 | (34500) | * | - | 58000 | (258000) | 5 | 6255DA | 2537 | |
| 0.476 | 274000 | (31000) | * | - | 58000 | (258000) | 0.575 | 274000 | (31000) | * | - | 58000 | (258000) | 5 | 6255DA | 3045 | C.F. |
| 0.417 | 305000 | (34500) | * | - | 58000 | (258000) | 0.503 | 305000 | (34500) | * | - | 58000 | (258000) | 5 | 6255DA | 3481 | |
| 0.327 | 274000 | (31000) | * | - | 58000 | (258000) | 0.394 | 274000 | (31000) | * | - | 58000 | (258000) | 5 | 6255DA | 4437 | |
| 0.282 | 305000 | (34500) | * | - | 58000 | (258000) | 0.341 | 305000 | (34500) | * | - | 58000 | (258000) | 5 | 6255DA | 5133 | |
| 0.235 | 274000 | (31000) | * | - | 58000 | (258000) | 0.283 | 274000 | (31000) | * | - | 58000 | (258000) | 5 | 6255DA | 6177 | |
| 0.192 | 274000 | (31000) | * | - | 58000 | (258000) | 0.231 | 274000 | (31000) | * | - | 58000 | (258000) | 5 | 6255DA | 7569 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

7.5 HP
5.5 kW

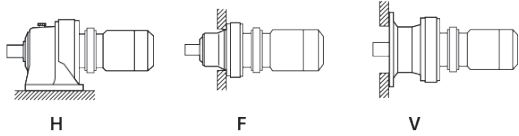

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 483 | 914 | (103) | 1.13 | I | 906 | (4030) | 583 | 757 | (85.5) | 1.06 | I | 863 | (3840) | 8 | 6125 | 3 | |
| | | | 1.71 | III | 1040 | (4630) | | | | 1.71 | III | 985 | (4380) | 8 | 6130 | 3 | |
| | | | 2.05 | III | 1040 | (4630) | | | | 2.05 | III | 985 | (4380) | 8 | 6135 | 3 | |
| 290 | 1520 | (172) | 1.13 | I | 1070 | (4780) | 350 | 1260 | (143) | 1.06 | I | 1020 | (4550) | 8 | 6125 | 5 | |
| | | | 1.71 | III | 1230 | (5490) | | | | 1.71 | III | 1170 | (5190) | 8 | 6130 | 5 | |
| | | | 2.05 | III | 1230 | (5490) | | | | 2.05 | III | 1170 | (5190) | 8 | 6135 | 5 | |
| 242 | 1830 | (206) | 1.27 | I | 1160 | (5140) | 292 | 1510 | (171) | 1.06 | I | 1090 | (4850) | 8 | 6125 | 6 | |
| | | | 1.71 | III | 1360 | (6060) | | | | 1.71 | III | 1280 | (5710) | 8 | 6130 | 6 | |
| | | | 2.05 | III | 1360 | (6060) | | | | 2.05 | III | 1280 | (5710) | 8 | 6135 | 6 | |
| | | | 2.37 | III | 2110 | (9370) | | | | 2.37 | III | 1990 | (8860) | 8 | 6140 | 6 | |
| | | | 2.75 | III | 2110 | (9370) | | | | 2.75 | III | 1990 | (8860) | 8 | 6145 | 6 | |
| 181 | 2440 | (275) | 1.26 | I | 1280 | (5710) | 219 | 2020 | (228) | 1.26 | I | 1210 | (5400) | 8 | 6125 | 8 | |
| | | | 1.71 | III | 1520 | (6740) | | | | 1.71 | III | 1430 | (6360) | 8 | 6130 | 8 | |
| | | | 2.05 | III | 1520 | (6740) | | | | 2.05 | III | 1430 | (6360) | 8 | 6135 | 8 | |
| | | | 2.37 | III | 2330 | (10400) | | | | 2.37 | III | 2210 | (9820) | 8 | 6140 | 8 | |
| | | | 2.75 | III | 2330 | (10400) | | | | 2.75 | III | 2210 | (9820) | 8 | 6145 | 8 | |
| 132 | 3350 | (379) | 1.08 | I | 1450 | (6450) | 159 | 2780 | (314) | 1.08 | I | 1370 | (6100) | 8 | 6125 | 11 | |
| | | | 1.71 | III | 1730 | (7680) | | | | 1.71 | III | 1630 | (7240) | 8 | 6130 | 11 | |
| | | | 2.05 | III | 1730 | (7680) | | | | 2.05 | III | 1630 | (7240) | 8 | 6135 | 11 | |
| | | | 2.37 | III | 2620 | (11600) | | | | 2.37 | III | 2480 | (11000) | 8 | 6140 | 11 | |
| | | | 2.75 | III | 2620 | (11600) | | | | 2.75 | III | 2480 | (11000) | 8 | 6145 | 11 | |
| 112 | 3960 | (447) | 1.08 | I | 1490 | (6630) | 135 | 3280 | (371) | 1.08 | I | 1410 | (6280) | 8 | 6125 | 13 | |
| | | | 1.71 | III | 1790 | (7980) | | | | 1.71 | III | 1690 | (7530) | 8 | 6130 | 13 | |
| | | | 1.86 | III | 1790 | (7980) | | | | 2.05 | III | 1690 | (7530) | 8 | 6135 | 13 | |
| | | | 2.37 | III | 2680 | (11900) | | | | 2.37 | III | 2530 | (11300) | 8 | 6140 | 13 | |
| | | | 2.74 | III | 2680 | (11900) | | | | 2.74 | III | 2530 | (11300) | 8 | 6145 | 13 | |
| 96.7 | 4570 | (516) | 1.08 | I | 1600 | (7100) | 117 | 3790 | (428) | 1.08 | I | 1510 | (6730) | 8 | 6125 | 15 | |
| | | | 1.42 | II | 1830 | (8130) | | | | 1.42 | II | 1730 | (7680) | 8 | 6130 | 15 | |
| | | | 1.63 | III | 1830 | (8130) | | | | 1.63 | III | 1730 | (7680) | 8 | 6135 | 15 | |
| | | | 2.18 | III | 2800 | (12400) | | | | 2.18 | III | 2650 | (11800) | 8 | 6140 | 15 | |
| | | | 2.63 | III | 2800 | (12400) | | | | 2.74 | III | 2650 | (11800) | 8 | 6145 | 15 | |
| 85.3 | 5180 | (585) | 1.03 | I | 1610 | (7150) | 103 | 4290 | (485) | 1.03 | I | 1520 | (6780) | 8 | 6125 | 17 | |
| | | | 1.32 | II | 1960 | (8710) | | | | 1.32 | II | 1850 | (8230) | 8 | 6130 | 17 | |
| | | | 1.51 | II | 1960 | (8710) | | | | 1.51 | II | 1850 | (8230) | 8 | 6135 | 17 | |
| | | | 1.83 | III | 2920 | (13000) | | | | 1.83 | III | 2760 | (12300) | 8 | 6140 | 17 | |
| | | | 2.18 | III | 2920 | (13000) | | | | 2.18 | III | 2760 | (12300) | 8 | 6145 | 17 | |
| | | | 2.37 | III | 3430 | (15300) | | | | 2.37 | III | 3230 | (14400) | 8 | 6160 | 17 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

7.5 HP
5.5 kW

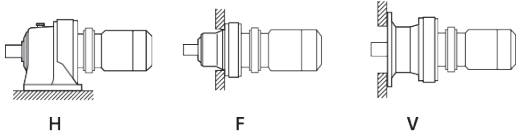

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 69.0 | 6400 | (723) | 0.87 | - | 1750 | (7780) | 83.3 | 5300 | (599) | 0.89 | - | 1660 | (7390) | 8 | 6125 | 21 | |
| | | | 1.08 | I | 2080 | (9260) | | | | 1.12 | I | 1970 | (8760) | 8 | 6130 | 21 | |
| | | | 1.22 | I | 2080 | (9260) | | | | 1.37 | II | 1970 | (8760) | 8 | 6135 | 21 | |
| | | | 1.58 | II | 3120 | (13900) | | | | 1.58 | II | 2960 | (13100) | 8 | 6140 | 21 | |
| | | | 1.72 | III | 3120 | (13900) | | | | 1.99 | III | 2960 | (13100) | 8 | 6145 | 21 | |
| | | | 2.35 | III | 3680 | (16400) | | | | 2.35 | III | 3460 | (15400) | 8 | 6160 | 21 | |
| | | | 2.91 | III | 3680 | (16400) | | | | 2.92 | III | 3460 | (15400) | 8 | 6165 | 21 | |
| 58.0 | 7610 | (860) | 1.05 | I | 2150 | (9580) | 70.0 | 6310 | (713) | 1.08 | I | 2040 | (9070) | 8 | 6135 | 25 | |
| | | | 1.25 | I | 3270 | (14500) | | | | 1.25 | I | 3090 | (13800) | 8 | 6140 | 25 | |
| | | | 1.44 | II | 3270 | (14500) | | | | 1.44 | II | 3090 | (13800) | 8 | 6145 | 25 | |
| | | | 1.79 | III | 3840 | (17100) | | | | 1.79 | III | 3620 | (16100) | 8 | 6160 | 25 | |
| | | | 2.44 | III | 3840 | (17100) | | | | 2.74 | III | 3620 | (16100) | 8 | 6165 | 25 | |
| | | | 2.83 | III | 4320 | (19200) | | | | 2.87 | III | 4060 | (18100) | 8 | 6170 | 25 | |
| 50.0 | 8830 | (998) | 0.89 | - | 2250 | (10000) | 60.3 | 7320 | (827) | 1.03 | I | 2140 | (9500) | 8 | 6135 | 29 | |
| | | | 1.08 | I | 3340 | (14800) | | | | 1.08 | I | 3160 | (14100) | 8 | 6140 | 29 | |
| | | | 1.37 | II | 3340 | (14800) | | | | 1.37 | II | 3160 | (14100) | 8 | 6145 | 29 | |
| | | | 1.74 | III | 4000 | (17800) | | | | 1.91 | III | 3770 | (16800) | 8 | 6160 | 29 | |
| | | | 2.08 | III | 4000 | (17800) | | | | 2.08 | III | 3770 | (16800) | 8 | 6165 | 29 | |
| | | | 2.45 | III | 4550 | (20200) | | | | 2.60 | III | 4290 | (19100) | 8 | 6170 | 29 | |
| 41.4 | 10700 | (1200) | 1.14 | I | 3560 | (15900) | 50.0 | 8830 | (998) | 1.37 | II | 3380 | (15000) | 8 | 6145 | 35 | |
| | | | 1.46 | II | 4230 | (18800) | | | | 1.76 | III | 3990 | (17800) | 8 | 6160 | 35 | |
| | | | 1.74 | III | 4230 | (18800) | | | | 2.08 | III | 3990 | (17800) | 8 | 6165 | 35 | |
| | | | 2.03 | III | 4820 | (21400) | | | | 2.18 | III | 4540 | (20200) | 8 | 6170 | 35 | |
| | | | 2.62 | III | 4820 | (21400) | | | | 2.74 | III | 4540 | (20200) | 8 | 6175 | 35 | |
| 33.7 | 13100 | (1480) | 0.85 | - | 3400 | (15100) | 40.7 | 10900 | (1230) | 0.98 | - | 3510 | (15600) | 8 | 6145 | 43 | |
| | | | 1.17 | I | 4510 | (20000) | | | | 1.35 | II | 4250 | (18900) | 8 | 6160 | 43 | |
| | | | 1.42 | II | 4510 | (20000) | | | | 1.44 | II | 4250 | (18900) | 8 | 6165 | 43 | |
| | | | 1.65 | III | 5120 | (22800) | | | | 1.77 | III | 4830 | (21500) | 8 | 6170 | 43 | |
| | | | 2.05 | III | 5120 | (22800) | | | | 2.05 | III | 4830 | (21500) | 8 | 6175 | 43 | |
| | | | 2.74 | III | 6940 | (30900) | | | | 2.74 | III | 6540 | (29100) | 8 | 6180 | 43 | |
| 28.4 | 15500 | (1760) | 1.00 | I | 4670 | (20800) | 34.3 | 12900 | (1450) | 1.05 | I | 4410 | (19600) | 8 | 6160 | 51 | |
| | | | 1.20 | I | 4670 | (20800) | | | | 1.37 | II | 4410 | (19600) | 8 | 6165 | 51 | |
| | | | 1.39 | II | 5330 | (23700) | | | | 1.53 | II | 5030 | (22400) | 8 | 6170 | 51 | |
| | | | 1.79 | III | 5330 | (23700) | | | | 2.05 | III | 5030 | (22400) | 8 | 6175 | 51 | |
| | | | 2.18 | III | 7180 | (31900) | | | | 2.18 | III | 6760 | (30100) | 8 | 6180 | 51 | |
| | | | 2.74 | III | 7180 | (31900) | | | | 2.74 | III | 6760 | (30100) | 8 | 6185 | 51 | |

Gearmotors

Selection Tables

C.F.

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

7.5 HP
5.5 kW

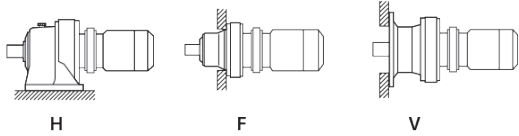

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|--|-------|-------------------------------|------------|---------------------------|------|--|---------------|-------|-------------------------------|----------------|---------------------------|--------|------------------|------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 24.6 | 18000 (2030) | | 1.03 | I | 4960 (22100) | 29.7 | 14900 (1680) | | 1.05 | I | 4890 (21700) | 8 | 6165 | 59 | C.F. | | |
| | | | 1.20 | I | 5580 (24800) | | | | 1.30 | II | 5260 (23400) | | | | | | |
| | | | 1.51 | II | 5580 (24800) | | | | 1.51 | II | 5260 (23400) | | | | | | |
| | | | 1.77 | III | 7510 (33400) | | | | 1.77 | III | 7070 (31400) | | | | | | |
| | | | 2.18 | III | 7510 (33400) | | | | 2.18 | III | 7070 (31400) | | | | | | |
| | | | 2.78 | III | 10600 (47000) | | | | 2.78 | III | 9930 (44200) | | | | | | |
| 20.4 | 21600 (2440) | | 0.86 | - | 4960 (22100) | 24.6 | 17900 (2020) | | 1.03 | I | 4850 (21600) | 8 | 6165 | 71 | C.F. | | |
| | | | 1.00 | I | 5880 (26200) | | | | 1.08 | I | 5550 (24700) | | | | | | |
| | | | 1.27 | I | 5880 (26200) | | | | 1.30 | II | 5550 (24700) | | | | | | |
| | | | 1.60 | III | 7970 (35500) | | | | 1.60 | III | 7510 (33400) | | | | | | |
| | | | 1.78 | III | 7970 (35500) | | | | 1.78 | III | 7510 (33400) | | | | | | |
| | | | 2.46 | III | 11200 (49800) | | | | 2.46 | III | 10500 (46900) | | | | | | |
| | | | 2.84 | III | 11200 (49800) | | | | 2.84 | III | 10500 (46900) | | | | | | |
| 16.7 | 26500 (2990) | | 1.02 | I | 6270 (27900) | 20.1 | 22000 (2480) | | 1.02 | I | 5930 (26400) | 8 | 6175 | 87 | C.F. | | |
| | | | 1.30 | II | 8560 (38100) | | | | 1.30 | II | 8070 (35900) | | | | | | |
| | | | 1.56 | II | 8560 (38100) | | | | 1.56 | II | 8070 (35900) | | | | | | |
| | | | 2.13 | III | 12100 (53600) | | | | 2.15 | III | 11300 (50500) | | | | | | |
| | | | 2.48 | III | 12100 (53600) | | | | 2.48 | III | 11300 (50500) | | | | | | |
| 13.9 | 18600 (2100) 22400 (2530) 27900 (3150) 30000 (3390) | | * | - | 4960 (22100) | 16.8 | 18600 (2100) 22400 (2530) 24900 (2810) | | * | - | 4960 (22100) | 8 | 6165DC | 104 | C.F. | | |
| | | | * | - | 6630 (29500) | | | | * | - | 6440 (28600) | | | | | | |
| | | | * | - | 6630 (29500) | | | | 1.12 | I | 6400 (28500) | | | | | | |
| | | | 1.20 | I | 9100 (40500) | | | | 1.45 | II | 8580 (38200) | | | | | | |
| | | | 1.45 | II | 9100 (40500) | | | | 1.74 | III | 8580 (38200) | | | | | | |
| | | | 1.88 | III | 12800 (56800) | | | | 2.05 | III | 12000 (53500) | | | | | | |
| | | | 2.05 | III | 12800 (56800) | | | | 2.05 | III | 12000 (53500) | | | | | | |
| | | | 2.05 | III | 12800 (56800) | | | | 2.05 | III | 12000 (53500) | | | | | | |
| 12.0 | 22400 (2530) 27900 (3150) 34900 (3940) | | * | - | 6630 (29500) | 14.5 | 22400 (2530) 28900 (3270) | | * | - | 6630 (29500) | 8 | 6170DC | 121 | C.F. | | |
| | | | * | - | 6630 (29500) | | | | 0.96 | - | 6630 (29500) | | | | | | |
| | | | 1.03 | I | 9380 (41700) | | | | 1.24 | I | 9130 (40600) | | | | | | |
| | | | 1.22 | I | 9380 (41700) | | | | 1.47 | II | 9130 (40600) | | | | | | |
| | | | 1.62 | III | 13300 (59000) | | | | 1.95 | III | 12800 (57000) | | | | | | |
| | | | 1.92 | III | 13300 (59000) | | | | 2.05 | III | 12800 (57000) | | | | | | |
| | | | 2.05 | III | 18900 (84100) | | | | 2.05 | III | 18900 (84100) | | | | | | |
| | | | 2.88 | III | 23400 (104000) | | | | 3.48 | III | 23100 (103000) | | | | | | |
| | | | 3.48 | III | 23400 (104000) | | | | 3.48 | III | 23100 (103000) | | | | | | |
| 10.1 | 27900 (3150) 41300 (4660) | | * | - | 6630 (29500) | 12.2 | 27900 (3150) 34200 (3860) | | * | - | 6630 (29500) | 8 | 6175DC | 143 | C.F. | | |
| | | | 1.05 | I | 9380 (41700) | | | | 1.27 | I | 9380 (41700) | | | | | | |
| | | | 1.37 | II | 13300 (59000) | | | | 1.65 | III | 13300 (59000) | | | | | | |
| | | | 1.64 | III | 13300 (59000) | | | | 1.97 | III | 13300 (59000) | | | | | | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

7.5 HP
5.5 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|----------|-------------------------------|---------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 8.79 | 27900 | (3150) | * | - | 6630 | (29500) | 10.6 | 27900 | (3150) | * | - | 6630 | (29500) | 8 | 6175DC | 165 | |
| | 35900 | (4060) | * | - | 9380 | (41700) | | 35900 | (4060) | * | - | 9380 | (41700) | 8 | 6180DB | 165 | |
| | 43600 | (4920) | * | - | 9380 | (41700) | | 39400 | (4460) | 1.10 | I | 9380 | (41700) | 8 | 6185DB | 165 | |
| | 47600 | (5380) | 1.19 | I | 13300 | (59000) | | 1.43 | II | 13300 | (59000) | 8 | 6190DB | 165 | | | |
| | | | 1.47 | II | 13300 | (59000) | | 1.77 | III | 13300 | (59000) | 8 | 6195DB | 165 | | | |
| | | | 1.72 | III | 18900 | (84100) | | 2.05 | III | 18900 | (84100) | 8 | 6205DB | 165 | | | |
| | | | 2.05 | III | 23400 | (104000) | | 2.05 | III | 23400 | (104000) | 8 | 6215DA | 165 | | | |
| | | | 2.26 | III | 23400 | (104000) | | 2.73 | III | 23400 | (104000) | 8 | 6215DB | 165 | | | |
| | | 2.69 | III | 28000 | (124000) | 3.25 | III | 26500 | (118000) | 8 | 6225DB | 165 | | | | | |
| 7.44 | 35900 | (4060) | * | - | 9380 | (41700) | 8.97 | 35900 | (4060) | * | - | 9380 | (41700) | 8 | 6180DB | 195 | |
| | 43600 | (4920) | * | - | 9380 | (41700) | | 43600 | (4920) | * | - | 9380 | (41700) | 8 | 6185DB | 195 | |
| | 56300 | (6360) | 1.00 | I | 13200 | (58900) | | 46600 | (5270) | 1.08 | I | 13300 | (59000) | 8 | 6190DA | 195 | |
| | | | 1.00 | I | 13200 | (58900) | | 1.21 | I | 13300 | (59000) | 8 | 6190DB | 195 | | | |
| | | | 1.24 | I | 13200 | (58900) | | 1.50 | II | 13300 | (59000) | 8 | 6195DB | 195 | | | |
| | | | 1.46 | II | 18900 | (84100) | | 1.76 | III | 18900 | (84100) | 8 | 6205DB | 195 | | | |
| | | | 1.86 | III | 23400 | (104000) | | 2.05 | III | 23400 | (104000) | 8 | 6215DA | 195 | | | |
| | | | 1.91 | III | 23400 | (104000) | | 2.31 | III | 23400 | (104000) | 8 | 6215DB | 195 | | | |
| | | 2.28 | III | 29400 | (131000) | 2.75 | III | 27800 | (124000) | 8 | 6225DB | 195 | | | | | |
| 6.28 | 44300 | (5000) | * | - | 9380 | (41700) | 7.58 | 44300 | (5000) | * | - | 9380 | (41700) | 8 | 6185DB | 231 | |
| | 66700 | (7530) | 1.06 | I | 13300 | (59000) | | 55200 | (6240) | 1.08 | I | 13300 | (59000) | 8 | 6195DA | 231 | |
| | | | 1.06 | I | 13300 | (59000) | | 1.28 | I | 13300 | (59000) | 8 | 6195DB | 231 | | | |
| | | | 1.23 | I | 18900 | (84100) | | 1.49 | II | 18900 | (84100) | 8 | 6205DB | 231 | | | |
| | | | 1.66 | III | 23400 | (104000) | | 2.00 | III | 23400 | (104000) | 8 | 6215DA | 231 | | | |
| | | | 1.97 | III | 31300 | (139000) | | 2.05 | III | 29600 | (132000) | 8 | 6225DA | 231 | | | |
| | | | 1.97 | III | 31300 | (139000) | | 2.37 | III | 29600 | (132000) | 8 | 6225DB | 231 | | | |
| | | | 2.51 | III | 39000 | (173000) | | 3.03 | III | 36900 | (164000) | 8 | 6235DA | 231 | | | |
| 5.31 | 44300 | (5000) | * | - | 9380 | (41700) | 6.41 | 44300 | (5000) | * | - | 9380 | (41700) | 8 | 6185DB | 273 | |
| | 56500 | (6380) | * | - | 13300 | (59000) | | 56500 | (6380) | * | - | 13300 | (59000) | 8 | 6190DA | 273 | |
| | 70500 | (7960) | * | - | 13300 | (59000) | | 65300 | (7370) | 1.08 | I | 13300 | (59000) | 8 | 6195DA | 273 | |
| | 78800 | (8900) | 1.04 | I | 18900 | (84100) | | 1.26 | I | 18900 | (84100) | 8 | 6205DB | 273 | | | |
| | | | 1.40 | II | 23400 | (104000) | | 1.70 | III | 23400 | (104000) | 8 | 6215DA | 273 | | | |
| | | | 1.66 | III | 32600 | (145000) | | 2.01 | III | 31100 | (138000) | 8 | 6225DA | 273 | | | |
| | | | 2.12 | III | 40100 | (179000) | | 2.56 | III | 38800 | (172000) | 8 | 6235DA | 273 | | | |
| | | | 2.90 | III | 45500 | (203000) | | 3.50 | III | 43100 | (192000) | 8 | 6245DA | 273 | | | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

7.5 HP
5.5 kW

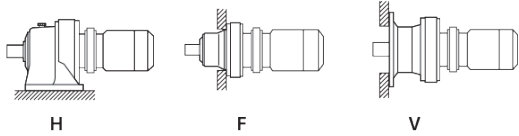

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|---------------|------------------|---------------|-------|--------------------|------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | | |
| 4.55 | 56500 | (6380) | * | - | 13300 | (59000) | 5.49 | 56500 | (6380) | * | - | 13300 | (59000) | 8 | 6190DA | 319 | | |
| | 70500 | (7960) | * | - | 13300 | (59000) | | 70500 | (7960) | * | - | 13300 | (59000) | 8 | 6195DA | 319 | | |
| | 81700 | (9230) | * | - | 18900 | (84100) | | 76300 | (8620) | 1.07 | I | 18900 | (84100) | 8 | 6205DB | 319 | | |
| | 92000 | (10400) | 1.22 | I | 23400 | (104000) | | | | 1.47 | II | 23400 | (104000) | 8 | 6215DA | 319 | | |
| | | | 1.45 | II | 32600 | (145000) | | | | 1.75 | III | 32300 | (143000) | 8 | 6225DA | 319 | | |
| | | | 1.82 | III | 40100 | (179000) | | | | 2.19 | III | 40100 | (179000) | 8 | 6235DA | 319 | | |
| | | 2.48 | III | 46800 | (208000) | | | 2.99 | III | 44900 | (200000) | 8 | 6245DA | 319 | | | | |
| 3.85 | 70500 | (7960) | * | - | 13300 | (59000) | 4.64 | 70500 | (7960) | * | - | 13300 | (59000) | 8 | 6195DA | 377 | | |
| | 75700 | (8550) | * | - | 18900 | (84100) | | 71100 | (8030) | * | - | 18900 | (84100) | 8 | 6205DA | 377 | | |
| | 109000 | (12300) | 1.03 | I | 23400 | (104000) | | 90100 | (10200) | 1.24 | I | 23400 | (104000) | 8 | 6215DA | 377 | | |
| | | | 1.22 | I | 32600 | (145000) | | | | 1.48 | II | 32600 | (145000) | 8 | 6225DA | 377 | | |
| | | | 1.54 | II | 40100 | (179000) | | | | 1.86 | III | 40100 | (179000) | 8 | 6235DA | 377 | | |
| | | | 2.10 | III | 46800 | (208000) | | | | 2.53 | III | 46800 | (208000) | 8 | 6245DA | 377 | | |
| | | 2.64 | III | 58000 | (258000) | | | 3.19 | III | 58000 | (258000) | 8 | 6255DA | 377 | C.F. | | | |
| 3.07 | 112000 | (12700) | * | - | 23400 | (104000) | 3.70 | 113000 | (12800) | 0.99 | - | 23400 | (104000) | 8 | 6215DA | 473 | | |
| | 136000 | (15400) | 1.04 | I | 32600 | (145000) | | | | 1.25 | I | 32600 | (145000) | 8 | 6225DA | 473 | | |
| | | | 1.33 | II | 40100 | (179000) | | | | 1.60 | III | 40100 | (179000) | 8 | 6235DA | 473 | | |
| | | | 1.67 | III | 46800 | (208000) | | | | 2.02 | III | 46800 | (208000) | 8 | 6245DA | 473 | | |
| | | | 2.24 | III | 58000 | (258000) | | | | 2.70 | III | 58000 | (258000) | 8 | 6255DA | 473 | | C.F. |
| | | | 2.98 | III | 62000 | (276000) | | | | 3.60 | III | 62000 | (276000) | 8 | 6265DA | 473 | | C.F. |
| 2.59 | 112000 | (12700) | * | - | 23400 | (104000) | 3.13 | 112000 | (12700) | * | - | 23400 | (104000) | 8 | 6215DA | 559 | | |
| | 142000 | (16000) | * | - | 32600 | (145000) | | 134000 | (15100) | 1.06 | I | 32600 | (145000) | 8 | 6225DA | 559 | | |
| | 161000 | (18200) | 1.12 | I | 40100 | (179000) | | | | 1.36 | II | 40100 | (179000) | 8 | 6235DA | 559 | | |
| | | | 1.42 | II | 46800 | (208000) | | | | 1.71 | III | 46800 | (208000) | 8 | 6245DA | 559 | | |
| | | | 1.89 | III | 58000 | (258000) | | | | 2.28 | III | 58000 | (258000) | 8 | 6255DA | 559 | | C.F. |
| | | | 2.52 | III | 62000 | (276000) | | | | 3.05 | III | 62000 | (276000) | 8 | 6265DA | 559 | | C.F. |
| 2.23 | 112000 | (12700) | * | - | 23400 | (104000) | 2.70 | 112000 | (12700) | * | - | 23400 | (104000) | 8 | 6215DA | 649 | | |
| | 141000 | (15900) | * | - | 32600 | (145000) | | 141000 | (15900) | * | - | 32600 | (145000) | 8 | 6225DA | 649 | | |
| | 187000 | (21200) | 0.97 | - | 40100 | (179000) | | 155000 | (17500) | 1.17 | I | 40100 | (179000) | 8 | 6235DA | 649 | | |
| | | | 1.22 | I | 46800 | (208000) | | | | 1.47 | II | 46800 | (208000) | 8 | 6245DA | 649 | | |
| | | | 1.63 | III | 58000 | (258000) | | | | 1.97 | III | 58000 | (258000) | 8 | 6255DA | 649 | | C.F. |
| | | | 2.17 | III | 62000 | (276000) | | | | 2.62 | III | 62000 | (276000) | 8 | 6265DA | 649 | | C.F. |
| 1.98 | 142000 | (16000) | * | - | 32600 | (145000) | 2.39 | 142000 | (16000) | * | - | 32600 | (145000) | 8 | 6225DA | 731 | | |
| | 181000 | (20500) | * | - | 40100 | (179000) | | 175000 | (19700) | 1.04 | I | 40100 | (179000) | 8 | 6235DA | 731 | | |
| | 211000 | (23800) | 1.08 | I | 46800 | (208000) | | | | 1.31 | II | 46800 | (208000) | 8 | 6245DA | 731 | | |
| | | | 1.45 | II | 58000 | (258000) | | | | 1.75 | III | 58000 | (258000) | 8 | 6255DA | 731 | | C.F. |
| | | | 1.93 | III | 62000 | (276000) | | | | 2.33 | III | 62000 | (276000) | 8 | 6265DA | 731 | | C.F. |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

7.5 HP
5.5 kW

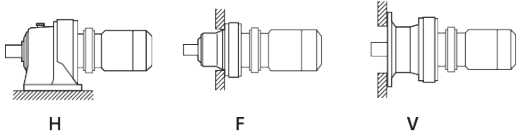

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|----------|-------------------------------|------------|---------------------------|----------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 1.72 | 167000 | (18900) | * | - | 40100 | (179000) | 2.08 | 167000 | (18900) | * | - | 40100 | (179000) | 8 | 6235DA | 841 | C.F. |
| | 228000 | (25800) | * | - | 46800 | (208000) | | 201000 | (22700) | 1.14 | I | 46800 | (208000) | 8 | 6245DA | 841 | |
| | 243000 | (27400) | 1.18 | I | 58000 | (258000) | | 58000 | (258000) | 1.43 | II | 58000 | (258000) | 8 | 6255DA | 841 | |
| | | | 1.68 | III | 62000 | (276000) | | 62000 | (276000) | 2.02 | III | 62000 | (276000) | 8 | 6265DA | 841 | |
| 1.45 | 181000 | (20500) | * | - | 40100 | (179000) | 1.74 | 181000 | (20500) | * | - | 40100 | (179000) | 8 | 6235DA | 1003 | C.F. |
| | 228000 | (25800) | * | - | 46800 | (208000) | | 228000 | (25800) | * | - | 46800 | (208000) | 8 | 6245DA | 1003 | |
| | 289000 | (32700) | 1.06 | I | 58000 | (258000) | | 58000 | (258000) | 1.27 | I | 58000 | (258000) | 8 | 6255DA | 1003 | |
| | | | 1.41 | II | 62000 | (276000) | | 62000 | (276000) | 1.70 | III | 62000 | (276000) | 8 | 6265DA | 1003 | |
| 1.16 | 228000 | (25800) | * | - | 46800 | (208000) | 1.40 | 228000 | (25800) | * | - | 46800 | (208000) | 8 | 6245DA | 1247 | C.F. |
| | 305000 | (34500) | * | - | 58000 | (258000) | | 298000 | (33700) | 1.02 | I | 58000 | (258000) | 8 | 6255DA | 1247 | |
| | 360000 | (40700) | 1.13 | I | 62000 | (276000) | | 62000 | (276000) | 1.37 | II | 62000 | (276000) | 8 | 6265DA | 1247 | |
| 0.980 | 274000 | (31000) | * | - | 58000 | (258000) | 1.18 | 274000 | (31000) | * | - | 58000 | (258000) | 8 | 6255DA | 1479 | C.F. |
| | 390000 | (44000) | * | - | 62000 | (276000) | | 354000 | (40000) | 1.10 | I | 62000 | (276000) | 8 | 6265DA | 1479 | C.F. |
| 0.784 | 305000 | (34500) | * | - | 58000 | (258000) | 0.946 | 305000 | (34500) | * | - | 58000 | (258000) | 8 | 6255DA | 1849 | C.F. |
| | 407000 | (46000) | * | - | 62000 | (276000) | | 407000 | (46000) | * | - | 62000 | (276000) | 8 | 6265DA | 1849 | |
| 0.702 | 407000 | (46000) | * | - | 62000 | (276000) | 0.847 | 407000 | (46000) | * | - | 62000 | (276000) | 8 | 6265DA | 2065 | C.F. |
| 0.572 | 407000 | (46000) | * | - | 62000 | (276000) | 0.690 | 407000 | (46000) | * | - | 62000 | (276000) | 8 | 6265DA | 2537 | C.F. |
| 0.476 | 390000 | (44000) | * | - | 62000 | (276000) | 0.575 | 390000 | (44000) | * | - | 62000 | (276000) | 8 | 6265DA | 3045 | C.F. |
| 0.417 | 407000 | (46000) | * | - | 62000 | (276000) | 0.503 | 407000 | (46000) | * | - | 62000 | (276000) | 8 | 6265DA | 3481 | C.F. |
| 0.327 | 390000 | (44000) | * | - | 62000 | (276000) | 0.394 | 390000 | (44000) | * | - | 62000 | (276000) | 8 | 6265DA | 4437 | C.F. |
| 0.282 | 407000 | (46000) | * | - | 62000 | (276000) | 0.341 | 407000 | (46000) | * | - | 62000 | (276000) | 8 | 6265DA | 5133 | C.F. |
| 0.235 | 390000 | (44000) | * | - | 62000 | (276000) | 0.283 | 390000 | (44000) | * | - | 62000 | (276000) | 8 | 6265DA | 6177 | C.F. |
| 0.192 | 390000 | (44000) | * | - | 62000 | (276000) | 0.231 | 390000 | (44000) | * | - | 62000 | (276000) | 8 | 6265DA | 7569 | C.F. |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

10 HP
7.5 kW

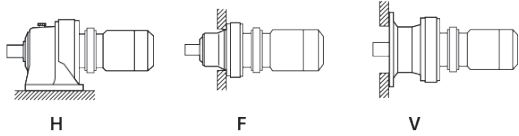

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|------------------|------------|--------------------|-------------|----|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Base | | VFD ^[2] | | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | Motor Power Code | Frame Size | | Ratio | |
| 483 | 1250 | (141) | 1.25 | I | 1040 | (4630) | 583 | 1030 | (117) | 1.25 | I | 985 | (4380) | 10 | 6130 | 3 |
| | | | 1.51 | II | 1040 | (4630) | | | | 1.51 | II | 985 | (4380) | 10 | 6135 | 3 |
| | | | 1.73 | III | 1640 | (7300) | | | | 1.73 | III | 1560 | (6920) | 10 | 6140 | 3 |
| | | | 1.88 | III | 1640 | (7300) | | | | 2.01 | III | 1560 | (6920) | 10 | 6145 | 3 |
| 290 | 2080 | (235) | 1.25 | I | 1230 | (5490) | 350 | 1720 | (194) | 1.25 | I | 1170 | (5190) | 10 | 6130 | 5 |
| | | | 1.51 | II | 1230 | (5490) | | | | 1.51 | II | 1170 | (5190) | 10 | 6135 | 5 |
| | | | 1.73 | III | 1950 | (8660) | | | | 1.73 | III | 1850 | (8210) | 10 | 6140 | 5 |
| | | | 2.01 | III | 1950 | (8660) | | | | 2.01 | III | 1850 | (8210) | 10 | 6145 | 5 |
| 242 | 2490 | (282) | 1.25 | I | 1340 | (5980) | 292 | 2060 | (233) | 1.25 | I | 1270 | (5650) | 10 | 6130 | 6 |
| | | | 1.51 | II | 1340 | (5980) | | | | 1.51 | II | 1270 | (5650) | 10 | 6135 | 6 |
| | | | 1.74 | III | 2100 | (9330) | | | | 1.74 | III | 1990 | (8830) | 10 | 6140 | 6 |
| | | | 2.02 | III | 2100 | (9330) | | | | 2.02 | III | 1990 | (8830) | 10 | 6145 | 6 |
| | | | 2.71 | III | 2350 | (10400) | | | | 2.71 | III | 2210 | (9830) | 10 | 6160 | 6 |
| 181 | 3320 | (375) | 1.25 | I | 1500 | (6650) | 219 | 2750 | (311) | 1.25 | I | 1410 | (6290) | 10 | 6130 | 8 |
| | | | 1.51 | II | 1500 | (6650) | | | | 1.51 | II | 1410 | (6290) | 10 | 6135 | 8 |
| | | | 1.74 | III | 2320 | (10300) | | | | 1.74 | III | 2200 | (9790) | 10 | 6140 | 8 |
| | | | 2.02 | III | 2320 | (10300) | | | | 2.02 | III | 2200 | (9790) | 10 | 6145 | 8 |
| | | | 2.63 | III | 2630 | (11700) | | | | 2.63 | III | 2480 | (11000) | 10 | 6160 | 8 |
| 132 | 4570 | (516) | 1.25 | I | 1700 | (7570) | 159 | 3790 | (428) | 1.25 | I | 1610 | (7150) | 10 | 6130 | 11 |
| | | | 1.51 | II | 1700 | (7570) | | | | 1.51 | II | 1610 | (7150) | 10 | 6135 | 11 |
| | | | 1.74 | III | 2610 | (11600) | | | | 1.74 | III | 2470 | (11000) | 10 | 6140 | 11 |
| | | | 2.02 | III | 2610 | (11600) | | | | 2.02 | III | 2470 | (11000) | 10 | 6145 | 11 |
| | | | 2.63 | III | 2970 | (13200) | | | | 2.63 | III | 2800 | (12500) | 10 | 6160 | 11 |
| 112 | 5400 | (610) | 1.25 | I | 1770 | (7860) | 135 | 4470 | (505) | 1.25 | I | 1670 | (7430) | 10 | 6130 | 13 |
| | | | 1.36 | II | 1770 | (7860) | | | | 1.51 | II | 1670 | (7430) | 10 | 6135 | 13 |
| | | | 1.74 | III | 2660 | (11800) | | | | 1.74 | III | 2520 | (11200) | 10 | 6140 | 13 |
| | | | 2.01 | III | 2660 | (11800) | | | | 2.01 | III | 2520 | (11200) | 10 | 6145 | 13 |
| | | | 2.63 | III | 3110 | (13800) | | | | 2.63 | III | 2930 | (13000) | 10 | 6160 | 13 |
| 96.7 | 6230 | (704) | 1.04 | I | 1800 | (8000) | 117 | 5160 | (583) | 1.04 | I | 1700 | (7570) | 10 | 6130 | 15 |
| | | | 1.20 | I | 1800 | (8000) | | | | 1.20 | I | 1700 | (7570) | 10 | 6135 | 15 |
| | | | 1.60 | III | 2780 | (12400) | | | | 1.60 | III | 2640 | (11700) | 10 | 6140 | 15 |
| | | | 1.93 | III | 2780 | (12400) | | | | 2.01 | III | 2640 | (11700) | 10 | 6145 | 15 |
| | | | 2.49 | III | 3290 | (14700) | | | | 2.50 | III | 3100 | (13800) | 10 | 6160 | 15 |
| | | | 2.98 | III | 3290 | (14700) | | | | 3.01 | III | 3100 | (13800) | 10 | 6165 | 15 |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

10 HP
7.5 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 85.3 | 7060 | (798) | 1.11 | I | 1920 | (8550) | 103 | 5850 | (661) | 1.11 | I | 1820 | (8100) | 10 | 6135 | 17 | |
| | | | 1.34 | II | 2900 | (12900) | | | | 1.34 | II | 2750 | (12200) | 10 | 6140 | 17 | |
| | | | 1.60 | III | 2900 | (12900) | | | | 1.60 | III | 2750 | (12200) | 10 | 6145 | 17 | |
| | | | 1.74 | III | 3400 | (15100) | | | | 1.74 | III | 3210 | (14300) | 10 | 6160 | 17 | |
| | | | 2.51 | III | 3400 | (15100) | | | | 2.51 | III | 3210 | (14300) | 10 | 6165 | 17 | |
| | | | 2.62 | III | 3850 | (17100) | | | | 2.62 | III | 3620 | (16100) | 10 | 6170 | 17 | |
| 69.0 | 8720 | (985) | 0.90 | - | 2030 | (9050) | 83.3 | 7230 | (817) | 1.00 | I | 1930 | (8590) | 10 | 6135 | 21 | |
| | | | 1.16 | I | 3100 | (13800) | | | | 1.16 | I | 2940 | (13100) | 10 | 6140 | 21 | |
| | | | 1.26 | I | 3100 | (13800) | | | | 1.46 | II | 2940 | (13100) | 10 | 6145 | 21 | |
| | | | 1.72 | III | 3640 | (16200) | | | | 1.72 | III | 3430 | (15300) | 10 | 6160 | 21 | |
| | | | 2.13 | III | 3640 | (16200) | | | | 2.14 | III | 3430 | (15300) | 10 | 6165 | 21 | |
| | | | 2.48 | III | 4140 | (18400) | | | | 2.60 | III | 3900 | (17400) | 10 | 6170 | 21 | |
| 58.0 | 10400 | (1170) | 1.05 | I | 3240 | (14400) | 70.0 | 8600 | (972) | 1.05 | I | 3070 | (13700) | 10 | 6145 | 25 | |
| | | | 1.32 | II | 3800 | (16900) | | | | 1.32 | II | 3590 | (15900) | 10 | 6160 | 25 | |
| | | | 1.79 | III | 3800 | (16900) | | | | 2.01 | III | 3590 | (15900) | 10 | 6165 | 25 | |
| | | | 2.08 | III | 4280 | (19100) | | | | 2.11 | III | 4040 | (18000) | 10 | 6170 | 25 | |
| | | | 2.60 | III | 4280 | (19100) | | | | 2.60 | III | 4040 | (18000) | 10 | 6175 | 25 | |
| | | | 50.0 | 12000 | (1360) | 1.00 | | | | I | 3310 | (14700) | 60.3 | 9980 | (1130) | 1.00 | |
| 1.27 | I | 3950 | (17600) | 1.40 | II | 3730 | (16600) | 10 | 6160 | 29 | | | | | | | |
| 1.52 | II | 3950 | (17600) | 1.52 | II | 3730 | (16600) | 10 | 6165 | 29 | | | | | | | |
| 1.79 | III | 4510 | (20100) | 1.91 | III | 4260 | (18900) | 10 | 6170 | 29 | | | | | | | |
| 2.31 | III | 4510 | (20100) | 2.51 | III | 4260 | (18900) | 10 | 6175 | 29 | | | | | | | |
| 2.60 | III | 6040 | (26800) | 2.60 | III | 5680 | (25300) | 10 | 6180 | 29 | | | | | | | |
| 41.4 | 14500 | (1640) | 0.83 | - | 3260 | (14500) | 50.0 | 12000 | (1360) | 1.00 | I | 3350 | (14900) | 10 | 6145 | 35 | |
| | | | 1.07 | I | 4170 | (18600) | | | | 1.29 | I | 3940 | (17500) | 10 | 6160 | 35 | |
| | | | 1.28 | I | 4170 | (18600) | | | | 1.52 | II | 3940 | (17500) | 10 | 6165 | 35 | |
| | | | 1.49 | II | 4770 | (21200) | | | | 1.60 | III | 4500 | (20000) | 10 | 6170 | 35 | |
| | | | 1.92 | III | 4770 | (21200) | | | | 2.01 | III | 4500 | (20000) | 10 | 6175 | 35 | |
| | | | 2.47 | III | 6440 | (28600) | | | | 2.51 | III | 6060 | (26900) | 10 | 6180 | 35 | |
| 33.7 | 17900 | (2020) | 1.04 | I | 4430 | (19700) | 40.7 | 14800 | (1670) | 1.05 | I | 4190 | (18600) | 10 | 6165 | 43 | |
| | | | 1.21 | I | 5070 | (22500) | | | | 1.30 | II | 4780 | (21300) | 10 | 6170 | 43 | |
| | | | 1.51 | II | 5070 | (22500) | | | | 1.51 | II | 4780 | (21300) | 10 | 6175 | 43 | |
| | | | 2.01 | III | 6900 | (30700) | | | | 2.01 | III | 6500 | (28900) | 10 | 6180 | 43 | |
| | | | 2.48 | III | 6900 | (30700) | | | | 2.51 | III | 6500 | (28900) | 10 | 6185 | 43 | |
| | | | 2.79 | III | 9630 | (42800) | | | | 2.79 | III | 9060 | (40300) | 10 | 6190 | 43 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

10 HP
7.5 kW

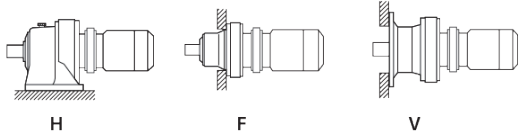

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 28.4 | 21200 | (2390) | 0.88 | - | 4580 | (20400) | 34.3 | 17600 | (1980) | 1.00 | I | 4340 | (19300) | 10 | 6165 | 51 | C.F. |
| | | | 1.02 | I | 5260 | (23400) | | | | 1.12 | I | 4970 | (22100) | 10 | 6170 | 51 | |
| | | | 1.32 | II | 5260 | (23400) | | | | 1.51 | II | 4970 | (22100) | 10 | 6175 | 51 | |
| | | | 1.60 | III | 7130 | (31700) | | | | 1.60 | III | 6720 | (29900) | 10 | 6180 | 51 | |
| | | | 2.01 | III | 7130 | (31700) | | | | 2.01 | III | 6720 | (29900) | 10 | 6185 | 51 | |
| | | | 2.42 | III | 10100 | (44800) | | | | 2.42 | III | 9470 | (42100) | 10 | 6190 | 51 | |
| | | | 2.79 | III | 10100 | (44800) | | | | 2.79 | III | 9470 | (42100) | 10 | 6195 | 51 | |
| 24.6 | 24500 | (2770) | 1.11 | I | 5500 | (24400) | 29.7 | 20300 | (2290) | 1.11 | I | 5200 | (23100) | 10 | 6175 | 59 | C.F. |
| | | | 1.30 | II | 7450 | (33100) | | | | 1.30 | II | 7020 | (31200) | 10 | 6180 | 59 | |
| | | | 1.60 | III | 7450 | (33100) | | | | 1.60 | III | 7020 | (31200) | 10 | 6185 | 59 | |
| | | | 2.04 | III | 10500 | (46800) | | | | 2.04 | III | 9900 | (44000) | 10 | 6190 | 59 | |
| | | | 2.51 | III | 10500 | (46800) | | | | 2.51 | III | 9900 | (44000) | 10 | 6195 | 59 | |
| 20.4 | 29500 | (3330) | 0.93 | - | 5780 | (25700) | 24.6 | 24400 | (2760) | 0.95 | - | 5470 | (24300) | 10 | 6175 | 71 | C.F. |
| | | | 1.17 | I | 7900 | (35100) | | | | 1.17 | I | 7450 | (33100) | 10 | 6180 | 71 | |
| | | | 1.31 | II | 7900 | (35100) | | | | 1.31 | II | 7450 | (33100) | 10 | 6185 | 71 | |
| | | | 1.80 | III | 11100 | (49600) | | | | 1.80 | III | 10500 | (46700) | 10 | 6190 | 71 | |
| | | | 2.08 | III | 11100 | (49600) | | | | 2.08 | III | 10500 | (46700) | 10 | 6195 | 71 | |
| 16.7 | 36100 | (4080) | 1.15 | I | 8470 | (37700) | 20.1 | 29900 | (3380) | 1.15 | I | 7990 | (35600) | 10 | 6185 | 87 | C.F. |
| | | | 1.56 | II | 12000 | (53300) | | | | 1.57 | II | 11300 | (50200) | 10 | 6190 | 87 | |
| | | | 1.82 | III | 12000 | (53300) | | | | 1.82 | III | 11300 | (50200) | 10 | 6195 | 87 | |
| 13.9 | 40900 | (4620) | 1.06 | I | 8990 | (40000) | 16.8 | 33900 | (3830) | 1.28 | I | 8490 | (37800) | 10 | 6185DB | 104 | C.F. |
| | | | 1.38 | II | 12700 | (56400) | | | | 1.51 | II | 12000 | (53200) | 10 | 6190DB | 104 | |
| | | | 1.51 | II | 12700 | (56400) | | | | 1.51 | II | 12000 | (53200) | 10 | 6195DB | 104 | |
| 12.0 | 35900 | (4060) | * | - | 9380 | (41700) | 14.5 | 35900 | (4060) | * | - | 9050 | (40300) | 10 | 6180DB | 121 | C.F. |
| | 42500 | (4810) | * | - | 9380 | (41700) | | 39400 | (4460) | 1.08 | I | 9020 | (40100) | 10 | 6185DB | 121 | |
| | 47600 | (5380) | 1.19 | I | 13300 | (59000) | | 1.43 | II | 12700 | (56600) | 10 | 6190DB | 121 | | | |
| | | | 1.41 | II | 13300 | (59000) | | 1.51 | II | 12700 | (56600) | 10 | 6195DB | 121 | | | |
| | | | 1.51 | II | 18900 | (84100) | | 1.51 | II | 18900 | (84100) | 10 | 6205DB | 121 | | | |
| | | | 2.12 | III | 23400 | (104000) | | 2.55 | III | 23000 | (102000) | 10 | 6215DB | 121 | | | |
| | | | 2.50 | III | 25800 | (115000) | | 3.02 | III | 24400 | (109000) | 10 | 6225DB | 121 | | | |
| 10.1 | 35900 | (4060) | * | - | 9380 | (41700) | 12.2 | 35900 | (4060) | * | - | 9380 | (41700) | 10 | 6180DB | 143 | C.F. |
| | 43400 | (4900) | * | - | 9380 | (41700) | | 43400 | (4900) | * | - | 9380 | (41700) | 10 | 6185DB | 143 | |
| | 56300 | (6360) | 1.00 | I | 13200 | (58700) | | 46600 | (5270) | 1.21 | I | 13200 | (58800) | 10 | 6190DB | 143 | |
| | | | 1.20 | I | 13200 | (58700) | | | | 1.45 | II | 13200 | (58800) | 10 | 6195DB | 143 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

10 HP
7.5 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 8.79 | 43600 | (4920) | * | - | 9380 | (41700) | 10.6 | 43600 | (4920) | * | - | 9380 | (41700) | 10 | 6185DB | 165 | C.F. |
| | 64900 | (7340) | 1.08 | I | 13200 | (58500) | | 53800 | (6080) | 1.30 | II | 13300 | (59000) | 10 | 6195DB | 165 | |
| | | | 1.26 | I | 18900 | (84100) | | | | 1.51 | II | 18900 | (84100) | 10 | 6205DB | 165 | |
| | | | 1.51 | II | 23400 | (104000) | | | | 1.51 | II | 23400 | (104000) | 10 | 6215DA | 165 | |
| | | | 1.66 | III | 23400 | (104000) | | | | 2.00 | III | 23400 | (104000) | 10 | 6215DB | 165 | |
| | | | 1.97 | III | 27900 | (124000) | | | | 2.38 | III | 26400 | (117000) | 10 | 6225DB | 165 | |
| | | | 2.67 | III | 34600 | (154000) | | | | 3.21 | III | 32700 | (146000) | 10 | 6235DA | 165 | |
| 7.44 | 56500 | (6380) | * | - | 13200 | (58900) | 8.97 | 56500 | (6380) | * | - | 13200 | (58900) | 10 | 6190DB | 195 | C.F. |
| | 70000 | (7910) | * | - | 13100 | (58300) | | 63600 | (7180) | 1.10 | I | 13200 | (58600) | 10 | 6195DB | 195 | |
| | 76700 | (8670) | 1.07 | I | 18900 | (84100) | | | | 1.29 | I | 18900 | (84100) | 10 | 6205DB | 195 | |
| | | | 1.36 | II | 23400 | (104000) | | | | 1.51 | II | 23400 | (104000) | 10 | 6215DA | 195 | |
| | | | 1.40 | II | 23400 | (104000) | | | | 1.69 | III | 23400 | (104000) | 10 | 6215DB | 195 | |
| | | | 1.67 | III | 29300 | (130000) | | | | 2.02 | III | 27700 | (123000) | 10 | 6225DB | 195 | |
| | | | 2.26 | III | 36300 | (162000) | | | | 2.73 | III | 34400 | (153000) | 10 | 6235DA | 195 | |
| 6.28 | 56500 | (6380) | * | - | 13300 | (59000) | 7.58 | 56500 | (6380) | * | - | 13300 | (59000) | 10 | 6190DB | 231 | C.F. |
| | 70500 | (7960) | * | - | 13300 | (59000) | | 70500 | (7960) | * | - | 13300 | (59000) | 10 | 6195DB | 231 | |
| | 82100 | (9270) | * | - | 18900 | (84100) | | 75300 | (8510) | 1.09 | I | 18900 | (84100) | 10 | 6205DB | 231 | |
| | 90900 | (10300) | 1.22 | I | 23400 | (104000) | | | | 1.47 | II | 23400 | (104000) | 10 | 6215DA | 231 | |
| | | | 1.44 | II | 31100 | (138000) | | | | 1.51 | II | 29500 | (131000) | 10 | 6225DA | 231 | |
| | | | 1.44 | II | 31100 | (138000) | | | | 1.74 | III | 29500 | (131000) | 10 | 6225DB | 231 | |
| | | | 1.84 | III | 38900 | (173000) | | | | 2.22 | III | 36800 | (164000) | 10 | 6235DA | 231 | |
| | | 2.51 | III | 43200 | (192000) | | | 3.03 | III | 40900 | (182000) | 10 | 6245DA | 231 | | | |
| 5.31 | 70500 | (7960) | * | - | 13300 | (59000) | 6.41 | 70500 | (7960) | * | - | 13300 | (59000) | 10 | 6195DB | 273 | C.F. |
| | 82100 | (9270) | * | - | 18900 | (84100) | | 82100 | (9270) | * | - | 18900 | (84100) | 10 | 6205DB | 273 | |
| | 107000 | (12100) | 1.03 | I | 23400 | (104000) | | 89000 | (10100) | 1.24 | I | 23400 | (104000) | 10 | 6215DA | 273 | |
| | | | 1.22 | I | 32600 | (145000) | | | | 1.47 | II | 30900 | (138000) | 10 | 6225DA | 273 | |
| | | | 1.56 | II | 40100 | (179000) | | | | 1.88 | III | 38600 | (172000) | 10 | 6235DA | 273 | |
| | | | 2.13 | III | 45400 | (202000) | | | | 2.57 | III | 43000 | (191000) | 10 | 6245DA | 273 | |
| | | | 2.55 | III | 55300 | (246000) | | | | 3.08 | III | 52300 | (233000) | 10 | 6255DA | 273 | |
| 4.55 | 112000 | (12700) | * | - | 23400 | (104000) | 5.49 | 104000 | (11800) | 1.08 | I | 23400 | (104000) | 10 | 6215DA | 319 | C.F. |
| | 126000 | (14200) | 1.06 | I | 32600 | (145000) | | | | 1.28 | I | 32100 | (143000) | 10 | 6225DA | 319 | |
| | | | 1.33 | II | 40100 | (179000) | | | | 1.61 | III | 40100 | (179000) | 10 | 6235DA | 319 | |
| | | | 1.82 | III | 46800 | (208000) | | | | 2.20 | III | 44800 | (199000) | 10 | 6245DA | 319 | |
| | | | 2.29 | III | 58000 | (258000) | | | | 2.76 | III | 55100 | (245000) | 10 | 6255DA | 319 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

10 HP
7.5 kW

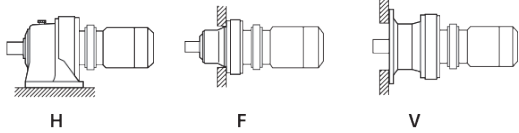

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 3.85 | 112000 | (12700) | * | - | 23400 | (104000) | 4.64 | 112000 | (12700) | * | - | 23400 | (104000) | 10 | 6215DA | 377 | C.F. |
| | 133000 | (15000) | * | - | 32600 | (145000) | | 123000 | (13900) | 1.08 | I | 32600 | (145000) | 10 | 6225DA | 377 | |
| | 148000 | (16800) | 1.13 | I | 40100 | (179000) | | 1.36 | II | 40100 | (179000) | 10 | 6235DA | 377 | | | |
| | | | 1.54 | II | 46800 | (208000) | | 1.86 | III | 46800 | (208000) | 10 | 6245DA | 377 | | | |
| | | | 1.94 | III | 58000 | (258000) | | 2.34 | III | 57900 | (257000) | 10 | 6255DA | 377 | | | |
| | | | 2.74 | III | 62000 | (276000) | | 3.31 | III | 62000 | (276000) | 10 | 6265DA | 377 | | | |
| 3.07 | 142000 | (16000) | * | - | 32600 | (145000) | 3.70 | 142000 | (16000) | * | - | 32600 | (145000) | 10 | 6225DA | 473 | C.F. |
| | 186000 | (21000) | 0.97 | - | 40100 | (179000) | | 154000 | (17400) | 1.18 | I | 40100 | (179000) | 10 | 6235DA | 473 | |
| | | | 1.23 | I | 46800 | (208000) | | 1.48 | II | 46800 | (208000) | 10 | 6245DA | 473 | | | |
| | | | 1.64 | III | 58000 | (258000) | | 1.98 | III | 58000 | (258000) | 10 | 6255DA | 473 | | | |
| | | | 2.19 | III | 62000 | (276000) | | 2.64 | III | 62000 | (276000) | 10 | 6265DA | 473 | | | |
| 2.59 | 142000 | (16000) | * | - | 32600 | (145000) | 3.13 | 142000 | (16000) | * | - | 32600 | (145000) | 10 | 6225DA | 559 | C.F. |
| | 181000 | (20500) | * | - | 40100 | (179000) | | 182000 | (20600) | 1.00 | I | 40100 | (179000) | 10 | 6235DA | 559 | |
| | 220000 | (24900) | 1.04 | I | 46800 | (208000) | | 1.25 | I | 46800 | (208000) | 10 | 6245DA | 559 | | | |
| | | | 1.39 | II | 58000 | (258000) | | 1.68 | III | 58000 | (258000) | 10 | 6255DA | 559 | | | |
| | | | 1.85 | III | 62000 | (276000) | | 2.23 | III | 62000 | (276000) | 10 | 6265DA | 559 | | | |
| | | | 2.74 | III | 55700 | (248000) | | 3.31 | III | 55700 | (248000) | 10 | 6275DA | 559 | | | |
| 2.23 | 181000 | (20500) | * | - | 40100 | (179000) | 2.70 | 181000 | (20500) | * | - | 40100 | (179000) | 10 | 6235DA | 649 | C.F. |
| | 228000 | (25800) | * | - | 46800 | (208000) | | 212000 | (23900) | 1.08 | I | 46800 | (208000) | 10 | 6245DA | 649 | |
| | 255000 | (28900) | 1.20 | I | 58000 | (258000) | | 1.44 | II | 58000 | (258000) | 10 | 6255DA | 649 | | | |
| | | | 1.59 | II | 62000 | (276000) | | 1.92 | III | 62000 | (276000) | 10 | 6265DA | 649 | | | |
| | | | 2.36 | III | 55700 | (248000) | | 2.85 | III | 55700 | (248000) | 10 | 6275DA | 649 | | | |
| 1.98 | 181000 | (20500) | * | - | 40100 | (179000) | 2.39 | 181000 | (20500) | * | - | 40100 | (179000) | 10 | 6235DA | 731 | C.F. |
| | 228000 | (25800) | * | - | 46800 | (208000) | | 228000 | (25800) | * | - | 46800 | (208000) | 10 | 6245DA | 731 | |
| | 288000 | (32500) | 1.06 | I | 58000 | (258000) | | 238000 | (26900) | 1.28 | I | 58000 | (258000) | 10 | 6255DA | 731 | |
| | | | 1.42 | II | 62000 | (276000) | | 1.71 | III | 62000 | (276000) | 10 | 6265DA | 731 | | | |
| | | | 2.10 | III | 55700 | (248000) | | 2.53 | III | 55700 | (248000) | 10 | 6275DA | 731 | | | |
| 1.72 | 228000 | (25800) | * | - | 46800 | (208000) | 2.08 | 228000 | (25800) | * | - | 46800 | (208000) | 10 | 6245DA | 841 | C.F. |
| | 287000 | (32500) | * | - | 58000 | (258000) | | 274000 | (31000) | 1.05 | I | 58000 | (258000) | 10 | 6255DA | 841 | |
| | 331000 | (37400) | 1.23 | I | 62000 | (276000) | | 1.48 | II | 62000 | (276000) | 10 | 6265DA | 841 | | | |
| | | | 1.82 | III | 55700 | (248000) | | 2.20 | III | 55700 | (248000) | 10 | 6275DA | 841 | | | |
| 1.45 | 305000 | (34500) | * | - | 58000 | (258000) | 1.74 | 305000 | (34500) | * | - | 58000 | (258000) | 10 | 6255DA | 1003 | C.F. |
| | 395000 | (44600) | 1.03 | I | 62000 | (276000) | | 327000 | (36900) | 1.25 | I | 62000 | (276000) | 10 | 6265DA | 1003 | |
| | | | 1.53 | II | 55700 | (248000) | | 1.85 | III | 55700 | (248000) | 10 | 6275DA | 1003 | | | |
| 1.16 | 305000 | (34500) | * | - | 58000 | (258000) | 1.40 | 305000 | (34500) | * | - | 58000 | (258000) | 10 | 6255DA | 1247 | C.F. |
| | 407000 | (46000) | * | - | 62000 | (276000) | | 407000 | (45900) | 1.00 | I | 62000 | (276000) | 10 | 6265DA | 1247 | |
| | 491000 | (55400) | 1.23 | I | 55700 | (248000) | | 1.48 | II | 55700 | (248000) | 10 | 6275DA | 1247 | | | |
| 0.980 | 390000 | (44000) | * | - | 62000 | (276000) | 1.18 | 390000 | (44000) | * | - | 62000 | (276000) | 10 | 6265DA | 1479 | C.F. |
| | 582000 | (65800) | 1.04 | I | 55500 | (247000) | | 482000 | (54500) | 1.25 | I | 55700 | (248000) | 10 | 6275DA | 1479 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

10 HP
7.5 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 0.784 | 604000 | (68200) | * | - | 55700 | (248000) | 0.946 | 603000 | (68100) | 1.00 | I | 55700 | (248000) | 10 | 6275DA | 1849 | C.F. |
| 0.702 | 604000 | (68200) | * | - | 55700 | (248000) | 0.847 | 604000 | (68200) | * | - | 55700 | (248000) | 10 | 6275DA | 2065 | C.F. |
| 0.572 | 604000 | (68200) | * | - | 55700 | (248000) | 0.690 | 604000 | (68200) | * | - | 55700 | (248000) | 10 | 6275DA | 2537 | C.F. |
| 0.476 | 604000 | (68200) | * | - | 55100 | (245000) | 0.575 | 604000 | (68200) | * | - | 55100 | (245000) | 10 | 6275DA | 3045 | C.F. |
| 0.417 | 604000 | (68200) | * | - | 55700 | (248000) | 0.503 | 604000 | (68200) | * | - | 55700 | (248000) | 10 | 6275DA | 3481 | C.F. |
| 0.327 | 604000 | (68200) | * | - | 55100 | (245000) | 0.394 | 604000 | (68200) | * | - | 55100 | (245000) | 10 | 6275DA | 4437 | C.F. |
| 0.282 | 604000 | (68200) | * | - | 55100 | (245000) | 0.341 | 604000 | (68200) | * | - | 55100 | (245000) | 10 | 6275DA | 5133 | C.F. |
| 0.235 | 604000 | (68200) | * | - | 55100 | (245000) | 0.283 | 604000 | (68200) | * | - | 55100 | (245000) | 10 | 6275DA | 6177 | C.F. |
| 0.192 | 604000 | (68200) | * | - | 55100 | (245000) | 0.231 | 604000 | (68200) | * | - | 55100 | (245000) | 10 | 6275DA | 7569 | C.F. |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

15 HP
11 kW

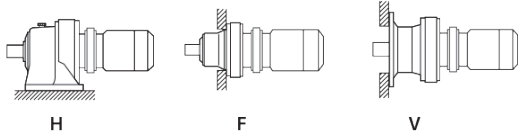

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] | |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | | |
| 483 | 1830 | (206) | 1.03 | I | 1040 | (4630) | 583 | 1510 | (171) | 1.03 | I | 985 | (4380) | 15 | 6135 | 3 | | |
| | | | 1.28 | I | 1640 | (7300) | | | | 1.37 | II | 1560 | (6920) | 15 | 6145 | 3 | | |
| | | | 1.85 | III | 1780 | (7930) | | | | 1.85 | III | 1690 | (7510) | 15 | 6160 | 3 | | |
| | | | 2.13 | III | 1780 | (7930) | | | | 2.19 | III | 1690 | (7510) | 15 | 6165 | 3 | | |
| 290 | 3050 | (344) | 1.03 | I | 1230 | (5490) | 350 | 2520 | (285) | 1.03 | I | 1170 | (5190) | 15 | 6135 | 5 | | |
| | | | 1.37 | II | 1950 | (8660) | | | | 1.37 | II | 1850 | (8210) | 15 | 6145 | 5 | | |
| | | | 1.85 | III | 2110 | (9400) | | | | 1.85 | III | 2000 | (8900) | 15 | 6160 | 5 | | |
| | | | 2.13 | III | 2110 | (9400) | | | | 2.19 | III | 2000 | (8900) | 15 | 6165 | 5 | | |
| 242 | 3650 | (413) | 1.03 | I | 1310 | (5840) | 292 | 3030 | (342) | 1.03 | I | 1240 | (5540) | 15 | 6135 | 6 | | |
| | | | 1.18 | I | 2080 | (9270) | | | | 1.18 | I | 1970 | (8780) | 15 | 6140 | 6 | | |
| | | | 1.38 | II | 2080 | (9270) | | | | 1.38 | II | 1970 | (8780) | 15 | 6145 | 6 | | |
| | | | 1.84 | III | 2330 | (10400) | | | | 1.84 | III | 2190 | (9760) | 15 | 6160 | 6 | | |
| | | | 2.19 | III | 2330 | (10400) | | | | 2.19 | III | 2190 | (9760) | 15 | 6165 | 6 | | |
| | | | 2.51 | III | 2630 | (11700) | | | | 2.51 | III | 2470 | (11000) | 15 | 6170 | 6 | | C.F. |
| | | | 2.74 | III | 2630 | (11700) | | | | 2.74 | III | 2470 | (11000) | 15 | 6175 | 6 | | C.F. |
| 181 | 4870 | (551) | 1.03 | I | 1460 | (6480) | 219 | 4040 | (456) | 1.03 | I | 1380 | (6150) | 15 | 6135 | 8 | | |
| | | | 1.18 | I | 2310 | (10300) | | | | 1.18 | I | 2190 | (9730) | 15 | 6140 | 8 | | |
| | | | 1.38 | II | 2310 | (10300) | | | | 1.38 | II | 2190 | (9730) | 15 | 6145 | 8 | | |
| | | | 1.79 | III | 2600 | (11600) | | | | 1.79 | III | 2450 | (10900) | 15 | 6160 | 8 | | |
| | | | 2.19 | III | 2600 | (11600) | | | | 2.19 | III | 2450 | (10900) | 15 | 6165 | 8 | | |
| | | | 2.51 | III | 2900 | (12900) | | | | 2.51 | III | 2730 | (12200) | 15 | 6170 | 8 | | C.F. |
| | | | 2.74 | III | 2900 | (12900) | | | | 2.74 | III | 2730 | (12200) | 15 | 6175 | 8 | | C.F. |
| 132 | 6700 | (757) | 1.03 | I | 1650 | (7360) | 159 | 5550 | (627) | 1.03 | I | 1570 | (6980) | 15 | 6135 | 11 | | |
| | | | 1.18 | I | 2590 | (11500) | | | | 1.18 | I | 2450 | (10900) | 15 | 6140 | 11 | | |
| | | | 1.38 | II | 2590 | (11500) | | | | 1.38 | II | 2450 | (10900) | 15 | 6145 | 11 | | |
| | | | 1.79 | III | 2940 | (13100) | | | | 1.79 | III | 2770 | (12300) | 15 | 6160 | 11 | | |
| | | | 2.19 | III | 2940 | (13100) | | | | 2.19 | III | 2770 | (12300) | 15 | 6165 | 11 | | |
| | | | 2.51 | III | 3350 | (14900) | | | | 2.51 | III | 3150 | (14000) | 15 | 6170 | 11 | | C.F. |
| | | | 2.74 | III | 3350 | (14900) | | | | 2.74 | III | 3150 | (14000) | 15 | 6175 | 11 | | C.F. |
| 112 | 7920 | (895) | 0.93 | - | 1710 | (7630) | 135 | 6560 | (741) | 1.03 | I | 1630 | (7250) | 15 | 6135 | 13 | | |
| | | | 1.18 | I | 2640 | (11700) | | | | 1.18 | I | 2500 | (11100) | 15 | 6140 | 13 | | |
| | | | 1.37 | II | 2640 | (11700) | | | | 1.37 | II | 2500 | (11100) | 15 | 6145 | 13 | | |
| | | | 1.79 | III | 3080 | (13700) | | | | 1.79 | III | 2900 | (12900) | 15 | 6160 | 13 | | |
| | | | 2.05 | III | 3080 | (13700) | | | | 2.05 | III | 2900 | (12900) | 15 | 6165 | 13 | | |
| | | | 2.48 | III | 3480 | (15500) | | | | 2.48 | III | 3280 | (14600) | 15 | 6170 | 13 | | C.F. |
| | | | 2.74 | III | 3480 | (15500) | | | | 2.74 | III | 3280 | (14600) | 15 | 6175 | 13 | | C.F. |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

15 HP
11 kW

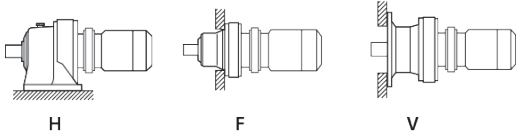

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 96.7 | 9140 | (1030) | 0.82 | - | 1740 | (7740) | 117 | 7570 | (855) | 0.82 | - | 1650 | (7360) | 15 | 6135 | 15 | C.F. |
| | | | 1.09 | I | 2760 | (12300) | | | | 1.09 | I | 2610 | (11600) | 15 | 6140 | 15 | |
| | | | 1.32 | II | 2760 | (12300) | | | | 1.37 | II | 2610 | (11600) | 15 | 6145 | 15 | |
| | | | 1.70 | III | 3250 | (14500) | | | | 1.70 | III | 3070 | (13600) | 15 | 6160 | 15 | |
| | | | 2.03 | III | 3250 | (14500) | | | | 2.05 | III | 3070 | (13600) | 15 | 6165 | 15 | |
| | | | 2.32 | III | 3660 | (16300) | | | | 2.32 | III | 3450 | (15400) | 15 | 6170 | 15 | |
| | | | 2.73 | III | 3660 | (16300) | | | | 2.74 | III | 3450 | (15400) | 15 | 6175 | 15 | |
| | | | 2.94 | III | 4880 | (21700) | | | | 2.94 | III | 4600 | (20400) | 15 | 6180 | 15 | |
| 85.3 | 10400 | (1170) | 1.09 | I | 2880 | (12800) | 103 | 8580 | (969) | 1.09 | I | 2730 | (12100) | 15 | 6145 | 17 | C.F. |
| | | | 1.19 | I | 3350 | (14900) | | | | 1.19 | I | 3160 | (14100) | 15 | 6160 | 17 | |
| | | | 1.71 | III | 3350 | (14900) | | | | 1.71 | III | 3160 | (14100) | 15 | 6165 | 17 | |
| | | | 1.79 | III | 3800 | (16900) | | | | 1.79 | III | 3590 | (16000) | 15 | 6170 | 17 | |
| | | | 2.19 | III | 3800 | (16900) | | | | 2.19 | III | 3590 | (16000) | 15 | 6175 | 17 | |
| | | | 2.78 | III | 5150 | (22900) | | | | 2.78 | III | 4850 | (21600) | 15 | 6180 | 17 | |
| 69.0 | 12800 | (1450) | 0.86 | - | 3060 | (13600) | 83.3 | 10600 | (1200) | 1.00 | I | 2910 | (12900) | 15 | 6145 | 21 | C.F. |
| | | | 1.17 | I | 3580 | (15900) | | | | 1.17 | I | 3380 | (15000) | 15 | 6160 | 21 | |
| | | | 1.45 | II | 3580 | (15900) | | | | 1.46 | II | 3380 | (15000) | 15 | 6165 | 21 | |
| | | | 1.69 | III | 4090 | (18200) | | | | 1.77 | III | 3860 | (17200) | 15 | 6170 | 21 | |
| | | | 2.14 | III | 4090 | (18200) | | | | 2.19 | III | 3860 | (17200) | 15 | 6175 | 21 | |
| | | | 2.73 | III | 5510 | (24500) | | | | 2.73 | III | 5190 | (23100) | 15 | 6180 | 21 | |
| 58.0 | 15200 | (1720) | 1.22 | I | 3730 | (16600) | 70.0 | 12600 | (1430) | 1.37 | II | 3530 | (15700) | 15 | 6165 | 25 | C.F. |
| | | | 1.42 | II | 4230 | (18800) | | | | 1.44 | II | 3990 | (17800) | 15 | 6170 | 25 | |
| | | | 1.77 | III | 4230 | (18800) | | | | 1.77 | III | 3990 | (17800) | 15 | 6175 | 25 | |
| | | | 2.19 | III | 5730 | (25500) | | | | 2.19 | III | 5390 | (24000) | 15 | 6180 | 25 | |
| | | | 2.74 | III | 5730 | (25500) | | | | 2.74 | III | 5390 | (24000) | 15 | 6185 | 25 | |
| 50.0 | 17700 | (2000) | 1.04 | I | 3860 | (17200) | 60.3 | 14600 | (1650) | 1.04 | I | 3660 | (16300) | 15 | 6165 | 29 | C.F. |
| | | | 1.22 | I | 4440 | (19800) | | | | 1.30 | II | 4200 | (18700) | 15 | 6170 | 29 | |
| | | | 1.58 | II | 4440 | (19800) | | | | 1.71 | III | 4200 | (18700) | 15 | 6175 | 29 | |
| | | | 1.77 | III | 5990 | (26600) | | | | 1.77 | III | 5640 | (25100) | 15 | 6180 | 29 | |
| | | | 2.19 | III | 5990 | (26600) | | | | 2.19 | III | 5640 | (25100) | 15 | 6185 | 29 | |
| | | | 2.79 | III | 8440 | (37500) | | | | 2.79 | III | 7940 | (35300) | 15 | 6190 | 29 | |
| 41.4 | 21300 | (2410) | 0.87 | - | 4060 | (18100) | 50.0 | 17700 | (2000) | 1.04 | I | 3860 | (17100) | 15 | 6165 | 35 | C.F. |
| | | | 1.01 | I | 4690 | (20900) | | | | 1.09 | I | 4430 | (19700) | 15 | 6170 | 35 | |
| | | | 1.31 | II | 4690 | (20900) | | | | 1.37 | II | 4430 | (19700) | 15 | 6175 | 35 | |
| | | | 1.68 | III | 6380 | (28400) | | | | 1.71 | III | 6010 | (26700) | 15 | 6180 | 35 | |
| | | | 2.05 | III | 6380 | (28400) | | | | 2.05 | III | 6010 | (26700) | 15 | 6185 | 35 | |
| | | | 2.21 | III | 8910 | (39600) | | | | 2.21 | III | 8380 | (37300) | 15 | 6190 | 35 | |
| | | | 2.74 | III | 8910 | (39600) | | | | 2.74 | III | 8380 | (37300) | 15 | 6195 | 35 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

15 HP
11 kW

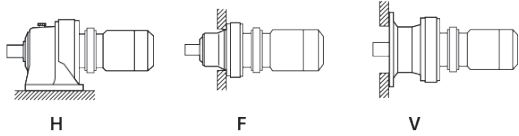

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | | | | |
|--------------------|---------------|-------|-------------------------------|------------|---------------------------|------|--------------------|---------------|----------------|-------------------------------|---------------|---------------------------|--------|------------------|------------|-------|--------------------|----|--------|-----|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] | | | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | | | | |
| 33.7 | 26200 (2960) | | 1.03 | I | 4960 (22100) | 40.7 | 21700 (2450) | | 1.03 | I | 4700 (20900) | 15 | 6175 | 43 | C.F. | | | | | |
| | | | 1.37 | II | 6820 (30300) | | | | 1.37 | II | 6430 (28600) | | | | | 15 | 6180 | 43 | | |
| | | | 1.69 | III | 6820 (30300) | | | | 1.71 | III | 6430 (28600) | | | | | 15 | 6185 | 43 | | |
| | | | 1.90 | III | 9580 (42600) | | | | 1.90 | III | 9010 (40100) | | | | | 15 | 6190 | 43 | | |
| | | | 2.47 | III | 9580 (42600) | | | | 2.74 | III | 9010 (40100) | | | | | 15 | 6195 | 43 | | |
| | | | 2.89 | III | 17500 (77700) | | | | 2.89 | III | 16500 (73500) | | | | | 15 | 6205 | 43 | | |
| 28.4 | 31100 (3510) | | 0.90 | - | 5140 (22900) | 34.3 | 25700 (2910) | | 1.03 | I | 4870 (21700) | 15 | 6175 | 51 | C.F. | | | | | |
| | | | 1.09 | I | 7050 (31300) | | | | 1.09 | I | 6650 (29600) | | | | | 15 | 6180 | 51 | | |
| | | | 1.37 | II | 7050 (31300) | | | | 1.37 | II | 6650 (29600) | | | | | 15 | 6185 | 51 | | |
| | | | 1.65 | III | 9990 (44400) | | | | 1.65 | III | 9410 (41900) | | | | | 15 | 6190 | 51 | | |
| | | | 1.90 | III | 9990 (44400) | | | | 1.90 | III | 9410 (41900) | | | | | 15 | 6195 | 51 | | |
| 24.6 | 35900 (4060) | | 1.09 | I | 7350 (32700) | 29.7 | 29800 (3360) | | 1.09 | I | 6940 (30900) | 15 | 6185 | 59 | C.F. | | | | | |
| | | | 1.39 | II | 10400 (46400) | | | | 1.39 | II | 9830 (43700) | | | | | 15 | 6190 | 59 | | |
| | | | 1.71 | III | 10400 (46400) | | | | 1.71 | III | 9830 (43700) | | | | | 15 | 6195 | 59 | | |
| | | | 2.05 | III | 18900 (84100) | | | | 2.05 | III | 18000 (79900) | | | | | 15 | 6205 | 59 | | |
| 20.4 | 43300 (4890) | | 0.89 | - | 7770 (34500) | 24.6 | 35800 (4050) | | 0.89 | - | 7340 (32700) | 15 | 6185 | 71 | C.F. | | | | | |
| | | | 1.23 | I | 11000 (49100) | | | | 1.23 | I | 10400 (46300) | | | | | 15 | 6190 | 71 | | |
| | | | 1.42 | II | 11000 (49100) | | | | 1.42 | II | 10400 (46300) | | | | | 15 | 6195 | 71 | | |
| 16.7 | 53000 (5990) | | 1.07 | I | 11900 (52700) | 20.1 | 43900 (4960) | | 1.07 | I | 11200 (49700) | 15 | 6190 | 87 | C.F. | | | | | |
| | | | 1.24 | I | 11900 (52700) | | | | 1.24 | I | 11200 (49700) | | | | | 15 | 6195 | 87 | | |
| | | | 1.45 | II | 18900 (84100) | | | | 1.45 | II | 18900 (84100) | | | | | 15 | 6205 | 87 | | |
| | | | 1.79 | III | 21700 (96600) | | | | 1.95 | III | 20600 (91500) | | | | | 15 | 6215 | 87 | | |
| 13.9 | 35900 (4060) | | * | - | 9040 (40200) | 16.8 | 35900 (4060) | | * | - | 8470 (37700) | 15 | 6180DB | 104 | C.F. | | | | | |
| | | | 43400 (4900) | * | - | | | | 8960 (39900) | 43400 (4900) | * | | | | | - | 8390 (37300) | 15 | 6185DB | 104 |
| | | | 60000 (6780) | 1.03 | I | | | | 12500 (55600) | 49700 (5620) | 1.03 | | | | | I | 11800 (52500) | 15 | 6195DB | 104 |
| 12.0 | 42500 (4810) | | * | - | 9380 (41700) | 14.5 | 42500 (4810) | | * | - | 8980 (40000) | 15 | 6185DB | 121 | C.F. | | | | | |
| | | | 56500 (6380) | * | - | | | | 13300 (59000) | 56500 (6380) | * | | | | | - | 12600 (55900) | 15 | 6190DB | 121 |
| | | | 69800 (7890) | 0.96 | - | | | | 13300 (59000) | 57900 (6540) | 1.03 | | | | | I | 12600 (55900) | 15 | 6195DB | 121 |
| | | | | 1.03 | I | | | | 18900 (84100) | | 1.03 | | | | | I | 18900 (84100) | 15 | 6205DB | 121 |
| | | | | 1.44 | II | | | | 23400 (104000) | | 1.74 | | | | | III | 22900 (102000) | 15 | 6215DB | 121 |
| | | | | 1.71 | III | | | | 25700 (114000) | | 2.06 | | | | | III | 24300 (108000) | 15 | 6225DB | 121 |
| | | | | 2.19 | III | | | | 32200 (143000) | | 2.19 | | | | | III | 30500 (135000) | 15 | 6235DA | 121 |
| | | | | 2.37 | III | | | | 32200 (143000) | | 2.86 | | | | | III | 30500 (135000) | 15 | 6235DB | 121 |
| | | | | 2.60 | III | | | | 35800 (159000) | | 3.14 | | | | | III | 33900 (151000) | 15 | 6245DB | 121 |
| 10.1 | 56500 (6380) | | * | - | 13200 (58700) | 12.2 | 56500 (6380) | | * | - | 13100 (58400) | 15 | 6190DB | 143 | C.F. | | | | | |
| | | | 67500 (7630) | * | - | | | | 13100 (58200) | 68400 (7730) | 0.99 | | | | | - | 13000 (57900) | 15 | 6195DB | 143 |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

15 HP
11 kW

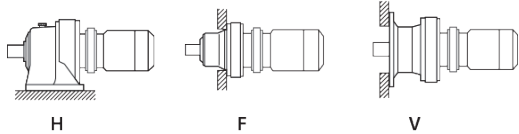

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|----------|-------------------------------|---------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 8.79 | 56500 | (6380) | * | - | 13200 | (58900) | 10.6 | 56500 | (6380) | * | - | 13200 | (58900) | 15 | 6190DB | 165 | C.F. |
| | 70000 | (7910) | * | - | 13100 | (58300) | | 70000 | (7910) | * | - | 13100 | (58300) | 15 | 6195DB | 165 | |
| | 82000 | (9270) | * | - | 18900 | (84100) | | 78900 | (8910) | 1.03 | I | 18900 | (84100) | 15 | 6205DB | 165 | |
| | 95200 | (10800) | 1.03 | I | 23400 | (104000) | | 1.03 | I | 23400 | (104000) | 15 | 6215DA | 165 | | | |
| | | | 1.13 | I | 23400 | (104000) | | 1.37 | II | 23400 | (104000) | 15 | 6215DB | 165 | | | |
| | | | 1.35 | II | 27700 | (123000) | | 1.62 | III | 26200 | (117000) | 15 | 6225DB | 165 | | | |
| | | | 1.82 | III | 34400 | (153000) | | 2.19 | III | 32600 | (145000) | 15 | 6235DA | 165 | | | |
| | | | 2.19 | III | 38400 | (171000) | | 2.19 | III | 36400 | (162000) | 15 | 6245DA | 165 | | | |
| | | | 2.44 | III | 38400 | (171000) | | 2.94 | III | 36400 | (162000) | 15 | 6245DB | 165 | | | |
| | | 2.90 | III | 47100 | (209000) | 3.50 | III | 44500 | (198000) | 15 | 6255DB | 165 | | | | | |
| 7.44 | 70000 | (7910) | * | - | 13100 | (58300) | 8.97 | 70000 | (7910) | * | - | 13100 | (58300) | 15 | 6195DB | 195 | C.F. |
| | 82000 | (9270) | * | - | 18900 | (84100) | | 82000 | (9270) | * | - | 18900 | (84100) | 15 | 6205DB | 195 | |
| | 105000 | (11800) | * | - | 23400 | (104000) | | 93200 | (10500) | 1.03 | I | 23400 | (104000) | 15 | 6215DA | 195 | |
| | 113000 | (12700) | 0.96 | - | 23400 | (104000) | | 1.16 | I | 23400 | (104000) | 15 | 6215DB | 195 | | | |
| | | | 1.14 | I | 29000 | (129000) | | 1.37 | II | 27500 | (122000) | 15 | 6225DB | 195 | | | |
| | | | 1.54 | II | 36100 | (161000) | | 1.86 | III | 34200 | (152000) | 15 | 6235DA | 195 | | | |
| | | | 2.05 | III | 40400 | (180000) | | 2.05 | III | 38200 | (170000) | 15 | 6245DA | 195 | | | |
| | | | 2.06 | III | 40400 | (180000) | | 2.49 | III | 38200 | (170000) | 15 | 6245DB | 195 | | | |
| | | | 2.45 | III | 49400 | (220000) | | 2.74 | III | 46800 | (208000) | 15 | 6255DA | 195 | | | |
| | | 2.45 | III | 49400 | (220000) | 2.96 | III | 46800 | (208000) | 15 | 6255DB | 195 | | | | | |
| 6.28 | 82100 | (9270) | * | - | 18900 | (84100) | 7.58 | 82100 | (9270) | * | - | 18900 | (84100) | 15 | 6205DB | 231 | C.F. |
| | 111000 | (12500) | * | - | 23400 | (104000) | | 110000 | (12500) | 1.00 | I | 23400 | (104000) | 15 | 6215DA | 231 | |
| | 133000 | (15100) | 0.98 | - | 30900 | (137000) | | 1.03 | I | 29300 | (130000) | 15 | 6225DA | 231 | | | |
| | | | 0.98 | - | 30900 | (137000) | | 1.19 | I | 29300 | (130000) | 15 | 6225DB | 231 | | | |
| | | | 1.25 | I | 38700 | (172000) | | 1.51 | II | 36600 | (163000) | 15 | 6235DA | 231 | | | |
| | | | 1.71 | III | 43000 | (191000) | | 2.07 | III | 40700 | (181000) | 15 | 6245DA | 231 | | | |
| | | | 2.06 | III | 52500 | (233000) | | 2.48 | III | 49700 | (221000) | 15 | 6255DA | 231 | | | |
| 5.31 | 111000 | (12500) | * | - | 23400 | (104000) | 6.41 | 111000 | (12500) | * | - | 23400 | (104000) | 15 | 6215DA | 273 | C.F. |
| | 131000 | (14800) | * | - | 32500 | (145000) | | 131000 | (14700) | 1.00 | I | 30700 | (137000) | 15 | 6225DA | 273 | |
| | 158000 | (17800) | 1.06 | I | 40100 | (179000) | | 1.28 | I | 38400 | (171000) | 15 | 6235DA | 273 | | | |
| | | | 1.45 | II | 45100 | (201000) | | 1.75 | III | 42800 | (190000) | 15 | 6245DA | 273 | | | |
| | | | 1.74 | III | 55100 | (245000) | | 2.10 | III | 52100 | (232000) | 15 | 6255DA | 273 | | | |
| | | | 2.58 | III | 62000 | (276000) | | 3.12 | III | 62000 | (276000) | 15 | 6265DA | 273 | | | |
| 4.55 | 112000 | (12700) | * | - | 23400 | (104000) | 5.49 | 112000 | (12700) | * | - | 23400 | (104000) | 15 | 6215DA | 319 | C.F. |
| | 133000 | (15000) | * | - | 32600 | (145000) | | 133000 | (15000) | * | - | 31900 | (142000) | 15 | 6225DA | 319 | |
| | 167000 | (18900) | * | - | 40100 | (179000) | | 153000 | (17200) | 1.10 | I | 39900 | (177000) | 15 | 6235DA | 319 | |
| | 184000 | (20800) | 1.24 | I | 46800 | (208000) | | 1.50 | II | 44600 | (198000) | 15 | 6245DA | 319 | | | |
| | | | 1.56 | II | 57900 | (258000) | | 1.88 | III | 54900 | (244000) | 15 | 6255DA | 319 | | | |
| | | | 2.21 | III | 62000 | (276000) | | 2.67 | III | 62000 | (276000) | 15 | 6265DA | 319 | | | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

15 HP
11 kW

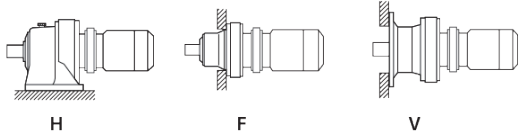

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|---------------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 3.85 | 133000 | (15000) | * | - | 32600 | (145000) | 4.64 | 133000 | (15000) | * | - | 32600 | (145000) | 15 | 6225DA | 377 | C.F. |
| | 167000 | (18900) | * | - | 40100 | (179000) | | 167000 | (18900) | * | - | 40100 | (179000) | 15 | 6235DA | 377 | |
| | 218000 | (24600) | 1.05 | I | 46800 | (208000) | | 180000 | (20400) | 1.27 | I | 46700 | (208000) | 15 | 6245DA | 377 | |
| | | | 1.32 | II | 58000 | (258000) | | | | 1.59 | II | 57600 | (256000) | 15 | 6255DA | 377 | |
| | | | 1.87 | III | 62000 | (276000) | | | | 2.26 | III | 62000 | (276000) | 15 | 6265DA | 377 | |
| | | 2.77 | III | 55700 | (248000) | | | 3.35 | III | 55700 | (248000) | 15 | 6275DA | 377 | | | |
| 3.07 | 181000 | (20500) | * | - | 40100 | (179000) | 3.70 | 181000 | (20500) | * | - | 40100 | (179000) | 15 | 6235DA | 473 | C.F. |
| | 228000 | (25800) | * | - | 46800 | (208000) | | 226000 | (25600) | 1.01 | I | 46800 | (208000) | 15 | 6245DA | 473 | |
| | 273000 | (30800) | 1.12 | I | 58000 | (258000) | | | | 1.35 | II | 58000 | (258000) | 15 | 6255DA | 473 | |
| | | | 1.49 | II | 62000 | (276000) | | | | 1.80 | III | 62000 | (276000) | 15 | 6265DA | 473 | |
| | | | 2.21 | III | 55700 | (248000) | | | | 2.67 | III | 55700 | (248000) | 15 | 6275DA | 473 | |
| 2.59 | 228000 | (25800) | * | - | 46800 | (208000) | 3.13 | 228000 | (25800) | * | - | 46800 | (208000) | 15 | 6245DA | 559 | C.F. |
| | 305000 | (34500) | * | - | 58000 | (258000) | | 267000 | (30200) | 1.14 | I | 58000 | (258000) | 15 | 6255DA | 559 | |
| | 323000 | (36400) | 1.26 | I | 62000 | (276000) | | | | 1.52 | II | 62000 | (276000) | 15 | 6265DA | 559 | |
| | | | 1.87 | III | 55700 | (248000) | | | | 2.26 | III | 55700 | (248000) | 15 | 6275DA | 559 | |
| 2.23 | 228000 | (25800) | * | - | 46800 | (208000) | 2.70 | 228000 | (25800) | * | - | 46800 | (208000) | 15 | 6245DA | 649 | C.F. |
| | 305000 | (34500) | * | - | 58000 | (258000) | | 310000 | (35100) | 0.98 | - | 58000 | (258000) | 15 | 6255DA | 649 | |
| | 375000 | (42300) | 1.09 | I | 62000 | (276000) | | | | 1.31 | II | 62000 | (276000) | 15 | 6265DA | 649 | |
| | | | 1.61 | III | 55700 | (248000) | | | | 1.95 | III | 55700 | (248000) | 15 | 6275DA | 649 | |
| 1.98 | 305000 | (34500) | * | - | 58000 | (258000) | 2.39 | 305000 | (34500) | * | - | 58000 | (258000) | 15 | 6255DA | 731 | C.F. |
| | 422000 | (47700) | 0.97 | - | 62000 | (276000) | | 350000 | (39500) | 1.16 | I | 62000 | (276000) | 15 | 6265DA | 731 | |
| | | | 1.43 | II | 55700 | (248000) | | | | 1.73 | III | 55700 | (248000) | 15 | 6275DA | 731 | |
| 1.72 | 287000 | (32500) | * | - | 58000 | (258000) | 2.08 | 287000 | (32500) | * | - | 58000 | (258000) | 15 | 6255DA | 841 | C.F. |
| | 407000 | (46000) | * | - | 62000 | (276000) | | 402000 | (45400) | 1.01 | I | 62000 | (276000) | 15 | 6265DA | 841 | |
| | 485000 | (54800) | 1.24 | I | 55700 | (248000) | | | | 1.50 | II | 55700 | (248000) | 15 | 6275DA | 841 | |
| 1.45 | 407000 | (46000) | * | - | 62000 | (276000) | 1.74 | 407000 | (46000) | * | - | 62000 | (276000) | 15 | 6265DA | 1003 | C.F. |
| | 579000 | (65400) | 1.04 | I | 55700 | (248000) | | 480000 | (54200) | 1.26 | I | 55700 | (248000) | 15 | 6275DA | 1003 | |
| 1.16 | 604000 | (68200) | * | - | 55700 | (248000) | 1.40 | 596000 | (67400) | 1.01 | I | 55700 | (248000) | 15 | 6275DA | 1247 | C.F. |
| 0.980 | 604000 | (68200) | * | - | 55100 | (245000) | 1.18 | 604000 | (68200) | * | - | 55100 | (245000) | 15 | 6275DA | 1479 | C.F. |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

20 HP
15 kW

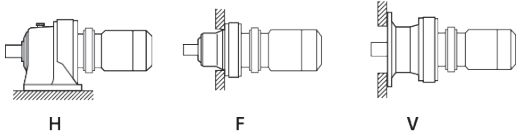

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] | |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | | |
| 483 | 2490 | (282) | 0.94 | - | 1640 | (7300) | 583 | 2060 | (233) | 1.01 | I | 1560 | (6920) | 20 | 6145 | 3 | | |
| | | | 1.35 | II | 1780 | (7930) | | | | 1.35 | II | 1690 | (7510) | 20 | 6160 | 3 | | |
| | | | 1.56 | II | 1780 | (7930) | | | | 1.61 | III | 1690 | (7510) | 20 | 6165 | 3 | | |
| | | | 1.84 | III | 2020 | (8970) | | | | 1.84 | III | 1910 | (8490) | 20 | 6170 | 3 | | |
| 290 | 4150 | (469) | 1.01 | I | 1950 | (8660) | 350 | 3440 | (389) | 1.01 | I | 1850 | (8210) | 20 | 6145 | 5 | | |
| | | | 1.35 | II | 2110 | (9400) | | | | 1.35 | II | 2000 | (8900) | 20 | 6160 | 5 | | |
| | | | 1.56 | II | 2110 | (9400) | | | | 1.61 | III | 2000 | (8900) | 20 | 6165 | 5 | | |
| | | | 1.84 | III | 2390 | (10600) | | | | 1.84 | III | 2260 | (10100) | 20 | 6170 | 5 | | |
| 242 | 4980 | (563) | 1.01 | I | 2070 | (9200) | 292 | 4130 | (467) | 1.01 | I | 1960 | (8730) | 20 | 6145 | 6 | | |
| | | | 1.35 | II | 2300 | (10200) | | | | 1.35 | II | 2170 | (9670) | 20 | 6160 | 6 | | |
| | | | 1.60 | III | 2300 | (10200) | | | | 1.60 | III | 2170 | (9670) | 20 | 6165 | 6 | | |
| | | | 1.84 | III | 2610 | (11600) | | | | 1.84 | III | 2460 | (10900) | 20 | 6170 | 6 | | |
| | | | 2.01 | III | 2610 | (11600) | | | | 2.01 | III | 2460 | (10900) | 20 | 6175 | 6 | | |
| 181 | 6650 | (751) | 1.01 | I | 2290 | (10200) | 219 | 5510 | (622) | 1.01 | I | 2170 | (9660) | 20 | 6145 | 8 | | |
| | | | 1.31 | II | 2570 | (11400) | | | | 1.31 | II | 2430 | (10800) | 20 | 6160 | 8 | | |
| | | | 1.60 | III | 2570 | (11400) | | | | 1.60 | III | 2430 | (10800) | 20 | 6165 | 8 | | |
| | | | 1.84 | III | 2880 | (12800) | | | | 1.84 | III | 2720 | (12100) | 20 | 6170 | 8 | | |
| | | | 2.01 | III | 2880 | (12800) | | | | 2.01 | III | 2720 | (12100) | 20 | 6175 | 8 | | |
| 132 | 9140 | (1030) | 1.01 | I | 2560 | (11400) | 159 | 7570 | (855) | 1.01 | I | 2430 | (10800) | 20 | 6145 | 11 | | |
| | | | 1.31 | II | 2900 | (12900) | | | | 1.31 | II | 2740 | (12200) | 20 | 6160 | 11 | | |
| | | | 1.60 | III | 2900 | (12900) | | | | 1.60 | III | 2740 | (12200) | 20 | 6165 | 11 | | |
| | | | 1.84 | III | 3310 | (14700) | | | | 1.84 | III | 3120 | (13900) | 20 | 6170 | 11 | | |
| | | | 2.01 | III | 3310 | (14700) | | | | 2.01 | III | 3120 | (13900) | 20 | 6175 | 11 | | |
| | | | 2.35 | III | 4420 | (19600) | | | | 2.35 | III | 4160 | (18500) | 20 | 6180 | 11 | | C.F. |
| | | | 2.60 | III | 4420 | (19600) | | | | 2.60 | III | 4160 | (18500) | 20 | 6185 | 11 | | C.F. |
| | | | 2.73 | III | 6170 | (27500) | | | | 2.73 | III | 5800 | (25800) | 20 | 6190 | 11 | | C.F. |
| 112 | 10800 | (1220) | 1.00 | I | 2610 | (11600) | 135 | 8950 | (1010) | 1.00 | I | 2480 | (11000) | 20 | 6145 | 13 | | |
| | | | 1.31 | II | 3030 | (13500) | | | | 1.31 | II | 2860 | (12700) | 20 | 6160 | 13 | | |
| | | | 1.51 | II | 3030 | (13500) | | | | 1.51 | II | 2860 | (12700) | 20 | 6165 | 13 | | |
| | | | 1.82 | III | 3440 | (15300) | | | | 1.82 | III | 3250 | (14500) | 20 | 6170 | 13 | | |
| | | | 2.01 | III | 3440 | (15300) | | | | 2.01 | III | 3250 | (14500) | 20 | 6175 | 13 | | |
| | | | 2.35 | III | 4590 | (20400) | | | | 2.35 | III | 4320 | (19200) | 20 | 6180 | 13 | | C.F. |
| | | | 2.60 | III | 4590 | (20400) | | | | 2.60 | III | 4320 | (19200) | 20 | 6185 | 13 | | C.F. |
| | | | 2.73 | III | 6430 | (28600) | | | | 2.73 | III | 6050 | (26900) | 20 | 6190 | 13 | | C.F. |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

20 HP
15 kW

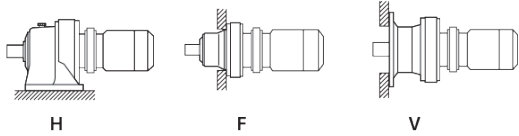

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | VFD ^[2] | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|-------------|--------------------|-------|------------------|------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Base | | | | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | | (N) | Motor Power Code | Frame Size |
| 96.7 | 12500 | (1410) | 0.96 | - | 2730 | (12100) | 117 | 10300 | (1170) | 1.00 | I | 2590 | (11500) | 20 | 6145 | 15 |
| | | | 1.25 | I | 3200 | (14200) | | | | 1.25 | I | 3030 | (13500) | 20 | 6160 | 15 |
| | | | 1.49 | II | 3200 | (14200) | | | | 1.51 | II | 3030 | (13500) | 20 | 6165 | 15 |
| | | | 1.70 | III | 3610 | (16100) | | | | 1.70 | III | 3410 | (15200) | 20 | 6170 | 15 |
| | | | 2.01 | III | 3610 | (16100) | | | | 2.01 | III | 3410 | (15200) | 20 | 6175 | 15 |
| | | | 2.16 | III | 4850 | (21600) | | | | 2.16 | III | 4570 | (20300) | 20 | 6180 | 15 |
| | | | 2.60 | III | 4850 | (21600) | | | | 2.60 | III | 4570 | (20300) | 20 | 6185 | 15 |
| | | | 2.73 | III | 6750 | (30000) | | | | 2.73 | III | 6350 | (28200) | 20 | 6190 | 15 |
| 85.3 | 14100 | (1600) | 0.80 | - | 2840 | (12600) | 103 | 11700 | (1320) | 0.80 | - | 2700 | (12000) | 20 | 6145 | 17 |
| | | | 0.87 | - | 3290 | (14600) | | | | 0.87 | - | 3110 | (13900) | 20 | 6160 | 17 |
| | | | 1.26 | I | 3290 | (14600) | | | | 1.26 | I | 3110 | (13900) | 20 | 6165 | 17 |
| | | | 1.31 | II | 3750 | (16700) | | | | 1.31 | II | 3540 | (15800) | 20 | 6170 | 17 |
| | | | 1.60 | III | 3750 | (16700) | | | | 1.60 | III | 3540 | (15800) | 20 | 6175 | 17 |
| | | | 2.04 | III | 5110 | (22700) | | | | 2.04 | III | 4820 | (21400) | 20 | 6180 | 17 |
| | | | 2.55 | III | 5110 | (22700) | | | | 2.55 | III | 4820 | (21400) | 20 | 6185 | 17 |
| | | | 2.73 | III | 7110 | (31600) | | | | 2.73 | III | 6690 | (29800) | 20 | 6190 | 17 |
| 69.0 | 17400 | (1970) | 1.07 | I | 3500 | (15600) | 83.3 | 14500 | (1630) | 1.07 | I | 3320 | (14800) | 20 | 6165 | 21 |
| | | | 1.24 | I | 4030 | (17900) | | | | 1.30 | II | 3810 | (17000) | 20 | 6170 | 21 |
| | | | 1.57 | II | 4030 | (17900) | | | | 1.60 | III | 3810 | (17000) | 20 | 6175 | 21 |
| | | | 2.00 | III | 5470 | (24300) | | | | 2.00 | III | 5160 | (22900) | 20 | 6180 | 21 |
| | | | 2.54 | III | 5470 | (24300) | | | | 2.60 | III | 5160 | (22900) | 20 | 6185 | 21 |
| | | | 2.73 | III | 7640 | (34000) | | | | 2.73 | III | 7190 | (32000) | 20 | 6190 | 21 |
| 58.0 | 20800 | (2350) | 0.90 | - | 3630 | (16200) | 70.0 | 17200 | (1940) | 1.00 | I | 3450 | (15400) | 20 | 6165 | 25 |
| | | | 1.04 | I | 4160 | (18500) | | | | 1.05 | I | 3940 | (17500) | 20 | 6170 | 25 |
| | | | 1.30 | II | 4160 | (18500) | | | | 1.30 | II | 3940 | (17500) | 20 | 6175 | 25 |
| | | | 1.60 | III | 5680 | (25300) | | | | 1.60 | III | 5360 | (23800) | 20 | 6180 | 25 |
| | | | 2.01 | III | 5680 | (25300) | | | | 2.01 | III | 5360 | (23800) | 20 | 6185 | 25 |
| | | | 2.35 | III | 7990 | (35600) | | | | 2.35 | III | 7520 | (33500) | 20 | 6190 | 25 |
| | | | 2.70 | III | 7990 | (35600) | | | | 2.70 | III | 7520 | (33500) | 20 | 6195 | 25 |
| | | | 50.0 | 24100 | (2720) | 1.16 | | | | I | 4360 | (19400) | 60.3 | 20000 | (2260) | 1.26 |
| 1.30 | II | 5930 | | | | (26400) | 1.30 | II | 5590 | (24900) | 20 | 6180 | | | | 29 |
| 1.60 | III | 5930 | | | | (26400) | 1.60 | III | 5590 | (24900) | 20 | 6185 | | | | 29 |
| 2.05 | III | 8400 | | | | (37400) | 2.05 | III | 7910 | (35200) | 20 | 6190 | | | | 29 |
| 2.52 | III | 8400 | | | | (37400) | 2.52 | III | 7910 | (35200) | 20 | 6195 | | | | 29 |
| 41.4 | 29100 | (3280) | 0.96 | - | 4590 | (20400) | 50.0 | 24100 | (2720) | 1.00 | I | 4350 | (19400) | 20 | 6175 | 35 |
| | | | 1.23 | I | 6310 | (28100) | | | | 1.25 | I | 5960 | (26500) | 20 | 6180 | 35 |
| | | | 1.51 | II | 6310 | (28100) | | | | 1.51 | II | 5960 | (26500) | 20 | 6185 | 35 |
| | | | 1.62 | III | 8850 | (39400) | | | | 1.62 | III | 8340 | (37100) | 20 | 6190 | 35 |
| | | | 2.01 | III | 8850 | (39400) | | | | 2.01 | III | 8340 | (37100) | 20 | 6195 | 35 |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

20 HP
15 kW

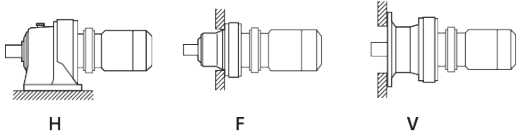

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|----------------|-------|-------------------------------|------------|---------------------------|------|--------------------|---------------|-------|-------------------------------|----------------|---------------------------|--------|------------------|------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 33.7 | 35700 (4040) | | 1.00 | I | 6720 (29900) | 40.7 | 29600 (3340) | | 1.00 | I | 6360 (28300) | 20 | 6180 | 43 | C.F. | | |
| | | | 1.24 | I | 6720 (29900) | | | | 1.26 | I | 6360 (28300) | | | | | | |
| | | | 1.40 | II | 9510 (42300) | | | | 1.40 | II | 8960 (39900) | | | | | | |
| | | | 1.81 | III | 9510 (42300) | | | | 2.01 | III | 8960 (39900) | | | | | | |
| | | | 2.12 | III | 17400 (77500) | | | | 2.12 | III | 16500 (73300) | | | | | | |
| 28.4 | 42400 (4790) | | 1.00 | I | 6940 (30900) | 34.3 | 35100 (3970) | | 1.00 | I | 6560 (29200) | 20 | 6185 | 51 | | | |
| | | | 1.21 | I | 9900 (44100) | | | | 1.21 | I | 9340 (41500) | | | | | | |
| | | | 1.40 | II | 9900 (44100) | | | | 1.40 | II | 9340 (41500) | | | | | | |
| 24.6 | 49000 (5540) | | 0.80 | - | 7220 (32100) | 29.7 | 40600 (4590) | | 0.80 | - | 6840 (30400) | 20 | 6185 | 59 | | | |
| | | | 1.02 | I | 10400 (46000) | | | | 1.02 | I | 9760 (43400) | | | | | | |
| | | | 1.26 | I | 10400 (46000) | | | | 1.26 | I | 9760 (43400) | | | | | | |
| | | | 1.51 | II | 18900 (84100) | | | | 1.51 | II | 17900 (79700) | | | | | | |
| | | | 2.26 | III | 19300 (85900) | | | | 2.51 | III | 18300 (81300) | | | | | | |
| 20.4 | 59000 (6660) | | 1.04 | I | 10900 (48600) | 24.6 | 48900 (5520) | | 1.04 | I | 10300 (45900) | 20 | 6195 | 71 | | | |
| 16.7 | 72300 (8170) | | 0.91 | - | 11700 (52100) | 20.1 | 59900 (6770) | | 0.91 | - | 11100 (49200) | 20 | 6195 | 87 | | | |
| | | | 1.06 | I | 18900 (84100) | | | | 1.06 | I | 18900 (84100) | | | | | | |
| | | | 1.31 | II | 21600 (96100) | | | | 1.43 | II | 20500 (91000) | | | | | | |
| 13.9 | 56500 (6380) | | * | - | 12500 (55800) | 16.8 | 51100 (5770) | | * | - | 11800 (52500) | 20 | 6190DB | 104 | | | |
| | 61700 (6970) | | * | - | 12500 (55600) | | | | * | - | 11800 (52500) | | | | | | |
| 12.0 | 67100 (7580) | | * | - | 13300 (59000) | 14.5 | 59400 (6720) | | * | - | 12500 (55800) | 20 | 6195DB | 121 | | | |
| | 71700 (8110) | | * | - | 18900 (84100) | | | | * | - | 18900 (84100) | | | | | | |
| | 95200 (10800) | | 1.06 | I | 23400 (104000) | | 78900 (8910) | 1.28 | I | 22800 (101000) | 20 | | | | 6215DB | 121 | |
| | | | 1.25 | I | 25500 (113000) | | | 1.51 | II | 24200 (108000) | 20 | | | | 6225DB | 121 | |
| | | | 1.60 | III | 32000 (142000) | | | 1.60 | III | 30300 (135000) | 20 | | | | 6235DA | 121 | |
| | | | 1.74 | III | 32000 (142000) | | | 2.10 | III | 30300 (135000) | 20 | | | | 6235DB | 121 | |
| | | | 1.91 | III | 35600 (159000) | | | 2.30 | III | 33700 (150000) | 20 | | | | 6245DB | 121 | |
| | | | 2.56 | III | 43700 (194000) | | | 3.08 | III | 41300 (184000) | 20 | | | | 6255DB | 121 | |
| 8.79 | 82000 (9270) | | * | - | 18900 (84100) | 10.6 | 81100 (9160) | | * | - | 18900 (84100) | 20 | 6205DB | 165 | | | |
| | 97800 (11100) | | * | - | 23400 (104000) | | | | * | - | 23400 (104000) | | | | | | |
| | 108000 (12200) | | * | - | 23400 (104000) | | 108000 (12200) | 1.00 | I | 23400 (104000) | 20 | | | | 6215DB | 165 | |
| | 130000 (14700) | | 0.99 | - | 27500 (122000) | | | 1.19 | I | 26100 (116000) | 20 | | | | 6225DB | 165 | |
| | | | 1.34 | II | 34200 (152000) | | | 1.60 | III | 32400 (144000) | 20 | | | | 6235DA | 165 | |
| | | | 1.60 | III | 38300 (170000) | | | 1.60 | III | 36200 (161000) | 20 | | | | 6245DA | 165 | |
| | | | 1.79 | III | 38300 (170000) | | | 2.16 | III | 36200 (161000) | 20 | | | | 6245DB | 165 | |
| | | | 2.12 | III | 46900 (209000) | | | 2.56 | III | 44400 (197000) | 20 | | | | 6255DB | 165 | |
| | | | 2.98 | III | 57200 (254000) | | | 3.21 | III | 54100 (241000) | 20 | | | | 6265DA | 165 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

20 HP
15 kW

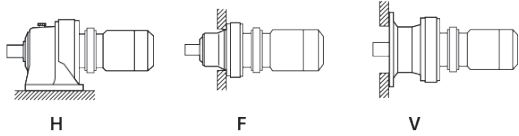

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|----------------|-------|-------------------------------|----------------|---------------------------|----------------|--------------------|----------------|--------|-------------------------------|----------------|---------------------------|--------|------------------|------------|--------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 7.44 | 105000 (11800) | | * | - | 23400 (104000) | 8.97 | 95800 (10800) | | * | - | 23400 (104000) | 20 | 6215DA | 195 | C.F. | | |
| | | | * | - | 29100 (129000) | | | | * | - | 27500 (122000) | | | | | 6225DA | 195 |
| | 128000 (14500) | | * | - | 29000 (129000) | | 127000 (14400) | 1.01 | I | 27300 (122000) | 20 | | 6225DB | 195 | | | |
| | 153000 (17300) | 1.13 | I | 35900 (160000) | 1.37 | | II | 34000 (151000) | 20 | 6235DA | 195 | | | | | | |
| | | 1.51 | II | 40100 (179000) | 1.51 | | II | 38000 (169000) | 20 | 6245DA | 195 | | | | | | |
| | | 1.51 | II | 40100 (179000) | 1.83 | | III | 38000 (169000) | 20 | 6245DB | 195 | | | | | | |
| | | 1.80 | III | 49200 (219000) | 2.01 | | III | 46600 (207000) | 20 | 6255DA | 195 | | | | | | |
| | | 1.80 | III | 49200 (219000) | 2.17 | | III | 46600 (207000) | 20 | 6255DB | 195 | | | | | | |
| 2.52 | | III | 60100 (267000) | 3.04 | III | 56800 (253000) | 20 | 6265DA | 195 | | | | | | | | |
| 6.28 | 131000 (14800) | | * | - | 30900 (137000) | 7.58 | 113000 (12800) | | * | - | 29300 (130000) | 20 | 6225DA | 231 | C.F. | | |
| | | | * | - | 38500 (171000) | | | | 1.11 | I | 36400 (162000) | | | | | 6235DA | 231 |
| | 182000 (20500) | 1.26 | I | 42800 (190000) | 1.52 | | II | 40500 (180000) | 20 | 6245DA | 231 | | | | | | |
| | 1.51 | II | 52300 (232000) | 1.82 | III | | 49500 (220000) | 20 | 6255DA | 231 | | | | | | | |
| | 2.24 | III | 62000 (276000) | 2.70 | III | | 60500 (269000) | 20 | 6265DA | 231 | | | | | | | |
| 5.31 | 167000 (18900) | | * | - | 40100 (179000) | 6.41 | 167000 (18900) | | * | - | 38200 (170000) | 20 | 6235DA | 273 | C.F. | | |
| | | | 1.06 | I | 44900 (200000) | | | | 1.28 | I | 42500 (189000) | | | | | 6245DA | 273 |
| | 215000 (24300) | 1.28 | I | 54800 (244000) | 1.54 | | II | 51900 (231000) | 20 | 6255DA | 273 | | | | | | |
| | 1.90 | III | 62000 (276000) | 2.29 | III | | 62000 (276000) | 20 | 6265DA | 273 | | | | | | | |
| 4.55 | 167000 (18900) | | * | - | 40100 (179000) | 5.49 | 167000 (18900) | | * | - | 39800 (177000) | 20 | 6235DA | 319 | C.F. | | |
| | | | * | - | 46800 (208000) | | | | 1.10 | I | 44300 (197000) | | | | | 6245DA | 319 |
| | 228000 (25800) | 1.14 | I | 57600 (256000) | 1.38 | | II | 54600 (243000) | 20 | 6255DA | 319 | | | | | | |
| | 251000 (28400) | 1.62 | III | 62000 (276000) | 1.96 | | III | 62000 (276000) | 20 | 6265DA | 319 | | | | | | |
| | | 2.40 | III | 55700 (248000) | 2.90 | | III | 55700 (248000) | 20 | 6275DA | 319 | | | | | | |
| 3.85 | | III | 55700 (248000) | 4.64 | III | 55700 (248000) | 20 | 6275DA | 319 | | | | | | | | |
| 3.85 | 228000 (25800) | | * | - | 46800 (208000) | 4.64 | 228000 (25800) | | * | - | 46500 (207000) | 20 | 6245DA | 377 | C.F. | | |
| | | | 0.97 | - | 58000 (258000) | | | | 1.17 | I | 57300 (255000) | | | | | 6255DA | 377 |
| | 297000 (33500) | 1.37 | II | 62000 (276000) | 1.66 | | III | 62000 (276000) | 20 | 6265DA | 377 | | | | | | |
| | 2.03 | III | 55700 (248000) | 2.46 | III | | 55700 (248000) | 20 | 6275DA | 377 | | | | | | | |
| 3.07 | 228000 (25800) | | * | - | 46800 (208000) | 3.70 | 228000 (25800) | | * | - | 46800 (208000) | 20 | 6245DA | 473 | C.F. | | |
| | | | * | - | 58000 (258000) | | | | 0.99 | - | 58000 (258000) | | | | | 6255DA | 473 |
| | 305000 (34500) | * | - | 58000 (258000) | 0.99 | | - | 58000 (258000) | 20 | 6255DB | 473 | | | | | | |
| | 372000 (42100) | 1.09 | I | 62000 (276000) | 1.32 | | II | 62000 (276000) | 20 | 6265DA | 473 | | | | | | |
| | | 1.62 | III | 55700 (248000) | 1.96 | | III | 55700 (248000) | 20 | 6275DA | 473 | | | | | | |
| 2.59 | | III | 55700 (248000) | 3.13 | III | 55700 (248000) | 20 | 6275DA | 473 | | | | | | | | |
| 2.59 | 305000 (34500) | | * | - | 58000 (258000) | 3.13 | 305000 (34500) | | * | - | 58000 (258000) | 20 | 6255DA | 559 | C.F. | | |
| | | | * | - | 62000 (276000) | | | | 1.12 | I | 62000 (276000) | | | | | 6265DA | 559 |
| | 440000 (49700) | 1.37 | II | 55700 (248000) | 1.66 | | III | 55700 (248000) | 20 | 6275DA | 559 | | | | | | |
| 2.23 | 407000 (46000) | | * | - | 62000 (276000) | 2.70 | 423000 (47800) | | 0.96 | - | 62000 (276000) | 20 | 6265DA | 649 | C.F. | | |
| | | | 1.18 | I | 55700 (248000) | | | | 1.43 | II | 55700 (248000) | | | | | 6275DA | 649 |
| 1.98 | 407000 (46000) | | * | - | 62000 (276000) | 2.39 | 407000 (46000) | | * | - | 62000 (276000) | 20 | 6265DA | 731 | C.F. | | |
| | | | 1.05 | I | 55700 (248000) | | | | 1.27 | I | 55700 (248000) | | | | | 6275DA | 731 |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

20 HP
15 kW



Dimension Pages:
 Foot Mount (H) 2.102 - 2.131
 V-Flange Mount (V) 2.132 - 2.161
 F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|------------------|---------------|---------------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 1.72 | 407000 | (46000) | * | - | 62000 | (276000) | 2.08 | 407000 | (46000) | * | - | 62000 | (276000) | 20 | 6265DA | 841 | |
| | 604000 | (68200) | * | - | 55700 | (248000) | | 548000 | (62000) | 1.10 | I | 55700 | (248000) | | 20 | 6275DA | |
| 1.45 | 604000 | (68200) | * | - | 55700 | (248000) | 1.74 | 604000 | (68200) | * | - | 55700 | (248000) | 20 | 6275DA | 1003 | C.F. |
| 1.16 | 604000 | (68200) | * | - | 55700 | (248000) | 1.40 | 604000 | (68200) | * | - | 55700 | (248000) | 20 | 6275DA | 1247 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

25 HP
18.5 kW

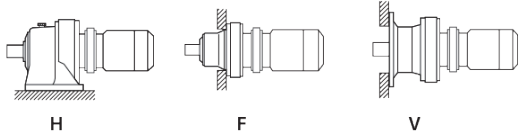

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|-------------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 483 | 3070 | (347) | 1.10 | I | 1780 | (7930) | 583 | 2550 | (288) | 1.10 | I | 1690 | (7510) | 25 | 6160 | 3 | |
| | | | 1.26 | I | 1780 | (7930) | | | | 1.30 | II | 1690 | (7510) | 25 | 6165 | 3 | |
| | | | 1.49 | II | 2020 | (8970) | | | | 1.49 | II | 1910 | (8490) | 25 | 6170 | 3 | |
| | | | 1.63 | III | 2020 | (8970) | | | | 1.63 | III | 1910 | (8490) | 25 | 6175 | 3 | |
| 290 | 5120 | (579) | 1.10 | I | 2110 | (9400) | 350 | 4240 | (480) | 1.10 | I | 2000 | (8900) | 25 | 6160 | 5 | |
| | | | 1.26 | I | 2110 | (9400) | | | | 1.30 | II | 2000 | (8900) | 25 | 6165 | 5 | |
| | | | 1.49 | II | 2390 | (10600) | | | | 1.49 | II | 2260 | (10100) | 25 | 6170 | 5 | |
| | | | 1.63 | III | 2390 | (10600) | | | | 1.63 | III | 2260 | (10100) | 25 | 6175 | 5 | |
| 242 | 6150 | (695) | 1.10 | I | 2280 | (10200) | 292 | 5090 | (575) | 1.10 | I | 2160 | (9590) | 25 | 6160 | 6 | |
| | | | 1.30 | II | 2280 | (10200) | | | | 1.30 | II | 2160 | (9590) | 25 | 6165 | 6 | |
| | | | 1.49 | II | 2590 | (11500) | | | | 1.49 | II | 2440 | (10900) | 25 | 6170 | 6 | |
| | | | 1.63 | III | 2590 | (11500) | | | | 1.63 | III | 2440 | (10900) | 25 | 6175 | 6 | |
| 181 | 8200 | (926) | 1.06 | I | 2540 | (11300) | 219 | 6790 | (767) | 1.06 | I | 2400 | (10700) | 25 | 6160 | 8 | |
| | | | 1.30 | II | 2540 | (11300) | | | | 1.30 | II | 2400 | (10700) | 25 | 6165 | 8 | |
| | | | 1.49 | II | 2860 | (12700) | | | | 1.49 | II | 2700 | (12000) | 25 | 6170 | 8 | |
| | | | 1.63 | III | 2860 | (12700) | | | | 1.63 | III | 2700 | (12000) | 25 | 6175 | 8 | |
| 132 | 11300 | (1270) | 1.06 | I | 2870 | (12700) | 159 | 9340 | (1060) | 1.06 | I | 2710 | (12100) | 25 | 6160 | 11 | |
| | | | 1.30 | II | 2870 | (12700) | | | | 1.30 | II | 2710 | (12100) | 25 | 6165 | 11 | |
| | | | 1.49 | II | 3280 | (14600) | | | | 1.49 | II | 3100 | (13800) | 25 | 6170 | 11 | |
| | | | 1.63 | III | 3280 | (14600) | | | | 1.63 | III | 3100 | (13800) | 25 | 6175 | 11 | |
| | | | 1.90 | III | 4390 | (19500) | | | | 1.90 | III | 4140 | (18400) | 25 | 6180 | 11 | |
| | | | 2.11 | III | 4390 | (19500) | | | | 2.11 | III | 4140 | (18400) | 25 | 6185 | 11 | |
| | | | 2.22 | III | 6150 | (27400) | | | | 2.22 | III | 5790 | (25800) | 25 | 6190 | 11 | C.F. |
| 2.60 | III | 6150 | (27400) | 2.60 | III | 5790 | (25800) | 25 | 6195 | 11 | C.F. | | | | | | |
| 112 | 13300 | (1500) | 1.06 | I | 2990 | (13300) | 135 | 11000 | (1250) | 1.06 | I | 2830 | (12600) | 25 | 6160 | 13 | |
| | | | 1.22 | I | 2990 | (13300) | | | | 1.22 | I | 2830 | (12600) | 25 | 6165 | 13 | |
| | | | 1.47 | II | 3410 | (15200) | | | | 1.47 | II | 3220 | (14300) | 25 | 6170 | 13 | |
| | | | 1.63 | III | 3410 | (15200) | | | | 1.63 | III | 3220 | (14300) | 25 | 6175 | 13 | |
| | | | 1.90 | III | 4570 | (20300) | | | | 1.90 | III | 4300 | (19100) | 25 | 6180 | 13 | |
| | | | 2.11 | III | 4570 | (20300) | | | | 2.11 | III | 4300 | (19100) | 25 | 6185 | 13 | |
| | | | 2.22 | III | 6400 | (28500) | | | | 2.22 | III | 6030 | (26800) | 25 | 6190 | 13 | C.F. |
| | | | 2.60 | III | 6400 | (28500) | | | | 2.60 | III | 6030 | (26800) | 25 | 6195 | 13 | C.F. |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

25 HP
18.5 kW

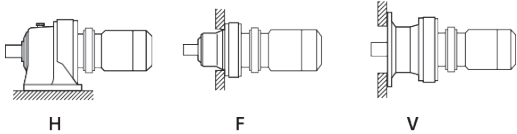

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 96.7 | 15400 | (1740) | 1.01 | I | 3150 | (14000) | 117 | 12700 | (1440) | 1.01 | I | 2990 | (13300) | 25 | 6160 | 15 | C.F. |
| | | | 1.21 | I | 3150 | (14000) | | | | 1.22 | I | 2990 | (13300) | 25 | 6165 | 15 | |
| | | | 1.38 | II | 3560 | (15800) | | | | 1.38 | II | 3370 | (15000) | 25 | 6170 | 15 | |
| | | | 1.63 | III | 3560 | (15800) | | | | 1.63 | III | 3370 | (15000) | 25 | 6175 | 15 | |
| | | | 1.75 | III | 4810 | (21400) | | | | 1.75 | III | 4540 | (20200) | 25 | 6180 | 15 | |
| | | | 2.11 | III | 4810 | (21400) | | | | 2.11 | III | 4540 | (20200) | 25 | 6185 | 15 | |
| | | | 2.22 | III | 6720 | (29900) | | | | 2.22 | III | 6330 | (28100) | 25 | 6190 | 15 | |
| | | | 2.60 | III | 6720 | (29900) | | | | 2.60 | III | 6330 | (28100) | 25 | 6195 | 15 | |
| 85.3 | 17400 | (1970) | 1.02 | I | 3230 | (14400) | 103 | 14400 | (1630) | 1.02 | I | 3070 | (13600) | 25 | 6165 | 17 | C.F. |
| | | | 1.06 | I | 3700 | (16500) | | | | 1.06 | I | 3500 | (15600) | 25 | 6170 | 17 | |
| | | | 1.30 | II | 3700 | (16500) | | | | 1.30 | II | 3500 | (15600) | 25 | 6175 | 17 | |
| | | | 1.65 | III | 5070 | (22600) | | | | 1.65 | III | 4790 | (21300) | 25 | 6180 | 17 | |
| | | | 2.06 | III | 5070 | (22600) | | | | 2.11 | III | 4790 | (21300) | 25 | 6185 | 17 | |
| | | | 2.22 | III | 7080 | (31500) | | | | 2.22 | III | 6670 | (29700) | 25 | 6190 | 17 | |
| | | | 2.60 | III | 7080 | (31500) | | | | 2.60 | III | 6670 | (29700) | 25 | 6195 | 17 | |
| | | | 69.0 | 21500 | (2430) | 0.86 | | | | - | 3430 | (15300) | 83.3 | 17800 | (2010) | 0.87 | |
| 1.00 | I | 3980 | | | | (17700) | 1.05 | I | 3770 | (16800) | 25 | 6170 | | | | 21 | |
| 1.27 | I | 3980 | | | | (17700) | 1.30 | II | 3770 | (16800) | 25 | 6175 | | | | 21 | |
| 1.62 | III | 5440 | | | | (24200) | 1.62 | III | 5130 | (22800) | 25 | 6180 | | | | 21 | |
| 2.06 | III | 5440 | | | | (24200) | 2.11 | III | 5130 | (22800) | 25 | 6185 | | | | 21 | |
| 2.22 | III | 7620 | | | | (33900) | 2.22 | III | 7170 | (31900) | 25 | 6190 | | | | 21 | |
| 2.60 | III | 7620 | | | | (33900) | 2.60 | III | 7170 | (31900) | 25 | 6195 | | | | 21 | |
| 58.0 | 25600 | (2890) | | | | 1.05 | I | 4100 | (18200) | 70.0 | 21200 | (2400) | | | | 1.05 | I |
| | | | 1.30 | II | 5640 | (25100) | 1.30 | II | 5320 | | | | (23700) | 25 | 6180 | 25 | |
| | | | 1.63 | III | 5640 | (25100) | 1.63 | III | 5320 | | | | (23700) | 25 | 6185 | 25 | |
| | | | 1.90 | III | 7960 | (35400) | 1.90 | III | 7500 | | | | (33300) | 25 | 6190 | 25 | |
| | | | 2.19 | III | 7960 | (35400) | 2.19 | III | 7500 | | | | (33300) | 25 | 6195 | 25 | |
| | | | 50.0 | 29700 | (3360) | 0.94 | - | 4280 | (19000) | | | | 60.3 | 24600 | (2780) | 1.02 | I |
| 1.05 | I | 5880 | | | | (26100) | 1.05 | I | 5550 | (24700) | 25 | 6180 | | | | 29 | |
| 1.30 | II | 5880 | | | | (26100) | 1.30 | II | 5550 | (24700) | 25 | 6185 | | | | 29 | |
| 1.66 | III | 8360 | | | | (37200) | 1.66 | III | 7870 | (35000) | 25 | 6190 | | | | 29 | |
| 2.04 | III | 8360 | | | | (37200) | 2.04 | III | 7870 | (35000) | 25 | 6195 | | | | 29 | |
| 2.47 | III | 15400 | | | | (68700) | 2.47 | III | 14600 | (65000) | 25 | 6205 | | | | 29 | |
| 41.4 | 35900 | (4050) | | | | 1.00 | I | 6250 | (27800) | 50.0 | 29700 | (3360) | | | | 1.02 | I |
| | | | 1.22 | I | 6250 | (27800) | 1.22 | I | 5910 | | | | (26300) | 25 | 6185 | 35 | |
| | | | 1.31 | II | 8810 | (39200) | 1.31 | II | 8300 | | | | (36900) | 25 | 6190 | 35 | |
| | | | 1.63 | III | 8810 | (39200) | 1.63 | III | 8300 | | | | (36900) | 25 | 6195 | 35 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

25 HP
18.5 kW

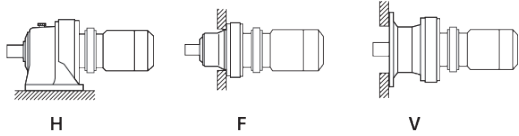

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|----------------------------------|-------|-------------------------------|------------|---------------------------|------|----------------------------------|---------------|-------|-------------------------------|---------------|---------------------------|-------------|------------------|------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 33.7 | 44100 (4980) | | 1.00 | I | 6640 (29500) | 40.7 | 36500 (4120) | | | 1.02 | I | 6290 (28000) | 25 | 6185 | 43 | C.F. | |
| | | | 1.13 | I | 9450 (42000) | | | | | 1.13 | I | 8910 (39600) | 25 | 6190 | 43 | | |
| | | | 1.47 | II | 9450 (42000) | | | | | 1.63 | III | 8910 (39600) | 25 | 6195 | 43 | | |
| | | | 1.72 | III | 17400 (77300) | | | | | 1.72 | III | 16500 (73200) | 25 | 6205 | 43 | | |
| | | | 2.44 | III | 17700 (78900) | | | | | 2.44 | III | 16800 (74700) | 25 | 6215 | 43 | | |
| 28.4 | 52200 (5900) | | 0.81 | - | 6850 (30400) | 34.3 | 43300 (4890) | | | 0.81 | - | 6490 (28900) | 25 | 6185 | 51 | | |
| | | | 0.98 | - | 9830 (43700) | | | | | 0.98 | - | 9280 (41300) | 25 | 6190 | 51 | | |
| | | | 1.13 | I | 9830 (43700) | | | | | 1.13 | I | 9280 (41300) | 25 | 6195 | 51 | | |
| 24.6 | 60400 (6830) | | 1.02 | I | 10300 (45700) | 29.7 | 50100 (5660) | | | 1.02 | I | 9690 (43100) | 25 | 6195 | 59 | C.F. | |
| | | | 1.22 | I | 18900 (83900) | | | | | 1.22 | I | 17900 (79400) | 25 | 6205 | 59 | | |
| | | | 1.83 | III | 19200 (85600) | | | | | 2.04 | III | 18200 (81100) | 25 | 6215 | 59 | | |
| | | | 2.13 | III | 20400 (90800) | | | | | 2.44 | III | 19300 (86000) | 25 | 6225 | 59 | | |
| 20.4 | 72700 (8220) | | 0.84 | - | 10800 (48100) | 24.6 | 60300 (6810) | | 0.84 | - | 10200 (45500) | 25 | 6195 | 71 | | | |
| 16.7 | 89100 (10100) | | 1.06 | I | 21500 (95600) | 20.1 | 73900 (8340) | | | 1.16 | I | 20400 (90600) | 25 | 6215 | 87 | C.F. | |
| | | | 1.45 | II | 22800 (101000) | | | | | 1.45 | II | 21600 (96100) | 25 | 6225 | 87 | | |
| 12.0 | 101000 (11400) 117000 (13300) | | * | - | 23400 (104000) | 14.5 | 97300 (11000) | | | 1.03 | I | 22600 (101000) | 25 | 6215DB | 121 | C.F. | |
| | | | 1.01 | I | 25400 (113000) | | | | | 1.22 | I | 24100 (107000) | 25 | 6225DB | 121 | | |
| | | | 1.30 | II | 31900 (142000) | | | | | 1.30 | II | 30200 (134000) | 25 | 6235DA | 121 | | |
| | | | 1.41 | II | 31900 (142000) | | | | | 1.70 | III | 30200 (134000) | 25 | 6235DB | 121 | | |
| | | | 1.55 | II | 35500 (158000) | | | | | 1.87 | III | 33600 (150000) | 25 | 6245DB | 121 | | |
| | | | 2.07 | III | 43600 (194000) | | | | | 2.50 | III | 41300 (184000) | 25 | 6255DB | 121 | | |
| | | | 2.36 | III | 53300 (237000) | | | | | 2.60 | III | 50400 (224000) | 25 | 6265DA | 121 | | |
| 8.79 | 128000 (14500) 160000 (18100) | | * | - | 27500 (122000) | 10.6 | 133000 (15000) | | | 0.97 | - | 25900 (115000) | 25 | 6225DB | 165 | C.F. | |
| | | | 1.08 | I | 34100 (151000) | | | | | 1.30 | II | 32300 (144000) | 25 | 6235DA | 165 | | |
| | | | 1.30 | II | 38100 (170000) | | | | | 1.30 | II | 36100 (161000) | 25 | 6245DA | 165 | | |
| | | | 1.45 | II | 38100 (170000) | | | | | 1.75 | III | 36100 (161000) | 25 | 6245DB | 165 | | |
| | | | 1.72 | III | 46800 (208000) | | | | | 2.08 | III | 44300 (197000) | 25 | 6255DB | 165 | | |
| | | | 2.42 | III | 57100 (254000) | | | | | 2.60 | III | 54000 (240000) | 25 | 6265DA | 165 | | |
| 7.44 | 174000 (19600) 189000 (21400) | | * | - | 35800 (159000) | 8.97 | 157000 (17700) | | | 1.11 | I | 33900 (151000) | 25 | 6235DA | 195 | C.F. | |
| | | | 1.22 | I | 40000 (178000) | | | | | 1.22 | I | 37900 (169000) | 25 | 6245DA | 195 | | |
| | | | 1.23 | I | 40000 (178000) | | | | | 1.48 | II | 37900 (169000) | 25 | 6245DB | 195 | | |
| | | | 1.46 | II | 49100 (218000) | | | | | 1.63 | III | 46500 (207000) | 25 | 6255DA | 195 | | |
| | | | 1.46 | II | 49100 (218000) | | | | | 1.76 | III | 46500 (207000) | 25 | 6255DB | 195 | | |
| | | | 2.05 | III | 59900 (267000) | | | | | 2.47 | III | 56700 (252000) | 25 | 6265DA | 195 | | |
| 6.28 | 167000 (18900) 224000 (25300) | | * | - | 38500 (171000) | 7.58 | 167000 (18900) 186000 (21000) | | | * | - | 36300 (162000) | 25 | 6235DA | 231 | C.F. | |
| | | | 1.02 | I | 42600 (189000) | | | | | 1.23 | I | 40400 (180000) | 25 | 6245DA | 231 | | |
| | | | 1.22 | I | 52100 (232000) | | | | | 1.48 | II | 49300 (219000) | 25 | 6255DA | 231 | | |
| | | | 1.82 | III | 62000 (276000) | | | | | 2.19 | III | 60400 (269000) | 25 | 6265DA | 231 | | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

25 HP
18.5 kW



Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 5.31 | 228000 | (25800) | * | - | 44800 | (199000) | 6.41 | 220000 | (24800) | 1.04 | I | 42300 | (188000) | 25 | 6245DA | 273 | C.F. |
| | 265000 | (29900) | 1.04 | I | 54600 | (243000) | | | | 1.25 | I | 51800 | (230000) | 25 | 6255DA | 273 | |
| | | | 1.54 | II | 62000 | (276000) | | | | 1.85 | III | 62000 | (276000) | 25 | 6265DA | 273 | |
| 4.55 | 228000 | (25800) | * | - | 46800 | (208000) | 5.49 | 228000 | (25800) | * | - | 44200 | (196000) | 25 | 6245DA | 319 | C.F. |
| | 287000 | (32500) | * | - | 57400 | (255000) | | | | 1.12 | I | 54400 | (242000) | 25 | 6255DA | 319 | C.F. |
| | 310000 | (35000) | 1.31 | II | 62000 | (276000) | | | | 1.59 | II | 62000 | (276000) | 25 | 6265DA | 319 | C.F. |
| | | | 1.95 | III | 55700 | (248000) | | | | 2.35 | III | 55700 | (248000) | 25 | 6275DA | 319 | C.F. |
| 3.85 | 287000 | (32500) | * | - | 58000 | (258000) | 4.64 | 287000 | (32500) | * | - | 57100 | (254000) | 25 | 6255DA | 377 | C.F. |
| | 366000 | (41300) | 1.11 | I | 62000 | (276000) | | | | 1.34 | II | 62000 | (276000) | 25 | 6265DA | 377 | |
| | | | 1.65 | III | 55700 | (248000) | | | | 1.99 | III | 55700 | (248000) | 25 | 6275DA | 377 | |
| 3.07 | 407000 | (46000) | * | - | 62000 | (276000) | 3.70 | 380000 | (43000) | 1.07 | I | 62000 | (276000) | 25 | 6265DA | 473 | C.F. |
| | 459000 | (51900) | 1.31 | II | 55700 | (248000) | | | | 1.59 | II | 55700 | (248000) | 25 | 6275DA | 473 | C.F. |
| 2.59 | 543000 | (61300) | 1.11 | I | 55700 | (248000) | 3.13 | 450000 | (50800) | 1.34 | II | 55700 | (248000) | 25 | 6275DA | 559 | C.F. |
| 2.23 | 630000 | (71200) | 0.96 | - | 55700 | (248000) | 2.70 | 522000 | (59000) | 1.16 | I | 55700 | (248000) | 25 | 6275DA | 649 | C.F. |
| 1.98 | 604000 | (68200) | * | - | 55700 | (248000) | 2.39 | 588000 | (66400) | 1.03 | I | 55700 | (248000) | 25 | 6275DA | 731 | C.F. |
| 1.72 | 604000 | (68200) | * | - | 55700 | (248000) | 2.08 | 604000 | (68200) | * | - | 55700 | (248000) | 25 | 6275DA | 841 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

30 HP
22 kW

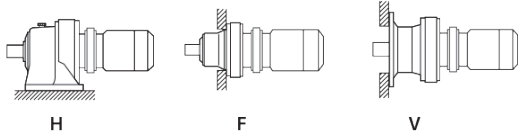

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | | 60 Hz | | | | | | Selection | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 483 | 3650 | (413) | 1.06 | I | 1780 | (7930) | 583 | 3030 | (342) | 1.10 | I | 1690 | (7510) | 30 | 6165 | 3 | |
| | | | 1.25 | I | 2020 | (8970) | | | | 1.25 | I | 1910 | (8490) | 30 | 6170 | 3 | |
| | | | 1.37 | II | 2020 | (8970) | | | | 1.37 | II | 1910 | (8490) | 30 | 6175 | 3 | |
| 290 | 6090 | (688) | 1.06 | I | 2110 | (9400) | 350 | 5050 | (570) | 1.10 | I | 2000 | (8900) | 30 | 6165 | 5 | |
| | | | 1.25 | I | 2390 | (10600) | | | | 1.25 | I | 2260 | (10100) | 30 | 6170 | 5 | |
| | | | 1.37 | II | 2390 | (10600) | | | | 1.37 | II | 2260 | (10100) | 30 | 6175 | 5 | |
| 242 | 7310 | (826) | 1.09 | I | 2260 | (10100) | 292 | 6060 | (684) | 1.09 | I | 2140 | (9510) | 30 | 6165 | 6 | |
| | | | 1.25 | I | 2570 | (11500) | | | | 1.25 | I | 2430 | (10800) | 30 | 6170 | 6 | |
| | | | 1.37 | II | 2570 | (11500) | | | | 1.37 | II | 2430 | (10800) | 30 | 6175 | 6 | |
| 181 | 9750 | (1100) | 1.09 | I | 2510 | (11200) | 219 | 8080 | (912) | 1.09 | I | 2380 | (10600) | 30 | 6165 | 8 | |
| | | | 1.25 | I | 2840 | (12600) | | | | 1.25 | I | 2680 | (11900) | 30 | 6170 | 8 | |
| | | | 1.37 | II | 2840 | (12600) | | | | 1.37 | II | 2680 | (11900) | 30 | 6175 | 8 | |
| 132 | 13400 | (1510) | 1.09 | I | 2830 | (12600) | 159 | 11100 | (1250) | 1.09 | I | 2680 | (11900) | 30 | 6165 | 11 | |
| | | | 1.25 | I | 3250 | (14500) | | | | 1.25 | I | 3070 | (13700) | 30 | 6170 | 11 | |
| | | | 1.37 | II | 3250 | (14500) | | | | 1.37 | II | 3070 | (13700) | 30 | 6175 | 11 | |
| | | | 1.60 | III | 4370 | (19500) | | | | 1.60 | III | 4120 | (18300) | 30 | 6180 | 11 | |
| | | | 1.77 | III | 4370 | (19500) | | | | 1.77 | III | 4120 | (18300) | 30 | 6185 | 11 | |
| | | | 1.86 | III | 6140 | (27300) | | | | 1.86 | III | 5780 | (25700) | 30 | 6190 | 11 | C.F. |
| | | | 2.19 | III | 6140 | (27300) | | | | 2.19 | III | 5780 | (25700) | 30 | 6195 | 11 | C.F. |
| | | | 2.71 | III | 11800 | (52300) | | | | 2.71 | III | 11100 | (49500) | 30 | 6205 | 11 | C.F. |
| 112 | 15800 | (1790) | 1.03 | I | 2940 | (13100) | 135 | 13100 | (1480) | 1.03 | I | 2800 | (12400) | 30 | 6165 | 13 | |
| | | | 1.24 | I | 3370 | (15000) | | | | 1.24 | I | 3190 | (14200) | 30 | 6170 | 13 | |
| | | | 1.37 | II | 3370 | (15000) | | | | 1.37 | II | 3190 | (14200) | 30 | 6175 | 13 | |
| | | | 1.60 | III | 4540 | (20200) | | | | 1.60 | III | 4280 | (19100) | 30 | 6180 | 13 | |
| | | | 1.77 | III | 4540 | (20200) | | | | 1.77 | III | 4280 | (19100) | 30 | 6185 | 13 | |
| | | | 1.86 | III | 6380 | (28400) | | | | 1.86 | III | 6010 | (26700) | 30 | 6190 | 13 | C.F. |
| | | | 2.19 | III | 6380 | (28400) | | | | 2.19 | III | 6010 | (26700) | 30 | 6195 | 13 | C.F. |
| 96.7 | 18300 | (2060) | 1.02 | I | 3100 | (13800) | 117 | 15100 | (1710) | 1.03 | I | 2940 | (13100) | 30 | 6165 | 15 | |
| | | | 1.16 | I | 3510 | (15600) | | | | 1.16 | I | 3330 | (14800) | 30 | 6170 | 15 | |
| | | | 1.37 | II | 3510 | (15600) | | | | 1.37 | II | 3330 | (14800) | 30 | 6175 | 15 | |
| | | | 1.47 | II | 4780 | (21300) | | | | 1.47 | II | 4510 | (20100) | 30 | 6180 | 15 | |
| | | | 1.77 | III | 4780 | (21300) | | | | 1.77 | III | 4510 | (20100) | 30 | 6185 | 15 | |
| | | | 1.86 | III | 6700 | (29800) | | | | 1.86 | III | 6310 | (28100) | 30 | 6190 | 15 | C.F. |
| | | | 2.19 | III | 6700 | (29800) | | | | 2.19 | III | 6310 | (28100) | 30 | 6195 | 15 | C.F. |
| | | | 2.71 | III | 12600 | (56200) | | | | 2.71 | III | 12000 | (53200) | 30 | 6205 | 15 | C.F. |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

30 HP
22 kW

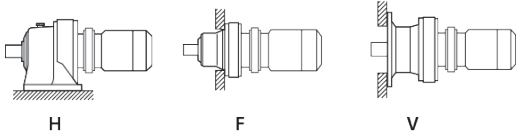

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|------------------|-------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 85.3 | 20700 | (2340) | 0.86 | - | 3170 | (14100) | 103 | 17200 | (1940) | 0.86 | - | 3020 | (13400) | 30 | 6165 | 17 | C.F. |
| | | | 0.89 | - | 3650 | (16200) | | | | 0.89 | - | 3460 | (15400) | 30 | 6170 | 17 | |
| | | | 1.09 | I | 3650 | (16200) | | | | 1.09 | I | 3460 | (15400) | 30 | 6175 | 17 | |
| | | | 1.39 | II | 5040 | (22400) | | | | 1.39 | II | 4760 | (21200) | 30 | 6180 | 17 | |
| | | | 1.74 | III | 5040 | (22400) | | | | 1.77 | III | 4760 | (21200) | 30 | 6185 | 17 | |
| | | | 1.86 | III | 7060 | (31400) | | | | 1.86 | III | 6650 | (29600) | 30 | 6190 | 17 | |
| | | | 2.19 | III | 7060 | (31400) | | | | 2.19 | III | 6650 | (29600) | 30 | 6195 | 17 | |
| 69.0 | 25600 | (2890) | 1.07 | I | 3920 | (17500) | 83.3 | 21200 | (2400) | 1.09 | I | 3720 | (16600) | 30 | 6175 | 21 | C.F. |
| | | | 1.36 | II | 5400 | (24000) | | | | 1.36 | II | 5100 | (22700) | 30 | 6180 | 21 | |
| | | | 1.73 | III | 5400 | (24000) | | | | 1.77 | III | 5100 | (22700) | 30 | 6185 | 21 | |
| | | | 1.86 | III | 7590 | (33700) | | | | 1.86 | III | 7150 | (31800) | 30 | 6190 | 21 | |
| | | | 2.19 | III | 7590 | (33700) | | | | 2.19 | III | 7150 | (31800) | 30 | 6195 | 21 | |
| | | | 2.69 | III | 14100 | (62900) | | | | 2.69 | III | 13400 | (59500) | 30 | 6205 | 21 | |
| 58.0 | 30500 | (3440) | 0.89 | - | 4030 | (17900) | 70.0 | 25200 | (2850) | 0.89 | - | 3830 | (17000) | 30 | 6175 | 25 | C.F. |
| | | | 1.09 | I | 5590 | (24900) | | | | 1.09 | I | 5280 | (23500) | 30 | 6180 | 25 | |
| | | | 1.37 | II | 5590 | (24900) | | | | 1.37 | II | 5280 | (23500) | 30 | 6185 | 25 | |
| | | | 1.60 | III | 7930 | (35300) | | | | 1.60 | III | 7470 | (33200) | 30 | 6190 | 25 | |
| | | | 1.84 | III | 7930 | (35300) | | | | 1.84 | III | 7470 | (33200) | 30 | 6195 | 25 | |
| 50.0 | 35300 | (3990) | 1.09 | I | 5820 | (25900) | 60.3 | 29300 | (3310) | 1.09 | I | 5510 | (24500) | 30 | 6185 | 29 | C.F. |
| | | | 1.40 | II | 8320 | (37000) | | | | 1.40 | II | 7840 | (34900) | 30 | 6190 | 29 | |
| | | | 1.72 | III | 8320 | (37000) | | | | 1.72 | III | 7840 | (34900) | 30 | 6195 | 29 | |
| | | | 2.08 | III | 15400 | (68500) | | | | 2.08 | III | 14600 | (64900) | 30 | 6205 | 29 | |
| | | | 2.66 | III | 15700 | (70000) | | | | 2.66 | III | 14900 | (66200) | 30 | 6215 | 29 | |
| 41.4 | 42600 | (4820) | 1.03 | I | 6190 | (27500) | 50.0 | 35300 | (3990) | 1.03 | I | 5850 | (26000) | 30 | 6185 | 35 | C.F. |
| | | | 1.10 | I | 8760 | (39000) | | | | 1.10 | I | 8260 | (36700) | 30 | 6190 | 35 | |
| | | | 1.37 | II | 8760 | (39000) | | | | 1.37 | II | 8260 | (36700) | 30 | 6195 | 35 | |
| 33.7 | 52400 | (5920) | 0.84 | - | 6540 | (29100) | 40.7 | 43400 | (4900) | 0.86 | - | 6210 | (27600) | 30 | 6185 | 43 | C.F. |
| | | | 0.95 | - | 9390 | (41800) | | | | 0.95 | - | 8860 | (39400) | 30 | 6190 | 43 | |
| | | | 1.23 | I | 9390 | (41800) | | | | 1.37 | II | 8860 | (39400) | 30 | 6195 | 43 | |
| | | | 1.45 | II | 17300 | (77100) | | | | 1.45 | II | 16400 | (73000) | 30 | 6205 | 43 | |
| | | | 2.05 | III | 17700 | (78700) | | | | 2.05 | III | 16800 | (74600) | 30 | 6215 | 43 | |
| | | | 2.57 | III | 18800 | (83400) | | | | 2.57 | III | 17800 | (79000) | 30 | 6225 | 43 | |
| 28.4 | 62100 | (7020) | 0.95 | - | 9750 | (43400) | 34.3 | 51500 | (5820) | 0.95 | - | 9210 | (41000) | 30 | 6195 | 51 | |
| 24.6 | 71900 | (8120) | 0.86 | - | 10200 | (45300) | 29.7 | 59600 | (6730) | 0.86 | - | 9630 | (42800) | 30 | 6195 | 59 | C.F. |
| | | | 1.03 | I | 18800 | (83600) | | | | 1.03 | I | 17800 | (79200) | 30 | 6205 | 59 | |
| | | | 1.54 | II | 19200 | (85300) | | | | 1.71 | III | 18200 | (80800) | 30 | 6215 | 59 | |
| | | | 1.79 | III | 20300 | (90500) | | | | 2.05 | III | 19300 | (85700) | 30 | 6225 | 59 | |
| 16.7 | 106000 | (12000) | 1.22 | I | 22700 | (101000) | 20.1 | 87800 | (9920) | 1.22 | I | 21500 | (95700) | 30 | 6225 | 87 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

30 HP
22 kW

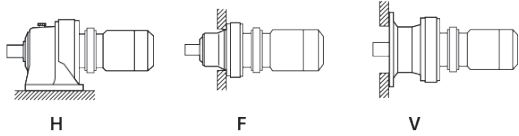

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|------------------|---------------|---------------|--------------------|------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | | |
| 12.0 | 101000 | (11400) | * | - | 23400 | (104000) | 14.5 | 101000 | (11400) | * | - | 22600 | (101000) | 30 | 6215DB | 121 | | |
| | 119000 | (13500) | * | - | 25400 | (113000) | | 116000 | (13100) | 1.03 | I | 23900 | (106000) | 30 | 6225DB | 121 | | |
| | 140000 | (15800) | 1.09 | I | 31800 | (141000) | | | | 1.09 | I | 30100 | (134000) | 30 | 6235DA | 121 | | |
| | | | 1.19 | I | 31800 | (141000) | | | | 1.43 | II | 30100 | (134000) | 30 | 6235DB | 121 | | |
| | | | 1.30 | II | 35400 | (157000) | | | | 1.57 | II | 33500 | (149000) | 30 | 6245DB | 121 | | |
| | | | 1.74 | III | 43500 | (193000) | | | | 2.10 | III | 41200 | (183000) | 30 | 6255DB | 121 | C.F. | |
| | | | 1.99 | III | 53200 | (237000) | | | | 2.19 | III | 50300 | (224000) | 30 | 6265DA | 121 | C.F. | |
| 8.79 | 174000 | (19600) | * | - | 34000 | (151000) | 10.6 | 158000 | (17800) | 1.09 | I | 32200 | (143000) | 30 | 6235DA | 165 | | |
| | 190000 | (21500) | 1.09 | I | 37900 | (169000) | | | | 1.09 | I | 36000 | (160000) | 30 | 6245DA | 165 | | |
| | | | 1.22 | I | 37900 | (169000) | | | | 1.47 | II | 36000 | (160000) | 30 | 6245DB | 165 | | |
| | | | 1.45 | II | 46600 | (207000) | | | | 1.75 | III | 44200 | (196000) | 30 | 6255DB | 165 | C.F. | |
| | | | 2.03 | III | 57000 | (253000) | | | | 2.19 | III | 53900 | (240000) | 30 | 6265DA | 165 | C.F. | |
| 7.44 | 174000 | (19600) | * | - | 35800 | (159000) | 8.97 | 174000 | (19600) | * | - | 33800 | (150000) | 30 | 6235DA | 195 | | |
| | 225000 | (25400) | 1.03 | I | 39800 | (177000) | | | 186000 | (21100) | 1.03 | I | 37700 | (168000) | 30 | 6245DA | 195 | |
| | | | 1.03 | I | 39800 | (177000) | | | | 1.25 | I | 37700 | (168000) | 30 | 6245DB | 195 | | |
| | | | 1.23 | I | 48900 | (218000) | | | | 1.37 | II | 46300 | (206000) | 30 | 6255DA | 195 | | |
| | | | 1.23 | I | 48900 | (218000) | | | | 1.48 | II | 46300 | (206000) | 30 | 6255DB | 195 | C.F. | |
| | | | 1.72 | III | 59800 | (266000) | | | | 2.08 | III | 56600 | (252000) | 30 | 6265DA | 195 | C.F. | |
| 6.28 | 228000 | (25800) | * | - | 42500 | (189000) | 7.58 | 221000 | (25000) | 1.03 | I | 40200 | (179000) | 30 | 6245DA | 231 | | |
| | 267000 | (30100) | 1.03 | I | 51900 | (231000) | | | | 1.24 | I | 49200 | (219000) | 30 | 6255DA | 231 | | |
| | | | 1.53 | II | 62000 | (276000) | | | | 1.84 | III | 60300 | (268000) | 30 | 6265DA | 231 | C.F. | |
| 5.31 | 228000 | (25800) | * | - | 44800 | (199000) | 6.41 | 228000 | (25800) | * | - | 42300 | (188000) | 30 | 6245DA | 273 | | |
| | 274000 | (31000) | * | - | 54600 | (243000) | | | 261000 | (29500) | 1.05 | I | 51600 | (229000) | 30 | 6255DA | 273 | |
| | 315000 | (35600) | 1.29 | I | 62000 | (276000) | | | | 1.56 | II | 62000 | (276000) | 30 | 6265DA | 273 | C.F. | |
| 4.55 | 287000 | (32500) | * | - | 57400 | (255000) | 5.49 | 287000 | (32500) | * | - | 54200 | (241000) | 30 | 6255DA | 319 | | |
| | 368000 | (41600) | 1.11 | I | 62000 | (276000) | | | 305000 | (34500) | 1.33 | II | 62000 | (276000) | 30 | 6265DA | 319 | C.F. |
| | | | 1.64 | III | 55700 | (248000) | | | | 1.98 | III | 55700 | (248000) | 30 | 6275DA | 319 | C.F. | |
| 3.85 | 407000 | (46000) | * | - | 62000 | (276000) | 4.64 | 361000 | (40700) | 1.13 | I | 62000 | (276000) | 30 | 6265DA | 377 | C.F. | |
| | 435000 | (49200) | 1.39 | II | 55700 | (248000) | | | | 1.67 | III | 55700 | (248000) | 30 | 6275DA | 377 | C.F. | |
| 3.07 | 407000 | (46000) | * | - | 62000 | (276000) | 3.70 | 407000 | (46000) | * | - | 62000 | (276000) | 30 | 6265DA | 473 | C.F. | |
| | 546000 | (61700) | 1.11 | I | 55700 | (248000) | | | 452000 | (51100) | 1.33 | II | 55700 | (248000) | 30 | 6275DA | 473 | C.F. |
| 2.59 | 604000 | (68200) | * | - | 55700 | (248000) | 3.13 | 535000 | (60400) | 1.13 | I | 55700 | (248000) | 30 | 6275DA | 559 | C.F. | |
| 2.23 | 604000 | (68200) | * | - | 55700 | (248000) | 2.70 | 621000 | (70100) | 0.97 | - | 55700 | (248000) | 30 | 6275DA | 649 | C.F. | |
| 1.98 | 604000 | (68200) | * | - | 55700 | (248000) | 2.39 | 604000 | (68200) | * | - | 55700 | (248000) | 30 | 6275DA | 731 | C.F. | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

40 HP
30 kW

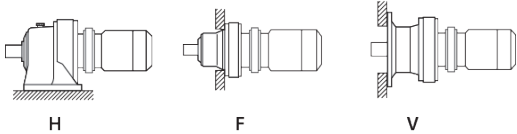

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|--------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|--------|-------------------------------|------------|-------|---------|--------------------|------------------|------------|-------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Base | | VFD ^[2] | | | |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Motor Power Code | Frame Size | Ratio |
| 483 | 4980 | (563) | 1.00 | I | 2020 | (8970) | 583 | 4130 | (467) | 1.00 | I | 1910 | (8490) | 40 | 6175 | 3 | |
| 290 | 8310 | (939) | 1.00 | I | 2390 | (10600) | 350 | 6880 | (778) | 1.00 | I | 2260 | (10100) | 40 | 6175 | 5 | |
| 242 | 9970 | (1130) | 1.00 | I | 2530 | (11300) | 292 | 8260 | (933) | 1.00 | I | 2400 | (10700) | 40 | 6175 | 6 | |
| 181 | 13300 | (1500) | 1.00 | I | 2780 | (12400) | 219 | 11000 | (1240) | 1.00 | I | 2640 | (11700) | 40 | 6175 | 8 | |
| 132 | 18300 | (2060) | 1.00 | I | 3170 | (14100) | 159 | 15100 | (1710) | 1.00 | I | 3010 | (13400) | 40 | 6175 | 11 | C.F. |
| | | | 1.17 | I | 4320 | (19200) | | | | 1.17 | I | 4080 | (18200) | 40 | 6180 | 11 | |
| | | | 1.30 | II | 4320 | (19200) | | | | 1.30 | II | 4080 | (18200) | 40 | 6185 | 11 | |
| | | | 1.37 | II | 6100 | (27100) | | | | 1.37 | II | 5740 | (25500) | 40 | 6190 | 11 | |
| | | | 1.60 | III | 6100 | (27100) | | | | 1.60 | III | 5740 | (25500) | 40 | 6195 | 11 | |
| | | | 1.99 | III | 11700 | (52200) | | | | 1.99 | III | 11100 | (49400) | 40 | 6205 | 11 | |
| 112 | 21600 | (2440) | 1.00 | I | 3280 | (14600) | 135 | 17900 | (2020) | 1.00 | I | 3120 | (13900) | 40 | 6175 | 13 | C.F. |
| | | | 1.17 | I | 4480 | (19900) | | | | 1.17 | I | 4230 | (18800) | 40 | 6180 | 13 | |
| | | | 1.30 | II | 4480 | (19900) | | | | 1.30 | II | 4230 | (18800) | 40 | 6185 | 13 | |
| | | | 1.37 | II | 6330 | (28200) | | | | 1.37 | II | 5970 | (26500) | 40 | 6190 | 13 | |
| | | | 1.60 | III | 6330 | (28200) | | | | 1.60 | III | 5970 | (26500) | 40 | 6195 | 13 | |
| 96.7 | 24900 | (2820) | 1.00 | I | 3390 | (15100) | 117 | 20600 | (2330) | 1.00 | I | 3240 | (14400) | 40 | 6175 | 15 | C.F. |
| | | | 1.08 | I | 4700 | (20900) | | | | 1.08 | I | 4450 | (19800) | 40 | 6180 | 15 | |
| | | | 1.30 | II | 4700 | (20900) | | | | 1.30 | II | 4450 | (19800) | 40 | 6185 | 15 | |
| | | | 1.37 | II | 6640 | (29500) | | | | 1.37 | II | 6260 | (27800) | 40 | 6190 | 15 | |
| | | | 1.60 | III | 6640 | (29500) | | | | 1.60 | III | 6260 | (27800) | 40 | 6195 | 15 | |
| | | | 1.99 | III | 12600 | (56000) | | | | 1.99 | III | 11900 | (53000) | 40 | 6205 | 15 | |
| 85.3 | 28200 | (3190) | 1.02 | I | 4950 | (22000) | 103 | 23400 | (2640) | 1.02 | I | 4680 | (20800) | 40 | 6180 | 17 | C.F. |
| | | | 1.27 | I | 4950 | (22000) | | | | 1.30 | II | 4680 | (20800) | 40 | 6185 | 17 | |
| | | | 1.37 | II | 6990 | (31100) | | | | 1.37 | II | 6600 | (29300) | 40 | 6190 | 17 | |
| | | | 1.60 | III | 6990 | (31100) | | | | 1.60 | III | 6600 | (29300) | 40 | 6195 | 17 | |
| 69.0 | 34900 | (3940) | 1.00 | I | 5310 | (23600) | 83.3 | 28900 | (3270) | 1.00 | I | 5030 | (22400) | 40 | 6180 | 21 | C.F. |
| | | | 1.27 | I | 5310 | (23600) | | | | 1.30 | II | 5030 | (22400) | 40 | 6185 | 21 | |
| | | | 1.37 | II | 7520 | (33500) | | | | 1.37 | II | 7090 | (31500) | 40 | 6190 | 21 | |
| | | | 1.60 | III | 7520 | (33500) | | | | 1.60 | III | 7090 | (31500) | 40 | 6195 | 21 | |
| | | | 1.97 | III | 14100 | (62700) | | | | 1.97 | III | 13300 | (59300) | 40 | 6205 | 21 | |
| | | | 2.51 | III | 14400 | (64100) | | | | 2.51 | III | 13600 | (60700) | 40 | 6215 | 21 | |
| 58.0 | 41500 | (4690) | 1.00 | I | 5480 | (24400) | 70.0 | 34400 | (3890) | 1.00 | I | 5190 | (23100) | 40 | 6185 | 25 | C.F. |
| | | | 1.17 | I | 7850 | (34900) | | | | 1.17 | I | 7410 | (32900) | 40 | 6190 | 25 | |
| | | | 1.35 | II | 7850 | (34900) | | | | 1.35 | II | 7410 | (32900) | 40 | 6195 | 25 | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

40 HP
30 kW

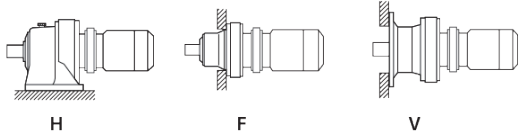

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | | |
|--------------------|----------------|-------|-------------------------------|------------|---------------------------|------|--------------------|---------------|-------|-------------------------------|----------------|---------------------------|--------|------------------|------------|-------|--------------------|-----|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | | |
| 50.0 | 48200 (5440) | | 0.80 | - | 5690 (25300) | 60.3 | 39900 (4510) | | 0.80 | - | 5400 (24000) | 40 | 6185 | 29 | C.F. | | | |
| | | | 1.02 | I | 8220 (36600) | | | | 1.02 | I | 7760 (34500) | | | | | 40 | 6190 | 29 |
| | | | 1.26 | I | 8220 (36600) | | | | 1.26 | I | 7760 (34500) | | | | | 40 | 6195 | 29 |
| | | | 1.52 | II | 15300 (68200) | | | | 1.52 | II | 14500 (64600) | | | | | 40 | 6205 | 29 |
| | | | 1.95 | III | 15600 (69600) | | | | 1.95 | III | 14800 (65900) | | | | | 40 | 6215 | 29 |
| | | | 2.51 | III | 16600 (73700) | | | | 2.51 | III | 15700 (69800) | | | | | 40 | 6225 | 29 |
| 41.4 | 58100 (6570) | | 1.00 | I | 8640 (38400) | 50.0 | 48200 (5440) | | 1.00 | I | 8170 (36300) | 40 | 6195 | 35 | | | | |
| 33.7 | 71400 (8070) | | 0.90 | - | 9250 (41100) | 40.7 | 59200 (6690) | | 1.00 | I | 8740 (38900) | 40 | 6195 | 43 | C.F. | | | |
| | | | 1.06 | I | 17200 (76600) | | | | 1.06 | I | 16300 (72600) | | | | | 40 | 6205 | 43 |
| | | | 1.51 | II | 17600 (78200) | | | | 1.51 | II | 16700 (74100) | | | | | 40 | 6215 | 43 |
| | | | 1.88 | III | 18600 (83000) | | | | 1.88 | III | 17700 (78600) | | | | | 40 | 6225 | 43 |
| 24.6 | 98000 (11100) | | 1.13 | I | 19000 (84600) | 29.7 | 81200 (9180) | | 1.26 | I | 18000 (80300) | 40 | 6215 | 59 | C.F. | | | |
| | | | 1.31 | II | 20200 (89800) | | | | 1.51 | II | 19100 (85200) | | | | | 40 | 6225 | 59 |
| 12.0 | 119000 (13500) | | * | - | 25400 (113000) | 14.5 | 119000 (13500) | | * | - | 23900 (106000) | 40 | 6225DB | 121 | C.F. | | | |
| | | | * | - | 31600 (141000) | | | | 1.05 | I | 29900 (133000) | | | | | 40 | 6235DB | 121 |
| | | | * | - | 35200 (156000) | | | | 1.15 | I | 33300 (148000) | | | | | 40 | 6245DB | 121 |
| | | | 1.28 | I | 43200 (192000) | | | | 1.54 | II | 40900 (182000) | | | | | 40 | 6255DB | 121 |
| | | | 1.46 | II | 53000 (236000) | | | | 1.60 | III | 50200 (223000) | | | | | 40 | 6265DA | 121 |
| 8.79 | 174000 (19600) | | * | - | 34000 (151000) | 10.6 | 174000 (19600) | | * | - | 32100 (143000) | 40 | 6235DB | 165 | C.F. | | | |
| | | | * | - | 37700 (168000) | | | | 1.08 | I | 35700 (159000) | | | | | 40 | 6245DB | 165 |
| | | | 1.06 | I | 46300 (206000) | | | | 1.28 | I | 43900 (195000) | | | | | 40 | 6255DB | 165 |
| | | | 1.49 | II | 56700 (252000) | | | | 1.60 | III | 53700 (239000) | | | | | 40 | 6265DA | 165 |
| 7.44 | 232000 (26200) | | * | - | 39700 (177000) | 8.97 | 232000 (26200) | | * | - | 37500 (167000) | 40 | 6245DB | 195 | C.F. | | | |
| | | | * | - | 48700 (216000) | | | | 1.00 | I | 46000 (205000) | | | | | 40 | 6255DA | 195 |
| | | | * | - | 48700 (216000) | | | | 1.08 | I | 46000 (205000) | | | | | 40 | 6255DB | 195 |
| | | | 1.26 | I | 59500 (265000) | | | | 1.52 | II | 56300 (251000) | | | | | 40 | 6265DA | 195 |
| 6.28 | 228000 (25800) | | * | - | 42500 (189000) | 7.58 | 228000 (25800) | | * | - | 40100 (179000) | 40 | 6245DB | 231 | C.F. | | | |
| | | | * | - | 51800 (231000) | | | | * | - | 48900 (218000) | | | | | 40 | 6255DA | 231 |
| | | | 1.12 | I | 62000 (276000) | | | | 1.35 | II | 60000 (267000) | | | | | 40 | 6265DA | 231 |
| 5.31 | 274000 (31000) | | * | - | 54600 (243000) | 6.41 | 274000 (31000) | | * | - | 51500 (229000) | 40 | 6255DA | 273 | C.F. | | | |
| | | | * | - | 62000 (276000) | | | | 1.14 | I | 62000 (276000) | | | | | 40 | 6265DA | 273 |
| 4.55 | 407000 (46000) | | * | - | 62000 (276000) | 5.49 | 416000 (47000) | | 0.98 | - | 62000 (276000) | 40 | 6265DA | 319 | C.F. | | | |
| | | | 1.20 | I | 55700 (248000) | | | | 1.45 | II | 55700 (248000) | | | | | 40 | 6275DA | 319 |
| 3.85 | 407000 (46000) | | * | - | 62000 (276000) | 4.64 | 407000 (46000) | | * | - | 62000 (276000) | 40 | 6265DA | 377 | C.F. | | | |
| | | | 1.02 | I | 55700 (248000) | | | | 1.23 | I | 55700 (248000) | | | | | 40 | 6275DA | 377 |
| 3.07 | 604000 (68200) | | * | - | 55700 (248000) | 3.70 | 617000 (69700) | | 0.98 | - | 55700 (248000) | 40 | 6275DA | 473 | C.F. | | | |
| 2.59 | 604000 (68200) | | * | - | 55700 (248000) | 3.13 | 604000 (68200) | | * | - | 55700 (248000) | 40 | 6275DA | 559 | | | | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

50 HP
37 kW

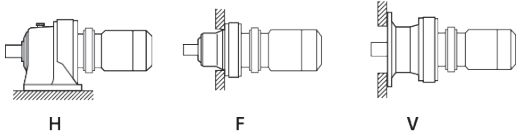

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | | | |
|--------------------|----------------|-------|-------------------------------|------------|---------------------------|------|--------------------|---------------|-------|-------------------------------|----------------|---------------------------|---------------|------------------|------------|-------|--------------------|-------------|----|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] | | |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | | | |
| 132 | 22500 (2550) | | 1.05 | I | 4280 (19000) | 159 | 18700 (2110) | | | 1.05 | I | 4040 (18000) | 50 | 6185 | 11 | C.F. | | | |
| | | | 1.11 | I | 6060 (27000) | | | | | 1.11 | I | 5710 (25400) | | | | | 50 | 6190 | 11 |
| | | | 1.30 | II | 6060 (27000) | | | | | 1.30 | II | 5710 (25400) | | | | | 50 | 6195 | 11 |
| | | | 1.61 | III | 11700 (52000) | | | | | 1.61 | III | 11100 (49300) | | | | | 50 | 6205 | 11 |
| | | | 2.04 | III | 11900 (52700) | | | | | 2.04 | III | 11200 (49900) | | | | | 50 | 6215 | 11 |
| | | | 2.69 | III | 12600 (56000) | | | | | 2.69 | III | 11900 (53000) | | | | | 50 | 6225 | 11 |
| 112 | 26600 (3010) | | 1.05 | I | 4430 (19700) | 135 | 22100 (2490) | | | 1.05 | I | 4190 (18600) | 50 | 6185 | 13 | C.F. | | | |
| | | | 1.11 | I | 6290 (28000) | | | | | 1.11 | I | 5930 (26400) | | | | | 50 | 6190 | 13 |
| | | | 1.30 | II | 6290 (28000) | | | | | 1.30 | II | 5930 (26400) | | | | | 50 | 6195 | 13 |
| 96.7 | 30700 (3470) | | 1.05 | I | 4630 (20600) | 117 | 25500 (2880) | | | 1.05 | I | 4390 (19500) | 50 | 6185 | 15 | C.F. | | | |
| | | | 1.11 | I | 6590 (29300) | | | | | 1.11 | I | 6220 (27700) | | | | | 50 | 6190 | 15 |
| | | | 1.30 | II | 6590 (29300) | | | | | 1.30 | II | 6220 (27700) | | | | | 50 | 6195 | 15 |
| | | | 1.61 | III | 12600 (55900) | | | | | 1.61 | III | 11900 (52900) | | | | | 50 | 6205 | 15 |
| | | | 2.04 | III | 12700 (56600) | | | | | 2.04 | III | 12100 (53600) | | | | | 50 | 6215 | 15 |
| | | | 2.69 | III | 13600 (60400) | | | | | 2.69 | III | 12900 (57200) | | | | | 50 | 6225 | 15 |
| 85.3 | 34800 (3940) | | 1.03 | I | 4870 (21600) | 103 | 28900 (3260) | | | 1.05 | I | 4620 (20500) | 50 | 6185 | 17 | C.F. | | | |
| | | | 1.11 | I | 6940 (30900) | | | | | 1.11 | I | 6550 (29100) | | | | | 50 | 6190 | 17 |
| | | | 1.30 | II | 6940 (30900) | | | | | 1.30 | II | 6550 (29100) | | | | | 50 | 6195 | 17 |
| 69.0 | 43000 (4860) | | 1.03 | I | 5230 (23300) | 83.3 | 35700 (4030) | | | 1.05 | I | 4960 (22100) | 50 | 6185 | 21 | C.F. | | | |
| | | | 1.11 | I | 7460 (33200) | | | | | 1.11 | I | 7040 (31300) | | | | | 50 | 6190 | 21 |
| | | | 1.30 | II | 7460 (33200) | | | | | 1.30 | II | 7040 (31300) | | | | | 50 | 6195 | 21 |
| | | | 1.60 | III | 14000 (62500) | | | | | 1.60 | III | 13300 (59200) | | | | | 50 | 6205 | 21 |
| | | | 2.04 | III | 14400 (63800) | | | | | 2.04 | III | 13600 (60500) | | | | | 50 | 6215 | 21 |
| | | | 2.55 | III | 15200 (67500) | | | | | 2.55 | III | 14400 (63900) | | | | | 50 | 6225 | 21 |
| 58.0 | 51200 (5790) | | 0.81 | - | 5380 (23900) | 70.0 | 42400 (4800) | | | 0.81 | - | 5110 (22700) | 50 | 6185 | 25 | C.F. | | | |
| | | | 0.95 | - | 7780 (34600) | | | | | 0.95 | - | 7350 (32700) | | | | | 50 | 6190 | 25 |
| | | | 1.09 | I | 7780 (34600) | | | | | 1.09 | I | 7350 (32700) | | | | | 50 | 6195 | 25 |
| 50.0 | 59400 (6710) | | 1.02 | I | 8140 (36200) | 60.3 | 49200 (5560) | | | 1.02 | I | 7690 (34200) | 50 | 6195 | 29 | C.F. | | | |
| | | | 1.23 | I | 15300 (67900) | | | | | 1.23 | I | 14500 (64400) | | | | | 50 | 6205 | 29 |
| | | | 1.58 | II | 15600 (69300) | | | | | 1.58 | II | 14800 (65700) | | | | | 50 | 6215 | 29 |
| | | | 2.04 | III | 16500 (73400) | | | | | 2.04 | III | 15600 (69600) | | | | | 50 | 6225 | 29 |
| 41.4 | 71700 (8100) | | 0.81 | - | 8540 (38000) | 50.0 | 59400 (6710) | | 0.81 | - | 8080 (35900) | 50 | 6195 | 35 | | | | | |
| 33.7 | 88100 (9950) | | 1.22 | I | 17500 (77700) | 40.7 | 73000 (8250) | | | 1.22 | I | 16600 (73800) | 50 | 6215 | 43 | C.F. | | | |
| | | | 1.53 | II | 18600 (82500) | | | | | 1.53 | II | 17600 (78300) | | | | | 50 | 6225 | 43 |
| 24.6 | 121000 (13700) | | 1.06 | I | 20000 (89200) | 29.7 | 100000 (11300) | | 1.22 | I | 19000 (84700) | 50 | 6225 | 59 | | | | | |
| 12.0 | 166000 (18700) | | * | - | 31600 (141000) | 14.5 | 166000 (18700) | | * | - | 29800 (133000) | 50 | 6235DB | 121 | C.F. | | | | |
| | 182000 (20500) | | * | - | 35200 (156000) | | 182000 (20500) | | * | - | 33200 (148000) | | | | | 50 | 6245DB | 121 | |
| | 235000 (26500) | | 1.04 | I | 43000 (191000) | | 195000 (22000) | | 1.25 | I | 40700 (181000) | | | | | 50 | 6255DB | 121 | |
| | | | 1.18 | I | 52800 (235000) | | | | 1.30 | II | 50000 (222000) | | | | | 50 | 6265DA | 121 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].


[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.

[2] Variable Frequency Drive Availability:


AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.


Selection Tables



H



F



V

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|--------------------|---------------|---------|-------------------------------|------------|---------------------------|----------|------------------|---------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Base | | | VFD ^[2] |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | Motor Power Code | Frame Size | Ratio | |
| 8.79 | 232000 | (26200) | * | - | 37700 | (168000) | 10.6 | 232000 | (26200) | * | - | 35600 | (158000) | 50 | 6245DB | 165 | |
| | 276000 | (31200) | * | - | 46200 | (206000) | | 265000 | (30000) | 1.04 | I | 43700 | (194000) | 50 | 6255DB | 165 | |
| | 320000 | (36200) | 1.21 | I | 56500 | (251000) | | | | 1.30 | II | 53500 | (238000) | 50 | 6265DA | 165 | |
| 7.44 | 276000 | (31200) | * | - | 48700 | (216000) | 8.97 | 276000 | (31200) | * | - | 45900 | (204000) | 50 | 6255DB | 195 | |
| | 379000 | (42800) | 1.02 | I | 59200 | (263000) | | 314000 | (35400) | 1.23 | I | 56100 | (250000) | 50 | 6265DA | 195 | |
| 6.28 | 407000 | (46000) | * | - | 62000 | (276000) | 7.58 | 372000 | (42000) | 1.10 | I | 59700 | (266000) | 50 | 6265DA | 231 | |
| 5.31 | 407000 | (46000) | * | - | 62000 | (276000) | 6.41 | 407000 | (46000) | * | - | 62000 | (276000) | 50 | 6265DA | 273 | |
| 4.55 | 619000 | (70000) | 0.97 | - | 55700 | (248000) | 5.49 | 513000 | (58000) | 1.18 | I | 55700 | (248000) | 50 | 6275DA | 319 | |
| 3.85 | 604000 | (68200) | * | - | 55700 | (248000) | 4.64 | 606000 | (68500) | 1.00 | I | 55700 | (248000) | 50 | 6275DA | 377 | |

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

60 HP
45 kW

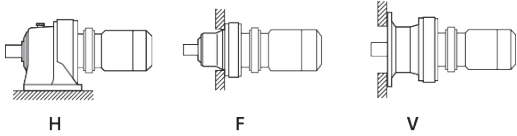

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | | 60 Hz | | | | | Selection | | | | | | | |
|--------------------|----------------|-------|-------------------------------|----------------|---------------------------|------|--------------------|---------------|-------|-------------------------------|----------------|---------------------------|---------------|------------------|------------|-------|--------------------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Motor Power Code | Base | | VFD ^[2] |
| | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in·lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Frame Size | Ratio | |
| 132 | 27400 (3100) | | 1.07 | I | 6020 (26800) | 159 | 22700 (2570) | | | 1.07 | I | 5680 (25300) | 60 | 6195 | 11 | C.F. | |
| | | | 1.33 | II | 11700 (51900) | | | | | 1.33 | II | 11000 (49200) | 60 | 6205 | 11 | | |
| | | | 1.67 | III | 11800 (52600) | | | | | 1.67 | III | 11200 (49800) | 60 | 6215 | 11 | | |
| | | | 2.21 | III | 12500 (55800) | | | | | 2.21 | III | 11900 (52800) | 60 | 6225 | 11 | | |
| 112 | 32400 (3660) | | 1.07 | I | 6230 (27700) | 135 | 26800 (3030) | | 1.07 | I | 5890 (26200) | 60 | 6195 | 13 | | | |
| 96.7 | 37400 (4220) | | 1.07 | I | 6520 (29000) | 117 | 31000 (3500) | | | 1.07 | I | 6170 (27400) | 60 | 6195 | 15 | C.F. | |
| | | | 1.33 | II | 12500 (55700) | | | | | 1.33 | II | 11900 (52800) | 60 | 6205 | 15 | | |
| | | | 1.67 | III | 12700 (56500) | | | | | 1.67 | III | 12000 (53500) | 60 | 6215 | 15 | | |
| | | | 2.21 | III | 13500 (60200) | | | | | 2.21 | III | 12800 (57000) | 60 | 6225 | 15 | | |
| 85.3 | 42400 (4790) | | 0.91 | - | 6870 (30600) | 103 | 35100 (3970) | | | 0.91 | - | 6500 (28900) | 60 | 6190 | 17 | | |
| | | | 1.07 | I | 6870 (30600) | | | | | 1.07 | I | 6500 (28900) | 60 | 6195 | 17 | | |
| 69.0 | 52300 (5910) | | 0.91 | - | 7390 (32900) | 83.3 | 43400 (4900) | | | 0.91 | - | 6980 (31100) | 60 | 6190 | 21 | C.F. | |
| | | | 1.07 | I | 7390 (32900) | | | | | 1.07 | I | 6980 (31100) | 60 | 6195 | 21 | | |
| | | | 1.32 | II | 14000 (62200) | | | | | 1.32 | II | 13300 (59000) | 60 | 6205 | 21 | | |
| | | | 1.67 | III | 14300 (63600) | | | | | 1.67 | III | 13500 (60300) | 60 | 6215 | 21 | | |
| | | | 2.09 | III | 15100 (67200) | | | | | 2.09 | III | 14300 (63700) | 60 | 6225 | 21 | | |
| 58.0 | 62300 (7040) | | 0.90 | - | 7700 (34200) | 70.0 | 51600 (5830) | | 0.90 | - | 7280 (32400) | 60 | 6195 | 25 | | | |
| 50.0 | 72300 (8170) | | 0.84 | - | 8040 (35700) | 60.3 | 59900 (6770) | | | 0.84 | - | 7610 (33900) | 60 | 6195 | 29 | C.F. | |
| | | | 1.01 | I | 15200 (67600) | | | | | 1.01 | I | 14400 (64100) | 60 | 6205 | 29 | | |
| | | | 1.30 | II | 15500 (68900) | | | | | 1.30 | II | 14700 (65400) | 60 | 6215 | 29 | | |
| | | | 1.67 | III | 16400 (73100) | | | | | 1.67 | III | 15600 (69300) | 60 | 6225 | 29 | | |
| 33.7 | 107000 (12100) | | 1.00 | I | 17400 (77200) | 40.7 | 88800 (10000) | | | 1.00 | I | 16500 (73300) | 60 | 6215 | 43 | C.F. | |
| | | | 1.26 | I | 18400 (82000) | | | | | 1.26 | I | 17500 (77800) | 60 | 6225 | 43 | | |
| 12.0 | 243000 (27500) | | * | - | 42900 (191000) | 14.5 | 237000 (26700) | | | 1.03 | I | 40500 (180000) | 60 | 6255DB | 121 | | |
| | 286000 (32300) | 0.97 | - | 52600 (234000) | 1.07 | | | | | I | 49800 (222000) | 60 | 6265DA | 121 | | | |
| 8.79 | 390000 (44000) | | 0.99 | - | 56200 (250000) | 10.6 | 323000 (36500) | | 1.07 | I | 53300 (237000) | 60 | 6265DA | 165 | | | |
| 7.44 | 387000 (43700) | | * | - | 59200 (263000) | 8.97 | 381000 (43100) | | 1.01 | I | 55800 (248000) | 60 | 6265DA | 195 | | | |
| 6.28 | 407000 (46000) | | * | - | 62000 (276000) | 7.58 | 407000 (46000) | | * | - | 59600 (265000) | 60 | 6265DA | 231 | | | |
| 4.55 | 604000 (68200) | | * | - | 55700 (248000) | 5.49 | 624000 (70500) | | 0.97 | - | 55700 (248000) | 60 | 6275DA | 319 | | | |

Gearmotors

Selection Tables

Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.


[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.

Selection Tables

75 HP
55 kW

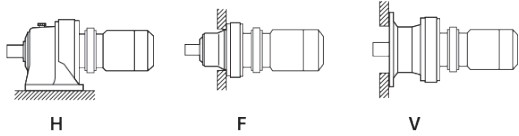

Dimension Pages:
Foot Mount (H) 2.102 - 2.131
V-Flange Mount (V) 2.132 - 2.161
F-Flange Mount (F) 2.162 - 2.191

| | | |
|-----------------|----------|----------|
| Frequency | 50 Hz | 60 Hz |
| Input Speed | 1450 RPM | 1750 RPM |
| Number of Poles | 4 | |

| 50 Hz | | | | 60 Hz | | | | Selection | | | | | | | | | |
|--------------------|---------------|---------|-------------------------------|------------|---------------------------|---------|--------------------|---------------|---------|-------------------------------|------------|-------|---------|--------------------|------------------|------------|-------|
| Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Solid Shaft Overhung Load | | Output Speed (RPM) | Output Torque | | Service Factor ^[1] | | Base | | VFD ^[2] | | | |
| | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | in-lbs | (N·m) | SF | AGMA Class | lbs | (N) | | Motor Power Code | Frame Size | Ratio |
| 132 | 33500 | (3790) | 1.09 | I | 11600 | (51700) | 159 | 27800 | (3140) | 1.09 | I | 11000 | (49000) | 75 | 6205 | 11 | C.F. |
| | | | 1.37 | II | 11800 | (52400) | | | | 1.37 | II | 11200 | (49700) | 75 | 6215 | 11 | C.F. |
| | | | 1.81 | III | 12500 | (55600) | | | | 1.81 | III | 11800 | (52700) | 75 | 6225 | 11 | C.F. |
| 96.7 | 45700 | (5160) | 1.09 | I | 12500 | (55500) | 117 | 37900 | (4280) | 1.09 | I | 11800 | (52600) | 75 | 6205 | 15 | C.F. |
| | | | 1.37 | II | 12600 | (56200) | | | | 1.37 | II | 12000 | (53300) | 75 | 6215 | 15 | C.F. |
| | | | 1.81 | III | 13500 | (60000) | | | | 1.81 | III | 12800 | (56900) | 75 | 6225 | 15 | C.F. |
| 69.0 | 64000 | (7230) | 1.08 | I | 13900 | (61900) | 83.3 | 53000 | (5990) | 1.08 | I | 13200 | (58700) | 75 | 6205 | 21 | C.F. |
| | | | 1.37 | II | 14200 | (63300) | | | | 1.37 | II | 13500 | (60000) | 75 | 6215 | 21 | C.F. |
| | | | 1.71 | III | 15000 | (66900) | | | | 1.71 | III | 14300 | (63400) | 75 | 6225 | 21 | C.F. |
| 50.0 | 88300 | (9980) | 1.06 | I | 15400 | (68500) | 60.3 | 73200 | (8270) | 1.06 | I | 14600 | (65000) | 75 | 6215 | 29 | C.F. |
| | | | 1.37 | II | 16300 | (72700) | | | | 1.37 | II | 15500 | (69000) | 75 | 6225 | 29 | C.F. |
| 33.7 | 131000 | (14800) | 1.03 | I | 18300 | (81400) | 40.7 | 109000 | (12300) | 1.03 | I | 17400 | (77300) | 75 | 6225 | 43 | C.F. |

Gearmotors

Selection Tables


Notes: All 1HP+ motors require EP suffix and can be used with a VFD, unless noted per column VFD [2].

[1] Selections with service factor marked with an asterisk (*) should be limited to the identified output torque.

[2] Variable Frequency Drive Availability:

AV = AF-motor (AV suffix) option available (does not apply to EP motors [1HP+])

C.F. = Consult Factory, VFD operation needs to be reviewed.



Dimensions Integral Universal Foot Mount

CNHM01-6065DAY ▶ CNHM1-6085Y-EP

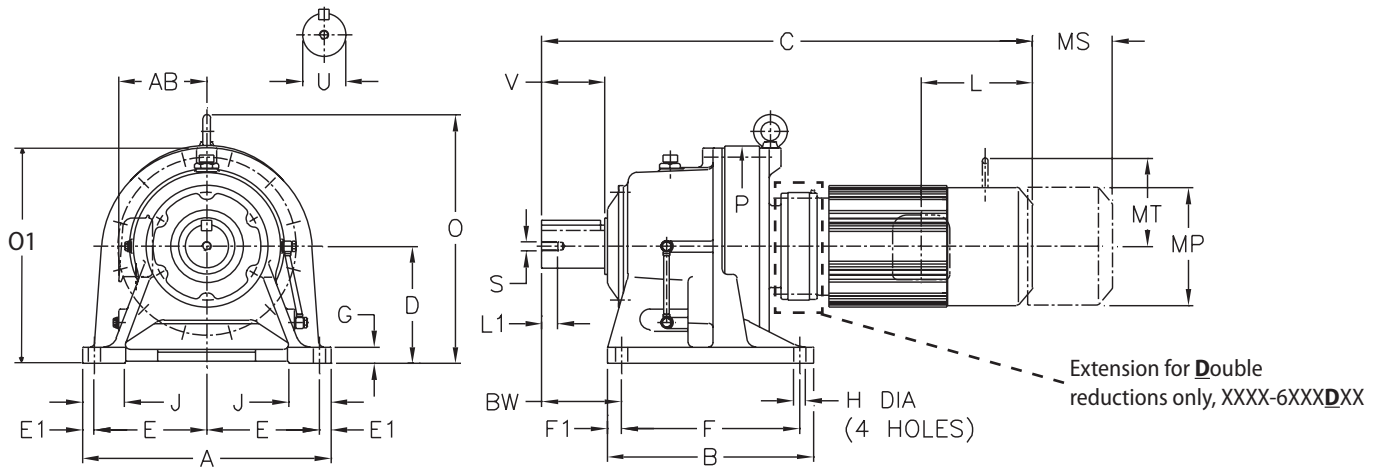


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |


Note: CNHM units are greased life units, and can be mounted in any position.
Dimensions are in inches (mm)

| Model CNHM, PHHM | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|------------------------------|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|--------------|---------------|--------------|
| 6060Y 6065Y | 5.67 (144) | 3.31 (84) | 1.61 (41) | 2.36 (60) | 0.47 (12) | 2.36 (60) | 0.47 (12) | 0.39 (10) | 0.35 (9) | 1.89 (48) | 4.33 (110) | 1.61 (41) |
| 6070Y 6075Y | 5.67 (144) | 3.31 (84) | 1.85 (47) | 2.36 (60) | 0.47 (12) | 2.36 (60) | 0.47 (12) | 0.39 (10) | 0.35 (9) | 1.89 (48) | 4.33 (110) | 1.61 (47) |
| 6080Y 6085Y | 5.67 (144) | 3.90 (99) | 2.05 (52) | 2.36 (60) | 0.47 (12) | 2.95 (75) | 0.47 (12) | 0.51 (13) | 0.35 (9) | 1.93 (49) | 5.28 (134) | 2.05 (52) |

All dimensions are in inches (mm)

| Model CNHM, PHHM | Low Speed Shaft | | | | |
|------------------------------|------------------|-----------|----------|-----------|--|
| | U ^[A] | V | S | L1 | Key |
| 6060Y 6065Y | 0.50 (12.7) | 0.98 (25) | 10-32UNF | 0.63 (16) | 1/8 X 1/8 X 0.79 (3.175 x 3.175 x 20.07) |
| 6070Y 6075Y | 0.75 (19.05) | 1.18 (30) | 12-28UNF | 0.63 (16) | 3/16 X 3/16 X 1.18 (4.762 x 4.762 x 30) |
| 6080Y 6085Y | 0.875 (22.23) | 1.38 (35) | 12-28UNF | 0.63 (16) | 3/16 X 3/16 X 1.18 (4.762 x 4.762 x 30) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal Foot Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CNHM01-6065DAY ▶ CNHM1-6085Y-EP

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | | | | |
|-------------------|-----------------------|-----------------------|----|----------------|----------------|-----------------|-------------------|-------------------|----------------|-----------------|-------------------|------------|------------|-------------------|-----------|----------------|---------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | |
| CNHM01-6065DAY | 1/8 x 4 (0.1 x 4) | - | - | 4.63 (118) | 10.20 (259) | 1.38 (35) | ø4.69 (ø119) | 17 (8) | 11.57 (294) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | - | 20 (9) | | | |
| CNHM01-6065Y-AV | | - | - | | 10.55 (268) | 2.32 (59) | ø4.88 (ø124) | 16 (7) | 11.81 (300) | 3.58 (91) | | 2.40 (61) | | 19 (9) | | | |
| CNHM01-6065DAY-AV | | - | - | | 11.85 (301) | | | 19 (9) | 13.11 (333) | | | 22 (10) | | | | | |
| CNHM01-6065Y | | - | - | | 8.90 (226) | 1.38 (35) | ø4.69 (ø119) | 13 (6) | 10.28 (261) | 2.76 (70) | | 1.93 (49) | | 17 (8) | | | |
| CNHM02-6065Y | | 1/4 x 4 (0.2 x 4) | - | | - | 10.55 (268) | 2.32 (59) | ø4.88 (ø124) | 16 (7) | 11.81 (300) | | 3.58 (91) | | 2.40 (61) | 19 (9) | 12.60 (320) | 19 (9) |
| CNHM02-6065Y-AV | | | - | | - | 11.34 (288) | | | 19 (9) | 11.81 (300) | | | | | 22 (10) | | |
| CNHM03-6065Y | | 1/3 x 4 (0.25 x 4) | - | | - | 10.55 (268) | | | 16 (7) | 11.81 (300) | | | | | 19 (9) | | |
| CNHM03-6065Y-AV | | | - | | - | 11.34 (288) | | | 19 (9) | 12.60 (320) | | | | | 22 (10) | | |
| CNHM01-6075DAY | 1/8 x 4 (0.1 x 4) | - | - | 4.63 (118) | 10.43 (265) | 1.38 (35) | ø4.69 (ø119) | 18 (8) | 11.81 (300) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | - | 21 (10) | | | |
| CNHM01-6075Y-AV | | - | - | | 10.79 (274) | 2.32 (59) | ø4.88 (ø124) | 16 (7) | 12.05 (306) | 3.58 (91) | | 2.40 (61) | | 19 (9) | | | |
| CNHM01-6075DAY-AV | | - | - | | 12.09 (307) | | | 20 (9) | 13.35 (339) | | | 23 (11) | | | | | |
| CNHM01-6075Y | | - | - | | 9.13 (232) | 1.38 (35) | ø4.69 (ø119) | 13 (6) | 10.51 (267) | 2.76 (70) | | 1.93 (49) | | 17 (8) | | | |
| CNHM02-6075Y | | 1/4 x 4 (0.2 x 4) | - | | - | 10.79 (274) | 2.32 (59) | ø4.88 (ø124) | 16 (7) | 12.05 (306) | | 3.58 (91) | | 2.40 (61) | 19 (9) | 12.83 (326) | 19 (9) |
| CNHM02-6075Y-AV | | | - | | - | 11.57 (294) | | | 19 (9) | 13.35 (339) | | | | | 22 (10) | | |
| CNHM02-6075DAY | | | - | | - | 12.09 (307) | | | 20 (9) | 14.13 (359) | | | | | 23 (11) | | |
| CNHM02-6075DAY-AV | | | - | | - | 12.87 (327) | | | 23 (11) | 12.05 (306) | | | | | 19 (9) | | |
| CNHM03-6075Y | 1/3 x 4 (0.25 x 4) | - | - | 10.79 (274) | 16 (7) | 12.05 (306) | 19 (9) | | | | | | | | | | |
| CNHM03-6075Y-AV | | - | - | 11.57 (294) | 19 (9) | 12.83 (326) | 22 (10) | | | | | | | | | | |
| CNHM05-6075Y | 1/2 x 4 (0.4 x 4) | - | - | 11.57 (294) | 19 (9) | 12.83 (326) | 22 (10) | | | | | | | | | | |
| CNHM01-6085Y | 1/8 x 4 (0.1 x 4) | - | - | 4.63 (118) | 10.16 (258) | 1.38 (35) | ø4.69 (ø119) | 23 (11) | 11.54 (293) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | - | 26 (12) | | | |
| CNHM01-6085Y-AV | | - | - | | 11.81 (300) | 2.32 (59) | ø4.88 (ø124) | 25 (12) | 13.07 (332) | 3.58 (91) | | 2.40 (61) | | 28 (13) | | | |
| CNHM02-6085Y | 1/4 x 4 (0.2 x 4) | - | - | | 12.60 (320) | | | 28 (13) | 13.86 (352) | | | | | 31 (14) | | | |
| CNHM02-6085Y-AV | | - | - | | 11.81 (300) | 25 (12) | 13.07 (332) | 28 (13) | | | | | | | | | |
| CNHM03-6085Y | 1/3 x 4 (0.25 x 4) | - | - | | 12.60 (320) | 28 (13) | 13.86 (352) | 31 (14) | | | | | | | | | |
| CNHM03-6085Y-AV | | - | - | | 11.81 (300) | 28 (13) | 13.86 (352) | 31 (14) | | | | | | | | | |
| CNHM05-6085Y | 1/2 x 4 (0.4 x 4) | - | - | | 12.60 (320) | 28 (13) | 13.86 (352) | 31 (14) | | | | | | | | | |
| CNHM05-6085Y-AV | 7.95 (202) | - | - | | 5.67 (144) | 14.21 (361) | 3.82 (97) | ø5.94 (ø151) | 35 (16) | 15.91 (404) | | 5.51 (140) | | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 41 (19) |
| CNHM08-6085Y | 3/4 x 4 (0.55 x 4) | - | - | 5.98 (152) | 15.85 (403) | ø6.22 (ø158) | | 46 (21) | 18.35 (466) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 55 (25) | | | |
| CNHM1-6085Y-EP | 1 x 4 (0.75 x 4) | 7.95 (202) | - | 5.98 (152) | 15.85 (403) | ø6.22 (ø158) | 46 (21) | 18.35 (466) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 55 (25) | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Universal Foot Mount

CNHM01-6095Y ▶ CNHM2-6095Y-EP

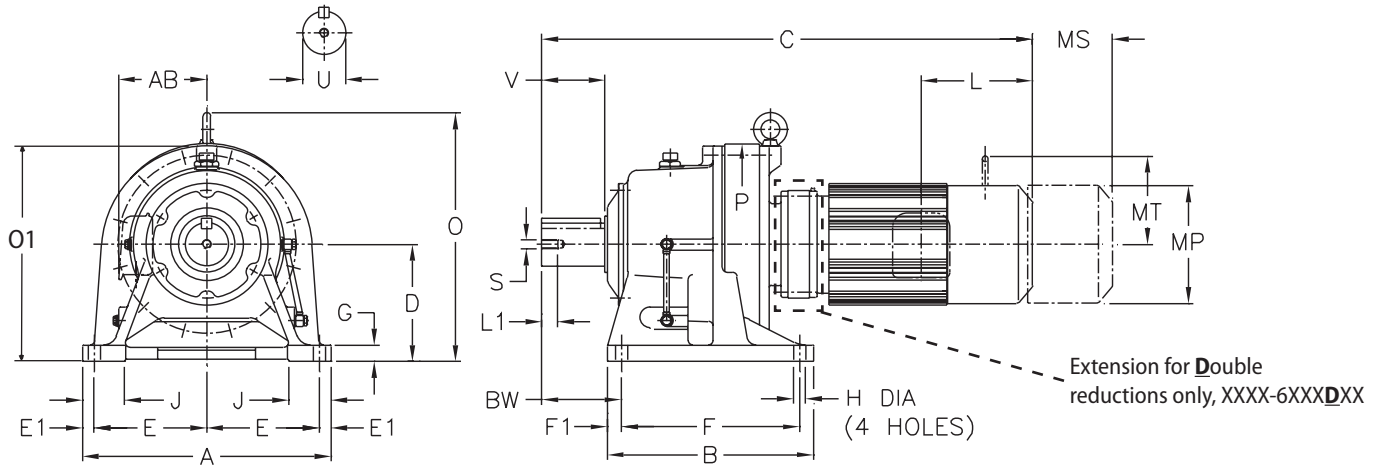


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |


Note: CNHM units are greased life units, and can be mounted in any position.
Dimensions are in inches (mm)

| Model CNHM, PHHM | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|------------------------------|---------------|---------------|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|--------------|
| 6090Y 6095Y | 7.09 (180) | 5.31 (135) | 3.94 (100) | 2.95 (75) | 0.59 (15) | 3.54 (90) | 0.59 (15) | 0.47 (12) | 0.43 (11) | 1.57 (65) | 5.91 (175) | 2.36 (60) |

All dimensions are in inches (mm)

| Model CNHM, PHHM | Low Speed Shaft | | | | |
|------------------------------|------------------|-----------|------------|-----------|-------------------------------------|
| | U ^[A] | V | S | L1 | Key |
| 6090Y 6095Y | 1.125 (28.58) | 1.38 (35) | 5/16-18UNC | 0.79 (20) | 1/4 X 1/4 X 1.18 (6.35 x 6.35 x 30) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal Foot Mount

CNHM01-6095Y ▶ CNHM2-6095Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | | | | | | | | | | |
|-------------------|-----------------------|------------|----------------|----------------|----------------|-----------------|-------------------|----------------------|----------------|-----------------|-------------------|------------|-----------------|-------------------|----------------|-----------------|---------|----------------|------------|-----------------|-----------|------------|---------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | | | | |
| CNHM01-6095Y | 1/8 x 4 (0.1 x 4) | - | - | 4.63 (118) | 10.87 (276) | 1.38 (35) | ø4.69 (ø119) | 31 (14) | 12.24 (311) | 2.76 (70) | ø4.88 (ø124) | 2.40 (61) | - | 34 (16) | | | | | | | | | |
| CNHM01-6095Y-AV | | - | - | | 12.52 (318) | 2.32 (59) | ø4.88 (ø124) | 33 (15) | 13.78 (350) | 3.58 (91) | | | | 2.40 (61) | 36 (16) | | | | | | | | |
| CNHM01-6095DAY | | - | - | | 12.76 (324) | 1.38 (35) | ø4.69 (ø119) | 34 (16) | 14.13 (359) | 2.76 (70) | | | | 1.93 (49) | 38 (17) | | | | | | | | |
| CNHM01-6095DAY-AV | | - | - | | 14.41 (366) | 2.32 (59) | ø4.88 (ø124) | 37 (17) | 15.67 (398) | 3.58 (91) | | | | 2.40 (61) | 40 (18) | | | | | | | | |
| CNHM02-6095Y | - | - | 12.52 (318) | | 33 (15) | | | 13.78 (350) | 36 (16) | | | | | | 14.57 (370) | 39 (18) | | | | | | | |
| CNHM02-6095Y-AV | - | - | 13.31 (338) | | 36 (16) | | | 14.57 (370) | 37 (17) | | | | | | 15.67 (398) | 40 (18) | | | | | | | |
| CNHM02-6095DAY | - | - | 14.41 (366) | | 37 (17) | | | 15.67 (398) | 40 (18) | | | | | | 16.46 (418) | 43 (20) | | | | | | | |
| CNHM02-6095DAY-AV | - | - | 15.20 (386) | | 40 (18) | | | 16.46 (418) | 33 (15) | | | | | | 13.78 (350) | 36 (16) | | | | | | | |
| CNHM03-6095Y | - | - | 12.52 (318) | | 33 (15) | | | 13.78 (350) | 36 (16) | | | | | | 14.57 (370) | 39 (18) | | | | | | | |
| CNHM03-6095Y-AV | - | - | 13.31 (338) | | 36 (16) | | | 14.57 (370) | 37 (17) | | | | | | 15.67 (398) | 40 (18) | | | | | | | |
| CNHM03-6095DAY | - | - | 14.41 (366) | | 37 (17) | | | 15.67 (398) | 40 (18) | | | | | | 16.46 (418) | 43 (20) | | | | | | | |
| CNHM03-6095DAY-AV | - | - | 15.20 (386) | | 40 (18) | | | 16.46 (418) | 36 (16) | | | | | | 14.57 (370) | 39 (18) | | | | | | | |
| CNHM05-6095Y | - | - | 13.31 (338) | 36 (16) | 14.57 (370) | | | 1/2 x 4 (0.4 x 4) | 8.35 (212) | | - | 5.67 (144) | 14.92 (379) | | 3.82 (97) | ø5.94 (ø151) | 43 (20) | 16.61 (422) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 49 (22) |
| CNHM05-6095Y-AV | - | - | 5.67 (144) | 14.92 (379) | 3.82 (97) | | | ø5.94 (ø151) | 40 (19) | | 16.61 (422) | 5.51 (140) | ø5.94 (ø151) | | 3.66 (93) | 3.94 (100) | 46 (21) | | | | | | |
| CNHM05-6095DAY | - | - | 4.63 (118) | 15.20 (386) | 2.32 (59) | | | ø4.88 (ø124) | 40 (18) | | 16.46 (418) | 3.58 (91) | ø4.88 (ø124) | | 2.40 (61) | - | 43 (20) | | | | | | |
| CNHM08-6095Y | - | - | 5.67 (144) | 14.92 (379) | 3.82 (97) | ø5.94 (ø151) | 40 (19) | 16.61 (422) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 46 (21) | | | | | | | | | | |
| CNHM08-6095Y-AV | 3/4 x 4 (0.55 x 4) | 8.54 (217) | - | 5.86 (149) | 16.22 (412) | 3.94 (100) | ø6.30 (ø160) | 51 (23) | 18.66 (474) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 62 (28) | | | | | | | | | |
| CNHM1-6095Y-EP | 1 x 4 (0.75 x 4) | 8.35 (212) | - | 5.98 (152) | 16.65 (423) | 3.82 (97) | □6.22 (□158) | 56 (26) | 19.15 (487) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 66 (30) | | | | | | | | | |
| CNHM1H-6095Y-EP | 1.5 x 4 (1.1 x 4) | 8.54 (217) | - | 6.16 (156) | 17.72 (450) | | □6.57 (□167) | 64 (29) | 20.45 (520) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 75 (34) | | | | | | | | | |
| CNHM2-6095Y-EP | 2 x 4 (1.5 x 4) | 8.54 (217) | - | 6.16 (156) | 17.72 (450) | | □6.57 (□167) | 66 (30) | 20.45 (520) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 78 (36) | | | | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Universal Foot Mount

CNHM01-6105DAY ▶ CNHM5-6115Y-EP

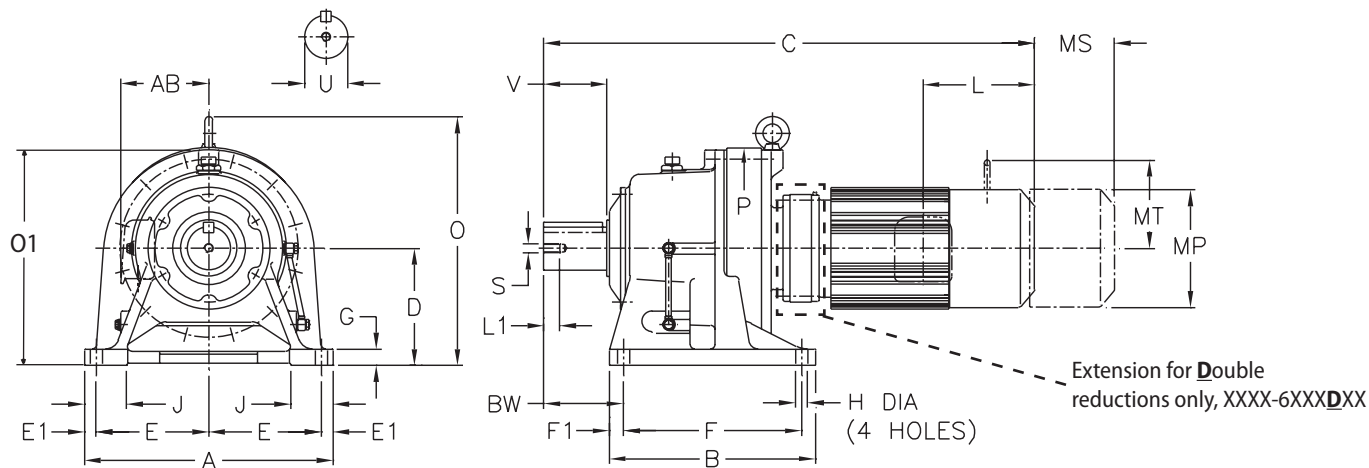


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CNHM units are greased life units, and can be mounted in any position.


Dimensions are in inches (mm)

| Model CNHM, PHHM | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|------------------------------|---------------|---------------|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|--------------|
| 6100Y 6105Y | 7.09 (180) | 5.31 (135) | 3.94 (100) | 2.95 (75) | 0.59 (15) | 3.54 (90) | 0.59 (15) | 0.47 (12) | 0.43 (11) | 1.57 (65) | 5.91 (175) | 2.36 (60) |
| 610HY | 7.09 (180) | 5.31 (135) | 3.94 (100) | 2.95 (75) | 0.59 (15) | 3.54 (90) | 0.59 (15) | 0.47 (12) | 0.43 (11) | 1.57 (65) | 5.91 (175) | 2.36 (60) |
| 6110Y 6115Y | 7.09 (180) | 5.31 (135) | 3.94 (100) | 2.95 (75) | 0.59 (15) | 3.54 (90) | 0.59 (15) | 0.47 (12) | 0.43 (11) | 1.57 (65) | 5.91 (175) | 2.36 (60) |

All dimensions are in inches (mm)

| Model CNHM, PHHM | Low Speed Shaft | | | | |
|------------------------------|------------------|-----------|------------|-----------|-------------------------------------|
| | U ^[A] | V | S | L1 | Key |
| 6100Y 6105Y | 1.125 (28.58) | 1.38 (35) | 5/16-18UNC | 0.79 (20) | 1/4 X 1/4 X 1.18 (6.35 x 6.35 x 30) |
| 610HY | 1.125 (28.58) | 1.38 (35) | 5/16-18UNC | 0.79 (20) | 1/4 X 1/4 X 1.18 (6.35 x 6.35 x 30) |
| 6110Y 6115Y | 1.25 (31.75) | 1.77 (45) | 5/16-18UNC | 0.79 (20) | 1/4 x 1/4 x 1.46 (6.35 x 6.35 x 37) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal Foot Mount


CNHM01-6105DAY ▶ CNHM5-6115Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | | | | | | | | | | | | | | | | | |
|-------------------|-----------------------|-----------------------|----|----------------|----------------|------------|-------------------|-------------------|----------------|------------|-------------------|------------|------------|-------------------|-----------------|---------|----------------|-----------|-----------------|-----------|--|-----------|-----------------|---------|----------------|------------|-----------------|-----------|------------|---------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | | | | | | | | | | | |
| CNHM01-6105DAY | 1/8 x 4 (0.1 x 4) | - | - | 4.63 (118) | 13.31 (338) | 1.38 (35) | ø4.69 (ø119) | 41 (19) | 14.69 (373) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | | 44 (20) | | | | | | | | | | | | | | | | |
| CNHM01-6105DAY-AV | | - | - | | 14.96 (380) | | | | 16.22 (412) | | | | | | 46 (21) | | | | | | | | | | | | | | | |
| CNHM02-6105Y | 1/4 x 4 (0.2 x 4) | - | - | | 13.07 (332) | | | | 2.32 (59) | | | | | | ø4.88 (ø124) | 37 (17) | 14.33 (364) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | | 40 (19) | | | | | | | | |
| CNHM02-6105Y-AV | | - | - | | 13.86 (352) | | | | | | | | | | | | 15.12 (384) | | | | | 43 (20) | | | | | | | | |
| CNHM02-6105DAY | | - | - | | 14.96 (380) | | | | | | | | | | | | 16.22 (412) | | | | | 46 (21) | | | | | | | | |
| CNHM02-6105DAY-AV | | - | - | | 15.75 (400) | | | | | | | | | | | | 17.01 (432) | | | | | 49 (23) | | | | | | | | |
| CNHM03-6105Y | | 1/3 x 4 (0.25 x 4) | - | | - | | | | | | | | | | | | 13.07 (332) | | | | | 3.82 (97) | ø5.94 (ø151) | 37 (17) | 14.33 (364) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 40 (19) |
| CNHM03-6105Y-AV | | | - | | - | | | | | | | | | | | | 13.86 (352) | | | | | | | | 15.12 (384) | | | | | 43 (20) |
| CNHM03-6105DAY | | | - | | - | | | | | | | | | | | | 14.96 (380) | | | | | | | | 16.22 (412) | | | | | 46 (21) |
| CNHM03-6105DAY-AV | | | - | | - | | | | | | | | | | | | 15.75 (400) | | | | | | | | 17.01 (432) | | | | | 49 (23) |
| CNHM05-6105Y | - | | - | 13.86 (352) | 15.12 (384) | 43 (20) | | | | | | | | | | | | | | | | | | | | | | | | |
| CNHM05-6105Y-AV | 1/2 x 4 (0.4 x 4) | 8.35 (212) | - | 5.67 (144) | 15.47 (393) | 2.32 (59) | ø4.88 (ø124) | 46 (21) | 17.17 (436) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | | 53 (25) | | | | | | | | | | | | | | | | |
| CNHM05-6105DAY | | - | - | 4.63 (118) | 15.75 (400) | | | | 17.01 (432) | | | | | 49 (23) | | | | | | | | | | | | | | | | |
| CNHM08-6105Y | 3/4 x 4 (0.55 x 4) | - | - | 5.67 (144) | 15.47 (393) | 3.82 (97) | ø5.94 (ø151) | 45 (21) | 17.17 (436) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 51 (23) | | | | | | | | | | | | | | | | |
| CNHM08-6105Y-AV | | 8.54 (217) | - | 5.86 (149) | 16.77 (426) | | | | 19.21 (488) | | | | | 67 (30) | | | | | | | | | | | | | | | | |
| CNHM1-6105Y-EP | 1 x 4 (0.75 x 4) | 8.35 (212) | - | 5.98 (152) | 17.20 (437) | 3.82 (97) | ø6.22 (ø158) | 61 (28) | 19.70 (501) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 71 (32) | | | | | | | | | | | | | | | | |
| CNHM1H-6105Y-EP | 1.5 x 4 (1.1 x 4) | 8.54 (217) | - | 6.16 (156) | 18.27 (464) | | | | 68 (31) | | | | | | | | | | | | | | | | | | | | | |
| CNHM2-6105Y-EP | 2 x 4 (1.5 x 4) | 8.54 (217) | - | | 19.09 (485) | | | | 71 (33) | | | | | | | | | | | | | | | | | | | | | |
| CNHM3-6105Y-EP | 3 x 4 (2.2 x 4) | 8.86 (225) | - | 6.71 (170) | 19.09 (485) | | | | 87 (40) | | | | | | | | | | | | | | | | | | | | | |
| CNHM1-610HY-EP | 1 x 4 (0.75 x 4) | 9.13 (232) | - | 5.98 (152) | 17.20 (437) | 3.82 (97) | ø6.22 (ø158) | 63 (29) | 19.70 (501) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 73 (33) | | | | | | | | | | | | | | | | |
| CNHM1H-610HY-EP | 1.5 x 4 (1.1 x 4) | 9.33 (237) | - | 6.16 (156) | 18.27 (464) | | | | 70 (32) | | | | | | | | | | | | | | | | | | | | | |
| CNHM2-610HY-EP | 2 x 4 (1.5 x 4) | 9.33 (237) | - | | 19.09 (485) | | | | 73 (34) | | | | | | | | | | | | | | | | | | | | | |
| CNHM3-610HY-EP | 3 x 4 (2.2 x 4) | 9.65 (245) | - | 6.71 (170) | 19.09 (485) | | | | 89 (41) | | | | | | | | | | | | | | | | | | | | | |
| CNHM05-6115Y | 1/2 x 4 (0.4 x 4) | - | - | 4.63 (118) | 14.25 (362) | 2.32 (59) | ø4.88 (ø124) | 47 (22) | 15.51 (394) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | | 50 (23) | | | | | | | | | | | | | | | | |
| CNHM05-6115Y-AV | | 9.25 (235) | - | 5.67 (144) | 15.87 (403) | | | | 17.56 (446) | | | | | 59 (27) | | | | | | | | | | | | | | | | |
| CNHM08-6115Y | 3/4 x 4 (0.55 x 4) | - | - | 5.67 (144) | 17.17 (436) | 3.82 (97) | ø6.30 (ø160) | 60 (28) | 19.61 (498) | 5.51 (140) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 71 (32) | | | | | | | | | | | | | | | | |
| CNHM08-6115Y-AV | | 9.33 (237) | - | 5.86 (149) | 17.60 (447) | | | | 20.10 (511) | | | | | 75 (34) | | | | | | | | | | | | | | | | |
| CNHM1-6115Y-EP | 1 x 4 (0.75 x 4) | 9.25 (235) | - | 5.98 (152) | 17.60 (447) | 3.82 (97) | ø6.22 (ø158) | 65 (30) | 20.10 (511) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 75 (34) | | | | | | | | | | | | | | | | |
| CNHM1H-6115Y-EP | 1.5 x 4 (1.1 x 4) | 9.33 (237) | - | 6.16 (156) | 18.66 (474) | | | | 72 (33) | | | | | | | | | | | | | | | | | | | | | |
| CNHM2-6115Y-EP | 2 x 4 (1.5 x 4) | 9.33 (237) | - | | 19.61 (498) | | | | 75 (34) | | | | | | | | | | | | | | | | | | | | | |
| CNHM3-6115Y-EP | 3 x 4 (2.2 x 4) | 9.65 (245) | - | 6.71 (170) | 19.61 (498) | | | | 87 (40) | | | | | | | | | | | | | | | | | | | | | |
| CNHM5-6115Y-EP | 5 x 4 (3.7 x 4) | 10.75 (273) | - | 7.34 (186) | 19.61 (498) | 4.65 (118) | ø8.74 (ø222) | 113 (51) | 23.17 (589) | 8.21 (209) | ø8.74 (ø222) | 6.02 (153) | 6.30 (160) | 136 (62) | | | | | | | | | | | | | | | | |

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Universal Foot Mount

CNHM01-6125DBY ▶ CNHM8-612HY-EP

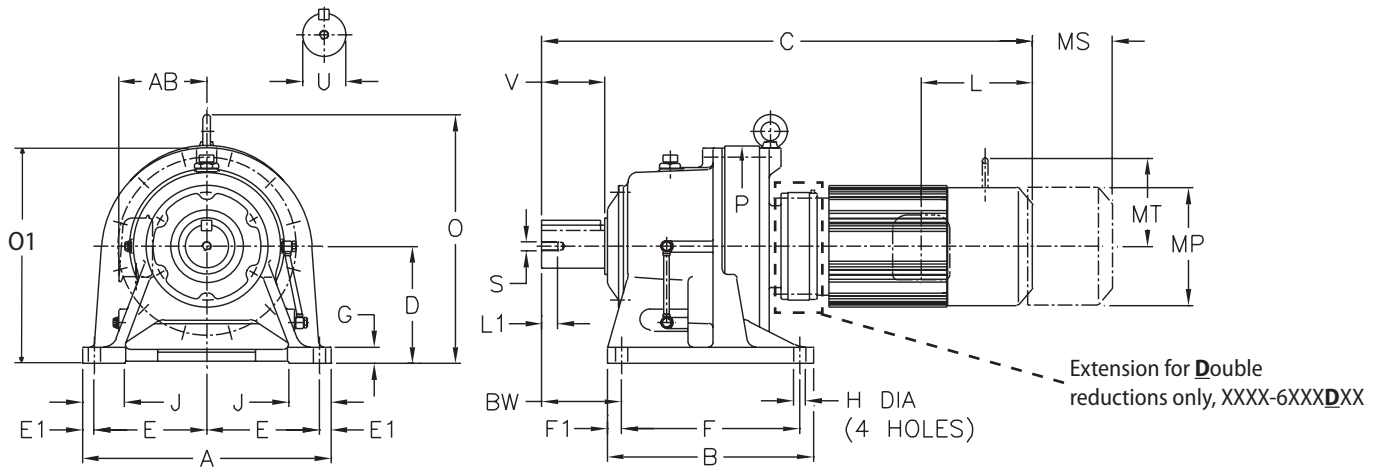


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |


Note: CNHM units are greased life units, and can be mounted in any position. Dimensions are in inches (mm)

| Model CNHM, PHHM | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|------------------------------|---------------|---------------|----------------|--------------|--------------|---------------|--------------|--------------|--------------|--------------|---------------|--------------|
| 6120Y 6125Y | 9.06 (230) | 6.10 (155) | 4.724 (120) | 3.74 (95) | 0.79 (20) | 4.53 (115) | 0.79 (20) | 0.59 (15) | 0.55 (14) | 2.17 (55) | 8.03 (204) | 3.23 (82) |
| 612HY | 9.06 (230) | 6.10 (155) | 5.512 (140) | 3.74 (95) | 0.79 (20) | 4.53 (115) | 0.79 (20) | 0.59 (15) | 0.55 (14) | 2.17 (55) | 8.03 (204) | 3.23 (82) |

All dimensions are in inches (mm)

| Model CNHM, PHHM | Low Speed Shaft | | | | |
|------------------------------|------------------|-----------|------------|-----------|---------------------------------------|
| | U ^[A] | V | S | L1 | Key |
| 6120Y 6125Y | 1.50 (38.1) | 2.17 (55) | 5/16-18UNC | 0.79 (20) | 3/8 x 3/8 x 1.77 (9.525 x 9.525 x 45) |
| 612HY | 1.50 (38.1) | 2.17 (55) | 5/16-18UNC | 0.79 (20) | 3/8 x 3/8 x 1.77 (9.525 x 9.525 x 45) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal Foot Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CNHM01-6125DBY ▶ CNHM8-612HY-EP

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | | | | | | | | | |
|-------------------|-----------------------|----------------|----|----------------|----------------|-----------------|-------------------|-------------------|-----------------|-----------------|-------------------|------------|----------------|-------------------|-----------------|-----------------|----------------|------------|-----------|---|---------|---------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | | | |
| CNHM01-6125DBY | 1/8 x 4 (0.1 x 4) | - | - | 4.63 (118) | 15.20 (386) | 1.38 (35) | ø4.69 (ø119) | 70 (32) | 16.57 (421) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | - | 74 (34) | | | | | | | | |
| CNHM01-6125DBY-AV | | - | - | | 16.85 (428) | | | | 18.11 (460) | | | | | | 75 (34) | | | | | | | |
| CNHM02-6125DAY | 1/4 x 4 (0.2 x 4) | - | - | | 16.38 (416) | | | | 2.32 (59) | | | | | | ø4.88 (ø124) | 67 (31) | 17.64 (448) | 3.58 (91) | 2.40 (61) | - | 70 (32) | |
| CNHM02-6125DBY | | - | - | | 16.85 (428) | | | | | | | | | | | | 18.11 (460) | | | | | 75 (34) |
| CNHM02-6125DAY-AV | | - | - | | 17.17 (436) | | | | | | | | | | | | 18.43 (468) | | | | | 74 (34) |
| CNHM02-6125DBY-AV | | - | - | | 17.64 (448) | | | | | | | | | | | | 18.90 (480) | | | | | 78 (36) |
| CNHM03-6125DBY | 1/3 x 4 (0.25 x 4) | - | - | | 16.85 (428) | | | | 2.32 (59) | | | | | | ø4.88 (ø124) | 72 (33) | 18.11 (460) | 3.58 (91) | 2.40 (61) | - | 75 (34) | |
| CNHM03-6125DBY-AV | | - | - | | 17.64 (448) | | | | | | | | | | | | 18.90 (480) | | | | | 78 (36) |
| CNHM05-6125Y | 1/2 x 4 (0.4 x 4) | - | - | 15.24 (387) | 3.82 (97) | ø5.94 (ø151) | 66 (30) | 16.50 (419) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 69 (32) | | | | | | | | | |
| CNHM05-6125Y-AV | | 10.12 (257) | - | 5.67 (144) | | | | 16.65 (423) | | | | | 73 (34) | 18.35 (466) | 79 (36) | | | | | | | |
| CNHM05-6125DBY | | - | - | 4.63 (118) | | | | 17.64 (448) | | | | | 75 (34) | 18.90 (480) | 78 (36) | | | | | | | |
| CNHM05-6125DBY-AV | | 10.12 (257) | - | 5.67 (144) | | | | 19.25 (489) | | | | | 83 (38) | 20.94 (532) | 88 (40) | | | | | | | |
| CNHM08-6125Y | 3/4 x 4 (0.55 x 4) | - | - | 16.65 (423) | 3.82 (97) | ø5.94 (ø151) | 71 (32) | 18.35 (466) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 77 (35) | | | | | | | | | |
| CNHM08-6125Y-AV | | 10.12 (257) | - | 5.86 (149) | | | | 17.95 (456) | | | | | 79 (36) | 20.39 (518) | 90 (41) | | | | | | | |
| CNHM08-6125DBY | | - | - | 5.67 (144) | | | | 19.25 (489) | | | | | 80 (37) | 20.94 (532) | 86 (39) | | | | | | | |
| CNHM08-6125DBY-AV | | 10.12 (257) | - | 5.86 (149) | | | | 20.55 (522) | | | | | 91 (41) | 22.99 (584) | 102 (46) | | | | | | | |
| CNHM1-6125Y-EP | 1 x 4 (0.75 x 4) | 10.12 (257) | - | 5.98 (152) | 18.39 (467) | 3.82 (97) | ø6.22 (ø158) | 84 (38) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 94 (43) | | | | | | | | | |
| CNHM1-6125DBY-EP | | 10.12 (257) | - | | 20.98 (533) | | | 96 (44) | | | | | 23.48 (597) | 106 (48) | | | | | | | | |
| CNHM1H-6125Y-EP | 1.5 x 4 (1.1 x 4) | 10.12 (257) | - | 6.16 (156) | 19.45 (494) | 3.82 (97) | ø6.57 (ø167) | 91 (42) | 6.56 (167) | ø6.57 (ø167) | 5.04 (128) | 4.61 (117) | 103 (47) | | | | | | | | | |
| CNHM1H-6125DBY-EP | | 10.12 (257) | - | | 22.05 (560) | | | 103 (47) | | | | | 24.78 (630) | 115 (52) | | | | | | | | |
| CNHM2-6125Y-EP | 2 x 4 (1.5 x 4) | 10.12 (257) | - | 6.16 (156) | 19.45 (494) | 3.82 (97) | ø6.57 (ø167) | 94 (43) | 6.56 (167) | ø6.57 (ø167) | 5.04 (128) | 4.61 (117) | 106 (48) | | | | | | | | | |
| CNHM2-6125DBY-EP | | 10.12 (257) | - | | 22.05 (560) | | | 106 (48) | | | | | 24.78 (630) | 118 (54) | | | | | | | | |
| CNHM3-6125Y-EP | 3 x 4 (2.2 x 4) | 10.12 (257) | - | 6.71 (170) | 18.86 (479) | 4.53 (115) | ø7.24 (ø184) | 107 (49) | 7.60 (193) | ø7.24 (ø184) | 5.43 (138) | 5.04 (128) | 124 (56) | | | | | | | | | |
| CNHM5-6125Y-EP | 5 x 4 (3.7 x 4) | 10.75 (273) | - | 7.34 (186) | 20.31 (516) | 4.65 (118) | ø8.74 (ø222) | 133 (60) | 8.21 (209) | ø8.74 (ø222) | 6.02 (153) | 6.30 (160) | 156 (71) | | | | | | | | | |
| CNHM8-6125Y-EP | 7.5 x 4 (5.5 x 4) | 10.75 (273) | - | | 22.01 (559) | | | 166 (76) | | | | | 25.57 (650) | 190 (87) | | | | | | | | |
| CNHM1-612HY-EP | 1 x 4 (0.75 x 4) | 10.91 (277) | - | 5.98 (152) | 18.39 (467) | 3.82 (97) | ø6.22 (ø158) | 86 (39) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 96 (44) | | | | | | | | | |
| CNHM1H-612HY-EP | 1.5 x 4 (1.1 x 4) | 10.91 (277) | - | 6.16 (156) | 19.45 (494) | | | 6.57 (ø167) | | | | | 93 (43) | 6.56 (167) | ø6.57 (ø167) | 5.04 (128) | 4.61 (117) | 105 (48) | | | | |
| CNHM2-612HY-EP | 2 x 4 (1.5 x 4) | 10.91 (277) | - | 6.16 (156) | 19.45 (494) | 3.82 (97) | ø6.57 (ø167) | | 96 (44) | 6.56 (167) | ø6.57 (ø167) | 5.04 (128) | 4.61 (117) | | | | | 108 (49) | | | | |
| CNHM3-612HY-EP | 3 x 4 (2.2 x 4) | 10.91 (277) | - | 6.71 (170) | 18.86 (479) | | | 4.53 (115) | ø7.24 (ø184) | | | | | 109 (50) | 7.60 (193) | ø7.24 (ø184) | 5.43 (138) | 5.04 (128) | 126 (57) | | | |
| CNHM5-612HY-EP | 5 x 4 (3.7 x 4) | 11.54 (293) | - | 7.34 (186) | 20.31 (516) | 4.65 (118) | ø8.74 (ø222) | 135 (61) | 8.21 (209) | ø8.74 (ø222) | 6.02 (153) | 6.30 (160) | 159 (72) | | | | | | | | | |
| CNHM8-612HY-EP | 7.5 x 4 (5.5 x 4) | 11.54 (293) | - | | 22.01 (559) | | | 169 (77) | | | | | 25.57 (650) | 192 (88) | | | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal Foot Mount

CHHM02-6135DAY ▶ CHHM15-6135Y-EP

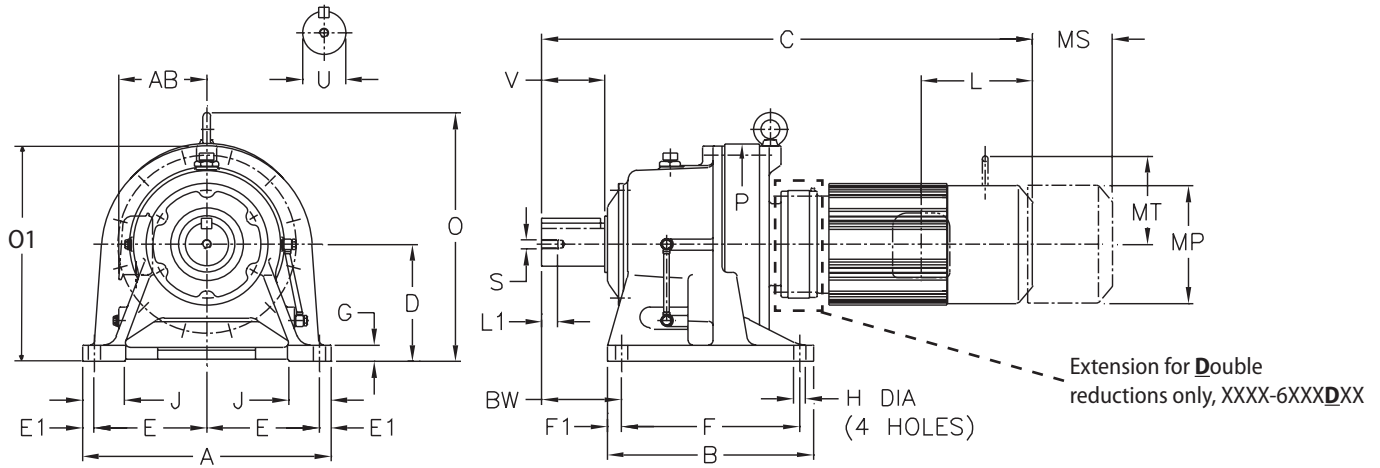


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHHM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|--------------|-------|-------|-------|-------|------|-------|------|------|------|------|-------|-------|
| 6130Y | 12.99 | 7.68 | 5.91 | 5.71 | 0.79 | 5.71 | 0.98 | 0.87 | 0.71 | 2.56 | 9.06 | 3.94 |
| 6135Y | (330) | (195) | (150) | (145) | (20) | (145) | (25) | (22) | (18) | (65) | (230) | (100) |

All dimensions are in inches (mm)

| Model | Low Speed Shaft | | | | |
|------------------------------|------------------|-----------|-----------|-----------|-------------------------------------|
| | U ^[A] | V | S | L1 | Key |
| 6130Y 6135Y | 1.88 (47.625) | 2.76 (70) | 3/8-16UNC | 0.79 (20) | 1/2 x 1/2 x 2.17 (12.7 x 12.7 x 55) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal Foot Mount


CHHM02-6135DAY ▶ CHHM15-6135Y-EP

XXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | | | | | | | | |
|-------------------|-----------------------|----------------|----------------|------------|----------------|------------|-------------------|-------------------|----------------|------------|-------------------|------------|------------|-------------------|----------|----------------|------------|-----------------|------------|------------|----------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | | |
| CHHM02-6135DAY | 1/4 x 4 (0.2 x 4) | - | - | 4.63 (118) | 18.50 (470) | 2.32 (59) | ø4.88 (ø124) | 100 (46) | 19.76 (502) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 103 (47) | | | | | | | |
| CHHM02-6135DAY-AV | | 20.55 (522) | 107 (49) | | | | | | | | | | | | | | | | | | |
| CHHM02-6135DCY | | 20.67 (525) | 113 (52) | | | | | | | | | | | | | | | | | | |
| CHHM02-6135DCY-AV | | 21.46 (545) | 116 (53) | | | | | | | | | | | | | | | | | | |
| CHHM03-6135DCY | | 19.41 (493) | 110 (50) | | | | | | | | | | | | | | | | | | |
| CHHM03-6135DCY-AV | | 20.67 (525) | 113 (52) | | | | | | | | | | | | | | | | | | |
| CHHM05-6135DCY | | 20.20 (513) | 113 (52) | | | | | | | | | | | | | | | | | | |
| CHHM05-6135DCY-AV | 1/3 x 4 (0.25 x 4) | - | - | 5.67 (144) | 21.81 (554) | 3.82 (97) | ø5.94 (ø151) | 120 (55) | 23.50 (597) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 126 (58) | | | | | | | |
| CHHM08-6135Y | 18.78 (477) | 114 (52) | | | | | | | | | | | | | | | | | | | |
| CHHM08-6135Y-AV | 10.51 (267) | 123 (56) | | | | | | | | | | | | | | | | | | | |
| CHHM08-6135DCY | - | 118 (54) | | | | | | | | | | | | | | | | | | | |
| CHHM08-6135DCY-AV | 11.81 (300) | 129 (59) | | | | | | | | | | | | | | | | | | | |
| CHHM1-6135Y-EP | 1 x 4 (0.75 x 4) | - | 10.43 (265) | | 5.98 (152) | | | 20.51 (521) | 3.82 (97) | | | | | ø6.22 (ø158) | 127 (58) | 23.01 (585) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 137 (63) |
| CHHM1-6135DCY-EP | 11.81 (300) | 133 (61) | | | | | | | | | | | | | | | | | | | |
| CHHM1H-6135Y-EP | 10.51 (267) | 134 (61) | | | | | | | | | | | | | | | | | | | |
| CHHM1H-6135DCY-EP | 11.81 (300) | 141 (64) | | | | | | | | | | | | | | | | | | | |
| CHHM2-6135Y-EP | 10.51 (267) | 137 (63) | | | | | | | | | | | | | | | | | | | |
| CHHM2-6135DCY-EP | 11.81 (300) | 144 (66) | | | | | | | | | | | | | | | | | | | |
| CHHM3-6135Y-EP | 10.83 (275) | 149 (68) | | | | | | | | | | | | | | | | | | | |
| CHHM3-6135DCY-EP | 11.81 (300) | 160 (73) | | | | | | | | | | | | | | | | | | | |
| CHHM5-6135Y-EP | 5 x 4 (3.7 x 4) | 11.93 (303) | - | 7.34 (186) | 22.24 (565) | 4.65 (118) | ø8.74 (ø222) | 173 (79) | 25.81 (656) | 8.21 (209) | ø8.74 (ø222) | 6.02 (153) | 6.30 (160) | 197 (90) | | | | | | | |
| CHHM8-6135Y-EP | 7.5 x 4 (5.5 x 4) | 11.93 (303) | - | | 23.94 (608) | | | 207 (94) | | | | | | | | | | | | | |
| CHHM10-6135Y-EP | 10 x 4 (7.5 x 4) | 12.68 (322) | - | | 25.43 (646) | | | 234 (106) | | | | | | | | | | | | | |
| CHHM15-6135Y-EP | 15 x 4 (11 x 4) | 12.68 (322) | - | | 27.87 (708) | | | 247 (112) | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal Foot Mount

CHHM02-6145DBY ▶ CHHM20-614HY-EP

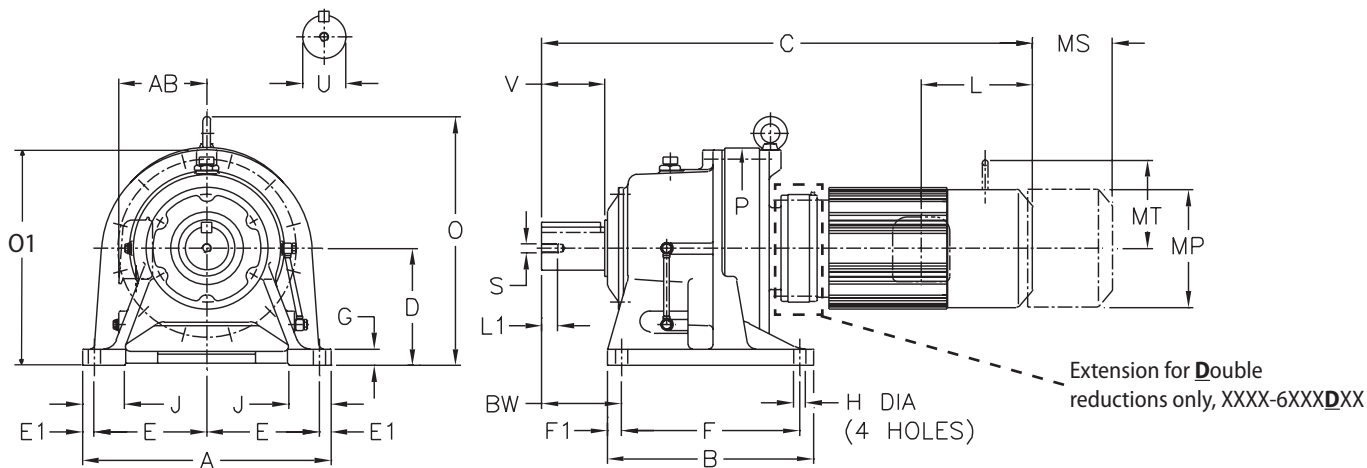


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHHM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|------------------------------|----------------|---------------|---------------|---------------|--------------|---------------|--------------|--------------|--------------|--------------|---------------|---------------|
| 6140Y 6145Y | 12.99 (330) | 7.68 (195) | 5.91 (150) | 5.71 (145) | 0.79 (20) | 5.71 (145) | 0.98 (25) | 0.87 (22) | 0.71 (18) | 2.56 (65) | 9.06 (230) | 4.72 (120) |
| 614HY | 12.99 (330) | 7.68 (195) | 6.30 (160) | 5.71 (145) | 0.79 (20) | 5.71 (145) | 0.98 (25) | 0.87 (22) | 0.71 (18) | 2.76 (70) | 9.06 (230) | 4.72 (120) |

All dimensions are in inches (mm)

| Model | Low Speed Shaft | | | | |
|------------------------------|------------------|--------------|-----------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6140Y 6145Y | 1.88 (47.625) | 3.54 (90) | 3/8-16UNC | 0.79 (20) | 1/2 x 1/2 x 2.95 (12.7 x 12.7 x 75) |
| 614HY | 1.88 (47.625) | 3.54 (90) | 3/8-16UNC | 0.79 (20) | 1/2 x 1/2 x 2.95 (12.7 x 12.7 x 75) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal Foot Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CHHM02-6145DBY ▶ CHHM20-614HY-EP

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | | | | | | | | | |
|-------------------|-----------------------|----------------|----------------|----------------|----------------|----------------|-------------------|-------------------|-----------------|----------------|-------------------|------------|-----------------|-------------------|----------------|------------------|-----------------|----------------|-----------------|------------------|------------|----------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | | | |
| CHHM02-6145DBY | 1/4 x 4 (0.2 x 4) | - | - | 4.63 (118) | 19.65 (499) | 2.32 (59) | ø4.88 (ø124) | 108 (49) | 20.91 (531) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 111 (50) | | | | | | | | |
| CHHM02-6145DBY-AV | | - | - | | 20.43 (519) | | | 111 (50) | 21.69 (551) | | | | | 114 (52) | | | | | | | | |
| CHHM03-6145DBY | 1/3 x 4 (0.25 x 4) | - | - | | 19.65 (499) | | | 108 (49) | 20.91 (531) | | | | | 111 (50) | 21.69 (551) | 111 (50) | | | | | | |
| CHHM03-6145DBY-AV | | - | - | | 20.43 (519) | | | 111 (50) | 21.69 (551) | | | | | 114 (52) | | | | | | | | |
| CHHM05-6145DBY | 1/2 x 4 (0.4 x 4) | - | - | 5.67 (144) | 22.05 (560) | 3.82 (97) | ø5.94 (ø151) | 111 (50) | 23.74 (603) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 114 (52) | | | | | | | | |
| CHHM05-6145DBY-AV | | 11.81 (300) | - | | | | | 118 (54) | | | | | | 124 (56) | | | | | | | | |
| CHHM08-6145DBY | 3/4 x 4 (0.55 x 4) | - | - | | 23.35 (593) | | | 3.94 (100) | ø6.30 (ø160) | | | | | 115 (53) | 25.79 (655) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 121 (55) | | |
| CHHM08-6145DBY-AV | | 11.81 (300) | - | | | | | | | | | | | 126 (57) | | | | | | 137 (62) | | |
| CHHM1-614HY-EP | 1 x 4 (0.75 x 4) | - | 10.83 (275) | 5.98 (152) | 21.30 (541) | 3.82 (97) | □6.22 (□158) | | | 134 (61) | 23.80 (605) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | | | | | 144 (66) | | |
| CHHM1-6145Y-EP | | - | 10.43 (265) | | | | | | | 130 (59) | | | | | | | | | | 139 (64) | | |
| CHHM1-6145DBY-EP | | 11.81 (300) | - | | | | | 23.78 (604) | 131 (60) | 26.28 (668) | | | | | | 141 (64) | | | | | | |
| CHHM1H-6145Y-EP | 1.5 x 4 (1.1 x 4) | 10.51 (267) | - | 6.16 (156) | 22.36 (568) | 3.82 (97) | □6.57 (□167) | 136 (62) | 25.10 (638) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 148 (67) | | | | | | | | |
| CHHM1H-6145DBY-EP | | 11.81 (300) | - | | | | | 24.84 (631) | | | | | | 139 (63) | 27.58 (701) | 150 (68) | | | | | | |
| CHHM2-6145Y-EP | 2 x 4 (1.5 x 4) | 10.51 (267) | - | | | | | 22.36 (568) | | | | | | 139 (64) | 25.10 (638) | 151 (69) | 24.84 (631) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 151 (69) |
| CHHM2-6145DBY-EP | | 11.81 (300) | - | | | | | 24.84 (631) | | | | | | | | | | | | | | 141 (64) |
| CHHM2-6145DCY-EP | | 11.81 (300) | - | 25.39 (645) | 144 (66) | 28.13 (715) | 155 (71) | | | | | | | | | | | | | | | |
| CHHM3-6145Y-EP | 3 x 4 (2.2 x 4) | 10.83 (275) | - | 6.71 (170) | 21.77 (553) | 4.53 (115) | □7.24 (□184) | 151 (69) | 24.84 (631) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 168 (76) | | | | | | | | |
| CHHM3-6145DBY-EP | | 11.81 (300) | - | | | | | 25.67 (652) | | | | | | 157 (72) | 28.74 (730) | 174 (79) | | | | | | |
| CHHM3-6145DCY-EP | | 11.81 (300) | - | | | | | 26.22 (666) | | | | | | 160 (73) | 29.29 (744) | 177 (80) | | | | | | |
| CHHM5-6145Y-EP | 5 x 4 (3.7 x 4) | 11.93 (303) | - | 7.34 (186) | 23.03 (585) | 4.65 (118) | □8.74 (□222) | 175 (80) | 26.59 (676) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 199 (91) | | | | | | | | |
| CHHM8-6145Y-EP | 7.5 x 4 (5.5 x 4) | 11.93 (303) | - | | | | | 24.72 (628) | | | | | | 209 (95) | 28.29 (719) | 233 (106) | | | | | | |
| CHHM10-6145Y-EP | 10 x 4 (7.5 x 4) | 12.68 (322) | - | 9.04 (230) | 26.22 (666) | 5.43 (138) | □10.24 (□260) | 236 (107) | 30.35 (771) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 280 (127) | | | | | | | | |
| CHHM15-6145Y-EP | 15 x 4 (11 x 4) | 12.68 (322) | - | | | | | 28.66 (728) | | | | | | 249 (113) | 32.80 (833) | 293 (133) | | | | | | |
| CHHM20-6145Y-EP | 20 x 4 (15 x 4) | 12.48 (317) | - | | | | | 10.26 (261) | | | | | | 31.10 (790) | 7.01 (178) | ø12.49 (ø317) | 329 (150) | 36.40 (925) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - |
| CHHM1H-614HY-EP | 1.5 x 4 (1.1 x 4) | 10.91 (277) | - | 6.16 (156) | 22.36 (568) | 3.82 (97) | □6.57 (□167) | 141 (64) | 25.10 (638) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 152 (69) | | | | | | | | |
| CHHM2-614HY-EP | 2 x 4 (1.5 x 4) | 10.91 (277) | - | | | | | 144 (66) | | | | | | 155 (71) | 24.84 (631) | 172 (78) | | | | | | |
| CHHM3-614HY-EP | 3 x 4 (2.2 x 4) | 11.22 (285) | - | 7.34 (186) | 23.03 (585) | 4.65 (118) | □8.74 (□222) | 155 (71) | 26.59 (676) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 172 (78) | | | | | | | | |
| CHHM5-614HY-EP | 5 x 4 (3.7 x 4) | 12.32 (313) | - | | | | | 180 (82) | | | | | | 214 (97) | 28.29 (719) | 203 (93) | | | | | | |
| CHHM8-614HY-EP | 7.5 x 4 (5.5 x 4) | 12.32 (313) | - | 9.04 (230) | 24.72 (628) | 5.43 (138) | □10.24 (□260) | 214 (97) | 30.35 (771) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 238 (108) | | | | | | | | |
| CHHM10-614HY-EP | 10 x 4 (7.5 x 4) | 13.07 (332) | - | | | | | 240 (109) | | | | | | 253 (115) | 32.80 (833) | 285 (129) | | | | | | |
| CHHM15-614HY-EP | 15 x 4 (11 x 4) | 13.07 (332) | - | | | | | 28.66 (728) | | | | | | 253 (115) | 32.80 (833) | 297 (135) | | | | | | |
| CHHM20-614HY-EP | 20 x 4 (15 x 4) | 12.87 (327) | - | 10.26 (261) | 31.10 (790) | 7.01 (178) | ø12.49 (ø317) | 334 (152) | 36.40 (925) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | 420 (191) | | | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal Foot Mount

CHHM05-6165DCY ▶ CHHM30-616HY-EP

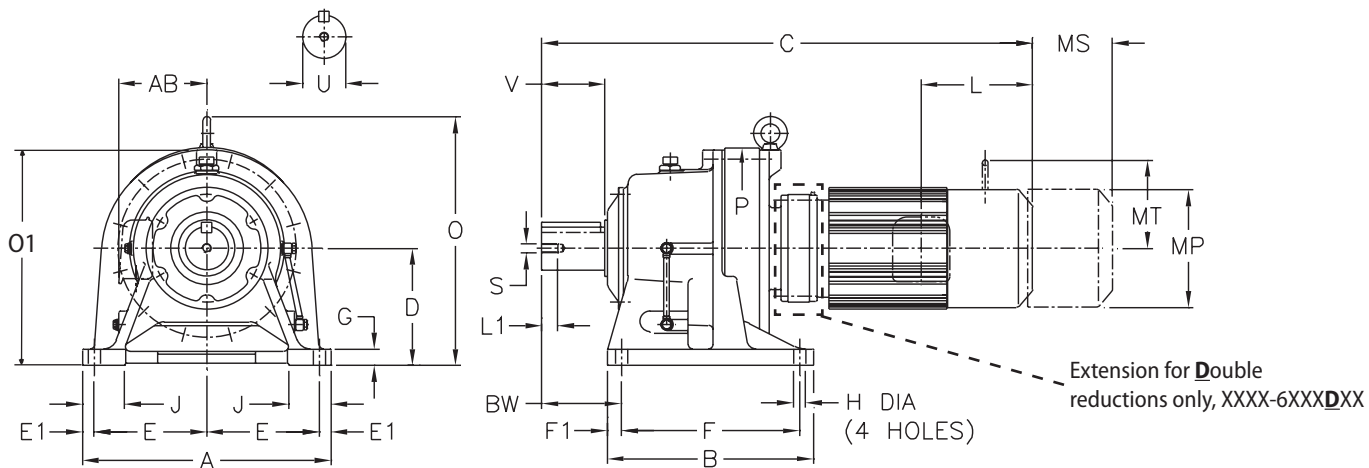


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHHM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|------------------------------|----------------|---------------|---------------|---------------|--------------|---------------|--------------|--------------|--------------|--------------|----------------|---------------|
| 6160Y 6165Y | 16.14 (410) | 9.37 (238) | 6.30 (160) | 7.28 (185) | 0.79 (20) | 5.91 (150) | 1.73 (44) | 0.98 (25) | 0.71 (18) | 2.95 (75) | 11.81 (300) | 5.47 (139) |
| 616HY | 16.14 (410) | 9.37 (238) | 7.87 (200) | 7.28 (185) | 0.79 (20) | 5.91 (150) | 1.73 (44) | 0.98 (25) | 0.71 (18) | 3.15 (80) | 11.81 (300) | 5.47 (139) |

All dimensions are in inches (mm)

| Model | Low Speed Shaft | | | | |
|------------------------------|------------------|--------------|-----------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6160Y 6165Y | 2.25 (57.15) | 3.54 (90) | 3/8-16UNC | 0.79 (20) | 1/2 x 1/2 x 2.95 (12.7 x 12.7 x 75) |
| 616HY | 2.25 (57.15) | 3.54 (90) | 3/8-16UNC | 0.79 (20) | 1/2 x 1/2 x 2.95 (12.7 x 12.7 x 75) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal Foot Mount


CHHM05-6165DCY ▶ CHHM30-616HY-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|-----------------------|----------------------|----------------|----------------|----------------|----------------|-------------------|-------------------|-----------------|----------------|-------------------|----------------|------------|-------------------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHHM05-6165DCY | 1/2 x 4 (0.4 x 4) | - | - | 4.63 (118) | 23.23 (590) | 2.32 (59) | ø4.88 (ø124) | 221 (100) | 24.49 (622) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 224 (102) |
| CHHM05-6165DCY-AV | | 13.74 (349) | - | 5.67 (144) | 24.65 (626) | 3.82 (97) | ø5.94 (ø151) | 228 (104) | 26.34 (669) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 234 (106) |
| CHHM08-6165DCY | 3/4 x 4 (0.55 x 4) | - | - | 5.86 (149) | 25.94 (659) | 3.94 (100) | ø6.30 (ø160) | 225 (102) | 28.39 (721) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 231 (105) |
| CHHM08-6165DCY-AV | | 13.74 (349) | - | 5.98 (152) | 26.38 (670) | 3.82 (97) | ø6.22 (ø158) | 234 (106) | 28.88 (734) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 244 (111) |
| CHHM1-6165DCY-EP | 1 x 4 (0.75 x 4) | - | 12.20 (310) | 6.16 (156) | 24.25 (616) | 3.82 (97) | ø6.57 (ø167) | 219 (99) | 26.99 (686) | 6.56 (167) | ø6.57 (ø167) | 5.04 (128) | 4.61 (117) | 238 (108) |
| CHHM1H-6165Y-EP | 1.5 x 4 (1.1 x 4) | - | 12.20 (310) | 24.25 (616) | 219 (99) | | | 26.99 (686) | 238 (108) | | | | | |
| CHHM1H-6165DCY-EP | 13.74 (349) | - | 12.20 (310) | 24.25 (616) | 245 (112) | 30.18 (767) | 222 (101) | 26.99 (686) | 248 (113) | 30.18 (767) | 5.04 (128) | 4.61 (117) | 230 (105) | |
| CHHM2-6165Y-EP | 2 x 4 (1.5 x 4) | - | 12.20 (310) | 6.71 (170) | 24.25 (616) | 4.53 (115) | ø7.24 (ø184) | 222 (101) | 26.99 (686) | 7.60 (193) | ø7.24 (ø184) | 5.43 (138) | 5.04 (128) | 233 (106) |
| CHHM2-6165DCY-EP | | 13.74 (349) | - | 27.44 (697) | 248 (113) | | | 30.18 (767) | 260 (118) | | | | | |
| CHHM3-6165Y-EP | 3 x 4 (2.2 x 4) | - | 12.20 (310) | 6.71 (170) | 23.66 (601) | 4.53 (115) | ø7.24 (ø184) | 232 (105) | 26.73 (679) | 7.60 (193) | ø7.24 (ø184) | 5.43 (138) | 5.04 (128) | 248 (113) |
| CHHM3-6165DCY-EP | | 13.74 (349) | - | 26.85 (682) | 261 (119) | | | 29.92 (760) | 278 (126) | | | | | |
| CHHM5-6165Y-EP | 5 x 4 (3.7 x 4) | 12.32 (313) | - | 7.34 (186) | 25.12 (638) | 4.65 (118) | ø8.74 (ø222) | 257 (117) | 28.68 (729) | 8.21 (209) | ø8.74 (ø222) | 6.02 (153) | 6.30 (160) | 280 (127) |
| CHHM5-6165DCY-EP | | 13.74 (349) | - | 28.31 (719) | 287 (130) | | | 31.87 (810) | 311 (141) | | | | | |
| CHHM8-6165Y-EP | 7.5 x 4 (5.5 x 4) | 12.32 (313) | - | 7.34 (186) | 26.81 (681) | 4.65 (118) | ø8.74 (ø222) | 291 (132) | 30.37 (772) | 8.21 (209) | ø8.74 (ø222) | 6.02 (153) | 6.30 (160) | 314 (143) |
| CHHM8-6165DCY-EP | | 13.74 (349) | - | 30.00 (762) | 321 (146) | | | 33.56 (853) | 345 (157) | | | | | |
| CHHM10-6165Y-EP | 10 x 4 (7.5 x 4) | 14.88 (378) | - | 9.04 (230) | 28.27 (718) | 5.43 (138) | ø10.24 (ø260) | 318 (145) | 32.40 (823) | 9.57 (243) | ø10.24 (ø260) | 7.44 (189) | 7.32 (186) | 363 (165) |
| CHHM15-6165Y-EP | | 15 x 4 (11 x 4) | 14.88 (378) | - | 30.71 (780) | | | 331 (150) | 34.84 (885) | | | | | 375 (170) |
| CHHM20-6165Y-EP | 20 x 4 (15 x 4) | 15.24 (387) | - | 10.26 (261) | 32.99 (838) | 7.01 (178) | ø12.49 (ø317) | 414 (188) | 38.29 (973) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | 500 (227) |
| CHHM25-6165Y-EP | | 25 x 4 (18.5 x 4) | 14.72 (374) | - | 13.39 (340) | | | 37.17 (944) | 9.06 (230) | | | | | ø15.12 (ø384) |
| CHHM30-6165Y-EP | 30 x 4 (22 x 4) | 14.72 (374) | - | 13.39 (340) | 37.17 (944) | 9.06 (230) | ø15.12 (ø384) | 692 (314) | 44.02 (1118) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | 789 (358) |
| CHHM1H-616HY-EP | 1.5 x 4 (1.1 x 4) | - | 13.78 (350) | 6.16 (156) | 24.25 (616) | 3.82 (97) | ø6.57 (ø167) | 230 (104) | 26.99 (686) | 6.56 (167) | ø6.57 (ø167) | 5.04 (128) | 4.61 (117) | 241 (110) |
| CHHM2-616HY-EP | 2 x 4 (1.5 x 4) | - | 13.78 (350) | 233 (106) | 244 (111) | | | | | | | | | |
| CHHM3-616HY-EP | 3 x 4 (2.2 x 4) | - | 13.78 (350) | 6.71 (170) | 23.66 (601) | 4.53 (115) | ø7.24 (ø184) | 243 (110) | 26.73 (679) | 7.60 (193) | ø7.24 (ø184) | 5.43 (138) | 5.04 (128) | 260 (118) |
| CHHM5-616HY-EP | 5 x 4 (3.7 x 4) | 13.90 (353) | - | 7.34 (186) | 25.12 (638) | | | 4.65 (118) | ø8.74 (ø222) | | | | | 268 (122) |
| CHHM8-616HY-EP | 7.5 x 4 (5.5 x 4) | 13.90 (353) | - | 26.81 (681) | 302 (137) | 30.37 (772) | 325 (148) | | | | | | | |
| CHHM10-616HY-EP | 10 x 4 (7.5 x 4) | 16.46 (418) | - | 9.04 (230) | 28.27 (718) | 5.43 (138) | ø10.24 (ø260) | 329 (150) | 32.40 (823) | 9.57 (243) | ø10.24 (ø260) | 7.44 (189) | 7.32 (186) | 374 (170) |
| CHHM15-616HY-EP | | 15 x 4 (11 x 4) | 16.46 (418) | - | 30.71 (780) | | | 342 (155) | 34.84 (885) | | | | | 386 (175) |
| CHHM20-616HY-EP | 20 x 4 (15 x 4) | 16.81 (427) | - | 10.26 (261) | 32.99 (838) | 7.01 (178) | ø12.49 (ø317) | 425 (193) | 38.29 (973) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | 511 (232) |
| CHHM25-616HY-EP | | 25 x 4 (18.5 x 4) | 16.30 (414) | - | 13.39 (340) | | | 37.17 (944) | 9.06 (230) | | | | | ø15.12 (ø384) |
| CHHM30-616HY-EP | 30 x 4 (22 x 4) | 16.30 (414) | - | 13.39 (340) | 37.17 (944) | 9.06 (230) | ø15.12 (ø384) | 703 (319) | 44.02 (1118) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | 800 (363) |

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal Foot Mount

CHHM05-6175DCY ▶ CHHM40-6175Y-EP

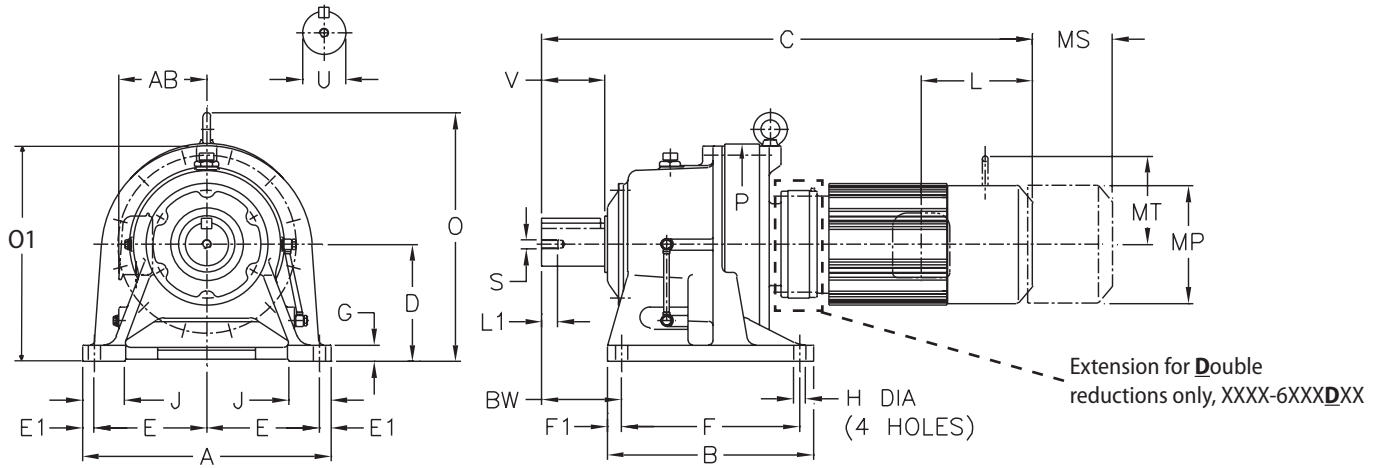


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHHM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|--------------|-------|-------|-------|-------|------|-------|------|------|------|------|-------|-------|
| 6170Y | 16.93 | 13.19 | 7.87 | 7.48 | 0.98 | 10.83 | 1.18 | 1.18 | 0.87 | 3.15 | 13.39 | 4.92 |
| 6175Y | (430) | (335) | (200) | (190) | (25) | (275) | (30) | (30) | (22) | (80) | (340) | (125) |

All dimensions are in inches (mm)

| Model | Low Speed Shaft | | | | |
|--------------|------------------|------|-----------|------|--|
| | U ^[A] | V | S | L1 | Key |
| 6170Y | 2.75 | 3.54 | 1/2-13UNC | 0.94 | 5/8 x 5/8 x 3.15 (15.87 x 15.87 x 80) |
| 6175Y | (69.85) | (90) | | (24) | |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal Foot Mount

CHHM05-6175DCY ▶ CHHM40-6175Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|-----------------------|----------------|----|----------------|-----------------|----------------|-------------------|-------------------|-----------------|----------------|-------------------|----------------|------------|-------------------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHHM05-6175DCY | 1/2 x 4 (0.4 x 4) | - | - | 4.63 (118) | 25.08 (637) | 2.32 (59) | ø4.88 (ø124) | 296 (134) | 26.34 (669) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 299 (136) |
| CHHM05-6175DCY-AV | | 16.38 (416) | - | 5.67 (144) | 26.50 (673) | 3.82 (97) | ø5.94 (ø151) | 303 (138) | 28.19 (716) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 309 (140) |
| CHHM08-6175DCY | 3/4 x 4 (0.55 x 4) | - | - | | | | | 300 (136) | | | | | | 306 (139) |
| CHHM08-6175DCY-AV | | 16.38 (416) | - | 5.86 (149) | 27.80 (706) | 3.94 (100) | ø6.30 (ø160) | 309 (140) | 30.24 (768) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 319 (145) |
| CHHM1-6175DAY-EP | 1 x 4 (0.75 x 4) | 16.38 (416) | - | 5.98 (152) | 27.52 (699) | 3.82 (97) | ø6.22 (ø158) | 299 (136) | 30.02 (763) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 308 (140) |
| CHHM1-6175DCY-EP | | 16.38 (416) | - | | 28.23 (717) | | | 313 (142) | 30.73 (781) | | | | | 323 (147) |
| CHHM1H-6175DCY-EP | 1.5 x 4 (1.1 x 4) | 16.38 (416) | - | | 29.29 (744) | 3.82 (97) | ø6.57 (ø167) | 320 (146) | 32.03 (814) | 6.56 (167) | ø6.57 (ø167) | 5.04 (128) | 4.61 (117) | 332 (151) |
| CHHM2-6175DAY-EP | 2 x 4 (1.5 x 4) | 16.38 (416) | - | 6.16 (156) | 28.58 (726) | | | 309 (140) | 31.32 (796) | | | | | 321 (146) |
| CHHM2-6175DCY-EP | | 16.38 (416) | - | | 29.29 (744) | 323 (147) | 32.03 (814) | 335 (152) | | | | | | |
| CHHM3-6175DCY-EP | 3 x 4 (2.2 x 4) | 16.38 (416) | - | 6.71 (170) | 28.70 (729) | 4.53 (115) | ø7.24 (ø184) | 336 (153) | 31.77 (807) | 7.60 (193) | ø7.24 (ø184) | 5.43 (138) | 5.04 (128) | 353 (160) |
| CHHM5-6175Y-EP | 5 x 4 (3.7 x 4) | 16.10 (409) | - | 7.34 (186) | 27.05 (687) | 4.65 (118) | ø8.74 (ø222) | 351 (159) | 30.61 (778) | 8.21 (209) | ø8.74 (ø222) | 6.02 (153) | 6.30 (160) | 375 (170) |
| CHHM5-6175DCY-EP | | 16.38 (416) | - | | 30.16 (766) | | | 362 (164) | 33.72 (857) | | | | | 386 (175) |
| CHHM8-6175Y-EP | 7.5 x 4 (5.5 x 4) | 16.10 (409) | - | | 28.74 (730) | | | 385 (175) | 32.30 (821) | | | | | 408 (186) |
| CHHM8-6175DCY-EP | | 16.38 (416) | - | 31.85 (809) | 396 (180) | 35.41 (900) | 419 (191) | | | | | | | |
| CHHM10-6175Y-EP | 10 x 4 (7.5 x 4) | 16.57 (421) | - | 9.04 (230) | 29.57 (751) | 5.43 (138) | ø10.24 (ø260) | 413 (188) | 33.70 (856) | 9.57 (243) | ø10.24 (ø260) | 7.44 (189) | 7.32 (186) | 458 (208) |
| CHHM15-6175Y-EP | 15 x 4 (11 x 4) | 16.57 (421) | - | | 32.01 (813) | | | 426 (194) | 36.14 (918) | | | | | 470 (214) |
| CHHM20-6175Y-EP | 20 x 4 (15 x 4) | 16.69 (424) | - | 10.26 (261) | 34.72 (882) | 7.01 (178) | ø12.49 (ø317) | 507 (230) | 40.02 (1017) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 593 (269) |
| CHHM25-6175Y-EP | 25 x 4 (18.5 x 4) | 16.69 (424) | - | 13.39 (340) | 38.90 (988) | 9.06 (230) | ø15.12 (ø384) | 786 (357) | 45.75 (1162) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | 883 (401) |
| CHHM30-6175Y-EP | 30 x 4 (22 x 4) | 16.69 (424) | - | | 43.78 (1112) | | | 786 (357) | 50.63 (1286) | | | | | 883 (401) |
| CHHM40-6175Y-EP | 40 x 4 (30 x 4) | 16.69 (424) | - | | | | | 899 (408) | 50.63 (1286) | | | | | 996 (452) |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal Foot Mount

CHHM1-6185DBY-EP ▶ CHHM50-6185Y-EP

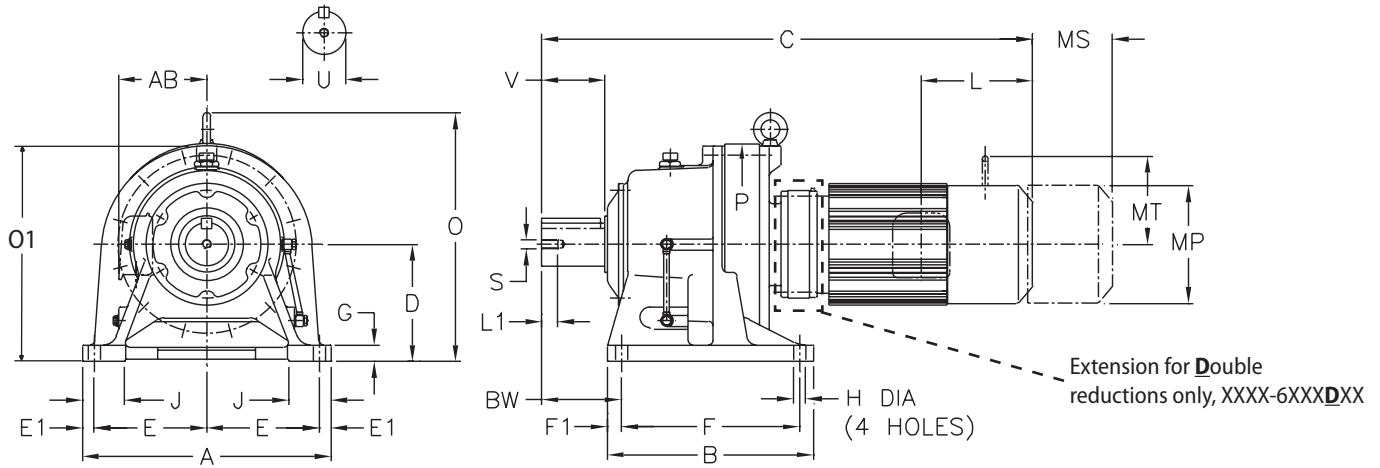


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHHM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|--------------|-------|-------|-------|-------|------|-------|------|------|------|------|-------|-------|
| 6180Y | 18.50 | 14.96 | 8.66 | 8.27 | 0.98 | 12.60 | 1.18 | 1.18 | 0.87 | 3.35 | 14.57 | 5.71 |
| 6185Y | (470) | (380) | (220) | (210) | (25) | (320) | (30) | (30) | (22) | (85) | (370) | (145) |

All dimensions are in inches (mm)

| Model | Low Speed Shaft | | | | |
|--------------|------------------|-------|-----------|------|--|
| | U ^[A] | V | S | L1 | Key |
| 6180Y | 3.13 | 4.33 | 1/2-13UNC | 0.94 | 3/4 x 3/4 x 3.74 (19.05 x 19.05 x 95) |
| 6185Y | (79.375) | (110) | | (24) | |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal Foot Mount

CHHM1-6185DBY-EP ▶ CHHM50-6185Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | | | | | | |
|-------------------|----------------------|----------------|----|----------------|-----------------|------------|-------------------|-------------------|-----------------|----------------|-------------------|----------------|------------|-------------------|-----------------|------------|------------|-----------|---|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | |
| CHHM1-6185DBY-EP | 1 x 4 (0.75 x 4) | 17.76 (451) | - | 5.98 (152) | 30.59 (777) | 3.82 (97) | □6.22 (□158) | 436 (198) | 33.09 (841) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 446 (203) | | | | | |
| CHHM1H-6185DBY-EP | 1.5 x 4 (1.1 x 4) | 17.76 (451) | - | 6.16 (156) | 31.65 (804) | | □6.57 (□167) | 443 (201) | 34.39 (874) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 454 (206) | | | | | |
| CHHM2-6185DAY-EP | 2 x 4 (1.5 x 4) | 17.76 (451) | - | | 30.79 (782) | | 406 (185) | 33.52 (852) | 418 (190) | | | | | | | | | | |
| CHHM2-6185DBY-EP | | 17.76 (451) | - | 31.65 (804) | 446 (203) | | 34.39 (874) | 457 (208) | | | | | | | | | | | |
| CHHM3-6185DBY-EP | 3 x 4 (2.2 x 4) | 17.76 (451) | - | 6.71 (170) | 31.06 (789) | 4.53 (115) | □7.24 (□184) | 457 (208) | 34.13 (867) | | | | | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 474 (215) | |
| CHHM5-6185Y-EP | 5 x 4 (3.7 x 4) | 17.48 (444) | - | 7.34 (186) | 28.50 (724) | 4.65 (118) | □8.74 (□222) | 431 (196) | 32.07 (815) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 455 (207) | | | | | |
| CHHM5-6185DBY-EP | | 17.76 (451) | - | | 32.32 (821) | | | 482 (219) | 35.89 (912) | | | | | 505 (230) | | | | | |
| CHHM8-6185Y-EP | 7.5 x 4 (5.5 x 4) | 17.48 (444) | - | | 30.20 (767) | | | 465 (211) | 33.76 (858) | | | | | 489 (222) | | | | | |
| CHHM8-6185DBY-EP | | 17.76 (451) | - | | 34.02 (864) | | | 516 (234) | 37.58 (955) | | | | | 540 (245) | | | | | |
| CHHM10-6185Y-EP | 10 x 4 (7.5 x 4) | 17.91 (455) | - | 9.04 (230) | 31.14 (791) | 5.43 (138) | □10.24 (□260) | 496 (225) | 35.28 (896) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 540 (245) | | | | | |
| CHHM10-6185DBY-EP | | 17.76 (451) | - | | 35.51 (902) | | | 543 (246) | 39.65 (1007) | | | | | 587 (266) | | | | | |
| CHHM15-6185Y-EP | 15 x 4 (11 x 4) | 17.91 (455) | - | | 33.58 (853) | | | 508 (231) | 37.72 (958) | | | | | 553 (251) | | | | | |
| CHHM15-6185DBY-EP | | 17.76 (451) | - | | 37.95 (964) | | | 555 (252) | 42.09 (1069) | | | | | 599 (272) | | | | | |
| CHHM20-6185Y-EP | 20 x 4 (15 x 4) | 17.83 (453) | - | 10.26 (261) | 36.18 (919) | 7.01 (178) | ∅12.49 (∅317) | 588 (267) | 41.48 (1054) | 12.30 (313) | ∅12.61 (∅320) | 9.53 (242) | - | 674 (306) | | | | | |
| CHHM25-6185Y-EP | 25 x 4 (18.5 x 4) | 17.87 (454) | - | 13.39 (340) | 40.35 (1025) | 9.06 (230) | ∅15.12 (∅384) | 865 (393) | 47.20 (1199) | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | - | 962 (437) | | | | | |
| CHHM30-6185Y-EP | 30 x 4 (22 x 4) | 17.87 (454) | - | | 865 (393) | | | 978 (444) | 52.09 (1323) | | | | 1075 (488) | | | | | | |
| CHHM40-6185Y-EP | 40 x 4 (30 x 4) | 17.87 (454) | - | | 45.24 (1149) | | | 1047 (475) | - | | | | - | - | - | - | - | - | - |
| CHHM50-6185Y-EP | 50 x 4 (37 x 4) | 17.87 (454) | - | | - | | | - | - | | | | - | - | - | - | - | - | - |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ∅ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal Foot Mount

CHHM1-6195DAY-EP ▶ CHHM60-6195Y-EP

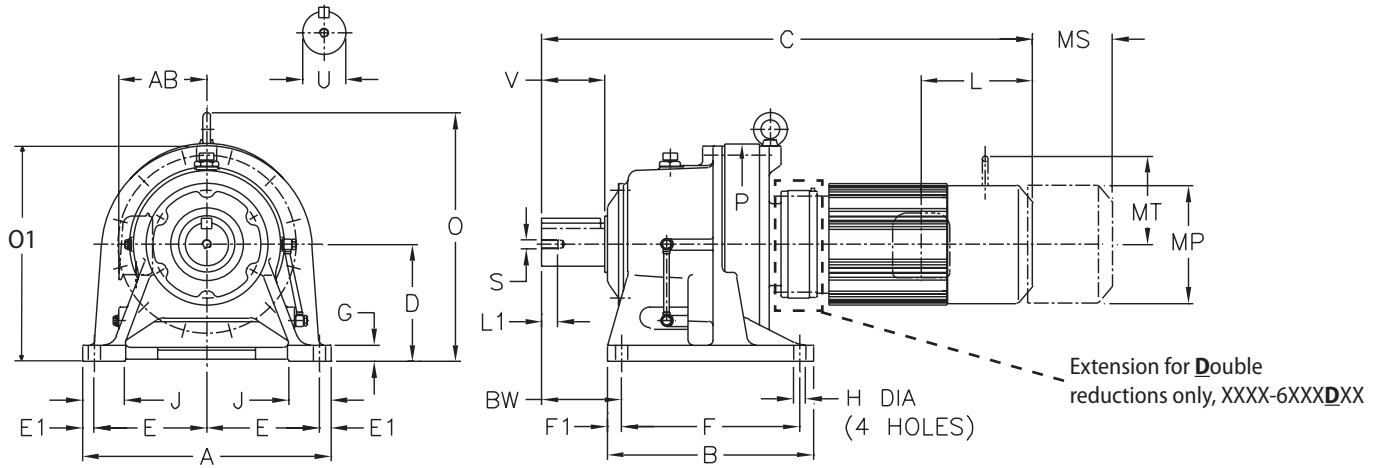


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHHM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|--------------|-------|-------|-------|-------|------|-------|------|------|------|------|-------|-------|
| 6190Y | 20.87 | 17.32 | 9.84 | 9.45 | 0.98 | 14.96 | 1.18 | 1.38 | 1.02 | 3.54 | 16.93 | 6.69 |
| 6195Y | (530) | (440) | (250) | (240) | (25) | (380) | (30) | (35) | (26) | (90) | (430) | (170) |

All dimensions are in inches (mm)

| Model | Low Speed Shaft | | | | |
|--------------|------------------|-------|-----------|------|---|
| | U ^[A] | V | S | L1 | Key |
| 6190Y | 3.63 | 5.31 | 3/4-10UNC | 1.34 | 7/8 x 7/8 x 4.92 (22.225 x 22.225 x 125) |
| 6195Y | (92.075) | (135) | | (34) | |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal Foot Mount


CHHM1-6195DAY-EP ▶ CHHM60-6195Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|----------------|----|----------------|-----------------|----------------|-------------------|-------------------|-----------------|----------------|-------------------|----------------|------------|-------------------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHHM1-6195DAY-EP | 1 x 4 (0.75 x 4) | 20.91 (531) | - | 5.98 (152) | 32.95 (837) | 3.82 (97) | □6.22 (□158) | 563 (255) | 35.45 (901) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 572 (260) |
| CHHM1H-6195DAY-EP | 1.5 x 4 (1.1 x 4) | 20.91 (531) | - | 6.16 (156) | 34.02 (864) | | □6.57 (□167) | 569 (259) | 36.75 (934) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 581 (264) |
| CHHM2-6195DAY-EP | 2 x 4 (1.5 x 4) | 20.91 (531) | - | | 33.43 (849) | | □7.24 (□184) | 572 (260) | 36.50 (927) | 7.60 (193) | □7.24 (□184) | 5.04 (128) | 4.61 (117) | 584 (265) |
| CHHM3-6195DAY-EP | 3 x 4 (2.2 x 4) | 20.91 (531) | - | 6.71 (170) | 34.06 (865) | 4.53 (115) | □7.24 (□184) | 585 (266) | 37.13 (943) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 602 (273) |
| CHHM3-6195DBY-EP | | 20.91 (531) | - | | 34.88 (886) | | | 605 (275) | 37.13 (943) | | | | | 622 (282) |
| CHHM5-6195DAY-EP | 5 x 4 (3.7 x 4) | 20.91 (531) | - | 7.34 (186) | 35.31 (897) | 4.65 (118) | □8.74 (□222) | 611 (277) | 38.44 (977) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 635 (288) |
| CHHM5-6195DBY-EP | | 20.91 (531) | - | | 33.78 (858) | | | 629 (286) | 38.88 (988) | | | | | 653 (297) |
| CHHM8-6195Y-EP | 7.5 x 4 (5.5 x 4) | 19.96 (507) | - | 9.04 (230) | 36.57 (929) | 5.43 (138) | □10.24 (□260) | 633 (287) | 37.34 (949) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 656 (298) |
| CHHM8-6195DAY-EP | | 20.91 (531) | - | | 37.01 (940) | | | 645 (293) | 40.14 (1020) | | | | | 669 (304) |
| CHHM8-6195DBY-EP | | 20.91 (531) | - | | 34.02 (864) | | | 663 (301) | 40.57 (1031) | | | | | 687 (312) |
| CHHM10-6195Y-EP | 10 x 4 (7.5 x 4) | 20.43 (519) | - | 10.26 (261) | 36.46 (926) | 7.01 (178) | ∅12.49 (∅317) | 663 (301) | 38.15 (969) | 12.30 (313) | ∅12.61 (∅320) | 9.53 (242) | - | 707 (321) |
| CHHM10-6195DBY-EP | | 20.91 (531) | - | | 38.50 (978) | | | 690 (313) | 42.64 (1083) | | | | | 735 (333) |
| CHHM15-6195Y-EP | 15 x 4 (11 x 4) | 20.43 (519) | - | 13.39 (340) | 40.94 (1040) | 9.06 (230) | ∅15.12 (∅384) | 676 (307) | 40.59 (1031) | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | - | 720 (327) |
| CHHM15-6195DBY-EP | | 20.91 (531) | - | | 43.35 (1101) | | | 703 (319) | 45.08 (1145) | | | | | 747 (339) |
| CHHM20-6195Y-EP | 20 x 4 (15 x 4) | 19.02 (483) | - | 16.33 (415) | 39.17 (995) | 16.81 (427) | ∅18.66 (∅474) | 754 (342) | 44.47 (1130) | - | - | - | - | 840 (381) |
| CHHM20-6195DBY-EP | | 20.91 (531) | - | | 43.39 (1102) | | | 783 (356) | 48.68 (1237) | | | | | 869 (395) |
| CHHM25-6195Y-EP | 25 x 4 (18.5 x 4) | 20.87 (530) | - | 16.33 (415) | 43.35 (1101) | 16.81 (427) | ∅18.66 (∅474) | 1032 (469) | 50.20 (1275) | - | - | - | - | 1129 (513) |
| CHHM30-6195Y-EP | 30 x 4 (22 x 4) | 20.87 (530) | - | | 48.23 (1225) | | | 1032 (469) | 55.08 (1399) | | | | | 1129 (513) |
| CHHM40-6195Y-EP | 40 x 4 (30 x 4) | 20.87 (530) | - | 16.33 (415) | 48.23 (1225) | 16.81 (427) | ∅18.66 (∅474) | 1145 (520) | 55.08 (1399) | - | - | - | - | 1242 (564) |
| CHHM50-6195Y-EP | 50 x 4 (37 x 4) | 20.87 (530) | - | | 1214 (551) | | | 1214 (551) | 1214 (551) | | | | | |
| CHHM60-6195Y-EP | 60 x 4 (45 x 4) | 20.51 (521) | - | 16.33 (415) | 49.69 (1262) | 16.81 (427) | ∅18.66 (∅474) | 1342 (609) | - | - | - | - | - | - |

Note: [1] MP Dimension Symbol ∅ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal Foot Mount

CHHM1-6205DAY-EP ▶ CHHM75-6205Y-EP

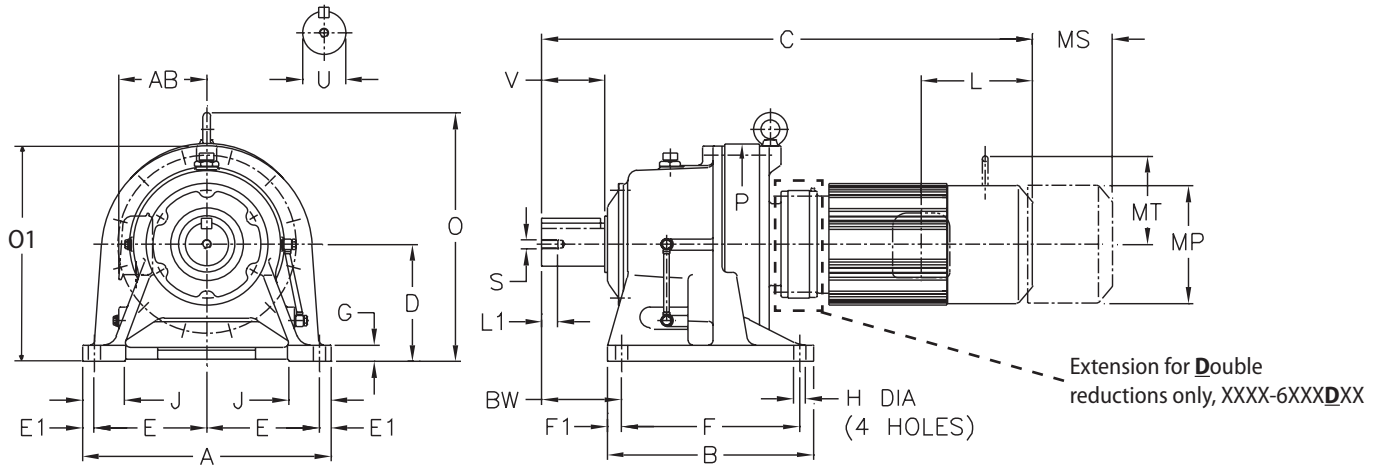


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHHM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|--------------|----------------|----------------|---------------|---------------|--------------|----------------|--------------|--------------|--------------|---------------|----------------|---------------|
| 6205Y | 20.87 (530) | 17.32 (440) | 9.84 (250) | 8.66 (220) | 1.77 (45) | 14.17 (360) | 1.57 (40) | 1.38 (35) | 1.02 (26) | 3.94 (100) | 17.64 (448) | 8.46 (215) |

All dimensions are in inches (mm)

| Model | Low Speed Shaft | | | | |
|--------------|------------------|---------------|-----------|--------------|------------------------------------|
| | U ^[A] | V | S | L1 | Key |
| 6205Y | 3.88 (98.425) | 6.50 (165) | 3/4-10UNC | 1.34 (34) | 1 x 1 x 6.5 (25.4 x 25.4 x 165) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal Foot Mount

CHHM1-6205DAY-EP ▶ CHHM75-6205Y-EP

XXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|----------------|----------------|-----------------|-----------------|-----------------|-------------------|-------------------|-----------------|----------------|-------------------|----------------|------------|-------------------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHHM1-6205DAY-EP | 1 x 4 (0.75 x 4) | 20.87 (530) | - | 5.98 (152) | 34.57 (878) | 3.82 (97) | □6.22 (□158) | 604 (274) | 37.07 (942) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 614 (279) |
| CHHM2-6205DAY-EP | 2 x 4 (1.5 x 4) | 20.87 (530) | - | 6.16 (156) | 35.63 (905) | | □6.57 (□167) | 614 (279) | 38.37 (975) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 626 (284) |
| CHHM3-6205DAY-EP | 3 x 4 (2.2 x 4) | 20.87 (530) | - | 6.71 (170) | 35.04 (890) | 4.53 (115) | □7.24 (□184) | 627 (285) | 38.11 (968) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 644 (292) |
| CHHM3-6205DBY-EP | | 20.87 (530) | 36.10 (917) | | 656 (298) | | | 39.17 (995) | 673 (305) | | | | | |
| CHHM5-6205DAY-EP | 5 x 4 (3.7 x 4) | 20.87 (530) | - | 7.34 (186) | 36.50 (927) | 4.65 (118) | □8.74 (□222) | 653 (296) | 40.06 (1018) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 677 (307) |
| CHHM5-6205DBY-EP | | 20.87 (530) | 37.36 (949) | | 680 (309) | | | 40.93 (1040) | 704 (320) | | | | | |
| CHHM8-6205DAY-EP | 7.5 x 4 (5.5 x 4) | 20.87 (530) | - | 7.34 (186) | 38.19 (970) | 4.65 (118) | □8.74 (□222) | 687 (312) | 41.75 (1061) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 710 (323) |
| CHHM8-6205DBY-EP | | 20.87 (530) | 39.06 (992) | | 714 (324) | | | 42.62 (1083) | 738 (335) | | | | | |
| CHHM10-6205DBY-EP | 10 x 4 (7.5 x 4) | 20.87 (530) | - | 9.04 (230) | 40.55 (1030) | 5.43 (138) | □10.24 (□260) | 741 (336) | 44.69 (1135) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 785 (356) |
| CHHM15-6205Y-EP | 15 x 4 (11 x 4) | 20.91 (531) | - | | 37.97 (965) | | | 705 (320) | 42.11 (1070) | | | | | 749 (340) |
| CHHM15-6205DBY-EP | | 20.87 (530) | - | 42.99 (1092) | 754 (342) | 47.13 (1197) | 798 (362) | | | | | | | |
| CHHM20-6205Y-EP | 20 x 4 (15 x 4) | 20.87 (530) | - | 10.26 (261) | 41.02 (1042) | 7.01 (178) | ø12.49 (ø317) | 794 (360) | 46.32 (1177) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 880 (399) |
| CHHM20-6205DBY-EP | | 20.87 (530) | - | 45.43 (1154) | 834 (379) | | | 50.73 (1289) | 920 (418) | | | | | |
| CHHM25-6205Y-EP | 25 x 4 (18.5 x 4) | 20.87 (530) | - | 13.39 (340) | 44.80 (1138) | 9.06 (230) | ø15.12 (ø384) | 1066 (484) | 51.65 (1312) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1163 (528) |
| CHHM30-6205Y-EP | 30 x 4 (22 x 4) | 20.87 (530) | - | | 49.69 (1262) | | | 1066 (484) | 56.54 (1436) | | | | | 1163 (528) |
| CHHM40-6205Y-EP | 40 x 4 (30 x 4) | 20.87 (530) | - | 16.33 (415) | 49.69 (1262) | 9.06 (230) | ø15.12 (ø384) | 1179 (535) | 56.54 (1436) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1276 (579) |
| CHHM50-6205Y-EP | 50 x 4 (37 x 4) | 20.87 (530) | - | | 1248 (566) | | | - | - | | | | | - |
| CHHM60-6205Y-EP | 60 x 4 (45 x 4) | 20.87 (530) | - | 16.33 (415) | 51.14 (1299) | 16.81 (427) | ø18.66 (ø474) | 1381 (627) | - | - | - | - | - | - |
| CHHM75-6205Y-EP | 75 x 4 (55 x 4) | 20.87 (530) | - | 16.33 (415) | 51.14 (1299) | 16.81 (427) | ø18.66 (ø474) | 1461 (663) | - | - | - | - | - | - |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal Foot Mount

CHHM2-6215DAY-EP ▶ CHHM75-6215Y-EP

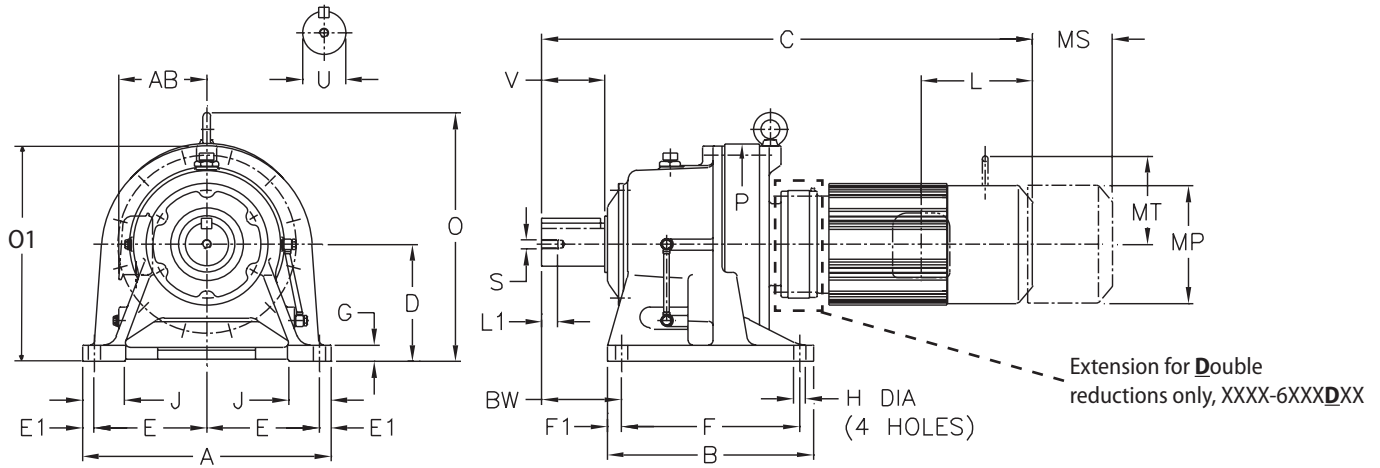


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHHM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|--------------|----------------|----------------|----------------|---------------|--------------|----------------|--------------|--------------|--------------|---------------|----------------|---------------|
| 6215Y | 22.83 (580) | 18.70 (475) | 10.43 (265) | 9.45 (240) | 1.97 (50) | 15.55 (395) | 1.57 (40) | 1.57 (40) | 1.02 (26) | 4.33 (110) | 19.09 (485) | 8.27 (210) |

All dimensions are in inches (mm)

| Model | Low Speed Shaft | | | | |
|--------------|------------------|---------------|-----------|--------------|------------------------------------|
| | U ^[A] | V | S | L1 | Key |
| 6215Y | 4.25 (107.95) | 6.50 (165) | 3/4-10UNC | 1.34 (34) | 1 x 1 x 6.5 (25.4 x 25.4 x 165) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal Foot Mount

CHHM2-6215DAY-EP ▶ CHHM75-6215Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|----------------|-----------------|----------------|-----------------|----------------|-------------------|-------------------|-----------------|----------------|-------------------|----------------|------------|-------------------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHHM2-6215DAY-EP | 2 x 4 (1.5 x 4) | 22.64 (575) | - | 6.16 (156) | 37.72 (958) | 3.82 (97) | □6.57 (□167) | 823 (374) | 40.45 (1028) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 834 (379) |
| CHHM3-6215DAY-EP | 3 x 4 (2.2 x 4) | 22.64 (575) | - | 6.71 (170) | 37.13 (943) | 4.53 (115) | □7.24 (□184) | 834 (379) | 40.20 (1021) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 851 (386) |
| CHHM5-6215DAY-EP | 5 x 4 (3.7 x 4) | 22.64 (575) | - | 7.34 (186) | 38.39 (975) | 4.65 (118) | □8.74 (□222) | 859 (390) | 41.95 (1066) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 882 (401) |
| CHHM5-6215DBY-EP | | 22.64 (575) | 39.57 (1005) | | 900 (409) | | | 43.13 (1096) | 924 (419) | | | | | |
| CHHM8-6215DAY-EP | 7.5 x 4 (5.5 x 4) | 22.64 (575) | - | 9.04 (230) | 40.08 (1018) | 5.43 (138) | □10.24 (□260) | 893 (405) | 43.64 (1109) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 917 (416) |
| CHHM8-6215DBY-EP | | 22.64 (575) | 41.26 (1048) | | 934 (424) | | | 44.82 (1139) | 958 (435) | | | | | |
| CHHM10-6215DAY-EP | 10 x 4 (7.5 x 4) | 22.64 (575) | - | 10.26 (261) | 41.57 (1056) | 7.01 (178) | ø12.49 (ø317) | 920 (417) | 45.71 (1161) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | 964 (437) |
| CHHM10-6215DBY-EP | | 22.64 (575) | 42.72 (1085) | | 962 (437) | | | 46.85 (1190) | 1006 (457) | | | | | |
| CHHM15-6215Y-EP | 15 x 4 (11 x 4) | 22.64 (575) | - | 13.39 (340) | 39.29 (998) | 9.06 (230) | ø15.12 (ø384) | 895 (406) | 43.43 (1103) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | 939 (426) |
| CHHM15-6215DAY-EP | | 22.64 (575) | 44.02 (1118) | | 932 (423) | | | 48.15 (1223) | 976 (443) | | | | | |
| CHHM15-6215DBY-EP | | 22.64 (575) | 45.16 (1147) | | 975 (442) | | | 49.29 (1252) | 1019 (462) | | | | | |
| CHHM20-6215Y-EP | 20 x 4 (15 x 4) | 22.64 (575) | - | 16.33 (415) | 41.97 (1066) | 16.81 (427) | ø18.66 (ø474) | 979 (444) | 47.26 (1201) | - | - | - | - | 1065 (483) |
| CHHM20-6215DAY-EP | | 22.64 (575) | 46.46 (1180) | | 1013 (460) | | | 51.75 (1315) | 1099 (499) | | | | | |
| CHHM20-6215DBY-EP | | 22.64 (575) | 47.44 (1205) | | 1058 (480) | | | 52.74 (1340) | 1144 (519) | | | | | |
| CHHM25-6215Y-EP | 25 x 4 (18.5 x 4) | 22.64 (575) | - | 16.33 (415) | 45.75 (1162) | 16.81 (427) | ø18.66 (ø474) | 1247 (566) | 52.60 (1336) | - | - | - | - | 1344 (610) |
| CHHM25-6215DBY-EP | | 22.64 (575) | 51.61 (1311) | | 1336 (606) | | | 58.46 (1485) | 1433 (650) | | | | | |
| CHHM30-6215Y-EP | 30 x 4 (22 x 4) | 22.64 (575) | - | 16.33 (415) | 45.75 (1162) | 16.81 (427) | ø18.66 (ø474) | 1247 (566) | 52.60 (1336) | - | - | - | - | 1344 (610) |
| CHHM30-6215DBY-EP | | 22.64 (575) | 51.61 (1311) | | 1336 (606) | | | 58.46 (1485) | 1433 (650) | | | | | |
| CHHM40-6215Y-EP | 40 x 4 (30 x 4) | 22.64 (575) | - | 16.33 (415) | 50.63 (1286) | 16.81 (427) | ø18.66 (ø474) | 1360 (617) | 57.48 (1460) | - | - | - | - | 1457 (661) |
| CHHM50-6215Y-EP | 50 x 4 (37 x 4) | 22.64 (575) | - | | 1428 (648) | | | - | - | | | | | - |
| CHHM60-6215Y-EP | 60 x 4 (45 x 4) | 22.64 (575) | - | 16.33 (415) | 52.09 (1323) | 16.81 (427) | ø18.66 (ø474) | 1556 (706) | - | - | - | - | - | - |
| CHHM75-6215Y-EP | 75 x 4 (55 x 4) | 22.64 (575) | - | | 1636 (742) | | | - | - | - | - | - | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal Foot Mount

CHHM2-6225DAY-EP ▶ CHHM75-6225Y-EP

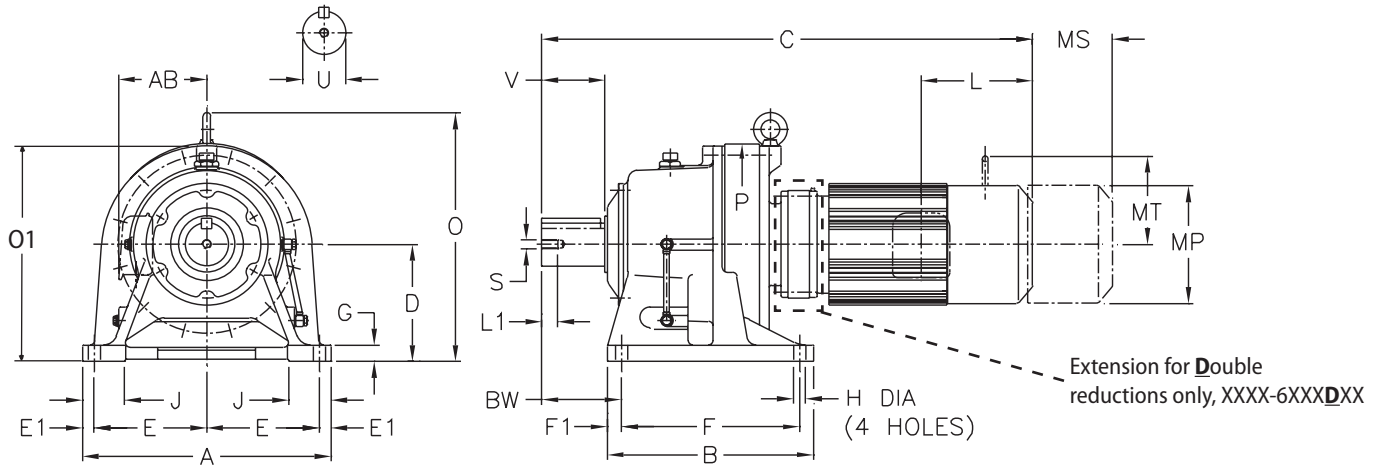


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHHM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|--------------|----------------|----------------|----------------|----------------|--------------|----------------|--------------|--------------|--------------|---------------|----------------|---------------|
| 6225Y | 24.41 (620) | 20.47 (520) | 11.02 (280) | 10.63 (270) | 1.57 (40) | 16.54 (420) | 1.97 (50) | 1.57 (40) | 1.30 (33) | 4.53 (115) | 20.71 (526) | 9.06 (230) |

All dimensions are in inches (mm)

| Model | Low Speed Shaft | | | | |
|--------------|-------------------|---------------|-----------|--------------|---|
| | U ^[A] | V | S | L1 | Key |
| 6225Y | 4.63 (117.475) | 6.50 (165) | 3/4-10UNC | 1.34 (34) | 1-1/4 x 7/8 x 6.5 (31.75 x 22.225 x 165) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal Foot Mount

CHHM2-6225DAY-EP ▶ CHHM75-6225Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|----------------|-----------------|----------------|-----------------|----------------|-------------------|-------------------|-----------------|----------------|-------------------|----------------|------------|-------------------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHHM2-6225DAY-EP | 2 x 4 (1.5 x 4) | 24.02 (610) | - | 6.16 (156) | 39.37 (1000) | 3.82 (97) | □6.57 (□167) | 988 (449) | 42.11 (1070) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 1000 (454) |
| CHHM3-6225DAY-EP | 3 x 4 (2.2 x 4) | 24.02 (610) | - | 6.71 (170) | 38.78 (985) | 4.53 (115) | □7.24 (□184) | 1000 (454) | 41.85 (1063) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 1016 (461) |
| CHHM5-6225DAY-EP | 5 x 4 (3.7 x 4) | 24.02 (610) | - | 7.34 (186) | 40.04 (1017) | 4.65 (118) | □8.74 (□222) | 1024 (465) | 43.60 (1108) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 1048 (476) |
| CHHM5-6225DBY-EP | | 24.02 (610) | 42.13 (1070) | | 1124 (510) | | | 45.69 (1161) | 1148 (521) | | | | | |
| CHHM8-6225DAY-EP | 7.5 x 4 (5.5 x 4) | 24.02 (610) | - | 9.04 (230) | 41.73 (1060) | 5.43 (138) | □10.24 (□260) | 1058 (480) | 45.30 (1151) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1082 (491) |
| CHHM8-6225DBY-EP | | 24.02 (610) | 43.82 (1113) | | 1158 (526) | | | 47.38 (1204) | 1182 (537) | | | | | |
| CHHM10-6225DAY-EP | 10 x 4 (7.5 x 4) | 24.02 (610) | - | 9.04 (230) | 43.23 (1098) | 5.43 (138) | □10.24 (□260) | 1085 (492) | 47.36 (1203) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1129 (512) |
| CHHM10-6225DBY-EP | | 24.02 (610) | 44.65 (1134) | | 1187 (539) | | | 48.78 (1239) | 1232 (559) | | | | | |
| CHHM15-6225DAY-EP | 15 x 4 (11 x 4) | 24.02 (610) | - | 9.04 (230) | 45.67 (1160) | 5.43 (138) | □10.24 (□260) | 1097 (498) | 49.80 (1265) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1142 (518) |
| CHHM15-6225DBY-EP | | 24.02 (610) | 47.09 (1196) | | 1200 (545) | | | 51.22 (1301) | 1244 (565) | | | | | |
| CHHM20-6225DAY-EP | 20 x 4 (15 x 4) | 24.02 (610) | - | 10.26 (261) | 48.11 (1222) | 7.01 (178) | ø12.49 (ø317) | 1178 (535) | 53.41 (1357) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | 1264 (574) |
| CHHM20-6225DBY-EP | | 24.02 (610) | 49.80 (1265) | | 1281 (581) | | | 55.10 (1400) | 1367 (620) | | | | | |
| CHHM25-6225Y-EP | 25 x 4 (18.5 x 4) | 24.02 (610) | - | 13.39 (340) | 47.32 (1202) | 9.06 (230) | ø15.12 (ø384) | 1426 (647) | 54.17 (1376) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | 1523 (691) |
| CHHM25-6225DBY-EP | | 24.02 (610) | 53.98 (1371) | | 1560 (708) | | | 60.83 (1545) | 1657 (752) | | | | | |
| CHHM30-6225Y-EP | 30 x 4 (22 x 4) | 24.02 (610) | - | 13.39 (340) | 47.32 (1202) | 9.06 (230) | ø15.12 (ø384) | 1426 (647) | 54.17 (1376) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | 1523 (691) |
| CHHM30-6225DBY-EP | | 24.02 (610) | 53.98 (1371) | | 1560 (708) | | | 60.83 (1545) | 1657 (752) | | | | | |
| CHHM40-6225Y-EP | 40 x 4 (30 x 4) | 24.02 (610) | - | 13.39 (340) | 52.20 (1326) | 9.06 (230) | ø15.12 (ø384) | 1539 (698) | 59.06 (1500) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | 1636 (742) |
| CHHM40-6225DBY-EP | | 24.02 (610) | 58.86 (1495) | | 1673 (759) | | | 65.71 (1669) | 1770 (803) | | | | | |
| CHHM50-6225Y-EP | 50 x 4 (37 x 4) | 24.02 (610) | - | 16.33 (415) | 52.20 (1326) | 16.81 (427) | ø18.66 (ø474) | 1607 (729) | - | - | - | - | - | - |
| CHHM60-6225Y-EP | 60 x 4 (45 x 4) | 24.02 (610) | - | | 53.66 (1363) | | | 1732 (786) | - | | | | | - |
| CHHM75-6225Y-EP | 75 x 4 (55 x 4) | 24.02 (610) | - | 16.33 (415) | 53.66 (1363) | 16.81 (427) | ø18.66 (ø474) | 1812 (822) | - | - | - | - | - | - |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal Foot Mount

CHHM3-6235DAY-EP ▶ CHHM50-6245DBY-EP

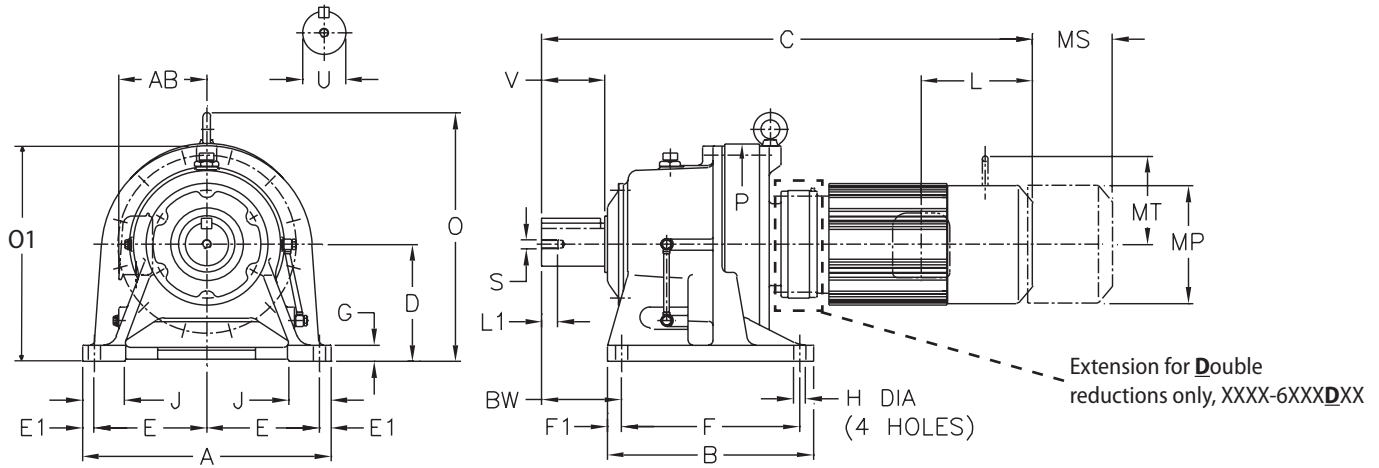


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHHM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|----------------------------------|----------------|----------------|----------------|----------------|--------------|----------------|--------------|--------------|--------------|---------------|----------------|----------------|
| 6235DAY 6235DBY | 26.38 (670) | 22.05 (560) | 11.81 (300) | 11.42 (290) | 1.77 (45) | 18.11 (460) | 1.97 (50) | 1.77 (45) | 1.30 (33) | 4.72 (120) | 22.13 (562) | 10.24 (260) |
| 6245DAY 6245DBY | 28.35 (720) | 22.83 (580) | 13.19 (335) | 12.40 (315) | 1.77 (45) | 18.90 (480) | 1.97 (50) | 1.77 (45) | 1.54 (39) | 5.04 (128) | 24.17 (614) | 10.35 (263) |

All dimensions are in inches (mm)

| Model | Low Speed Shaft | | | | |
|----------------------------------|------------------|---------------|--------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6235DAY 6235DBY | 5.00 (127) | 7.87 (200) | 1-8UNC | 1.61 (41) | 1-1/4 x 7/8 x 7.87 (31.75 x 22.225 x 200) |
| 6245DAY 6245DBY | 5.50 (139.7) | 7.87 (200) | 1-8UNC | 1.61 (41) | 1-1/4 x 7/8 x 7.87 (31.75 x 22.225 x 200) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal Foot Mount

CHHM3-6235DAY-EP ▶ CHHM50-6245DBY-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | | | | | | | |
|-------------------|--------------------|-------------|----|-------------|---------------|------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|---------------|-------------|---|---|---|-------------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | |
| CHHM3-6235DAY-EP | 3 x 4 (2.2 x 4) | 26.26 (667) | - | 6.71 (170) | 42.17 (1071) | 4.53 (115) | □7.24 (□184) | 1255 (569) | 45.24 (1149) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 1271 (577) | | | | | | |
| CHHM5-6235DAY-EP | 5 x 4 (3.7 x 4) | 26.26 (667) | - | 7.34 (186) | 43.62 (1108) | 4.65 (118) | □8.74 (□222) | 1280 (581) | 47.19 (1199) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 1303 (591) | | | | | | |
| CHHM8-6235DAY-EP | 7.5 x 4 (5.5 x 4) | 26.26 (667) | - | | 45.31 (1151) | | | 1313 (596) | 48.88 (1242) | | | | | 1337 (607) | | | | | | |
| CHHM10-6235DAY-EP | 10 x 4 (7.5 x 4) | 26.26 (667) | - | 9.04 (230) | 46.77 (1188) | 5.43 (138) | □10.24 (□260) | 1341 (609) | 50.91 (1293) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1386 (629) | | | | | | |
| CHHM15-6235DAY-EP | 15 x 4 (11 x 4) | 26.26 (667) | - | | 49.21 (1250) | | | 1354 (614) | 53.35 (1355) | | | | | 1398 (634) | | | | | | |
| CHHM15-6235DBY-EP | | 26.26 (667) | - | | 49.76 (1264) | | | 1432 (650) | 53.90 (1369) | | | | | 1476 (670) | | | | | | |
| CHHM20-6235DAY-EP | 20 x 4 (15 x 4) | 26.26 (667) | - | 10.26 (261) | 51.50 (1308) | 7.01 (178) | ∅12.49 (∅317) | 1437 (652) | 56.79 (1443) | 12.30 (313) | ∅12.61 (∅320) | 9.53 (242) | | 1523 (691) | | | | | | |
| CHHM20-6235DBY-EP | | 26.26 (667) | - | | 52.36 (1330) | | | 1512 (686) | 57.66 (1465) | | | | | 1598 (725) | | | | | | |
| CHHM25-6235DAY-EP | 25 x 4 (18.5 x 4) | 26.26 (667) | - | 13.39 (340) | 55.67 (1414) | 9.06 (230) | ∅15.12 (∅384) | 1715 (778) | 62.52 (1588) | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | | 1812 (822) | | | | | | |
| CHHM25-6235DBY-EP | | 26.26 (667) | - | | 56.54 (1436) | | | 1789 (812) | 63.39 (1610) | | | | | 1886 (856) | | | | | | |
| CHHM30-6235DAY-EP | 30 x 4 (22 x 4) | 26.26 (667) | - | | 55.67 (1414) | | | 1715 (778) | 62.52 (1588) | | | | | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | | | | 1812 (822) |
| CHHM30-6235DBY-EP | | 26.26 (667) | - | | 56.54 (1436) | | | | | | | | | | | | | | | 1789 (812) |
| CHHM40-6235DBY-EP | 40 x 4 (30 x 4) | 26.26 (667) | - | | 61.42 (1560) | | | 1902 (863) | 68.27 (1734) | | | | | | | | | | | 1999 (907) |
| CHHM50-6235DBY-EP | 50 x 4 (37 x 4) | 26.26 (667) | - | | | | | 1970 (894) | - | | | | | - | - | - | - | - | - | - |
| CHHM3-6245DAY-EP | 3 x 4 (2.2 x 4) | 28.70 (729) | - | 6.71 (170) | 43.66 (1109) | 4.53 (115) | □7.24 (□184) | 1493 (677) | 46.73 (1187) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 1510 (685) | | | | | | |
| CHHM5-6245DAY-EP | 5 x 4 (3.7 x 4) | 28.70 (729) | - | 7.34 (186) | 45.12 (1146) | 4.65 (118) | □8.74 (□222) | 1518 (689) | 48.68 (1237) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 1541 (699) | | | | | | |
| CHHM8-6245DAY-EP | 7.5 x 4 (5.5 x 4) | 28.70 (729) | - | | 46.81 (1189) | | | 1552 (704) | 50.37 (1280) | | | | | 1575 (715) | | | | | | |
| CHHM10-6245DAY-EP | 10 x 4 (7.5 x 4) | 28.70 (729) | - | 9.04 (230) | 48.27 (1226) | 5.43 (138) | □10.24 (□260) | 1579 (717) | 52.40 (1331) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1624 (737) | | | | | | |
| CHHM15-6245DAY-EP | 15 x 4 (11 x 4) | 28.70 (729) | - | | 50.71 (1288) | | | 1592 (722) | 54.84 (1393) | | | | | 1636 (742) | | | | | | |
| CHHM15-6245DBY-EP | | 28.70 (729) | - | | 51.22 (1301) | | | 1661 (754) | 55.35 (1406) | | | | | 1706 (774) | | | | | | |
| CHHM20-6245DAY-EP | 20 x 4 (15 x 4) | 28.70 (729) | - | 10.26 (261) | 52.99 (1346) | 7.01 (178) | ∅12.49 (∅317) | 1675 (760) | 58.29 (1481) | 12.30 (313) | ∅12.61 (∅320) | 9.53 (242) | | 1761 (799) | | | | | | |
| CHHM20-6245DBY-EP | | 28.70 (729) | - | | 53.82 (1367) | | | 1741 (790) | 59.11 (1502) | | | | | 1827 (829) | | | | | | |
| CHHM25-6245DAY-EP | 25 x 4 (18.5 x 4) | 28.70 (729) | - | 13.39 (340) | 57.17 (1452) | 9.06 (230) | ∅15.12 (∅384) | 1953 (886) | 64.02 (1626) | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | | 2050 (930) | | | | | | |
| CHHM25-6245DBY-EP | | 28.70 (729) | - | | 57.99 (1473) | | | 2018 (916) | 64.84 (1647) | | | | | 2115 (960) | | | | | | |
| CHHM30-6245DAY-EP | 30 x 4 (22 x 4) | 28.70 (729) | - | | 57.17 (1452) | | | 1953 (886) | 64.02 (1626) | | | | | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | | | | 2050 (930) |
| CHHM30-6245DBY-EP | | 28.70 (729) | - | | 57.99 (1473) | | | | | | | | | | | | | | | 2018 (916) |
| CHHM40-6245DBY-EP | 40 x 4 (30 x 4) | 28.70 (729) | - | | 62.87 (1597) | | | 2131 (967) | 69.72 (1771) | | | | | | | | | | | 2228 (1011) |
| CHHM50-6245DBY-EP | 50 x 4 (37 x 4) | 28.70 (729) | - | | | | | 2200 (998) | - | | | | | - | - | - | - | - | - | - |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ∅ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal Foot Mount

CHHM5-6255DAY-EP ▶ CHHM60-6275DAY-EP

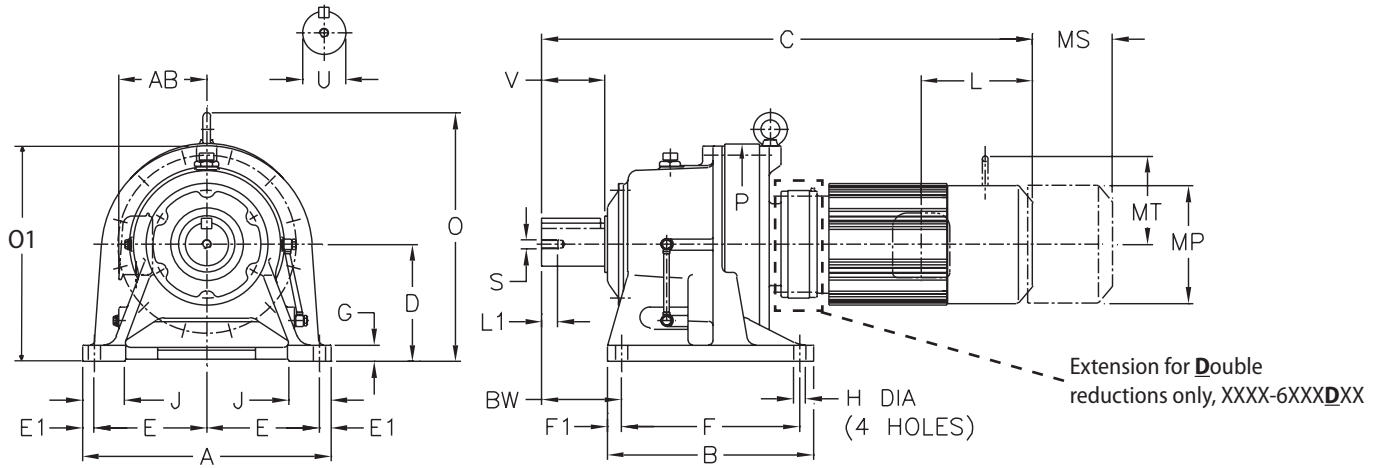


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHHM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model | A | B | D | E | E1 | F | F1 | G | H | J | P | BW |
|----------------------------------|-----------------|-----------------|----------------|----------------|--------------|----------------|---------------|--------------|--------------|---------------|----------------|----------------|
| 6255DAY 6255DBY | 30.71 (780) | 24.80 (630) | 14.76 (375) | 13.19 (335) | 2.17 (55) | 20.47 (520) | 2.17 (55) | 1.97 (50) | 1.54 (39) | 5.51 (140) | 26.38 (670) | 12.60 (320) |
| 6265DAY | 34.65 (880) | 27.56 (700) | 15.75 (400) | 15.16 (385) | 2.17 (55) | 23.23 (590) | 2.17 (55) | 2.17 (55) | 1.77 (45) | 6.30 (160) | 28.98 (736) | 15.35 (390) |
| 6275DAY | 45.67 (1160) | 40.94 (1040) | 21.26 (540) | 20.67 (525) | 2.17 (55) | 16.54 (420) | 3.94 (100) | 2.36 (60) | 1.77 (45) | 7.87 (200) | 37.40 (950) | 19.09 (485) |

All dimensions are in inches (mm)

| Model | Low Speed Shaft | | | | |
|----------------------------------|-------------------|----------------|------------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6255DAY 6255DBY | 6.25 (158.75) | 9.45 (240) | 1-1/4-7UNC | 2.05 (52) | 1-1/2 x 1 x 9.45 (38.1 x 25.4 x 240) |
| 6265DAY | 6.63 (168.275) | 11.81 (300) | 1-1/4-7UNC | 2.05 (52) | 1-3/4 x 1-1/4 x 11.81 (44.45 x 31.75 x 300) |
| 6275DAY | 7.00 (177.8) | 12.99 (330) | 1-1/4-7UNC | 2.05 (52) | 1-3/4 x 1-1/4 x 12.6 (44.45 x 31.75 x 330) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal Foot Mount


XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

CHHM5-6255DAY-EP ▶ CHHM60-6275DAY-EP

| Model | HP x P (kW x P) | O | O1 | AB | Without Brake | | | | With Brake | | | | | | | | | | | | |
|-------------------|--------------------|--------------|----|--------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|-------------|--------------|------------|---------------|------------|------------|-------------|
| | | | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | | |
| CHHM5-6255DAY-EP | 5 x 4 (3.7 x 4) | 32.09 (815) | - | 7.34 (186) | 50.83 (1291) | 4.65 (118) | □8.74 (□222) | 2302 (1044) | 54.39 (1382) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 2326 (1055) | | | | | | | |
| CHHM8-6255DAY-EP | 7.5 x 4 (5.5 x 4) | 32.09 (815) | - | | 52.52 (1334) | | | 2336 (1060) | 56.08 (1425) | | | | | 2360 (1071) | | | | | | | |
| CHHM10-6255DAY-EP | 10 x 4 (7.5 x 4) | 32.09 (815) | - | 9.04 (230) | 53.35 (1355) | 5.43 (138) | □10.24 (□260) | 2365 (1073) | 57.48 (1460) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 2409 (1093) | | | | | | | |
| CHHM15-6255DAY-EP | 15 x 4 (11 x 4) | 32.09 (815) | - | | 55.79 (1417) | | | 2377 (1079) | 59.92 (1522) | | | | | 2421 (1099) | | | | | | | |
| CHHM15-6255DBY-EP | | 32.09 (815) | - | | 56.65 (1439) | | | 2539 (1152) | 60.79 (1544) | | | | | 2583 (1172) | | | | | | | |
| CHHM20-6255DAY-EP | 20 x 4 (15 x 4) | 32.09 (815) | - | 10.26 (261) | 58.50 (1486) | 7.01 (178) | ø12.49 (ø317) | 2458 (1115) | 63.80 (1621) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 2544 (1154) | | | | | | | |
| CHHM20-6255DBY-EP | | 32.09 (815) | - | | 59.37 (1508) | | | 2617 (1187) | 64.67 (1643) | | | | | 2703 (1226) | | | | | | | |
| CHHM25-6255DAY-EP | 25 x 4 (18.5 x 4) | 32.09 (815) | - | 13.39 (340) | 62.68 (1592) | 9.06 (230) | ø15.12 (ø384) | 2737 (1242) | 69.53 (1766) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 2834 (1286) | | | | | | | |
| CHHM25-6255DBY-EP | | 32.09 (815) | - | | 63.54 (1614) | | | 2895 (1314) | 70.39 (1788) | | | | | 2992 (1358) | | | | | | | |
| CHHM30-6255DAY-EP | 30 x 4 (22 x 4) | 32.09 (815) | - | | 62.68 (1592) | | | 2737 (1242) | 69.53 (1766) | | | | | 2834 (1286) | | | | | | | |
| CHHM30-6255DBY-EP | | 32.09 (815) | - | | 63.54 (1614) | | | 2895 (1314) | 70.39 (1788) | | | | | 2992 (1358) | | | | | | | |
| CHHM40-6255DAY-EP | 40 x 4 (30 x 4) | 32.09 (815) | - | | 67.56 (1716) | | | 2850 (1293) | 74.41 (1890) | | | | | 2947 (1337) | | | | | | | |
| CHHM40-6255DBY-EP | | 32.09 (815) | - | | 68.43 (1738) | | | 3008 (1365) | 75.28 (1912) | | | | | 3105 (1409) | | | | | | | |
| CHHM50-6255DBY-EP | 50 x 4 (37 x 4) | 32.09 (815) | - | | | | 3077 (1396) | | | | | | | - | | | | | | | |
| CHHM60-6255DBY-EP | 60 x 4 (45 x 4) | 32.09 (815) | - | 16.33 (415) | 69.88 (1775) | 16.81 (427) | ø18.66 (ø474) | 3205 (1454) | | | | | | - | | | | | | | |
| CHHM8-6265DAY-EP | 7.5 x 4 (5.5 x 4) | 34.41 (874) | - | 7.34 (186) | 58.31 (1481) | 4.65 (118) | □8.74 (□222) | 3058 (1387) | 61.87 (1572) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 3081 (1398) | | | | | | | |
| CHHM10-6265DAY-EP | 10 x 4 (7.5 x 4) | 34.41 (874) | - | 9.04 (230) | 58.54 (1487) | 5.43 (138) | □10.24 (□260) | 3088 (1401) | 62.68 (1592) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 3132 (1421) | | | | | | | |
| CHHM15-6265DAY-EP | 15 x 4 (11 x 4) | 34.41 (874) | - | | 60.98 (1549) | | | 3101 (1407) | 65.12 (1654) | | | | | 3145 (1427) | | | | | | | |
| CHHM20-6265DAY-EP | 20 x 4 (15 x 4) | 34.41 (874) | - | 10.26 (261) | 63.70 (1618) | 7.01 (178) | ø12.49 (ø317) | 3179 (1442) | 69.00 (1753) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 3265 (1481) | | | | | | | |
| CHHM25-6265DAY-EP | 25 x 4 (18.5 x 4) | 34.41 (874) | - | 13.39 (340) | 67.87 (1724) | 9.06 (230) | ø15.12 (ø384) | 3457 (1569) | 74.72 (1898) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 3554 (1613) | | | | | | | |
| CHHM30-6265DAY-EP | | 34.41 (874) | - | | 3457 (1569) | | | 79.61 (2022) | 3667 (1664) | | | | | | | | | | | | |
| CHHM40-6265DAY-EP | 40 x 4 (30 x 4) | 34.41 (874) | - | | 72.76 (1848) | | | 3570 (1620) | 3639 (1651) | | | | | | | | | | | - | |
| CHHM50-6265DAY-EP | | 34.41 (874) | - | | | | | | | | | | | | | | | | | | - |
| CHHM60-6265DAY-EP | 60 x 4 (45 x 4) | 34.41 (874) | - | | 16.33 (415) | | | 74.21 (1885) | 16.81 (427) | | | | | ø18.66 (ø474) | 3767 (1709) | | | | | | - |
| CHHM10-6275DAY-EP | 10 x 4 (7.5 x 4) | 45.71 (1161) | - | | 9.04 (230) | | | 68.82 (1748) | 5.43 (138) | | | | | □10.24 (□260) | 5601 (2541) | 72.95 (1853) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 5646 (2561) |
| CHHM15-6275DAY-EP | 15 x 4 (11 x 4) | 45.71 (1161) | - | 71.26 (1810) | | 5614 (2547) | 75.39 (1915) | 5658 (2567) | | | | | | | | | | | | | |
| CHHM20-6275DAY-EP | 20 x 4 (15 x 4) | 45.71 (1161) | - | 10.26 (261) | 73.98 (1879) | 7.01 (178) | ø12.49 (ø317) | 5692 (2582) | 79.27 (2014) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 5778 (2621) | | | | | | | |
| CHHM25-6275DAY-EP | 25 x 4 (18.5 x 4) | 45.71 (1161) | - | 13.39 (340) | 78.15 (1985) | 9.06 (230) | ø15.12 (ø384) | 5971 (2709) | 85.00 (2159) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 6068 (2753) | | | | | | | |
| CHHM30-6275DAY-EP | | 45.71 (1161) | - | | 5971 (2709) | | | 89.88 (2283) | 6181 (2804) | | | | | | | | | | | | |
| CHHM40-6275DAY-EP | 40 x 4 (30 x 4) | 45.71 (1161) | - | | 83.03 (2109) | | | 6084 (2760) | 6152 (2791) | | | | | | | | | | | - | |
| CHHM50-6275DAY-EP | | 45.71 (1161) | - | | | | | | | | | | | | | | | | | | - |
| CHHM60-6275DAY-EP | 60 x 4 (45 x 4) | 45.71 (1161) | - | | 16.33 (415) | | | 84.49 (2146) | 16.81 (427) | | | | | ø18.66 (ø474) | 6280 (2849) | | | | | | - |

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Universal V-Flange Mount

CNVM01-6065DAY ▶ CNVM1-6085Y-EP

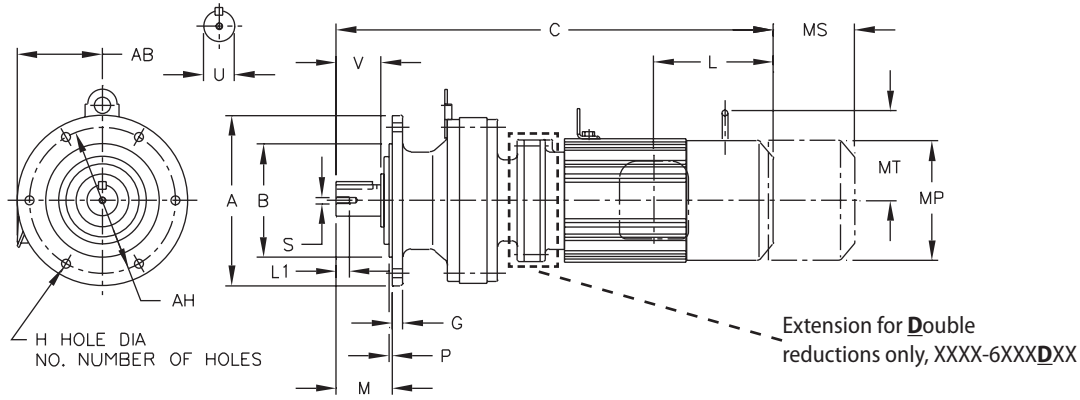


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CNVM units are greased for life, and can be mounted in any position.


Dimensions are in inches (mm)

| Model CNVM | A | B | G | H | NO. | M | O | P | AH |
|------------------------------|---------------|---------------|-------------|--------------|-----|--------------|---|-------------|---------------|
| 6060Y 6065Y | 4.72 (120) | 3.15 (80) | 0.31 (8) | 0.35 (9) | 6 | 1.34 (34) | - | 0.12 (3) | 4.02 (102) |
| 6070Y 6075Y | 6.30 (160) | 4.33 (110) | 0.35 (9) | 0.43 (11) | 4 | 1.89 (42) | - | 0.12 (3) | 5.28 (134) |
| 6080Y 6085Y | 6.30 (160) | 4.33 (110) | 0.35 (9) | 0.43 (11) | 4 | 1.89 (48) | - | 0.12 (3) | 5.28 (134) |

All dimensions are in inches (mm)

| Model CNVM | Low Speed Shaft | | | | |
|------------------------------|------------------|-----------|----------|-----------|--|
| | U ^[A] | V | S | L1 | Key |
| 6060Y 6065Y | 0.50 (12.7) | 0.98 (25) | 10-32UNF | 0.63 (16) | 1/8 X 1/8 X 0.79 (3.175 x 3.175 x 20.07) |
| 6070Y 6075Y | 0.75 (19.05) | 1.18 (30) | 12-28UNF | 0.63 (16) | 3/16 X 3/16 X 1.18 (4.762 x 4.762 x 30) |
| 6080Y 6085Y | 0.875 (22.23) | 1.38 (35) | 12-28UNF | 0.63 (16) | 3/16 X 3/16 X 1.18 (4.762 x 4.762 x 30) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal V-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CNVM01-6065DAY ▶ CNVM1-6085Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|-----------------------|-------------|----------------------|-------------|-------------------|-------------------|-------------|-------------|-------------------|-----------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CNVM01-6065DAY | 1/8 x 4 (0.1 x 4) | 4.63 (118) | 10.20 (259) | 1.38 (35) | ø4.69 (ø119) | 19 (9) | 11.57 (294) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | - | 22 (10) |
| CNVM01-6065Y-AV | | | 10.55 (268) | 2.32 (59) | ø4.88 (ø124) | 18 (8) | 11.81 (300) | 3.58 (91) | | | | 21 (10) |
| CNVM01-6065DAY-AV | | | 11.85 (301) | | | 21 (10) | 13.11 (333) | | | | | 24 (11) |
| CNVM01-6065Y | 1/4 x 4 (0.2 x 4) | | 8.90 (226) | 1.38 (35) | ø4.69 (ø119) | 16 (7) | 10.28 (261) | 2.76 (70) | ø4.88 (ø124) | 2.40 (61) | - | 19 (9) |
| CNVM02-6065Y | | | 10.55 (268) | 2.32 (59) | ø4.88 (ø124) | 18 (8) | 11.81 (300) | 3.58 (91) | | | | 21 (10) |
| CNVM02-6065Y-AV | | | 11.34 (288) | | | 21 (10) | 12.60 (320) | | | | | 24 (11) |
| CNVM03-6065Y | 10.55 (268) | | 18 (8) | | | 11.81 (300) | 21 (10) | | | | | |
| CNVM03-6065Y-AV | 1/3 x 4 (0.25 x 4) | | 11.34 (288) | | | 21 (10) | 12.60 (320) | | | | | 24 (11) |
| CNVM01-6075DAY | 1/8 x 4 (0.1 x 4) | 4.63 (118) | 10.43 (265) | 1.38 (35) | ø4.69 (ø119) | 23 (11) | 11.81 (300) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | - | 26 (12) |
| CNVM01-6075Y-AV | | | 10.79 (274) | 2.32 (59) | ø4.88 (ø124) | 20 (9) | 12.05 (306) | 3.58 (91) | | | | 23 (11) |
| CNVM01-6075DAY-AV | | | 12.09 (307) | | | 25 (12) | 13.35 (339) | | | | | 28 (13) |
| CNVM01-6075Y | 1/4 x 4 (0.2 x 4) | | 9.13 (232) | 1.38 (35) | ø4.69 (ø119) | 18 (8) | 10.51 (267) | 2.76 (70) | ø4.88 (ø124) | 2.40 (61) | - | 21 (10) |
| CNVM02-6075Y | | | 10.79 (274) | 2.32 (59) | ø4.88 (ø124) | 20 (9) | 12.05 (306) | 3.58 (91) | | | | 23 (11) |
| CNVM02-6075Y-AV | | | 11.57 (294) | | | 23 (11) | 12.83 (326) | | | | | 26 (12) |
| CNVM02-6075DAY | 12.09 (307) | | 25 (12) | | | 13.35 (339) | 28 (13) | | | | | |
| CNVM02-6075DAY-AV | 1/3 x 4 (0.25 x 4) | | 12.87 (327) | | | 28 (13) | 14.13 (359) | | | | | 31 (14) |
| CNVM03-6075Y | 1/2 x 4 (0.4 x 4) | 10.79 (274) | | | 20 (9) | 12.05 (306) | | | | | 23 (11) | |
| CNVM03-6075Y-AV | | 11.57 (294) | | | 23 (11) | 12.83 (326) | | | | 26 (12) | | |
| CNVM01-6085Y | 1/8 x 4 (0.1 x 4) | 4.63 (118) | 10.16 (258) | 1.38 (35) | ø4.69 (ø119) | 23 (11) | 11.54 (293) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | - | 26 (12) |
| CNVM01-6085Y-AV | | | 11.81 (300) | 2.32 (59) | ø4.88 (ø124) | 25 (12) | 13.07 (332) | 3.58 (91) | | | | 28 (13) |
| CNVM02-6085Y | | | 12.60 (320) | | | 28 (13) | 13.86 (352) | | | | | 31 (14) |
| CNVM02-6085Y-AV | 1/4 x 4 (0.2 x 4) | | 11.81 (300) | | | 25 (12) | 13.07 (332) | | | | | 28 (13) |
| CNVM03-6085Y | 1/3 x 4 (0.25 x 4) | | 12.60 (320) | | | 28 (13) | 13.86 (352) | | | | | 31 (14) |
| CNVM03-6085Y-AV | | | 1/2 x 4 (0.4 x 4) | 14.21 (361) | 3.82 (97) | ø5.94 (ø151) | 35 (16) | 15.91 (404) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) |
| CNVM05-6085Y | 3/4 x 4 (0.55 x 4) | | 15.85 (403) | | | | | 33 (15) | 18.35 (466) | | | |
| CNVM1-6085Y-EP | 1 x 4 (0.75 x 4) | | 5.98 (152) | | | ø6.22 (ø158) | 46 (21) | 18.35 (466) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Universal V-Flange Mount

CNVM01-6095Y ▶ CNVM2-6095Y-EP

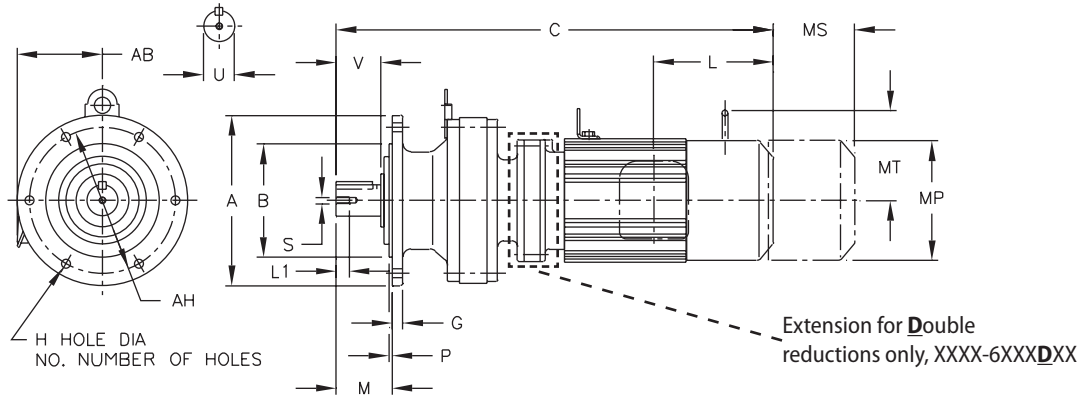


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CNVM units are greased for life, and can be mounted in any position.


Dimensions are in inches (mm)

| Model CNVM | A | B | G | H | NO. | M | O | P | AH |
|------------------------------|---------------|---------------|-------------|--------------|-------------|--------------|---------------|-------------|---------------|
| 6090Y 6095Y | 6.30 (160) | 4.33 (110) | 0.35 (9) | 0.43 (11) | 0.16 (4) | 1.89 (48) | 4.21 (107) | 0.12 (3) | 5.28 (134) |

All dimensions are in inches (mm)

| Model CNVM | Low Speed Shaft | | | | |
|------------------------------|------------------|-----------|------------|-----------|-------------------------------------|
| | U ^[A] | V | S | L1 | Key |
| 6090Y 6095Y | 1.125 (28.58) | 1.38 (35) | 5/16-18UNC | 0.79 (20) | 1/4 X 1/4 X 1.18 (6.35 x 6.35 x 30) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal V-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CNVM01-6095Y ▶ CNVM2-6095Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | |
|-------------------|-----------------------|-------------|---------------|-----------------|-------------------|-------------------|-------------|-----------------|-------------------|------------|------------|-------------------|-----------|---------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | |
| CNVM01-6095Y | 1/8 x 4 (0.1 x 4) | 4.63 (118) | 10.87 (276) | 1.38 (35) | ∅4.69 (∅119) | 26 (12) | 12.24 (311) | 2.76 (70) | ∅4.88 (∅124) | 3.58 (91) | 2.40 (61) | - | 1.93 (49) | 29 (14) |
| CNVM01-6095Y-AV | | | 12.52 (318) | 2.32 (59) | ∅4.88 (∅124) | 28 (13) | 13.78 (350) | 3.58 (91) | | | | | 2.40 (61) | 31 (14) |
| CNVM01-6095DAY | | | 12.76 (324) | 1.38 (35) | ∅4.69 (∅119) | 32 (15) | 14.13 (359) | 2.76 (70) | | | | | 1.93 (49) | 35 (16) |
| CNVM01-6095DAY-AV | | | 14.41 (366) | 2.32 (59) | ∅4.88 (∅124) | 34 (16) | 15.67 (398) | 3.58 (91) | | | | | 2.40 (61) | 37 (17) |
| CNVM02-6095Y | 12.52 (318) | | 28 (13) | | | 13.78 (350) | 31 (14) | | | | | | | 31 (14) |
| CNVM02-6095Y-AV | 13.31 (338) | | 31 (14) | | | 14.57 (370) | 34 (16) | | | | | | | 34 (16) |
| CNVM02-6095DAY | 14.41 (366) | | 34 (16) | | | 15.67 (398) | 37 (17) | | | | | | | 37 (17) |
| CNVM02-6095DAY-AV | 15.20 (386) | | 37 (17) | | | 16.46 (418) | 40 (19) | | | | | | | 40 (19) |
| CNVM03-6095Y | 12.52 (318) | | 28 (13) | | | 13.78 (350) | 31 (14) | | | | | | | 31 (14) |
| CNVM03-6095Y-AV | 13.31 (338) | | 31 (14) | | | 14.57 (370) | 34 (16) | | | | | | | 34 (16) |
| CNVM03-6095DAY | 14.41 (366) | | 34 (16) | | | 15.67 (398) | 37 (17) | | | | | | | 37 (17) |
| CNVM03-6095DAY-AV | 15.20 (386) | | 37 (17) | 16.46 (418) | 40 (19) | 40 (19) | | | | | | | | |
| CNVM05-6095Y | 1/2 x 4 (0.4 x 4) | 13.31 (338) | 31 (14) | 14.57 (370) | 34 (16) | 34 (16) | | | | | | | | |
| CNVM05-6095Y-AV | | 5.67 (144) | 14.92 (379) | 3.82 (97) | ∅5.94 (∅151) | 38 (18) | 16.61 (422) | 5.51 (140) | ∅5.94 (∅151) | 3.66 (93) | 3.94 (100) | 44 (20) | | |
| CNVM05-6095DAY | 4.63 (118) | 15.20 (386) | 2.32 (59) | ∅4.88 (∅124) | 37 (17) | 16.46 (418) | 3.58 (91) | ∅4.88 (∅124) | 2.40 (61) | - | 40 (19) | | | |
| CNVM08-6095Y | 3/4 x 4 (0.55 x 4) | 5.67 (144) | 14.92 (379) | 3.82 (97) | ∅5.94 (∅151) | 36 (17) | 16.61 (422) | 5.51 (140) | ∅5.94 (∅151) | 3.66 (93) | 3.94 (100) | 42 (19) | | |
| CNVM08-6095Y-AV | | 5.86 (149) | 16.22 (412) | 3.94 (100) | ∅6.30 (∅160) | 47 (21) | 18.66 (474) | 6.38 (162) | ∅6.30 (∅160) | 4.53 (115) | 4.29 (109) | 58 (26) | | |
| CNVM1-6095Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 16.65 (423) | 3.82 (97) | ∅6.22 (∅158) | 52 (24) | 19.15 (487) | 6.32 (161) | ∅6.22 (∅158) | 4.80 (122) | 4.25 (108) | 61 (28) | | |
| CNVM1H-6095Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 17.72 (450) | | ∅6.57 (∅167) | 59 (27) | 20.45 (520) | 6.56 (167) | ∅6.57 (∅167) | 5.04 (128) | 4.61 (117) | 71 (32) | | |
| CNVM2-6095Y-EP | 2 x 4 (1.5 x 4) | | | | 62 (28) | 74 (34) | | | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ∅ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Universal V-Flange Mount

CNVM01-6105DAY ▶ CNVM5-6115Y-EP

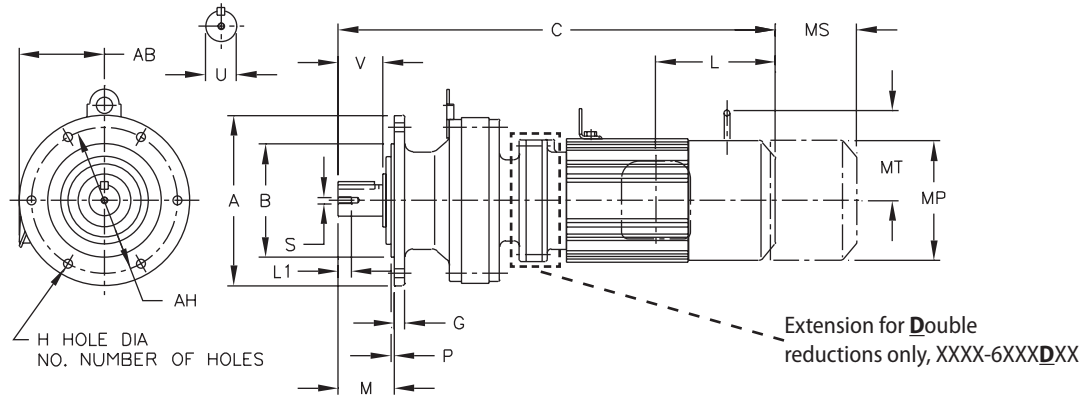


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CNVM units are greased for life, and can be mounted in any position.


Dimensions are in inches (mm)

| Model CNVM | A | B | G | H | NO. | M | O | P | AH |
|------------------------------|---------------|---------------|--------------|--------------|-------------|--------------|---------------|-------------|---------------|
| 6100Y 6105Y | 6.30 (160) | 4.33 (110) | 0.35 (9) | 0.43 (11) | 0.16 (4) | 1.89 (48) | 4.21 (107) | 0.12 (3) | 5.28 (134) |
| 6110Y 6115Y | 8.27 (210) | 5.51 (140) | 0.43 (11) | 0.43 (11) | 0.24 (6) | 2.28 (58) | 4.53 (115) | 0.16 (4) | 7.09 (180) |

All dimensions are in inches (mm)

| Model CNVM | Low Speed Shaft | | | | |
|------------------------------|------------------|-----------|------------|-----------|-------------------------------------|
| | U ^[A] | V | S | L1 | Key |
| 6100Y 6105Y | 1.125 (28.58) | 1.38 (35) | 5/16-18UNC | 0.79 (20) | 1/4 X 1/4 X 1.18 (6.35 x 6.35 x 30) |
| 6110Y 6115Y | 1.25 (31.75) | 1.77 (45) | 5/16-18UNC | 0.79 (20) | 1/4 x 1/4 x 1.46 (6.35 x 6.35 x 37) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal V-Flange Mount

CNVM01-6105DAY ▶ CNVM5-6115Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | |
|-------------------|-----------------------|-------------|---------------|-----------------|-------------------|-------------------|-------------|-----------------|-------------------|-----------------|------------|-------------------|-------------|-----------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | |
| CNVM01-6105DAY | 1/8 x 4 (0.1 x 4) | 4.63 (118) | 13.31 (338) | 1.38 (35) | ø4.69 (ø119) | 37 (17) | 14.69 (373) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | - | 40 (18) | | |
| CNVM01-6105DAY-AV | | | 14.96 (380) | | | 39 (18) | | | | | | 16.22 (412) | 42 (19) | |
| CNVM02-6105Y | 1/4 x 4 (0.2 x 4) | | 13.07 (332) | 2.32 (59) | ø4.88 (ø124) | 33 (15) | 17.01 (432) | 3.58 (91) | | 2.40 (61) | | - | 36 (17) | |
| CNVM02-6105Y-AV | | | 13.86 (352) | | | 36 (17) | | | | | | | 15.12 (384) | 39 (18) |
| CNVM02-6105DAY | | | 14.96 (380) | | | 39 (18) | | | | | | | 16.22 (412) | 42 (19) |
| CNVM02-6105DAY-AV | | | 15.75 (400) | | | 42 (19) | | | | | | | 17.01 (432) | 45 (21) |
| CNVM03-6105Y | | | 13.07 (332) | | | 33 (15) | | | | | | | 14.33 (364) | 36 (17) |
| CNVM03-6105Y-AV | 1/3 x 4 (0.25 x 4) | | 13.86 (352) | 2.32 (59) | ø4.88 (ø124) | 36 (17) | 17.01 (432) | 3.58 (91) | | 2.40 (61) | | - | 39 (18) | |
| CNVM03-6105DAY | | | 14.96 (380) | | | 39 (18) | | | | | | | 16.22 (412) | 42 (19) |
| CNVM03-6105DAY-AV | | | 15.75 (400) | | | 42 (19) | | | | | | | 17.01 (432) | 45 (21) |
| CNVM05-6105Y | 1/2 x 4 (0.4 x 4) | 4.63 (118) | 13.86 (352) | 2.32 (59) | ø4.88 (ø124) | 36 (17) | 15.12 (384) | 3.58 (91) | 2.40 (61) | - | 39 (18) | | | |
| CNVM05-6105Y-AV | | | 5.67 (144) | | | 15.47 (393) | | | | | 3.82 (97) | ø5.94 (ø151) | 43 (20) | 17.17 (436) |
| CNVM05-6105DAY | 4.63 (118) | 15.75 (400) | 2.32 (59) | ø4.88 (ø124) | 42 (19) | 17.01 (432) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 45 (21) | | | |
| CNVM08-6105Y | 3/4 x 4 (0.55 x 4) | 5.67 (144) | 15.47 (393) | 3.82 (97) | ø5.94 (ø151) | 41 (19) | 17.17 (436) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 46 (21) | | |
| CNVM08-6105Y-AV | | 5.86 (149) | 16.77 (426) | 3.94 (100) | ø6.30 (ø160) | 51 (24) | 19.21 (488) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 62 (28) | | |
| CNVM1-6105Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 17.20 (437) | 3.82 (97) | □6.22 (□158) | 56 (26) | 19.70 (501) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 66 (30) | | |
| CNVM1H-6105Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 18.27 (464) | | □6.57 (□167) | 64 (29) | 21.00 (534) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 75 (34) | | |
| CNVM2-6105Y-EP | 2 x 4 (1.5 x 4) | | | | □6.57 (□167) | 67 (31) | | | □6.57 (□167) | | | 78 (36) | | |
| CNVM3-6105Y-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 19.09 (485) | | 4.53 (115) | □7.24 (□184) | 83 (38) | 22.17 (563) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 100 (45) | |
| CNVM05-6115Y | 1/2 x 4 (0.4 x 4) | 4.63 (118) | 14.25 (362) | 2.32 (59) | ø4.88 (ø124) | 43 (20) | 15.51 (394) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 46 (21) | | |
| CNVM05-6115Y-AV | | 5.67 (144) | 15.87 (403) | 3.82 (97) | ø5.94 (ø151) | 49 (23) | 17.56 (446) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 55 (25) | | |
| CNVM08-6115Y | 3/4 x 4 (0.55 x 4) | 5.86 (149) | 17.17 (436) | 3.94 (100) | ø6.30 (ø160) | 47 (21) | | | | | | 19.61 (498) | 6.38 (162) | ø6.30 (ø160) |
| CNVM08-6115Y-AV | | 5.86 (149) | 17.17 (436) | 3.94 (100) | ø6.30 (ø160) | 56 (26) | 19.61 (498) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 66 (30) | | |
| CNVM1-6115Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 17.60 (447) | 3.82 (97) | □6.22 (□158) | 61 (28) | 20.10 (511) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 70 (32) | | |
| CNVM1H-6115Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 18.66 (474) | | □6.57 (□167) | 68 (31) | 21.40 (544) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 79 (36) | | |
| CNVM2-6115Y-EP | 2 x 4 (1.5 x 4) | | | | □6.57 (□167) | 71 (32) | | | □6.57 (□167) | | | 82 (38) | | |
| CNVM3-6115Y-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 18.54 (471) | | 4.53 (115) | □7.24 (□184) | 83 (38) | 21.61 (549) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 100 (45) | |
| CNVM5-6115Y-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 19.61 (498) | 4.65 (118) | ø8.74 (ø222) | 108 (49) | 23.17 (589) | 8.21 (209) | ø8.74 (ø222) | 6.02 (153) | 6.30 (160) | 132 (60) | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Universal V-Flange Mount

CNVM01-6125DBY ▶ CNVM8-6125Y-EP

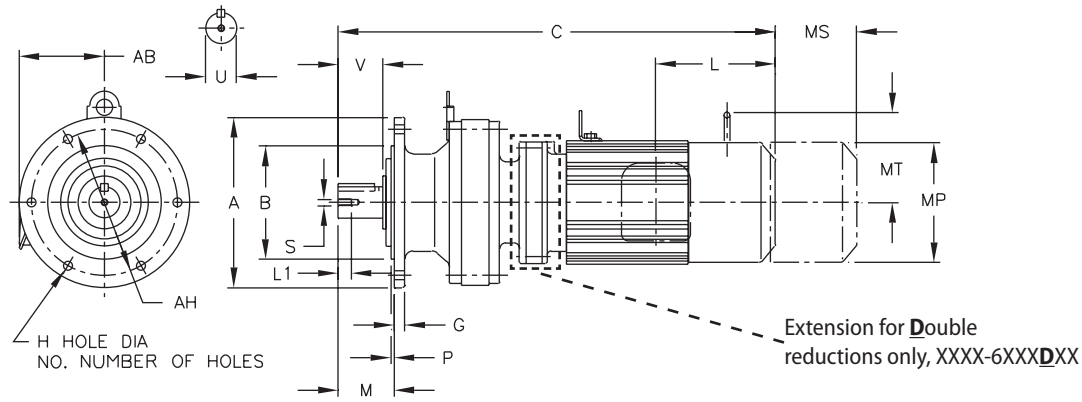


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CNVM units are greased for life, and can be mounted in any position.


Dimensions are in inches (mm)

| Model CNVM | A | B | G | H | NO. | M | O | P | AH |
|------------------------------|---------------|---------------|--------------|--------------|-------------|--------------|---------------|-------------|---------------|
| 6120Y 6125Y | 8.27 (210) | 5.51 (140) | 0.51 (13) | 0.43 (11) | 0.24 (6) | 2.72 (69) | 5.39 (137) | 0.16 (4) | 7.09 (180) |

All dimensions are in inches (mm)

| Model CNVM | Low Speed Shaft | | | | |
|------------------------------|------------------|-----------|------------|-----------|---------------------------------------|
| | U ^[A] | V | S | L1 | Key |
| 6120Y 6125Y | 1.50 (38.1) | 2.17 (55) | 5/16-18UNC | 0.79 (20) | 3/8 x 3/8 x 1.77 (9.525 x 9.525 x 45) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal V-Flange Mount


XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

CNVM01-6125DBY ▶ CNVM8-6125Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | | |
|-------------------|-----------------------|------------|---------------|-----------------|----------------------|-------------------|-------------|-----------------|-------------------|-----------------|-------------|-------------------|-----------|-------------|-------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | |
| CNVM01-6125DBY | 1/8 x 4 (0.1 x 4) | 4.63 (118) | 15.20 (386) | 1.38 (35) | ø4.69 (ø119) | 70 (32) | 16.57 (421) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | - | 74 (34) | | | |
| CNVM01-6125DBY-AV | | | 16.85 (428) | | | 72 (33) | | | | | | 18.11 (460) | 75 (34) | | |
| CNVM02-6125DAY | 1/4 x 4 (0.2 x 4) | | 16.38 (416) | 2.32 (59) | | ø4.88 (ø124) | 65 (30) | 3.58 (91) | | ø4.88 (ø124) | | 2.40 (61) | - | 68 (31) | |
| CNVM02-6125DBY | | | 16.85 (428) | | | | 72 (33) | | | | | | | 18.11 (460) | 75 (34) |
| CNVM02-6125DAY-AV | | | 17.17 (436) | | | | 68 (31) | | | | | | | 18.43 (468) | 71 (33) |
| CNVM02-6125DBY-AV | | | 17.64 (448) | | | | 75 (34) | | | | | | | 18.90 (480) | 78 (36) |
| CNVM03-6125DBY | 1/3 x 4 (0.25 x 4) | | 16.85 (428) | 2.32 (59) | | ø4.88 (ø124) | 72 (33) | 18.11 (460) | | 3.58 (91) | | ø4.88 (ø124) | 2.40 (61) | - | 75 (34) |
| CNVM03-6125DBY-AV | | | 17.64 (448) | | | | 75 (34) | | | | | | | | 18.90 (480) |
| CNVM05-6125Y | 1/2 x 4 (0.4 x 4) | | 15.24 (387) | 3.82 (97) | | ø5.94 (ø151) | 64 (29) | 16.50 (419) | | 5.51 (140) | | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 67 (31) |
| CNVM05-6125Y-AV | | 5.67 (144) | 71 (33) | | 18.35 (466) | | 77 (35) | | | | | | | | |
| CNVM05-6125DBY | 3/4 x 4 (0.55 x 4) | 4.63 (118) | 3.82 (97) | ø4.88 (ø124) | 75 (34) | 18.90 (480) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 78 (36) | | | | |
| CNVM05-6125DBY-AV | | 5.67 (144) | | | 83 (38) | | | | | | 20.94 (532) | 88 (40) | | | |
| CNVM08-6125Y | 3/4 x 4 (0.55 x 4) | 5.67 (144) | 3.94 (100) | ø5.94 (ø151) | 69 (31) | 18.35 (466) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 75 (34) | | | | |
| CNVM08-6125Y-AV | | 5.86 (149) | | | 77 (35) | | | | | | 20.39 (518) | 88 (40) | | | |
| CNVM08-6125DBY | | 5.67 (144) | | | 80 (37) | | | | | | 20.94 (532) | 86 (39) | | | |
| CNVM08-6125DBY-AV | | 5.86 (149) | | | 91 (41) | | | | | | 22.99 (584) | 102 (46) | | | |
| CNVM1-6125Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 3.82 (97) | □6.22 (□158) | 82 (37) | 20.89 (531) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 92 (42) | | | | |
| CNVM1-6125DBY-EP | | | | | 20.98 (533) | | | | | | 96 (44) | 23.48 (597) | 106 (48) | | |
| CNVM1H-6125Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 3.82 (97) | □6.57 (□167) | 89 (41) | 22.19 (564) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 100 (46) | | | | |
| CNVM1H-6125DBY-EP | | | | | 22.05 (560) | | | | | | 103 (47) | 24.78 (630) | 115 (52) | | |
| CNVM2-6125Y-EP | 2 x 4 (1.5 x 4) | 6.16 (156) | 3.82 (97) | □6.57 (□167) | 92 (42) | 22.19 (564) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 103 (47) | | | | |
| CNVM2-6125DBY-EP | | | | | 22.05 (560) | | | | | | 106 (48) | 24.78 (630) | 118 (54) | | |
| CNVM3-6125Y-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 4.53 (115) | □7.24 (□184) | 105 (48) | 21.93 (557) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 122 (55) | | | | |
| CNVM5-6125Y-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 4.65 (118) | □8.74 (□222) | 130 (59) | 23.88 (607) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 154 (70) | | | | |
| CNVM8-6125Y-EP | | | | | 7.5 x 4 (5.5 x 4) | | | | | | 164 (75) | 25.57 (650) | 188 (86) | | |

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Vertical V-Flange Mount

CVVM02-6135DAY ▶ CVVM15-6135Y-EP

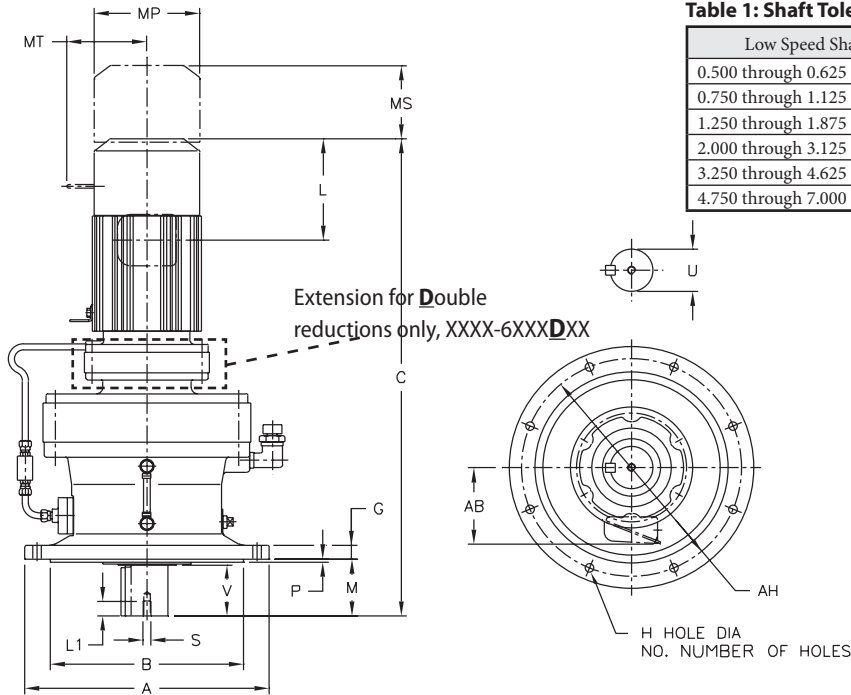


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CVVM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CVVM | A | B | G | H | NO. | M | O | P | AH |
|------------------------------|----------------|---------------|--------------|--------------|-------------|--------------|---|-------------|---------------|
| 6130Y 6135Y | 10.24 (260) | 7.87 (200) | 0.59 (15) | 0.43 (11) | 0.24 (6) | 2.99 (76) | - | 0.16 (4) | 9.06 (230) |

All dimensions are in inches (mm)

| Model CVVM | Low Speed Shaft | | | | |
|------------------------------|------------------|--------------|-----------|--------------|--|
| | U* | V | S | L1 | Key |
| 6130Y 6135Y | 1.88 (47.625) | 2.40 (61) | 3/8-16UNC | 0.79 (20) | 1/2 x 1/2 x 2.17 (12.7 x 12.7 x 55) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Vertical V-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CVVM02-6135DAY ▶ CVVM15-6135Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | |
|-------------------|-----------------------|------------|---------------|------------|-------------------|-------------------|-------------|-----------------|-------------------|------------|------------|-------------------|----------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | |
| CVVM02-6135DAY | 1/4 x 4 (0.2 x 4) | 4.63 (118) | 18.50 (470) | 2.32 (59) | ø4.88 (ø124) | 98 (45) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | - | 101 (46) | |
| CVVM02-6135DAY-AV | | | 19.29 (490) | | | 101 (46) | | | | | | 20.55 (522) | 104 (48) |
| CVVM02-6135DCY | | | 19.41 (493) | | | 106 (48) | | | | | | 20.67 (525) | 109 (50) |
| CVVM02-6135DCY-AV | 1/3 x 4 (0.25 x 4) | 4.63 (118) | 20.20 (513) | 2.32 (59) | ø4.88 (ø124) | 109 (50) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | - | 112 (51) | |
| CVVM03-6135DCY | | | 19.41 (493) | | | 106 (48) | | | | | | 20.67 (525) | 109 (50) |
| CVVM05-6135DCY | 1/2 x 4 (0.4 x 4) | 4.63 (118) | 20.20 (513) | 2.32 (59) | ø4.88 (ø124) | 109 (50) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | - | 112 (51) | |
| CVVM05-6135DCY-AV | | | 21.81 (554) | | | 116 (53) | | | | | | 23.50 (597) | 122 (56) |
| CVVM08-6135Y | 3/4 x 4 (0.55 x 4) | 5.67 (144) | 18.78 (477) | 3.82 (97) | ø5.94 (ø151) | 112 (51) | 20.47 (520) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 118 (54) | |
| CVVM08-6135Y-AV | | 5.86 (149) | 20.08 (510) | 3.94 (100) | ø6.30 (ø160) | 121 (55) | 22.52 (572) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 131 (60) | |
| CVVM08-6135DCY | | 5.67 (144) | 21.81 (554) | 3.82 (97) | ø5.94 (ø151) | 113 (52) | 23.50 (597) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 119 (54) | |
| CVVM08-6135DCY-AV | | 5.86 (149) | 23.11 (587) | 3.94 (100) | ø6.30 (ø160) | 124 (57) | 25.55 (649) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 135 (61) | |
| CVVM1-6135Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 20.51 (521) | 3.82 (97) | □6.22 (□158) | 125 (57) | 23.01 (585) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 135 (62) | |
| CVVM1-6135DCY-EP | | | 23.54 (598) | | | 129 (59) | 26.04 (662) | | | | | 139 (63) | |
| CVVM1H-6135Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 21.57 (548) | 3.82 (97) | □6.57 (□167) | 132 (60) | 24.31 (618) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 144 (65) | |
| CVVM1H-6135DCY-EP | | | 24.61 (625) | | | 137 (62) | 27.34 (695) | | | | | 148 (67) | |
| CVVM2-6135Y-EP | 2 x 4 (1.5 x 4) | 6.16 (156) | 21.57 (548) | 3.82 (97) | □6.57 (□167) | 135 (62) | 24.31 (618) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 147 (67) | |
| CVVM2-6135DCY-EP | | | 24.61 (625) | | | 139 (64) | 27.34 (695) | | | | | 151 (69) | |
| CVVM3-6135Y-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 20.98 (533) | 4.53 (115) | □7.24 (□184) | 147 (67) | 24.06 (611) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 163 (74) | |
| CVVM3-6135DCY-EP | | | 25.43 (646) | | | 156 (71) | 28.50 (724) | | | | | 172 (78) | |
| CVVM5-6135Y-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 22.24 (565) | 4.65 (118) | □8.74 (□222) | 171 (78) | 25.81 (656) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 195 (89) | |
| CVVM8-6135Y-EP | 7.5 x 4 (5.5 x 4) | | 23.94 (608) | | | 205 (93) | 27.50 (699) | | | | | 229 (104) | |
| CVVM10-6135Y-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 25.43 (646) | 5.43 (138) | □10.24 (□260) | 232 (105) | 29.57 (751) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 276 (125) | |
| CVVM15-6135Y-EP | 15 x 4 (11 x 4) | | 27.87 (708) | | | 244 (111) | 32.01 (813) | | | | | 289 (131) | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Vertical V-Flange Mount

CVVM02-6145DBY ▶ CVVM20-6145Y-EP

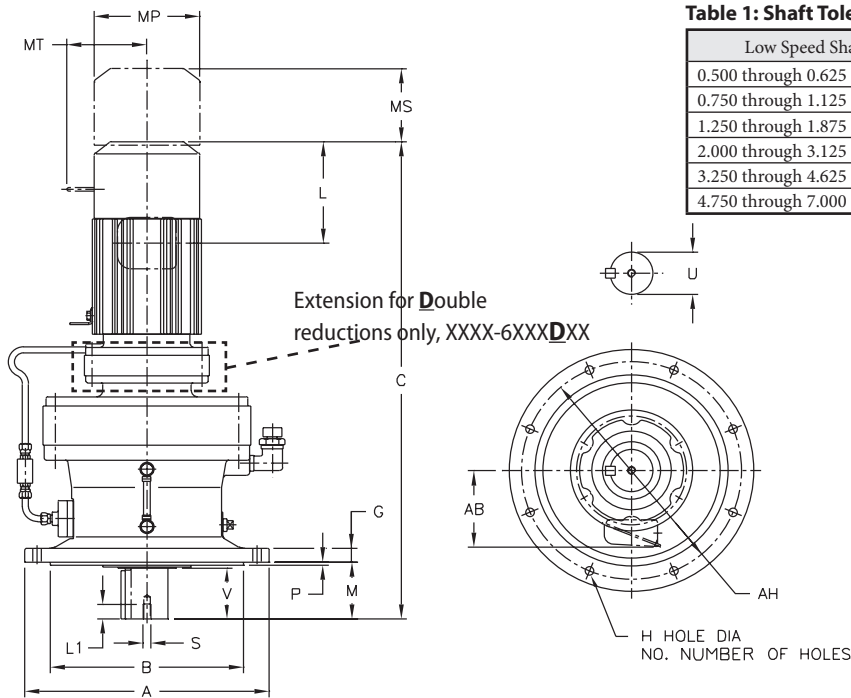


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CVVM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CVVM | A | B | G | H | NO. | M | O | P | AH |
|------------|-------|-------|------|------|------|------|---|------|-------|
| 6140Y | 10.24 | 7.87 | 0.59 | 0.43 | 0.24 | 3.78 | - | 0.16 | 9.06 |
| 6145Y | (260) | (200) | (15) | (11) | (6) | (96) | | (4) | (230) |

All dimensions are in inches (mm)

| Model CVVM | Low Speed Shaft | | | | |
|------------|-----------------|------|-----------|------|--|
| | U* | V | S | L1 | Key |
| 6140Y | 1.88 | 3.19 | 3/8-16UNC | 0.79 | 1/2 x 1/2 x 2.95 (12.7 x 12.7 x 75) |
| 6145Y | (47.625) | (81) | | (20) | |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Vertical V-Flange Mount

CVVM02-6145DBY ▶ CVVM20-6145Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | | | | | | | |
|-------------------|-----------------------|-------------|---------------|-----------------|-------------------|-------------------|-------------|-----------------|-------------------|-------------|------------|-------------------|-----------------|-------------|------------|-----------------|------------|-------------|-------------|----------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | | | |
| CVVM02-6145DBY | 1/4 x 4 (0.2 x 4) | 4.63 (118) | 19.65 (499) | 2.32 (59) | ø4.88 (ø124) | 103 (47) | 20.91 (531) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 106 (48) | | | | | | | | |
| CVVM02-6145DBY-AV | | | 20.43 (519) | | | 106 (48) | 21.69 (551) | | | | | 109 (50) | | | | | | | | |
| CVVM03-6145DBY | 1/3 x 4 (0.25 x 4) | | 19.65 (499) | | | 103 (47) | 20.91 (531) | | | | | 106 (48) | | | | | | | | |
| CVVM03-6145DBY-AV | | | 20.43 (519) | | | 106 (48) | 21.69 (551) | | | | | 109 (50) | | | | | | | | |
| CVVM05-6145DBY | 1/2 x 4 (0.4 x 4) | | 5.67 (144) | | | 22.05 (560) | 3.82 (97) | | | | | ø5.94 (ø151) | 113 (52) | 23.74 (603) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 119 (54) | |
| CVVM05-6145DBY-AV | | | | | | 111 (51) | 23.74 (603) | | | | | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 117 (53) | | | | |
| CVVM08-6145DBY | 3/4 x 4 (0.55 x 4) | 5.86 (149) | 23.35 (593) | 3.94 (100) | ø6.30 (ø160) | 122 (55) | 25.79 (655) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 132 (60) | | | | | | | | |
| CVVM08-6145DBY-AV | | 23.35 (593) | 3.94 (100) | ø6.30 (ø160) | 122 (55) | 25.79 (655) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 132 (60) | | | | | | | | | |
| CVVM1-6145Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 21.30 (541) | 3.82 (97) | □6.22 (□158) | 127 (58) | 23.80 (605) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 137 (63) | | | | | | | | |
| CVVM1-6145DBY-EP | | | 23.78 (604) | | | 26.28 (668) | 136 (62) | | | | | | | | | | | | | |
| CVVM1H-6145Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 22.36 (568) | | | □6.57 (□167) | 134 (61) | 25.10 (638) | | | | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 149 (68) | | | | |
| CVVM1H-6145DBY-EP | | | 24.84 (631) | | | | | 27.58 (701) | | | | | | | | | 146 (66) | | | |
| CVVM2-6145Y-EP | 2 x 4 (1.5 x 4) | | 22.36 (568) | | | | | 137 (63) | | | | 25.10 (638) | | | | | 139 (64) | 28.13 (715) | 28.13 (715) | 151 (69) |
| CVVM2-6145DBY-EP | | | 24.84 (631) | | | | | 137 (62) | | | | 27.58 (701) | | | | | | | | |
| CVVM2-6145DCY-EP | 25.39 (645) | | 139 (64) | 28.13 (715) | 151 (69) | | | | | | | | | | | | | | | |
| CVVM3-6145Y-EP | 3 x 4 (2.2 x 4) | | 6.71 (170) | 21.77 (553) | 4.53 (115) | | | □7.24 (□184) | 149 (68) | 24.84 (631) | 7.60 (193) | □7.24 (□184) | | | | | 5.43 (138) | 5.04 (128) | 165 (75) | |
| CVVM3-6145DBY-EP | | 25.67 (652) | | 153 (70) | | 28.74 (730) | 170 (77) | | | | | | | | | | | | | |
| CVVM3-6145DCY-EP | | 26.22 (666) | | 156 (71) | | 29.29 (744) | 172 (78) | | | | | | | | | | | | | |
| CVVM5-6145Y-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 23.03 (585) | 4.65 (118) | □8.74 (□222) | 173 (79) | 26.59 (676) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 197 (90) | | | | | | | | |
| CVVM8-6145Y-EP | 7.5 x 4 (5.5 x 4) | | 24.72 (628) | | | 207 (94) | 28.29 (719) | | | | | 231 (105) | | | | | | | | |
| CVVM10-6145Y-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 26.22 (666) | 5.43 (138) | □10.24 (□260) | 234 (106) | 30.35 (771) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 278 (126) | | | | | | | | |
| CVVM15-6145Y-EP | 15 x 4 (11 x 4) | | 28.66 (728) | | | 247 (112) | 32.80 (833) | | | | | 291 (132) | | | | | | | | |
| CVVM20-6145Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 31.10 (790) | 7.01 (178) | ø12.49 (ø317) | 327 (149) | 36.40 (925) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | 413 (188) | | | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Vertical V-Flange Mount

CVVM05-6165DCY ▶ CVVM30-6165Y-EP

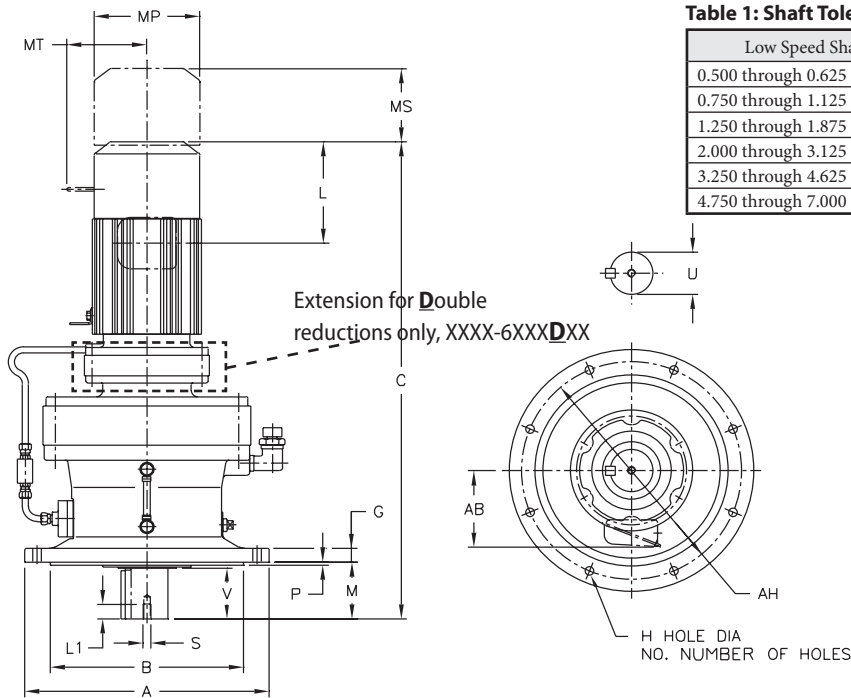


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CVVM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CVVM | A | B | G | H | NO. | M | O | P | AH |
|------------------------------|----------------|----------------|--------------|--------------|-----|--------------|---|-------------|----------------|
| 6160Y 6165Y | 13.39 (340) | 10.63 (270) | 0.79 (20) | 0.43 (11) | 6 | 3.50 (89) | - | 0.16 (4) | 12.20 (310) |

All dimensions are in inches (mm)

| Model CVVM | Low Speed Shaft | | | | |
|------------------------------|-----------------|--------------|-----------|--------------|--|
| | U* | V | S | L1 | Key |
| 6160Y 6165Y | 2.25 (57.15) | 3.19 (81) | 3/8-16UNC | 0.79 (20) | 1/2 x 1/2 x 2.95 (12.7 x 12.7 x 75) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Vertical V-Flange Mount


XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

CVVM05-6165DCY ▶ CVVM30-6165Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|-----------------------|-------------|---------------|------------------|-------------------|-------------------|--------------|------------------|-------------------|-----------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CVVM05-6165DCY | 1/2 x 4 (0.4 x 4) | 4.63 (118) | 23.23 (590) | 2.32 (59) | ∅4.88 (∅124) | 212 (96) | 24.49 (622) | 3.58 (91) | ∅4.88 (∅124) | 2.40 (61) | - | 215 (98) |
| CVVM05-6165DCY-AV | | 5.67 (144) | 24.65 (626) | 3.82 (97) | ∅5.94 (∅151) | 219 (100) | 26.34 (669) | 5.51 (140) | ∅5.94 (∅151) | 3.66 (93) | 3.94 (100) | 225 (102) |
| CVVM08-6165DCY | 3/4 x 4 (0.55 x 4) | 5.86 (149) | 25.94 (659) | 3.94 (100) | ∅6.30 (∅160) | 216 (98) | | | | | | 225 (102) |
| CVVM08-6165DCY-AV | | 5.98 (152) | 26.38 (670) | 3.82 (97) | ∅6.57 (∅167) | ∅6.22 (∅158) | 230 (104) | 28.88 (734) | 6.32 (161) | ∅6.22 (∅158) | 4.80 (122) | 4.25 (108) |
| CVVM1H-6165Y-EP | 1.5 x 4 (1.1 x 4) | 24.25 (616) | 208 (94) | | | 26.99 (686) | 6.56 (167) | ∅6.57 (∅167) | 5.04 (128) | 4.61 (117) | 219 (100) | |
| CVVM1H-6165DCY-EP | | 27.44 (697) | 237 (108) | | | 30.18 (767) | | | | | 248 (113) | |
| CVVM2-6165Y-EP | 2 x 4 (1.5 x 4) | 24.25 (616) | 211 (96) | | | 26.99 (686) | | | | | 222 (101) | |
| CVVM2-6165DCY-EP | | 27.44 (697) | 240 (109) | 30.18 (767) | 251 (114) | | | | | | | |
| CVVM3-6165Y-EP | 3 x 4 (2.2 x 4) | 23.66 (601) | 4.53 (115) | ∅7.24 (∅184) | 221 (100) | 26.73 (679) | 7.60 (193) | ∅7.24 (∅184) | 5.43 (138) | 5.04 (128) | 237 (108) | |
| CVVM3-6165DCY-EP | | 26.85 (682) | | | 253 (115) | 29.92 (760) | | | | | 269 (122) | |
| CVVM5-6165Y-EP | 5 x 4 (3.7 x 4) | 25.12 (638) | 4.65 (118) | ∅8.74 (∅222) | 246 (112) | 28.68 (729) | 8.21 (209) | ∅8.74 (∅222) | 6.02 (153) | 6.30 (160) | 302 (137) | |
| CVVM5-6165DCY-EP | | 28.31 (719) | | | 278 (126) | 31.87 (810) | | | | | 303 (138) | |
| CVVM8-6165Y-EP | 7.5 x 4 (5.5 x 4) | 26.81 (681) | | | 279 (127) | 30.37 (772) | | | | | 303 (138) | |
| CVVM8-6165DCY-EP | | 30.00 (762) | | | 312 (142) | 33.56 (853) | | | | | 336 (153) | |
| CVVM10-6165Y-EP | 10 x 4 (7.5 x 4) | 28.27 (718) | 5.43 (138) | ∅10.24 (∅260) | 307 (140) | 32.40 (823) | 9.57 (243) | ∅10.24 (∅260) | 7.44 (189) | 7.32 (186) | 352 (160) | |
| CVVM15-6165Y-EP | 15 x 4 (11 x 4) | 30.71 (780) | | | 320 (145) | 34.84 (885) | | | | | 364 (165) | |
| CVVM20-6165Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 32.99 (838) | 7.01 (178) | ∅12.49 (∅317) | 403 (183) | 38.29 (973) | 12.30 (313) | ∅12.61 (∅320) | 9.53 (242) | - | 489 (222) |
| CVVM25-6165Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 37.17 (944) | 9.06 (230) | ∅15.12 (∅384) | 681 (309) | 44.02 (1118) | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | - | 778 (353) |
| CVVM30-6165Y-EP | 30 x 4 (22 x 4) | | | | | | | | | | | |

Note: [1] MP Dimension Symbol ∅ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Vertical V-Flange Mount

CVVM05-6175DCY ▶ CVVM40-6175Y-EP


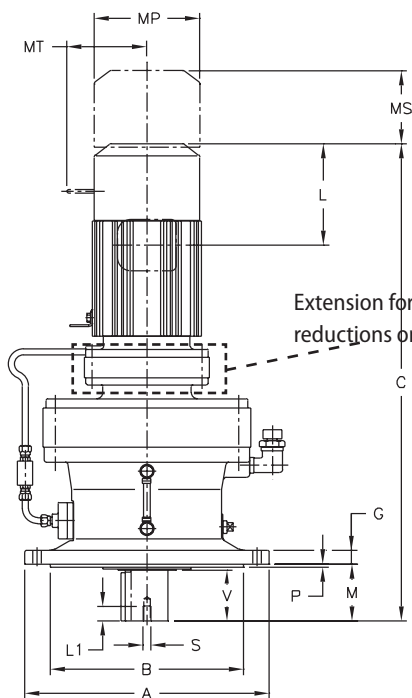


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

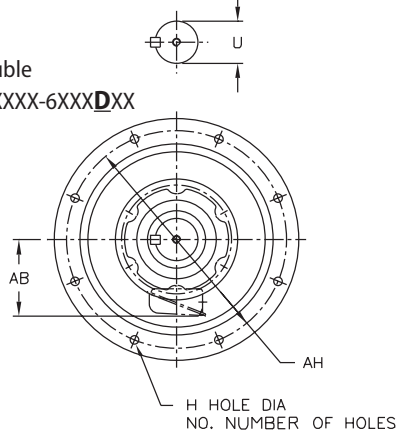

Note: CVVM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CVVM | A | B | G | H | NO. | M | O | P | AH |
|--------------|-------|-------|------|------|------|------|---|------|-------|
| 6170Y | 15.75 | 12.44 | 0.87 | 0.55 | 0.31 | 3.70 | - | 0.20 | 14.17 |
| 6175Y | (400) | (316) | (22) | (14) | (8) | (94) | | (5) | (360) |

All dimensions are in inches (mm)

| Model CVVM | Low Speed Shaft | | | | |
|--------------|-----------------|------|-----------|------|--|
| | U* | V | S | L1 | Key |
| 6170Y | 2.75 | 3.19 | 1/2-13UNC | 0.94 | 5/8 x 5/8 x 3.15 (15.87 x 15.87 x 80) |
| 6175Y | (69.85) | (80) | | (24) | |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Vertical V-Flange Mount


CVVM05-6175DCY ▶ CVVM40-6175Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | |
|-------------------|-----------------------|-------------|---------------|-------------|-------------------|----------------------|--------------|------------------|-------------------|-----------------|--------------|-------------------|------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | |
| CVVM05-6175DCY | 1/2 x 4 (0.4 x 4) | 4.63 (118) | 25.08 (637) | 2.32 (59) | ∅4.88 (∅124) | 289 (131) | 26.34 (669) | 3.58 (91) | ∅4.88 (∅124) | 2.40 (61) | - | 292 (133) | |
| CVVM05-6175DCY-AV | | 5.67 (144) | 26.50 (673) | 3.82 (97) | ∅5.94 (∅151) | 296 (135) | 28.19 (716) | 5.51 (140) | ∅5.94 (∅151) | 3.66 (93) | 3.94 (100) | 302 (137) | |
| CVVM08-6175DCY | 3/4 x 4 (0.55 x 4) | 5.86 (149) | 27.80 (706) | 3.94 (100) | ∅6.30 (∅160) | 294 (133) | | | | | | 302 (137) | 30.24 (768) |
| CVVM08-6175DCY-AV | | 5.98 (152) | 27.52 (699) | 28.23 (717) | 3.82 (97) | ∅6.22 (∅158) | 285 (130) | 30.02 (763) | 6.32 (161) | ∅6.22 (∅158) | 4.80 (122) | 4.25 (108) | 295 (134) |
| CVVM1-6175DAY-EP | 1 x 4 (0.75 x 4) | 29.29 (744) | | | | | 314 (143) | 32.03 (814) | | | | | 307 (139) |
| CVVM1-6175DCY-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 28.58 (726) | 3.82 (97) | ∅6.57 (∅167) | 296 (134) | 31.32 (796) | 6.56 (167) | ∅6.57 (∅167) | 5.04 (128) | 4.61 (117) | 307 (140) | |
| CVVM1H-6175DCY-EP | | | | | | 2 x 4 (1.5 x 4) | 29.29 (744) | | | | | 317 (144) | 32.03 (814) |
| CVVM2-6175DAY-EP | 2 x 4 (1.5 x 4) | 6.71 (170) | 28.70 (729) | 4.53 (115) | ∅7.24 (∅184) | 330 (150) | 31.77 (807) | 7.60 (193) | ∅7.24 (∅184) | 5.43 (138) | 5.04 (128) | 347 (157) | |
| CVVM2-6175DCY-EP | | | | | | 3 x 4 (2.2 x 4) | 27.05 (687) | 351 (159) | 30.61 (778) | 375 (172) | | | |
| CVVM5-6175Y-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 30.16 (766) | 4.65 (118) | ∅8.74 (∅222) | 355 (161) | 33.72 (857) | 8.21 (209) | ∅8.74 (∅222) | 6.02 (153) | 6.30 (160) | 379 (172) | |
| CVVM5-6175DCY-EP | | | | | | 385 (175) | 32.30 (821) | | | | | 408 (186) | |
| CVVM8-6175Y-EP | 7.5 x 4 (5.5 x 4) | 9.04 (230) | 28.74 (730) | 5.43 (138) | ∅10.24 (∅260) | 389 (177) | 35.41 (900) | 9.57 (243) | ∅10.24 (∅260) | 7.44 (189) | 7.32 (186) | 413 (188) | |
| CVVM8-6175DCY-EP | | | | | | 29.57 (751) | 413 (188) | | | | | 33.70 (856) | 458 (208) |
| CVVM10-6175Y-EP | 15 x 4 (11 x 4) | 32.01 (813) | 426 (194) | 36.14 (918) | 426 (194) | 36.14 (918) | 9.57 (243) | ∅10.24 (∅260) | 7.44 (189) | 7.32 (186) | 470 (214) | | |
| CVVM15-6175Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 34.72 (882) | 7.01 (178) | ∅12.49 (∅317) | 507 (230) | 40.02 (1017) | 12.30 (313) | ∅12.61 (∅320) | 9.53 (242) | - | 593 (269) | |
| CVVM20-6175Y-EP | | | | | | 25 x 4 (18.5 x 4) | 38.90 (988) | 9.06 (230) | ∅15.12 (∅384) | 786 (357) | 45.75 (1162) | 15.91 (404) | ∅15.28 (∅388) |
| CVVM25-6175Y-EP | 30 x 4 (22 x 4) | 13.39 (340) | 43.78 (1112) | 9.06 (230) | ∅15.12 (∅384) | 899 (408) | 50.63 (1286) | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | - | 996 (452) | |
| CVVM30-6175Y-EP | | | | | | 40 x 4 (30 x 4) | 38.90 (988) | 9.06 (230) | ∅15.12 (∅384) | 786 (357) | 45.75 (1162) | 15.91 (404) | ∅15.28 (∅388) |
| CVVM40-6175Y-EP | 40 x 4 (30 x 4) | 13.39 (340) | 43.78 (1112) | 9.06 (230) | ∅15.12 (∅384) | 899 (408) | 50.63 (1286) | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | - | 996 (452) | |

Note: [1] MP Dimension Symbol ∅ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Vertical V-Flange Mount

CVVM1-6185DBY-EP ▶ CVVM50-6185Y-EP


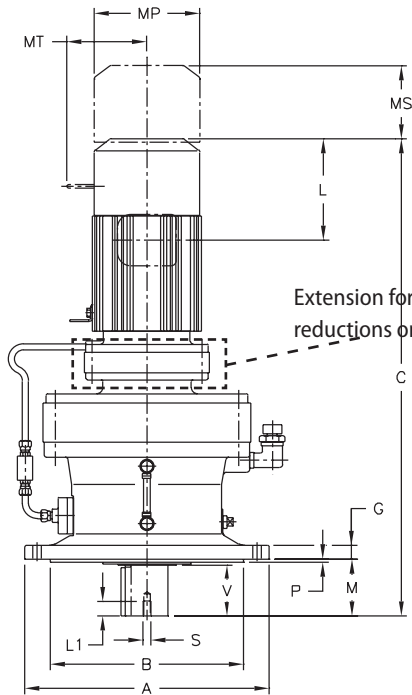


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

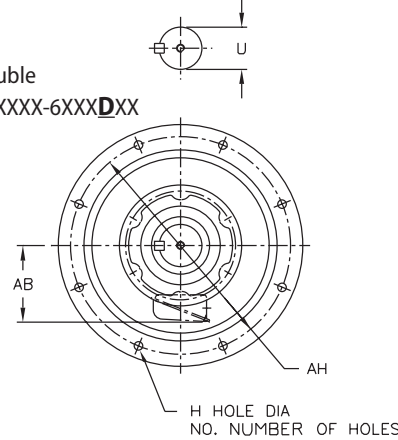

Note: CVVM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CVVM | A | B | G | H | NO. | M | O | P | AH |
|--------------|-------|-------|------|------|------|-------|---|------|-------|
| 6180Y | 16.93 | 13.58 | 0.87 | 0.71 | 0.31 | 4.33 | - | 0.20 | 15.35 |
| 6185Y | (430) | (345) | (22) | (18) | (8) | (110) | | (5) | (390) |

All dimensions are in inches (mm)

| Model CVVM | Low Speed Shaft | | | | |
|--------------|-----------------|-------|-----------|------|--|
| | U* | V | S | L1 | Key |
| 6180Y | 3.13 | 3.94 | 1/2-13UNC | 0.94 | 3/4 x 3/4 x 3.74 (19.05 x 19.05 x 95) |
| 6185Y | (79.375) | (100) | | (24) | |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Vertical V-Flange Mount

CVVM1-6185DBY-EP ▶ CVVM50-6185Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | | | | | |
|-------------------|----------------------|-------------|---------------|------------|-------------------|-------------------|--------------|-----------------|-------------------|-------------|------------|-------------------|-------------|-----------------|-----------|-------------|------------|-----------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | |
| CVVM1-6185DBY-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 30.59 (777) | 3.82 (97) | □6.22 (□158) | 410 (186) | 33.09 (841) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 419 (191) | | | | | | |
| CVVM1H-6185DBY-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 31.65 (804) | | 416 (189) | 34.39 (874) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 428 (194) | | | | | | | |
| CVVM2-6185DAY-EP | 2 x 4 (1.5 x 4) | | 30.79 (782) | | 371 (169) | 33.52 (852) | | | | | | 419 (191) | 34.39 (874) | 382 (174) | | | | |
| CVVM2-6185DBY-EP | | | 31.65 (804) | | 419 (191) | 34.39 (874) | | | | | | | | | 431 (196) | 34.13 (867) | 7.60 (193) | □7.24 (□184) |
| CVVM3-6185DBY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 31.06 (789) | 4.53 (115) | □7.24 (□184) | 431 (196) | | | | | | 34.13 (867) | 7.60 (193) | □7.24 (□184) | | | | |
| CVVM5-6185Y-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 28.50 (724) | 4.65 (118) | □8.74 (□222) | 403 (183) | 32.07 (815) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 426 (194) | | | | | | |
| CVVM5-6185DBY-EP | | | 32.32 (821) | | | 455 (207) | 35.89 (912) | | | | | | 436 (198) | 33.76 (858) | 489 (222) | 37.58 (955) | 513 (233) | |
| CVVM8-6185Y-EP | 7.5 x 4 (5.5 x 4) | | 30.20 (767) | | | 467 (212) | 35.28 (896) | | | | | | | | | | | 9.57 (243) |
| CVVM8-6185DBY-EP | | | 34.02 (864) | | | 489 (222) | 37.58 (955) | | | | | | 516 (234) | 39.65 (1007) | 524 (238) | | | |
| CVVM10-6185Y-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 31.14 (791) | 5.43 (138) | □10.24 (□260) | 467 (212) | 35.28 (896) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 573 (260) | | | | | | |
| CVVM10-6185DBY-EP | | | 35.51 (902) | | | 516 (234) | 39.65 (1007) | | | | | | 529 (240) | 42.09 (1069) | 560 (254) | | | |
| CVVM15-6185Y-EP | 15 x 4 (11 x 4) | | 33.58 (853) | | | 480 (218) | 37.72 (958) | | | | | | | | | 645 (293) | | |
| CVVM15-6185DBY-EP | | | 37.95 (964) | | | 529 (240) | 42.09 (1069) | | | | | | 9.53 (242) | - | 933 (424) | | | |
| CVVM20-6185Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 36.18 (919) | 7.01 (178) | ∅12.49 (∅317) | 559 (254) | 41.48 (1054) | 12.30 (313) | ∅12.61 (∅320) | 9.53 (242) | - | 645 (293) | | | | | | |
| CVVM25-6185Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 40.35 (1025) | 9.06 (230) | ∅15.12 (∅384) | 836 (380) | 47.20 (1199) | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | - | 1047 (475) | | | | | | |
| CVVM30-6185Y-EP | 30 x 4 (22 x 4) | | | | | 950 (431) | 52.09 (1323) | | | | | | 1018 (462) | - | - | - | - | - |
| CVVM40-6185Y-EP | 40 x 4 (30 x 4) | | | | | 45.24 (1149) | 1018 (462) | | | | | | | | | | | |
| CVVM50-6185Y-EP | 50 x 4 (37 x 4) | | | | | | | | | | | | 1018 (462) | - | - | - | - | - |

Gearmotors


Dimensions

Note: [1] MP Dimension Symbol ∅ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Vertical V-Flange Mount

CVVM1-6195DAY-EP ▶ CVVM60-6195Y-EP

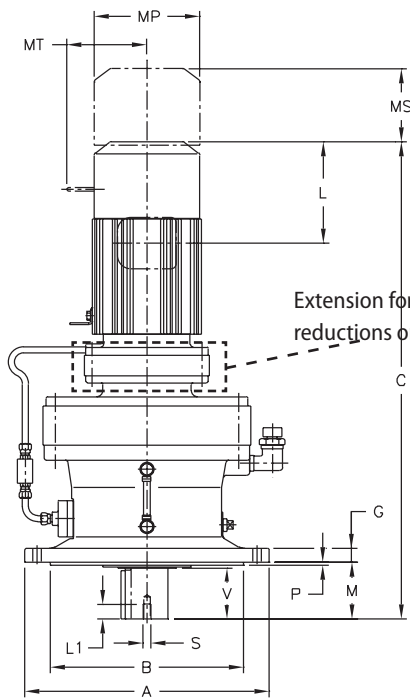

Extension for Double reductions only, XXXX-6XXXDXX

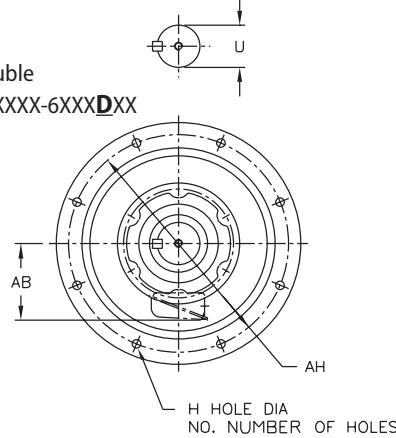


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CVVM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CVVM | A | B | G | H | NO. | M | O | P | AH |
|--------------|-------|-------|------|------|------|-------|---|------|-------|
| 6190Y | 19.29 | 15.75 | 1.18 | 0.71 | 0.47 | 5.71 | - | 0.24 | 17.72 |
| 6195Y | (490) | (400) | (30) | (18) | (12) | (145) | | (6) | (450) |

All dimensions are in inches (mm)

| Model CVVM | Low Speed Shaft | | | | |
|--------------|-----------------|--------|-----------|------|-------------------------|
| | U* | V | S | L1 | Key |
| 6190Y | 3.63 | 4.92 | 3/4-10UNC | 1.34 | 7/8 x 7/8 x 4.92 |
| 6195Y | (92.075) | (12=5) | | (34) | (22.225 x 22.225 x 125) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Vertical V-Flange Mount

CVVM1-6195DAY-EP ▶ CVVM60-6195Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|-------------|---------------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CVVM1-6195DAY-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 32.95 (837) | 3.82 (97) | □6.22 (□158) | 536 (243) | 35.45 (901) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 546 (248) |
| CVVM1H-6195DAY-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 34.02 (864) | | □6.57 (□167) | 543 (247) | 36.75 (934) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 555 (252) |
| CVVM2-6195DAY-EP | 2 x 4 (1.5 x 4) | | | | 546 (248) | 558 (253) | | | | | | |
| CVVM3-6195DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 33.43 (849) | 4.53 (115) | □7.24 (□184) | 559 (254) | 36.50 (927) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 576 (261) |
| CVVM3-6195DBY-EP | | | 34.06 (865) | | | 583 (265) | 37.13 (943) | | | | | 600 (272) |
| CVVM5-6195DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 34.88 (886) | 4.65 (118) | □8.74 (□222) | 585 (265) | 38.44 (977) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 608 (276) |
| CVVM5-6195DBY-EP | | | 35.31 (897) | | | 607 (276) | 38.88 (988) | | | | | 631 (287) |
| CVVM8-6195Y-EP | 7.5 x 4 (5.5 x 4) | 7.34 (186) | 33.78 (858) | 5.43 (138) | □10.24 (□260) | 599 (272) | 37.34 (949) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 623 (283) |
| CVVM8-6195DAY-EP | | | 36.57 (929) | | | 618 (281) | 40.14 (1020) | | | | | 642 (292) |
| CVVM8-6195DBY-EP | | | 37.01 (940) | | | 641 (291) | 40.57 (1031) | | | | | 665 (302) |
| CVVM10-6195Y-EP | | | 10 x 4 (7.5 x 4) | | | 9.04 (230) | 34.02 (864) | | | | | 5.43 (138) |
| CVVM10-6195DBY-EP | 38.50 (978) | 668 (303) | 42.64 (1083) | 712 (323) | | | | | | | | |
| CVVM15-6195Y-EP | 15 x 4 (11 x 4) | 9.04 (230) | 36.46 (926) | 5.43 (138) | □10.24 (□260) | 643 (292) | 40.59 (1031) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 687 (312) |
| CVVM15-6195DBY-EP | | | 40.94 (1040) | | | 681 (309) | 45.08 (1145) | | | | | 725 (329) |
| CVVM20-6195Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 39.17 (995) | 7.01 (178) | ø12.49 (ø317) | 721 (327) | 44.47 (1130) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | 807 (366) |
| CVVM20-6195DBY-EP | | | 43.39 (1102) | | | 761 (346) | 48.68 (1237) | | | | | 847 (385) |
| CVVM25-6195Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 43.35 (1101) | 9.06 (230) | ø15.12 (ø384) | 999 (454) | 50.20 (1275) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | 1096 (498) |
| CVVM30-6195Y-EP | 30 x 4 (22 x 4) | | 1112 (505) | | | 55.08 (1399) | 1209 (549) | | | | | |
| CVVM40-6195Y-EP | 40 x 4 (30 x 4) | | 48.23 (1225) | | | 1181 (536) | - | | | | | |
| CVVM50-6195Y-EP | 50 x 4 (37 x 4) | | - | | | - | - | | | | | |
| CVVM60-6195Y-EP | 60 x 4 (45 x 4) | 16.33 (415) | 49.69 (1262) | 16.81 (427) | ø18.66 (ø474) | 1309 (594) | - | - | - | - | - | - |

Gearmotors


Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Vertical V-Flange Mount

CVVM1-6205DAY-EP ▶ CVVM75-6205Y-EP

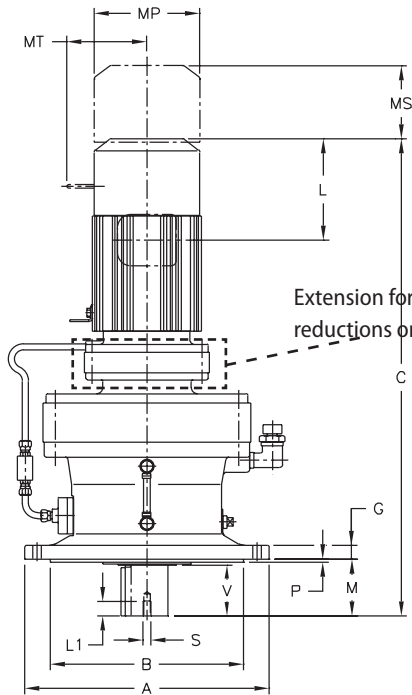

Extension for Double reductions only, XXXX-6XXXDXX

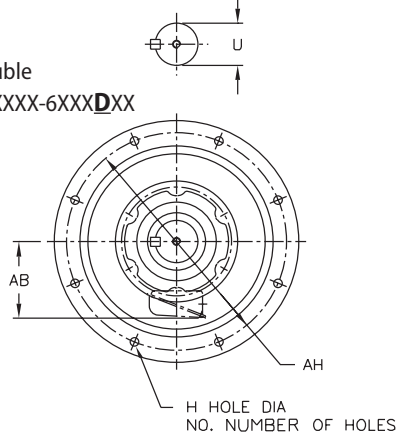


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CVVM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CVVM | A | B | G | H | NO. | M | O | P | AH |
|------------|----------------|----------------|--------------|--------------|-------------|---------------|---|-------------|----------------|
| 6205Y | 17.91 (455) | 13.98 (355) | 1.18 (30) | 0.87 (22) | 0.31 (8) | 8.03 (204) | - | 0.20 (5) | 15.94 (405) |

All dimensions are in inches (mm)

| Model CVVM | Low Speed Shaft | | | | |
|------------|------------------|---------------|-----------|--------------|------------------------------------|
| | U* | V | S | L1 | Key |
| 6205Y | 3.88 (98.425) | 6.50 (165) | 3/4-10UNC | 1.34 (34) | 1 x 1 x 6.5 (25.4 x 25.4 x 165) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Vertical V-Flange Mount

CVVM1-6205DAY-EP ▶ CVVM75-6205Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|-------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CVVM1-6205DAY-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 34.57 (878) | 3.82 (97) | □6.22 (□158) | 574 (260) | 37.07 (942) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 583 (265) |
| CVVM2-6205DAY-EP | 2 x 4 (1.5 x 4) | 6.16 (156) | 35.63 (905) | | □6.57 (□167) | 584 (265) | 38.37 (975) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 595 (270) |
| CVVM3-6205DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 35.04 (890) | 4.53 (115) | □7.24 (□184) | 597 (271) | 38.11 (968) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 613 (278) |
| CVVM3-6205DBY-EP | | | 36.10 (917) | | | 623 (283) | 39.17 (995) | | | | | 639 (290) |
| CVVM5-6205DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 36.50 (927) | 4.65 (118) | □8.74 (□222) | 622 (282) | 40.06 (1018) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 646 (293) |
| CVVM5-6205DBY-EP | | | 37.36 (949) | | | 647 (294) | 40.93 (1040) | | | | | 671 (305) |
| CVVM8-6205DAY-EP | 7.5 x 4 (5.5 x 4) | | 38.19 (970) | | | 656 (298) | 41.75 (1061) | | | | | 680 (309) |
| CVVM8-6205DBY-EP | | | 39.06 (992) | | | 681 (309) | 42.62 (1083) | | | | | 705 (320) |
| CVVM10-6205DBY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 40.55 (1030) | 5.43 (138) | □10.24 (□260) | 708 (321) | 44.69 (1135) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 752 (341) |
| CVVM15-6205Y-EP | 15 x 4 (11 x 4) | | 37.97 (965) | | | 679 (308) | 42.11 (1070) | | | | | 723 (328) |
| CVVM15-6205DBY-EP | 42.99 (1092) | | 721 (327) | | | 47.13 (1197) | 765 (347) | | | | | |
| CVVM20-6205Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 41.02 (1042) | 7.01 (178) | ø12.49 (ø317) | 767 (348) | 46.32 (1177) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 853 (387) |
| CVVM20-6205DBY-EP | | | 45.43 (1154) | | | 801 (364) | 50.73 (1289) | | | | | 887 (403) |
| CVVM25-6205Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 44.80 (1138) | 9.06 (230) | ø15.12 (ø384) | 1040 (472) | 51.65 (1312) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1137 (516) |
| CVVM30-6205Y-EP | 30 x 4 (22 x 4) | | 49.69 (1262) | | | 1153 (523) | 56.54 (1436) | | | | | 1250 (567) |
| CVVM40-6205Y-EP | 40 x 4 (30 x 4) | | | | | | | | | | | |
| CVVM50-6205Y-EP | 50 x 4 (37 x 4) | | | | | | | | | | | |
| CVVM60-6205Y-EP | 60 x 4 (45 x 4) | 16.33 (415) | | | ø18.66 (ø474) | 1354 (615) | - | - | - | - | - | - |
| CVVM75-6205Y-EP | 75 x 4 (55 x 4) | | 51.14 (1299) | 16.81 (427) | | 1434 (651) | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Vertical V-Flange Mount

CVVM2-6215DAY-EP ▶ CVVM75-6215Y-EP


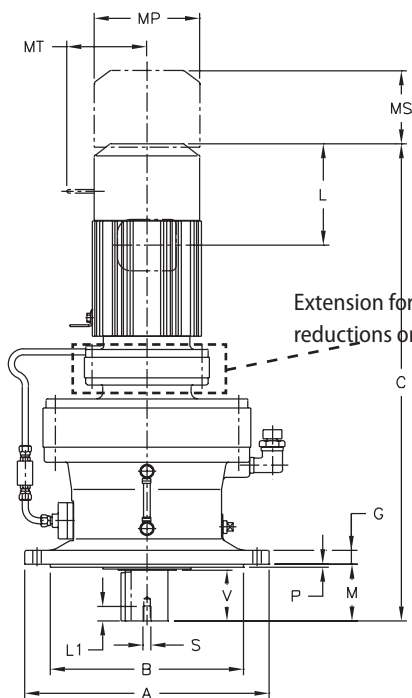


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

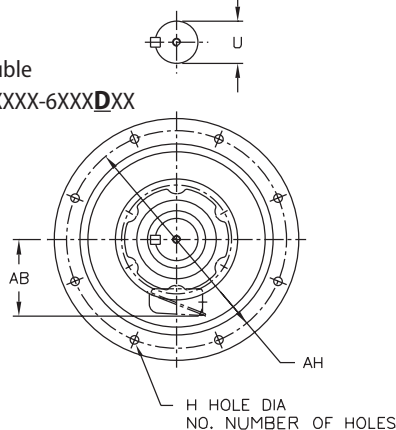

Note: CVVM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CVVM | A | B | G | H | NO. | M | O | P | AH |
|--------------|----------------|----------------|--------------|--------------|-------------|---------------|---|-------------|----------------|
| 6215Y | 19.29 (490) | 15.35 (390) | 1.38 (35) | 0.94 (24) | 0.31 (8) | 7.99 (203) | - | 0.28 (7) | 17.32 (440) |

All dimensions are in inches (mm)

| Model CVVM | Low Speed Shaft | | | | |
|--------------|------------------|---------------|-----------|--------------|------------------------------------|
| | U* | V | S | L1 | Key |
| 6215Y | 4.25 (107.95) | 6.50 (165) | 3/4-10UNC | 1.34 (34) | 1 x 1 x 6.5 (25.4 x 25.4 x 165) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Vertical V-Flange Mount

CVVM2-6215DAY-EP ▶ CVVM75-6215Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|-------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CVVM2-6215DAY-EP | 2 x 4 (1.5 x 4) | 6.16 (156) | 37.72 (958) | 3.82 (97) | □6.57 (□167) | 777 (353) | 40.45 (1028) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 788 (358) |
| CVVM3-6215DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 37.13 (943) | 4.53 (115) | □7.24 (□184) | 788 (358) | 40.20 (1021) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 805 (365) |
| CVVM5-6215DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 38.39 (975) | 4.65 (118) | □8.74 (□222) | 812 (369) | 41.95 (1066) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 836 (380) |
| CVVM5-6215DBY-EP | | | 39.57 (1005) | | | 854 (388) | 43.13 (1096) | | | | | 878 (398) |
| CVVM8-6215DAY-EP | 7.5 x 4 (5.5 x 4) | 7.34 (186) | 40.08 (1018) | 4.65 (118) | □8.74 (□222) | 846 (384) | 43.64 (1109) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 870 (395) |
| CVVM8-6215DBY-EP | | | 41.26 (1048) | | | 888 (403) | 44.82 (1139) | | | | | 912 (414) |
| CVVM10-6215DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 41.57 (1056) | 5.43 (138) | □10.24 (□260) | 873 (396) | 45.71 (1161) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 918 (416) |
| CVVM10-6215DBY-EP | | | 42.72 (1085) | | | 916 (416) | 46.85 (1190) | | | | | 960 (436) |
| CVVM15-6215Y-EP | 15 x 4 (11 x 4) | 9.04 (230) | 39.29 (998) | 5.43 (138) | □10.24 (□260) | 846 (384) | 43.43 (1103) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 890 (404) |
| CVVM15-6215DAY-EP | | | 44.02 (1118) | | | 886 (402) | 48.15 (1223) | | | | | 930 (422) |
| CVVM15-6215DBY-EP | | | 45.16 (1147) | | | 928 (421) | 49.29 (1252) | | | | | 973 (441) |
| CVVM20-6215Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 41.97 (1066) | 7.01 (178) | ø12.49 (ø317) | 931 (422) | 47.26 (1201) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 1017 (461) |
| CVVM20-6215DAY-EP | | | 46.46 (1180) | | | 966 (439) | 51.75 (1315) | | | | | 1052 (478) |
| CVVM20-6215DBY-EP | | | 47.44 (1205) | | | 1012 (459) | 52.74 (1340) | | | | | 1098 (498) |
| CVVM25-6215Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 45.75 (1162) | 9.06 (230) | ø15.12 (ø384) | 1198 (544) | 52.60 (1336) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1295 (588) |
| CVVM25-6215DBY-EP | | | 51.61 (1311) | | | 1289 (585) | 58.46 (1485) | | | | | 1386 (629) |
| CVVM30-6215Y-EP | 30 x 4 (22 x 4) | 13.39 (340) | 45.75 (1162) | 9.06 (230) | ø15.12 (ø384) | 1198 (544) | 52.60 (1336) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1295 (588) |
| CVVM30-6215DBY-EP | | | 51.61 (1311) | | | 1289 (585) | 58.46 (1485) | | | | | 1386 (629) |
| CVVM40-6215Y-EP | 40 x 4 (30 x 4) | 16.33 (415) | 50.63 (1286) | 16.81 (427) | ø18.66 (ø474) | 1311 (595) | 57.48 (1460) | | | | | 1408 (639) |
| CVVM50-6215Y-EP | 50 x 4 (37 x 4) | | 1379 (626) | | | | | | | | | |
| CVVM60-6215Y-EP | 60 x 4 (45 x 4) | 16.33 (415) | 52.09 (1323) | 16.81 (427) | ø18.66 (ø474) | 1507 (684) | - | - | - | - | - | - |
| CVVM75-6215Y-EP | 75 x 4 (55 x 4) | | 1588 (720) | | | | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Vertical V-Flange Mount

CVVM2-6225DAY-EP ▶ CVVM50-6235DBY-EP


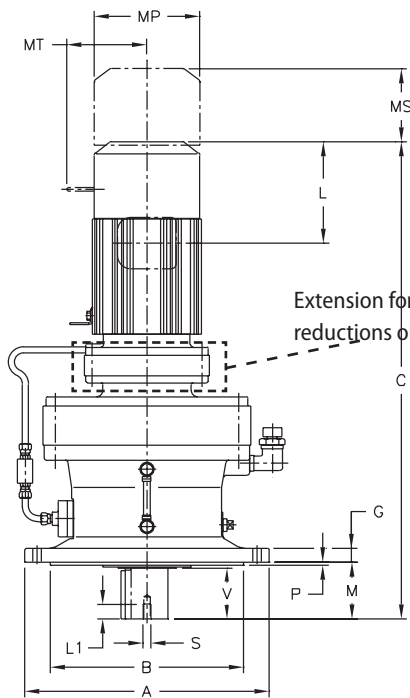


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

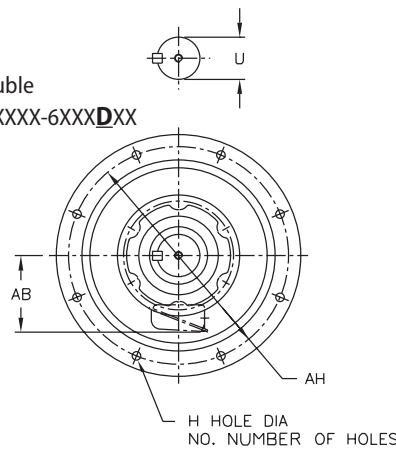

Note: CVVM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CVVM | A | B | G | H | NO. | M | O | P | AH |
|--------------|----------------|----------------|--------------|--------------|-------------|---------------|---|--------------|----------------|
| 6225Y | 19.29 (490) | 15.35 (390) | 1.38 (35) | 0.94 (24) | 0.31 (8) | 7.99 (203) | - | 0.28 (7) | 17.32 (440) |
| 6235Y | 22.44 (570) | 17.72 (450) | 1.57 (40) | 1.06 (27) | 0.31 (8) | 9.84 (250) | - | 0.39 (10) | 20.08 (510) |

All dimensions are in inches (mm)

| Model CVVM | Low Speed Shaft | | | | |
|--------------|------------------|---------------|-----------|--------------|--|
| | U* | V | S | L1 | Key |
| 6225Y | 4.25 (107.95) | 6.50 (165) | 3/4-10UNC | 1.34 (34) | 1 x 1 x 6.5 (25.4 x 25.4 x 165) |
| 6235Y | 5.00 (127) | 7.87 (200) | 1-8UNC | 1.61 (41) | 1-1/4 x 7/8 x 7.87 (31.75 x 22.225 x 200) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Vertical V-Flange Mount

CVVM2-6225DAY-EP ▶ CVVM50-6235DBY-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|--------------------|-------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CVVM2-6225DAY-EP | 2 x 4 (1.5 x 4) | 6.16 (156) | 39.37 (1000) | 3.82 (97) | □6.57 (□167) | 942 (428) | 42.11 (1070) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 954 (433) |
| CVVM3-6225DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 38.78 (985) | 4.53 (115) | □7.24 (□184) | 953 (433) | 41.85 (1063) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 970 (440) |
| CVVM5-6225DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 40.04 (1017) | 4.65 (118) | □8.74 (□222) | 978 (444) | 43.60 (1108) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 1001 (455) |
| CVVM5-6225DBY-EP | | | 42.13 (1070) | | | 1078 (489) | 45.69 (1161) | | | | | 1102 (500) |
| CVVM8-6225DAY-EP | 7.5 x 4 (5.5 x 4) | 7.34 (186) | 41.73 (1060) | 4.65 (118) | □8.74 (□222) | 1012 (459) | 45.30 (1151) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 1036 (470) |
| CVVM8-6225DBY-EP | | | 43.82 (1113) | | | 1112 (505) | 47.38 (1204) | | | | | 1136 (516) |
| CVVM10-6225DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 43.23 (1098) | 5.43 (138) | □10.24 (□260) | 1039 (471) | 47.36 (1203) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1083 (491) |
| CVVM10-6225DBY-EP | | | 44.65 (1134) | | | 1141 (518) | 48.78 (1239) | | | | | 1185 (538) |
| CVVM15-6225DAY-EP | 15 x 4 (11 x 4) | 9.04 (230) | 45.67 (1160) | 5.43 (138) | □10.24 (□260) | 1051 (477) | 49.80 (1265) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1095 (497) |
| CVVM15-6225DBY-EP | | | 47.09 (1196) | | | 1154 (524) | 51.22 (1301) | | | | | 1198 (544) |
| CVVM20-6225DAY-EP | 20 x 4 (15 x 4) | 10.26 (261) | 48.11 (1222) | 7.01 (178) | ø12.49 (ø317) | 1132 (514) | 53.41 (1357) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 1218 (553) |
| CVVM20-6225DBY-EP | | | 49.80 (1265) | | | 1234 (560) | 55.10 (1400) | | | | | 1320 (599) |
| CVVM25-6225Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 47.32 (1202) | 9.06 (230) | ø15.12 (ø384) | 1397 (634) | 54.17 (1376) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1494 (678) |
| CVVM25-6225DBY-EP | | | 53.98 (1371) | | | 1513 (687) | 60.83 (1545) | | | | | 1610 (731) |
| CVVM30-6225Y-EP | 30 x 4 (22 x 4) | 13.39 (340) | 47.32 (1202) | 9.06 (230) | ø15.12 (ø384) | 1397 (634) | 54.17 (1376) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1494 (678) |
| CVVM30-6225DBY-EP | | | 53.98 (1371) | | | 1513 (687) | 60.83 (1545) | | | | | 1610 (731) |
| CVVM40-6225Y-EP | 40 x 4 (30 x 4) | 13.39 (340) | 52.20 (1326) | 9.06 (230) | ø15.12 (ø384) | 1510 (685) | 59.06 (1500) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1607 (729) |
| CVVM40-6225DBY-EP | | | 58.86 (1495) | | | 1627 (738) | 65.71 (1669) | | | | | 1724 (782) |
| CVVM50-6225Y-EP | 50 x 4 (37 x 4) | 16.33 (415) | 52.20 (1326) | 9.06 (230) | ø15.12 (ø384) | 1578 (716) | - | - | - | - | - | - |
| CVVM60-6225Y-EP | 60 x 4 (45 x 4) | 16.33 (415) | 53.66 (1363) | 16.81 (427) | ø18.66 (ø474) | 1703 (773) | - | - | - | - | - | - |
| CVVM75-6225Y-EP | 75 x 4 (55 x 4) | 16.33 (415) | 53.66 (1363) | 16.81 (427) | ø18.66 (ø474) | 1783 (809) | - | - | - | - | - | - |
| CVVM3-6235DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 42.17 (1071) | 4.53 (115) | □7.24 (□184) | 1171 (531) | 45.24 (1149) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 1188 (539) |
| CVVM5-6235DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 43.62 (1108) | 4.65 (118) | □8.74 (□222) | 1196 (543) | 47.19 (1199) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 1220 (553) |
| CVVM8-6235DAY-EP | | | 45.31 (1151) | | | 1230 (558) | 48.88 (1242) | | | | | 1254 (569) |
| CVVM10-6235DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 46.77 (1188) | 5.43 (138) | □10.24 (□260) | 1258 (571) | 50.91 (1293) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1302 (591) |
| CVVM15-6235DAY-EP | 15 x 4 (11 x 4) | 9.04 (230) | 49.21 (1250) | 5.43 (138) | □10.24 (□260) | 1270 (576) | 53.35 (1355) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1314 (596) |
| CVVM15-6235DBY-EP | | | 49.76 (1264) | | | 1348 (612) | 53.90 (1369) | | | | | 1392 (632) |
| CVVM20-6235DAY-EP | 20 x 4 (15 x 4) | 10.26 (261) | 51.50 (1308) | 7.01 (178) | ø12.49 (ø317) | 1353 (614) | 56.79 (1443) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 1439 (653) |
| CVVM20-6235DBY-EP | | | 52.36 (1330) | | | 1428 (648) | 57.66 (1465) | | | | | 1514 (687) |
| CVVM25-6235DAY-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 55.67 (1414) | 9.06 (230) | ø15.12 (ø384) | 1631 (740) | 62.52 (1588) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1728 (784) |
| CVVM25-6235DBY-EP | | | 56.54 (1436) | | | 1705 (774) | 63.39 (1610) | | | | | 1802 (818) |
| CVVM30-6235DAY-EP | 30 x 4 (22 x 4) | 13.39 (340) | 55.67 (1414) | 9.06 (230) | ø15.12 (ø384) | 1631 (740) | 62.52 (1588) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1728 (784) |
| CVVM30-6235DBY-EP | | | 56.54 (1436) | | | 1705 (774) | 63.39 (1610) | | | | | 1802 (818) |
| CVVM40-6235DBY-EP | 40 x 4 (30 x 4) | 16.33 (415) | 61.42 (1560) | 9.06 (230) | ø15.12 (ø384) | 1818 (825) | 68.27 (1734) | - | - | - | - | 1915 (869) |
| CVVM50-6235DBY-EP | 50 x 4 (37 x 4) | 16.33 (415) | 61.42 (1560) | 9.06 (230) | ø15.12 (ø384) | 1886 (856) | - | - | - | - | - | - |

Gearmotors


Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Vertical V-Flange Mount

CVVM3-6245DAY-EP ▶ CVVM60-6255DBY-EP

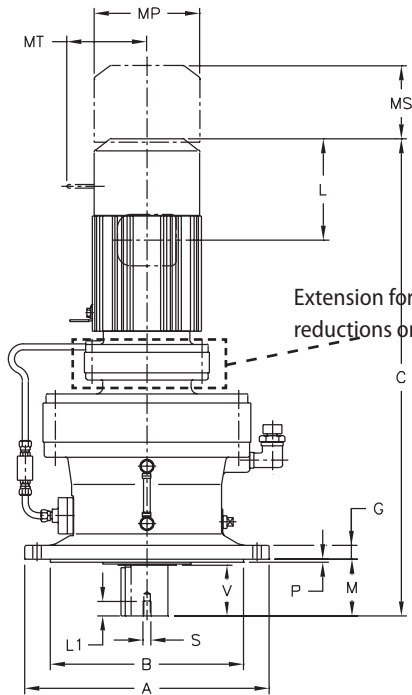


Extension for Double reductions only, XXXX-6XXXDXX

Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

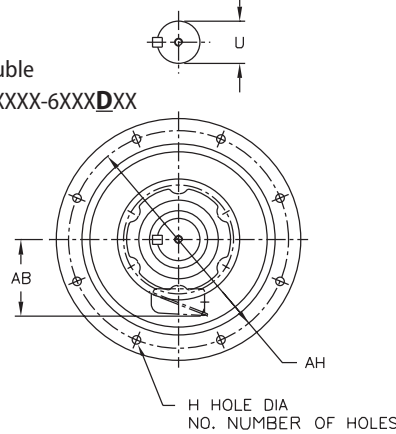

Note: CVVM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CVVM | A | B | G | H | NO. | M | O | P | AH |
|------------|----------------|----------------|--------------|--------------|-------------|----------------|---|--------------|----------------|
| 6245Y | 25.00 (635) | 19.09 (485) | 1.57 (40) | 1.30 (33) | 0.31 (8) | 9.84 (250) | - | 0.39 (10) | 22.05 (560) |
| 6255Y | 26.97 (685) | 21.06 (535) | 1.77 (45) | 1.30 (33) | 0.31 (8) | 11.61 (295) | - | 0.39 (10) | 24.02 (610) |

All dimensions are in inches (mm)

| Model CVVM | Low Speed Shaft | | | | |
|------------|------------------|---------------|------------|--------------|--|
| | U* | V | S | L1 | Key |
| 6245Y | 5.50 (139.7) | 7.87 (200) | 1-8UNC | 1.61 (41) | 1-1/4 x 7/8 x 7.87 (31.75 x 22.225 x 200) |
| 6255Y | 6.25 (158.75) | 9.45 (240) | 1-1/4-7UNC | 2.05 (52) | 1-1/2 x 1 x 9.45 (38.1 x 25.4 x 240) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Vertical V-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CVVM3-6245DAY-EP ▶ CVVM60-6255DBY-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|--------------------|-------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CVVM3-6245DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 43.66 (1109) | 4.53 (115) | □7.24 (□184) | 1378 (625) | 46.73 (1187) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 1395 (633) |
| CVVM5-6245DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 45.12 (1146) | 4.65 (118) | □8.74 (□222) | 1403 (637) | 48.68 (1237) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 1427 (647) |
| CVVM8-6245DAY-EP | 7.5 x 4 (5.5 x 4) | | 46.81 (1189) | | | 1437 (652) | 50.37 (1280) | | | | | 1461 (663) |
| CVVM10-6245DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 48.27 (1226) | 5.43 (138) | □10.24 (□260) | 1465 (665) | 52.40 (1331) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1509 (685) |
| CVVM15-6245DAY-EP | 15 x 4 (11 x 4) | | 50.71 (1288) | | | 1477 (670) | 54.84 (1393) | | | | | 1522 (690) |
| CVVM15-6245DBY-EP | | | 51.22 (1301) | | | 1544 (701) | 55.35 (1406) | | | | | 1589 (721) |
| CVVM20-6245DAY-EP | 20 x 4 (15 x 4) | 10.26 (261) | 52.99 (1346) | 7.01 (178) | φ12.49 (φ317) | 1561 (708) | 58.29 (1481) | 12.30 (313) | φ12.61 (φ320) | 9.53 (242) | | 1647 (747) |
| CVVM20-6245DBY-EP | | | 53.82 (1367) | | | 1624 (737) | 59.11 (1502) | | | | | 1710 (776) |
| CVVM25-6245DAY-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 57.17 (1452) | 9.06 (230) | φ15.12 (φ384) | 1838 (834) | 64.02 (1626) | 15.91 (404) | φ15.28 (φ388) | 12.13 (308) | | 1935 (878) |
| CVVM25-6245DBY-EP | | | 57.99 (1473) | | | 1901 (863) | 64.84 (1647) | | | | | 1998 (907) |
| CVVM30-6245DAY-EP | 30 x 4 (22 x 4) | | 57.17 (1452) | | | 1838 (834) | 64.02 (1626) | | | | | 1935 (878) |
| CVVM30-6245DBY-EP | | | 57.99 (1473) | | | 1901 (863) | 64.84 (1647) | | | | | 1998 (907) |
| CVVM40-6245DBY-EP | 40 x 4 (30 x 4) | | 62.87 (1597) | | | 2014 (914) | 69.72 (1771) | | | | | 2111 (958) |
| CVVM50-6245DBY-EP | 50 x 4 (37 x 4) | | | | | | | | | | | |
| CVVM5-6255DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 50.83 (1291) | 4.65 (118) | □8.74 (□222) | 2114 (959) | 54.39 (1382) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 2138 (970) |
| CVVM8-6255DAY-EP | 7.5 x 4 (5.5 x 4) | | 52.52 (1334) | | | 2148 (975) | 56.08 (1425) | | | | | 2172 (986) |
| CVVM10-6255DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 53.35 (1355) | 5.43 (138) | □10.24 (□260) | 2177 (988) | 57.48 (1460) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 2221 (1008) |
| CVVM15-6255DAY-EP | 15 x 4 (11 x 4) | | 55.79 (1417) | | | 2190 (994) | 59.92 (1522) | | | | | 2234 (1014) |
| CVVM15-6255DBY-EP | | | 56.65 (1439) | | | 2336 (1060) | 60.79 (1544) | | | | | 2380 (1080) |
| CVVM20-6255DAY-EP | 20 x 4 (15 x 4) | 10.26 (261) | 58.50 (1486) | 7.01 (178) | φ12.49 (φ317) | 2270 (1030) | 63.80 (1621) | 12.30 (313) | φ12.61 (φ320) | 9.53 (242) | | 2356 (1069) |
| CVVM20-6255DBY-EP | | | 59.37 (1508) | | | 2414 (1095) | 64.67 (1643) | | | | | 2500 (1134) |
| CVVM25-6255DAY-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 62.68 (1592) | 9.06 (230) | φ15.12 (φ384) | 2550 (1157) | 69.53 (1766) | 15.91 (404) | φ15.28 (φ388) | 12.13 (308) | | 2647 (1201) |
| CVVM25-6255DBY-EP | | | 63.54 (1614) | | | 2692 (1222) | 70.39 (1788) | | | | | 2789 (1266) |
| CVVM30-6255DAY-EP | 30 x 4 (22 x 4) | | 62.68 (1592) | | | 2550 (1157) | 69.53 (1766) | | | | | 2647 (1201) |
| CVVM30-6255DBY-EP | | | 63.54 (1614) | | | 2692 (1222) | 70.39 (1788) | | | | | 2789 (1266) |
| CVVM40-6255DAY-EP | 40 x 4 (30 x 4) | | 67.56 (1716) | | | 2663 (1208) | 74.41 (1890) | | | | | 2760 (1252) |
| CVVM40-6255DBY-EP | | | 68.43 (1738) | | | 2805 (1273) | 75.28 (1912) | | | | | 2902 (1317) |
| CVVM50-6255DBY-EP | 50 x 4 (37 x 4) | | | | | | | | | | | |
| CVVM60-6255DBY-EP | 60 x 4 (45 x 4) | 16.33 (415) | 69.88 (1775) | 16.81 (427) | φ18.66 (φ474) | 3002 (1362) | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol φ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Vertical V-Flange Mount

CVVM8-6265DAY-EP ▶ CVVM60-6275DAY-EP


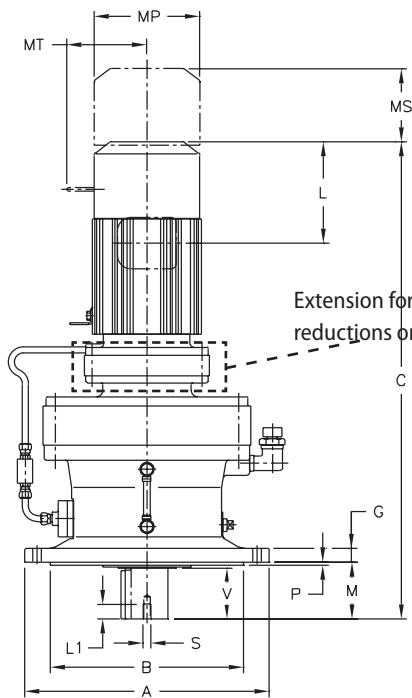


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

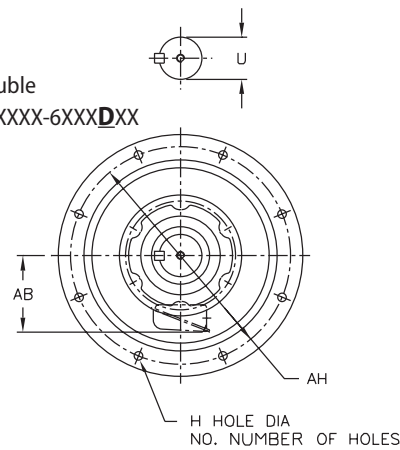

Note: CVVM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CVVM | A | B | G | H | NO. | M | O | P | AH |
|--------------|-----------------|----------------|--------------|--------------|-------------|----------------|---|--------------|-----------------|
| 6265Y | 29.53 (750) | 22.44 (570) | 1.97 (50) | 1.14 (29) | 0.31 (8) | 14.17 (360) | - | 0.39 (10) | 25.98 (660) |
| 6275Y | 45.67 (1160) | 35.43 (900) | 2.36 (60) | 1.54 (39) | 0.31 (8) | 13.98 (355) | - | 0.39 (10) | 40.16 (1020) |

All dimensions are in inches (mm)

| Model CVVM | Low Speed Shaft | | | | |
|--------------|-------------------|----------------|------------|--------------|--|
| | U* | V | S | L1 | Key |
| 6265Y | 6.63 (168.275) | 11.81 (300) | 1-1/4-7UNC | 2.05 (52) | 1-3/4 x 1-1/4 x 11.81 (44.45 x 31.75 x 300) |
| 6275Y | 7.00 (177.8) | 12.60 (320) | 1-1/4-7UNC | 2.05 (52) | 1-3/4 x 1-1/4 x 12.6 (44.45 x 31.75 x 330) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Vertical V-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CVVM8-6265DAY-EP ▶ CVVM60-6275DAY-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | | |
|-------------------|----------------------|-------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|-------------|---|---|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | |
| CVVM8-6265DAY-EP | 7.5 x 4 (5.5 x 4) | 7.34 (186) | 58.31 (1481) | 4.65 (118) | □8.74 (□222) | 2892 (1312) | 61.87 (1572) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 2916 (1323) | | | |
| CVVM10-6265DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 58.54 (1487) | 5.43 (138) | □10.24 (□260) | 2923 (1326) | 62.68 (1592) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 2967 (1346) | | | |
| CVVM15-6265DAY-EP | 15 x 4 (11 x 4) | | 60.98 (1549) | | | 2935 (1332) | 65.12 (1654) | | | | | 2980 (1352) | | | |
| CVVM20-6265DAY-EP | 20 x 4 (15 x 4) | 10.26 (261) | 63.70 (1618) | 7.01 (178) | ∅12.49 (∅317) | 3014 (1367) | 69.00 (1753) | 12.30 (313) | ∅12.61 (∅320) | 9.53 (242) | - | 3100 (1406) | | | |
| CVVM25-6265DAY-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 67.87 (1724) | 9.06 (230) | ∅15.12 (∅384) | 3292 (1494) | 74.72 (1898) | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | | 3389 (1538) | | | |
| CVVM30-6265DAY-EP | 30 x 4 (22 x 4) | | 3405 (1545) | | | 79.61 (2022) | 3502 (1589) | | | | | | | | |
| CVVM40-6265DAY-EP | 40 x 4 (30 x 4) | | 72.76 (1848) | | | 3473 (1576) | - | | | | | - | - | - | - |
| CVVM50-6265DAY-EP | 50 x 4 (37 x 4) | | 3602 (1634) | | | - | - | | | | | - | - | - | - |
| CVVM60-6265DAY-EP | 60 x 4 (45 x 4) | 16.33 (415) | 74.21 (1885) | 16.81 (427) | ∅18.66 (∅474) | 3602 (1634) | - | - | - | - | | - | | | |
| CVVM10-6275DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 68.82 (1748) | 5.43 (138) | □10.24 (□260) | 5998 (2721) | 72.95 (1853) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | | 7.32 (186) | 6042 (2741) | | |
| CVVM15-6275DAY-EP | 15 x 4 (11 x 4) | | 71.26 (1810) | | | 6011 (2727) | 75.39 (1915) | | | | | | 6055 (2747) | | |
| CVVM20-6275DAY-EP | 20 x 4 (15 x 4) | 10.26 (261) | 73.98 (1879) | 7.01 (178) | ∅12.49 (∅317) | 6089 (2762) | 79.27 (2014) | 12.30 (313) | ∅12.61 (∅320) | 9.53 (242) | - | 6175 (2801) | | | |
| CVVM25-6275DAY-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 78.15 (1985) | 9.06 (230) | ∅15.12 (∅384) | 6367 (2889) | 85.00 (2159) | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | | 6464 (2933) | | | |
| CVVM30-6275DAY-EP | 30 x 4 (22 x 4) | | 6481 (2940) | | | 89.88 (2283) | 6578 (2984) | | | | | | | | |
| CVVM40-6275DAY-EP | 40 x 4 (30 x 4) | | 83.03 (2109) | | | 6549 (2971) | - | | | | | - | - | - | |
| CVVM50-6275DAY-EP | 50 x 4 (37 x 4) | | 6677 (3029) | | | - | - | | | | | - | - | - | |
| CVVM60-6275DAY-EP | 60 x 4 (45 x 4) | 16.33 (415) | 84.49 (2146) | 16.81 (427) | ∅18.66 (∅474) | 6677 (3029) | - | - | - | - | | - | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ∅ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Universal F-Flange Mount

CNFM01-6065Y ▶ CNFM1-6085Y-EP

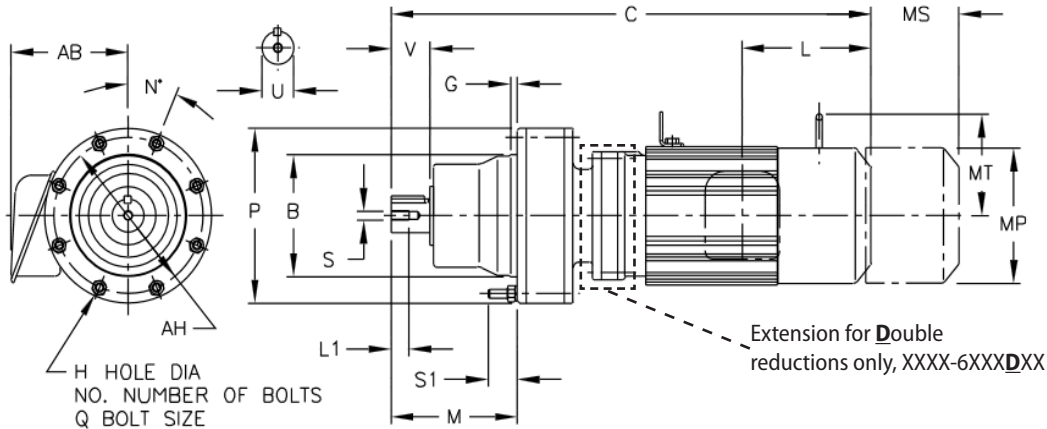


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CNFM units are greased for life, and can be mounted in any position.


Dimensions are in inches (mm)

| Model CNFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|------------------------------|--------------|-------------|---------------|-----|--------------|------|---------------|----|--------------|---------------|
| 6060Y 6065Y | 3.15 (80) | 0.16 (4) | 0.26 (6.6) | 6 | 2.68 (68) | 60 | 4.33 (110) | M6 | 0.94 (24) | 3.86 (98) |
| 6070Y 6075Y | 3.15 (80) | 0.16 (4) | 0.26 (6.6) | 6 | 2.91 (74) | 60 | 4.33 (110) | M6 | 0.94 (24) | 3.86 (98) |
| 6080Y 6085Y | 3.74 (95) | 0.20 (5) | 0.35 (9) | 8 | 3.58 (91) | 22.5 | 5.28 (134) | M8 | 1.06 (27) | 4.65 (118) |

All dimensions are in inches (mm)

| Model CNFM | Low Speed Shaft | | | | |
|------------------------------|-----------------|-----------|----------|-----------|--|
| | U* | V | S | L1 | Key |
| 6060Y 6065Y | 0.50 (12.7) | 0.98 (25) | 10-32UNF | 0.63 (16) | 1/8 X 1/8 X 0.79 (3.175 x 3.175 x 20.07) |
| 6070Y 6075Y | 0.75 (19.05) | 1.18 (30) | 12-28UNF | 0.63 (16) | 3/16 X 3/16 X 1.18 (4.762 x 4.762 x 30) |
| 6080Y 6085Y | 0.88 (22.225) | 1.38 (35) | 12-28UNF | 0.63 (16) | 3/16 x 3/16 x 1.18 (4.762 x 4.762 x 30) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal F-Flange Mount

CNFM01-6065Y ▶ CNFM1-6085Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | |
|-------------------|-----------------------|-----------------|-----------------------|-----------------|-------------------|-------------------|-------------|----------------|-------------------|------------|---------|-------------------|-----------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | |
| CNFM01-6065Y | 1/8 x 4 (0.1 x 4) | 4.63 (118) | 8.90 (226) | 1.38 (35) | ø4.69 (ø119) | 15 (7) | 10.28 (261) | 2.76 (70) | ø4.88 (ø124) | 2.40 (61) | - | 18 (8) | |
| CNFM01-6065DAY | | | 10.20 (259) | | | 18 (8) | 11.57 (294) | | | | | 21 (10) | |
| CNFM01-6065Y-AV | | | 10.55 (268) | 2.32 (59) | | ø4.88 (ø124) | 17 (8) | 11.81 (300) | | | | 20 (9) | 20 (9) |
| CNFM01-6065DAY-AV | | | 11.85 (301) | | | | 20 (9) | 13.11 (333) | | | | 23 (11) | |
| CNFM02-6065Y | | | 10.55 (268) | | | | 17 (8) | 11.81 (300) | | | | 20 (9) | 20 (9) |
| CNFM02-6065Y-AV | | | 1/4 x 4 (0.2 x 4) | | | | 11.34 (288) | 20 (9) | | | | 12.60 (320) | 23 (11) |
| CNFM03-6065Y | | | 1/3 x 4 (0.25 x 4) | | | | 10.55 (268) | 17 (8) | | | | 11.81 (300) | 20 (9) |
| CNFM03-6065Y-AV | | | 1/3 x 4 (0.25 x 4) | | | | 11.34 (288) | 20 (9) | | | | 12.60 (320) | 23 (11) |
| CNFM01-6075Y | 1/8 x 4 (0.1 x 4) | 4.63 (118) | 9.13 (232) | 1.38 (35) | ø4.69 (ø119) | 15 (7) | 10.51 (267) | 2.76 (70) | ø4.88 (ø124) | 2.40 (61) | - | 18 (8) | |
| CNFM01-6075DAY | | | 10.43 (265) | | | 18 (8) | 11.81 (300) | | | | | 21 (10) | |
| CNFM01-6075Y-AV | | | 10.79 (274) | 2.32 (59) | | ø4.88 (ø124) | 17 (8) | 12.05 (306) | | | | 20 (9) | 20 (9) |
| CNFM01-6075DAY-AV | | | 12.09 (307) | | | | 20 (9) | 13.35 (339) | | | | 23 (11) | |
| CNFM02-6075Y | 10.79 (274) | | 17 (8) | | 12.05 (306) | | 20 (9) | 20 (9) | | | | | |
| CNFM02-6075Y-AV | 1/4 x 4 (0.2 x 4) | | 11.57 (294) | | 20 (9) | | 12.83 (326) | 23 (11) | | | | | |
| CNFM02-6075DAY | 12.09 (307) | | 23 (11) | | 14.13 (359) | | 26 (12) | | | | | | |
| CNFM02-6075DAY-AV | 12.87 (327) | | 17 (8) | | 12.05 (306) | | 20 (9) | | | | | | |
| CNFM03-6075Y | 1/3 x 4 (0.25 x 4) | | 10.79 (274) | 2.32 (59) | ø4.88 (ø124) | 20 (9) | 12.83 (326) | 23 (11) | | | | 23 (11) | |
| CNFM03-6075Y-AV | 11.57 (294) | | 17 (8) | | | 12.05 (306) | 20 (9) | | | | | | |
| CNFM05-6075Y | 1/2 x 4 (0.4 x 4) | | 11.57 (294) | | | 20 (9) | 12.83 (326) | 23 (11) | | | | | |
| CNFM01-6085Y | 1/8 x 4 (0.1 x 4) | | 4.63 (118) | 10.16 (258) | 1.38 (35) | ø4.69 (ø119) | 23 (11) | 11.54 (293) | | | | 2.76 (70) | ø4.88 (ø124) |
| CNFM01-6085Y-AV | 11.81 (300) | 25 (12) | | 13.07 (332) | | | 28 (13) | | | | | | |
| CNFM02-6085Y | 1/4 x 4 (0.2 x 4) | 2.32 (59) | | ø4.88 (ø124) | 28 (13) | | 13.86 (352) | 28 (13) | 28 (13) | | | | |
| CNFM02-6085Y-AV | 12.60 (320) | | | | 25 (12) | | 13.07 (332) | 31 (14) | | | | | |
| CNFM03-6085Y | 1/3 x 4 (0.25 x 4) | | | | 11.81 (300) | 28 (13) | 13.86 (352) | 28 (13) | | | | | |
| CNFM03-6085Y-AV | 12.60 (320) | | | | 28 (13) | 13.86 (352) | 31 (14) | | | | | | |
| CNFM05-6085Y | 1/2 x 4 (0.4 x 4) | | | | 5.67 (144) | 3.82 (97) | 35 (16) | 15.91 (404) | 5.51 (140) | 41 (19) | | | |
| CNFM05-6085Y-AV | 14.21 (361) | | | | | | 33 (15) | 3.66 (93) | 3.94 (100) | 38 (18) | | | |
| CNFM08-6085Y | 3/4 x 4 (0.55 x 4) | ø5.94 (ø151) | 4.80 (122) | 4.25 (108) | | | | | | | | | |
| CNFM1-6085Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 15.85 (403) | ø6.22 (ø158) | 46 (21) | 18.35 (466) | 6.32 (161) | 6.22 (ø158) | 4.80 (122) | 4.25 (108) | 55 (25) | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Universal F-Flange Mount

CNFM01-6095Y ▶ CNFM2-6095Y-EP

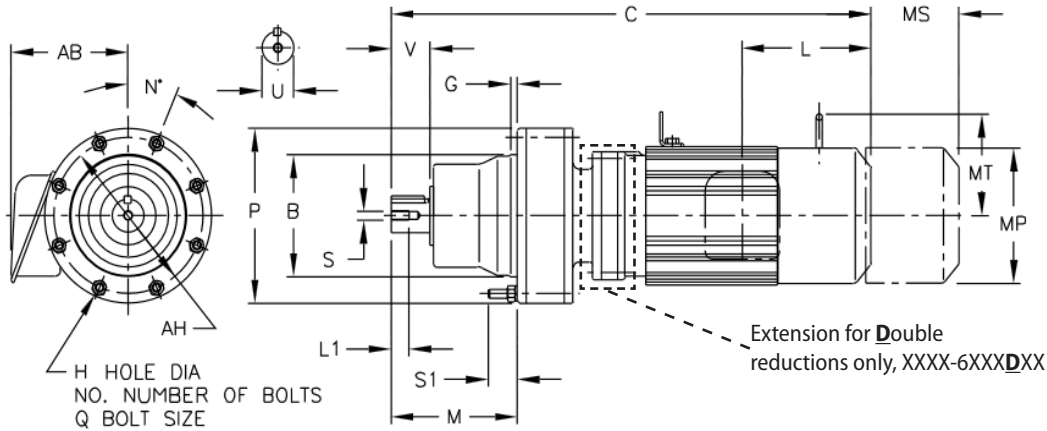


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CNFM units are greased for life, and can be mounted in any position.


Dimensions are in inches (mm)

| Model CNFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|------------------------------|---------------|-------------|-------------|-----|---------------|------|---------------|----|--------------|---------------|
| 6090Y 6095Y | 4.13 (105) | 0.24 (6) | 0.35 (9) | 8 | 4.49 (114) | 22.5 | 5.91 (150) | M8 | 1.14 (29) | 5.28 (134) |

All dimensions are in inches (mm)

| Model CNFM | Low Speed Shaft | | | | |
|------------------------------|------------------|--------------|------------|--------------|--|
| | U* | V | S | L1 | Key |
| 6090Y 6095Y | 1.13 (28.575) | 1.38 (35) | 5/16-18UNC | 0.79 (20) | 1/4 x 1/4 x 1.18 (6.35 x 6.35 x 30) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal F-Flange Mount

CNFM01-6095Y ▶ CNFM2-6095Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | | | |
|-------------------|-----------------------|-----------------------|---------------|-------------|-------------------|-------------------|-------------|-------------|-------------------|-----------------|------------|-------------------|---------|---|---------|---------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | |
| CNFM01-6095Y | 1/8 x 4 (0.1 x 4) | 4.63 (118) | 10.87 (276) | 1.38 (35) | ∅4.69 (∅119) | 25 (12) | 12.24 (311) | 2.76 (70) | ∅4.88 (∅124) | - | - | 1.93 (49) | 28 (13) | | | |
| CNFM01-6095Y-AV | | | 12.52 (318) | 2.32 (59) | ∅4.88 (∅124) | 27 (13) | 13.78 (350) | 3.58 (91) | | | | 2.40 (61) | 30 (14) | | | |
| CNFM01-6095DAY | | | 12.76 (324) | 1.38 (35) | ∅4.69 (∅119) | 30 (14) | 14.13 (359) | 2.76 (70) | | | | 1.93 (49) | 33 (15) | | | |
| CNFM01-6095DAY-AV | | | 14.41 (366) | | | 32 (15) | 15.67 (398) | | | | | | 35 (16) | | | |
| CNFM02-6095Y | 1/4 x 4 (0.2 x 4) | | 12.52 (318) | | | 27 (13) | 13.78 (350) | | | | | | 30 (14) | | | |
| CNFM02-6095Y-AV | | | 13.31 (338) | | | 30 (14) | 14.57 (370) | | | | | | 33 (15) | | | |
| CNFM02-6095DAY | | | 14.41 (366) | | | 32 (15) | 15.67 (398) | | | | | | 35 (16) | | | |
| CNFM02-6095DAY-AV | | | 15.20 (386) | | | 35 (16) | 16.46 (418) | | | | | | 38 (18) | | | |
| CNFM03-6095Y | 1/3 x 4 (0.25 x 4) | | 12.52 (318) | 2.32 (59) | ∅4.88 (∅124) | 27 (13) | 13.78 (350) | 3.58 (91) | | | | 2.40 (61) | - | - | 30 (14) | 30 (14) |
| CNFM03-6095Y-AV | | | 13.31 (338) | | | 30 (14) | 14.57 (370) | | | | | | | | 33 (15) | |
| CNFM03-6095DAY | | | 14.41 (366) | | | 32 (15) | 15.67 (398) | | | | | | | | 35 (16) | |
| CNFM03-6095DAY-AV | | | 15.20 (386) | | | 35 (16) | 16.46 (418) | | | | | | | | 38 (18) | |
| CNFM05-6095Y | 1/2 x 4 (0.4 x 4) | 13.31 (338) | | | 30 (14) | 14.57 (370) | | | 33 (15) | | | | | | | |
| CNFM05-6095DAY | | 15.20 (386) | | | 35 (16) | 16.46 (418) | | | 38 (18) | | | | | | | |
| CNFM05-6095Y-AV | | 5.67 (144) | 14.92 (379) | 3.82 (97) | ∅5.94 (∅151) | 37 (17) | 16.61 (422) | 5.51 (140) | ∅5.94 (∅151) | 3.66 (93) | 3.94 (100) | 43 (20) | | | | |
| CNFM08-6095Y | | 3/4 x 4 (0.55 x 4) | 5.86 (149) | 16.22 (412) | 3.94 (100) | ∅6.30 (∅160) | 46 (21) | 18.66 (474) | 6.38 (162) | ∅6.30 (∅160) | 4.53 (115) | 4.29 (109) | 56 (26) | | | |
| CNFM1-6095Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 16.65 (423) | | ∅6.22 (∅158) | 51 (23) | 19.15 (487) | 6.32 (161) | ∅6.22 (∅158) | 4.80 (122) | 4.25 (108) | 60 (28) | | | | |
| CNFM1H-6095Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 17.72 (450) | 3.82 (97) | ∅6.57 (∅167) | 58 (27) | 20.45 (520) | 6.56 (167) | ∅6.57 (∅167) | 5.04 (128) | 4.61 (117) | 70 (32) | | | | |
| CNFM2-6095Y-EP | 2 x 4 (1.5 x 4) | | | | | 61 (28) | | | | | | 72 (33) | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ∅ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Universal F-Flange Mount

CNFM01-6105DAY ▶ CNFM5-6115Y-EP

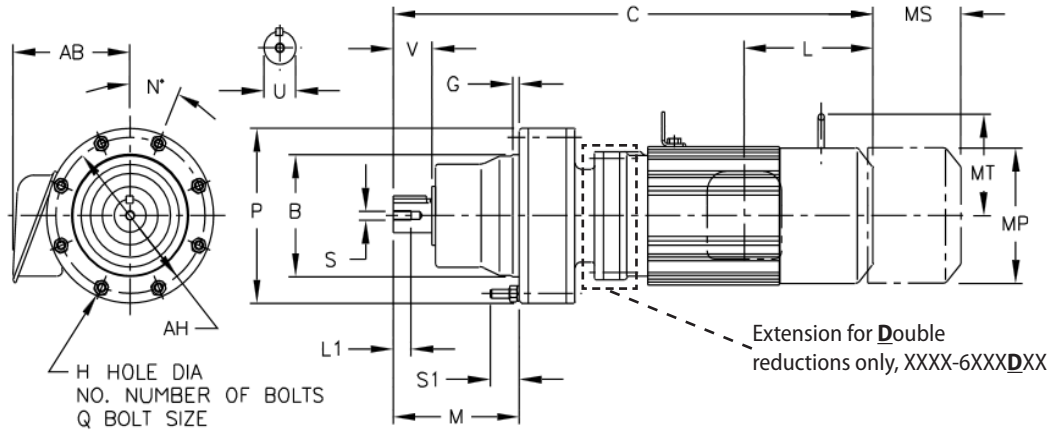


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CNFM units are greased for life, and can be mounted in any position.


Dimensions are in inches (mm)

| Model CNFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|------------------------------|---------------|-------------|-------------|-----|---------------|------|---------------|----|--------------|---------------|
| 6100Y 6105Y | 4.13 (105) | 0.24 (6) | 0.35 (9) | 8 | 4.49 (114) | 22.5 | 5.91 (150) | M8 | 1.10 (28) | 5.28 (134) |
| 6110Y 6115Y | 4.53 (115) | 0.24 (6) | 0.35 (9) | 8 | 4.65 (118) | 22.5 | 6.38 (162) | M8 | 1.10 (28) | 5.75 (146) |

All dimensions are in inches (mm)

| Model CNFM | Low Speed Shaft | | | | |
|------------------------------|------------------|--------------|------------|--------------|--|
| | U* | V | S | L1 | Key |
| 6100Y 6105Y | 1.13 (28.575) | 1.38 (35) | 5/16-18UNC | 0.79 (20) | 1/4 x 1/4 x 1.18 (6.35 x 6.35 x 30) |
| 6110Y 6115Y | 1.25 (31.75) | 1.77 (45) | 5/16-18UNC | 0.79 (20) | 1/4 x 1/4 x 1.46 (6.35 x 6.35 x 37) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal F-Flange Mount

CNFM01-6105DAY ▶ CNFM5-6115Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.


All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | | | | | | | |
|-------------------|-----------------------|-------------|-----------------------|-----------------|-------------------|-------------------|-------------|-----------------|-------------------|------------|------------|-------------------|-----------------|-------------|-------------|-----------|-----------------|-----------|---|-------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | | | |
| CNFM01-6105DAY | 1/8 x 4 (0.1 x 4) | 4.63 (118) | 13.31 (338) | 1.38 (35) | ø4.69 (ø119) | 34 (16) | 14.69 (373) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | - | 38 (17) | | | | | | | | |
| CNFM01-6105DAY-AV | | | 14.96 (380) | | | 37 (17) | | | | | | 16.22 (412) | 40 (18) | | | | | | | |
| CNFM02-6105Y | 1/4 x 4 (0.2 x 4) | | 13.07 (332) | | | 30 (14) | | | | | | 14.33 (364) | 33 (15) | | | | | | | |
| CNFM02-6105Y-AV | | | 13.86 (352) | | | 33 (15) | | | | | | 15.12 (384) | 36 (16) | | | | | | | |
| CNFM02-6105DAY | | | 14.96 (380) | | | 37 (17) | | | | | | 16.22 (412) | 40 (18) | | | | | | | |
| CNFM02-6105DAY-AV | | | 15.75 (400) | | | 40 (18) | | | | | | 17.01 (432) | 43 (20) | | | | | | | |
| CNFM03-6105Y | | | 1/3 x 4 (0.25 x 4) | | | 13.07 (332) | | | | | | 2.32 (59) | ø4.88 (ø124) | 30 (14) | 14.33 (364) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 33 (15) |
| CNFM03-6105Y-AV | | | | | | 13.86 (352) | | | | | | | | 33 (15) | | | | | | 15.12 (384) |
| CNFM03-6105DAY | 14.96 (380) | | | | | 37 (17) | | | | | | | | 16.22 (412) | | | | | | 40 (18) |
| CNFM03-6105DAY-AV | 15.75 (400) | | | | | 40 (18) | | | | | | | | 17.01 (432) | | | | | | 43 (20) |
| CNFM05-6105Y | 1/2 x 4 (0.4 x 4) | | 13.86 (352) | | | 33 (15) | | | | | | 15.12 (384) | 36 (16) | | | | | | | |
| CNFM05-6105DAY | | | 15.75 (400) | | | 40 (18) | | | | | | 17.01 (432) | 43 (20) | | | | | | | |
| CNFM05-6105Y-AV | 3/4 x 4 (0.55 x 4) | 5.67 (144) | 15.47 (393) | 3.82 (97) | ø5.94 (ø151) | 17.17 (436) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 46 (21) | | | | | | | | | |
| CNFM08-6105Y | | 37 (17) | | | 17.17 (436) | | | | | | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 43 (20) | | | | | |
| CNFM08-6105Y-AV | 5.86 (149) | 16.77 (426) | 3.94 (100) | ø6.30 (ø160) | 48 (22) | 19.21 (488) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 59 (27) | | | | | | | | | |
| CNFM1-6105Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 17.20 (437) | 3.82 (97) | ø6.22 (ø158) | 53 (24) | 19.70 (501) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 63 (29) | | | | | | | | |
| CNFM1H-6105Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 18.27 (464) | | ø6.57 (ø167) | 60 (28) | 21.00 (534) | 6.56 (167) | ø6.57 (ø167) | 5.04 (128) | 4.61 (117) | 72 (33) | | | | | | | | |
| CNFM2-6105Y-EP | 2 x 4 (1.5 x 4) | | | ø6.57 (ø167) | 63 (29) | ø6.57 (ø167) | | | 75 (34) | | | | | | | | | | | |
| CNFM3-6105Y-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 19.09 (485) | 4.53 (115) | ø7.24 (ø184) | 79 (36) | 22.17 (563) | 7.60 (193) | ø7.24 (ø184) | 5.43 (138) | 5.04 (128) | 96 (44) | | | | | | | | |
| CNFM05-6115Y | 1/2 x 4 (0.4 x 4) | 4.63 (118) | 14.25 (362) | 2.32 (59) | ø4.88 (ø124) | 38 (18) | 15.51 (394) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 41 (19) | | | | | | | | |
| CNFM05-6115Y-AV | | 5.67 (144) | 15.87 (403) | 3.82 (97) | ø5.94 (ø151) | 45 (21) | 17.56 (446) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 51 (23) | | | | | | | | |
| CNFM08-6115Y | 3/4 x 4 (0.55 x 4) | 5.67 (144) | 15.87 (403) | 3.82 (97) | ø5.94 (ø151) | 42 (19) | 17.56 (446) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 48 (22) | | | | | | | | |
| CNFM08-6115Y-AV | | 5.86 (149) | 17.17 (436) | 3.94 (100) | ø6.30 (ø160) | 51 (24) | 19.61 (498) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 62 (28) | | | | | | | | |
| CNFM1-6115Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 17.60 (447) | 3.82 (97) | ø6.22 (ø158) | 56 (26) | 20.10 (511) | 6.32 (161) | ø6.22 (ø158) | 4.80 (122) | 4.25 (108) | 66 (30) | | | | | | | | |
| CNFM1H-6115Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 18.66 (474) | | ø6.57 (ø167) | 63 (29) | 21.40 (544) | 6.56 (167) | ø6.57 (ø167) | 5.04 (128) | 4.61 (117) | 75 (34) | | | | | | | | |
| CNFM2-6115Y-EP | 2 x 4 (1.5 x 4) | | | ø6.57 (ø167) | 66 (30) | ø6.57 (ø167) | | | 78 (36) | | | | | | | | | | | |
| CNFM3-6115Y-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 18.54 (471) | 4.53 (115) | ø7.24 (ø184) | 78 (36) | 21.61 (549) | 7.60 (193) | ø7.24 (ø184) | 5.43 (138) | 5.04 (128) | 95 (43) | | | | | | | | |
| CNFM5-6115Y-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 19.61 (498) | 4.65 (118) | ø8.74 (ø222) | 104 (47) | 23.17 (589) | 8.21 (209) | ø8.74 (ø222) | 6.02 (153) | 6.30 (160) | 128 (58) | | | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Universal F-Flange Mount

CNFM01-6125DBY ▶ CNFM8-6125Y-EP

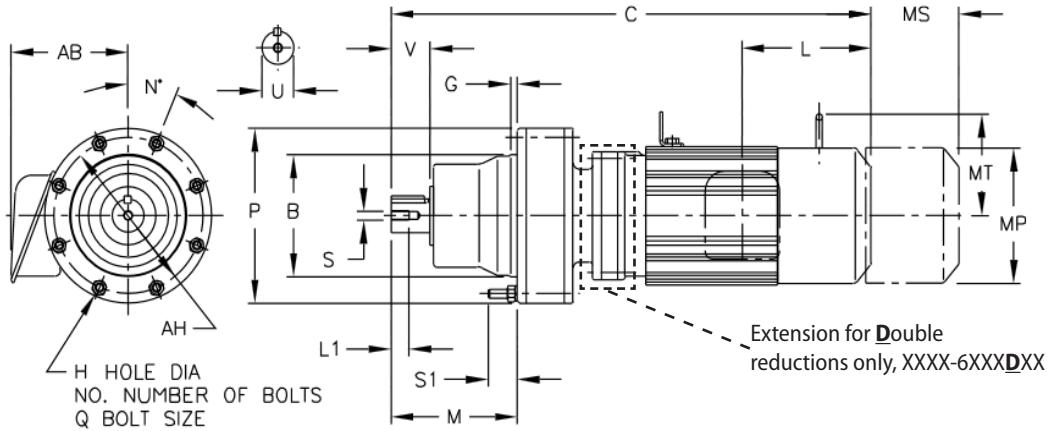


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CNFM units are greased for life, and can be mounted in any position.


Dimensions are in inches (mm)

| Model CNFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|------------------------------|---------------|--------------|--------------|-----|---------------|----|---------------|-----|--------------|---------------|
| 6120Y 6125Y | 5.51 (140) | 0.55 (14) | 0.43 (11) | 6 | 5.47 (139) | 60 | 8.03 (204) | M10 | 1.30 (33) | 7.09 (180) |

All dimensions are in inches (mm)

| Model CNFM | Low Speed Shaft | | | | |
|------------------------------|-----------------|--------------|------------|--------------|--|
| | U* | V | S | L1 | Key |
| 6120Y 6125Y | 1.50 (38.1) | 2.17 (55) | 5/16-18UNC | 0.79 (20) | 3/8 x 3/8 x 1.77 (9.525 x 9.525 x 45) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Universal F-Flange Mount


CNFM01-6125DBY ▶ CNFM8-6125Y-EP

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | | | | |
|-------------------|-----------------------|-------------|---------------|------------|-------------------|-------------------|-----------------|-----------------|-------------------|-----------------|------------|-------------------|-----------------|------------|-------------|------------|---------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | |
| CNFM01-6125DBY | 1/8 x 4 (0.1 x 4) | 4.63 (118) | 15.20 (386) | 1.38 (35) | ø4.69 (ø119) | 61 (28) | 16.57 (421) | 2.76 (70) | ø4.88 (ø124) | 1.93 (49) | - | 65 (30) | | | | | |
| CNFM01-6125DBY-AV | | | 16.85 (428) | | | 64 (29) | | | | | | 18.11 (460) | 67 (30) | | | | |
| CNFM02-6125DAY | 1/4 x 4 (0.2 x 4) | | 16.38 (416) | 2.32 (59) | | 59 (27) | 3.58 (91) | ø4.88 (ø124) | | 2.40 (61) | | - | 62 (28) | | | | |
| CNFM02-6125DBY | | | 16.85 (428) | | | 64 (29) | | | | | | | 18.11 (460) | 67 (30) | | | |
| CNFM02-6125DAY-AV | | | 17.17 (436) | | | 62 (28) | | | | | | | 18.43 (468) | 65 (30) | | | |
| CNFM02-6125DBY-AV | | | 17.64 (448) | | | 67 (30) | | | | | | | 18.90 (480) | 70 (32) | | | |
| CNFM03-6125DBY | 1/3 x 4 (0.25 x 4) | | 16.85 (428) | 3.82 (97) | | ø5.94 (ø151) | 64 (29) | 18.11 (460) | | 5.51 (140) | | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 67 (30) | | |
| CNFM03-6125DBY-AV | | | 17.64 (448) | | | | 67 (30) | | | | | | | | 18.90 (480) | 70 (32) | |
| CNFM05-6125Y | 1/2 x 4 (0.4 x 4) | | 15.24 (387) | | | | 58 (26) | 16.50 (419) | | | | | 61 (28) | | | | |
| CNFM05-6125Y-AV | | 5.67 (144) | 16.65 (423) | | 3.82 (97) | | ø5.94 (ø151) | 65 (30) | 18.35 (466) | | 5.51 (140) | | ø5.94 (ø151) | | 3.66 (93) | 3.94 (100) | 71 (32) |
| CNFM05-6125DBY | | 4.63 (118) | 17.64 (448) | | 2.32 (59) | | ø4.88 (ø124) | 67 (30) | 18.90 (480) | | 3.58 (91) | | ø4.88 (ø124) | | 2.40 (61) | - | 70 (32) |
| CNFM05-6125DBY-AV | | 5.67 (144) | 19.25 (489) | | 3.82 (97) | | ø5.94 (ø151) | 74 (34) | 20.94 (532) | | 5.51 (140) | | ø5.94 (ø151) | | 3.66 (93) | 3.94 (100) | 80 (36) |
| CNFM08-6125Y | 3/4 x 4 (0.55 x 4) | 16.65 (423) | 62 (28) | | 18.35 (466) | | 68 (31) | | | | | | | | | | |
| CNFM08-6125Y-AV | | 5.86 (149) | 17.95 (456) | | 3.94 (100) | | ø6.30 (ø160) | 71 (32) | 20.39 (518) | | 6.38 (162) | | ø6.30 (ø160) | | 4.53 (115) | 4.29 (109) | 81 (37) |
| CNFM08-6125DBY | | 5.67 (144) | 19.25 (489) | | 3.82 (97) | | ø5.94 (ø151) | 71 (33) | 20.94 (532) | | 5.51 (140) | | ø5.94 (ø151) | | 3.66 (93) | 3.94 (100) | 77 (35) |
| CNFM08-6125DBY-AV | | 5.86 (149) | 20.55 (522) | 3.94 (100) | ø6.30 (ø160) | 82 (37) | 22.99 (584) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 93 (42) | | | | | |
| CNFM1-6125Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 18.39 (467) | 3.82 (97) | □6.22 (□158) | 75 (34) | 20.89 (531) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 85 (39) | | | | | |
| CNFM1-6125DBY-EP | | | 20.98 (533) | | | 87 (40) | | | | | | 23.48 (597) | 97 (44) | | | | |
| CNFM1H-6125Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 19.45 (494) | | □6.57 (□167) | 82 (38) | 22.19 (564) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 94 (43) | | | | | |
| CNFM1H-6125DBY-EP | | | 22.05 (560) | | | 94 (43) | | | | | | 24.78 (630) | 106 (48) | | | | |
| CNFM2-6125Y-EP | 2 x 4 (1.5 x 4) | 6.16 (156) | 19.45 (494) | | □6.57 (□167) | 85 (39) | 22.19 (564) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 97 (44) | | | | | |
| CNFM2-6125DBY-EP | | | 22.05 (560) | | | 97 (44) | | | | | | 24.78 (630) | 109 (50) | | | | |
| CNFM3-6125Y-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 18.86 (479) | | 4.53 (115) | □7.24 (□184) | 98 (45) | 21.93 (557) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 115 (52) | | | | |
| CNFM5-6125Y-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 20.31 (516) | | 4.65 (118) | □8.74 (□222) | 124 (56) | 23.88 (607) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 148 (67) | | | | |
| CNFM8-6125Y-EP | 7.5 x 4 (5.5 x 4) | | 22.01 (559) | | | | 157 (72) | | | | | | 25.57 (650) | 181 (83) | | | |

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal F-Flange Mount

CHFM02-6135DAY ▶ CHFM15-6135Y-EP

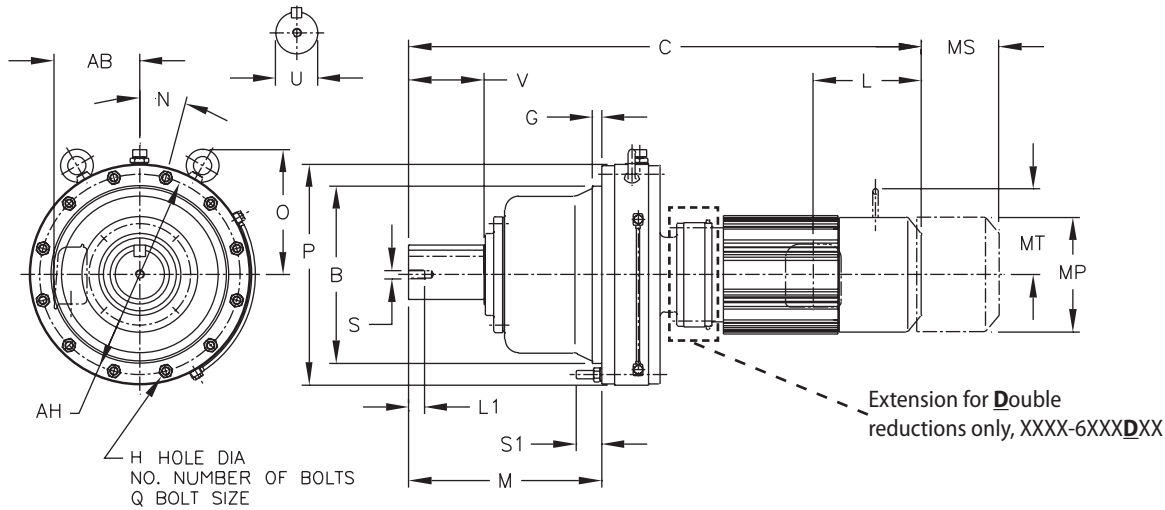


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHFM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CHFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|------------------------------|---------------|--------------|--------------|-----|---------------|----|---------------|-----|--------------|---------------|
| 6130Y 6135Y | 6.50 (165) | 0.63 (16) | 0.43 (11) | 6 | 7.01 (178) | 60 | 9.06 (230) | M10 | 1.22 (31) | 8.07 (205) |

All dimensions are in inches (mm)

| Model CHFM | Low Speed Shaft | | | | |
|------------------------------|------------------|--------------|-----------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6130Y 6135Y | 1.88 (47.625) | 2.76 (70) | 3/8-16UNC | 0.79 (20) | 1/2 x 1/2 x 2.17 (12.7 x 12.7 x 55) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal F-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CHFM02-6135DAY ▶ CHFM15-6135Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | | | | | | |
|-------------------|-----------------------|------------|---------------|------------|-------------------|-------------------|-------------|------------|-------------------|------------|------------|-------------------|-----------------|-------------|-------------|-----------------|-----------------|------------|------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | | |
| CHFM02-6135DAY | 1/4 x 4 (0.2 x 4) | 4.63 (118) | 18.50 (470) | 2.32 (59) | ø4.88 (ø124) | 89 (41) | 19.76 (502) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 92 (42) | | | | | | | |
| CHFM02-6135DAY-AV | | | 19.29 (490) | | | 20.55 (522) | 96 (44) | | | | | | | | | | | | |
| CHFM02-6135DCY | | | 19.41 (493) | | | 20.67 (525) | 100 (46) | | | | | | | | | | | | |
| CHFM02-6135DCY-AV | 20.20 (513) | | 21.46 (545) | | | 103 (47) | | | | | | | | | | | | | |
| CHFM03-6135DCY | 19.41 (493) | | 20.67 (525) | | | 100 (46) | | | | | | | | | | | | | |
| CHFM03-6135DCY-AV | 20.20 (513) | | 21.46 (545) | | | 103 (47) | | | | | | | | | | | | | |
| CHFM05-6135DCY | 1/2 x 4 (0.4 x 4) | 5.67 (144) | 21.81 (554) | 3.82 (97) | ø5.94 (ø151) | 107 (49) | 23.50 (597) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 113 (52) | | | | | | | |
| CHFM05-6135DCY-AV | 18.78 (477) | | 20.47 (520) | | | 104 (48) | | | | | | | | | | | | | |
| CHFM08-6135Y | 3/4 x 4 (0.55 x 4) | 5.86 (149) | 20.08 (510) | 3.94 (100) | ø6.30 (ø160) | 107 (49) | 22.52 (572) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 118 (54) | | | | | | | |
| CHFM08-6135Y-AV | | | 5.67 (144) | | | 21.81 (554) | 3.82 (97) | | | | | ø5.94 (ø151) | 105 (48) | 23.50 (597) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 110 (50) |
| CHFM08-6135DCY | | | 5.86 (149) | | | 23.11 (587) | 3.94 (100) | | | | | ø6.30 (ø160) | 115 (53) | 25.55 (649) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 126 (57) |
| CHFM08-6135DCY-AV | | | 20.51 (521) | | | 5.98 (152) | 23.54 (598) | | | | | 3.82 (97) | □6.22 (□158) | 112 (51) | 23.01 (585) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) |
| CHFM1-6135Y-EP | 23.54 (598) | 120 (55) | 26.04 (662) | 130 (59) | | | | | | | | | | | | | | | |
| CHFM1H-6135Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 21.57 (548) | 3.82 (97) | □6.57 (□167) | 119 (54) | 24.31 (618) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 139 (63) | | | | | | | |
| CHFM1H-6135DCY-EP | 24.61 (625) | | 128 (58) | | | 27.34 (695) | 133 (61) | | | | | | | | | | | | |
| CHFM2-6135Y-EP | 2 x 4 (1.5 x 4) | 6.71 (170) | 21.57 (548) | 4.53 (115) | □7.24 (□184) | 122 (56) | 24.31 (618) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 142 (65) | | | | | | | |
| CHFM2-6135DCY-EP | 24.61 (625) | | 131 (60) | | | 27.34 (695) | 150 (68) | | | | | | | | | | | | |
| CHFM3-6135Y-EP | 3 x 4 (2.2 x 4) | 7.34 (186) | 20.98 (533) | 4.65 (118) | □8.74 (□222) | 133 (61) | 24.06 (611) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 163 (74) | | | | | | | |
| CHFM3-6135DCY-EP | 25.43 (646) | | 147 (67) | | | 28.50 (724) | 181 (83) | | | | | | | | | | | | |
| CHFM5-6135Y-EP | 5 x 4 (3.7 x 4) | 9.04 (230) | 22.24 (565) | 5.43 (138) | □10.24 (□260) | 157 (72) | 25.81 (656) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 216 (98) | | | | | | | |
| CHFM8-6135Y-EP | 7.5 x 4 (5.5 x 4) | | 23.94 (608) | | | 192 (87) | 27.50 (699) | | | | | 263 (119) | | | | | | | |
| CHFM10-6135Y-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 25.43 (646) | 5.43 (138) | □10.24 (□260) | 218 (99) | 29.57 (751) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 275 (125) | | | | | | | |
| CHFM15-6135Y-EP | 15 x 4 (11 x 4) | | 27.87 (708) | | | 231 (105) | 32.01 (813) | | | | | | | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal F-Flange Mount

CHFM02-6145DBY ▶ CHFM20-6145Y-EP

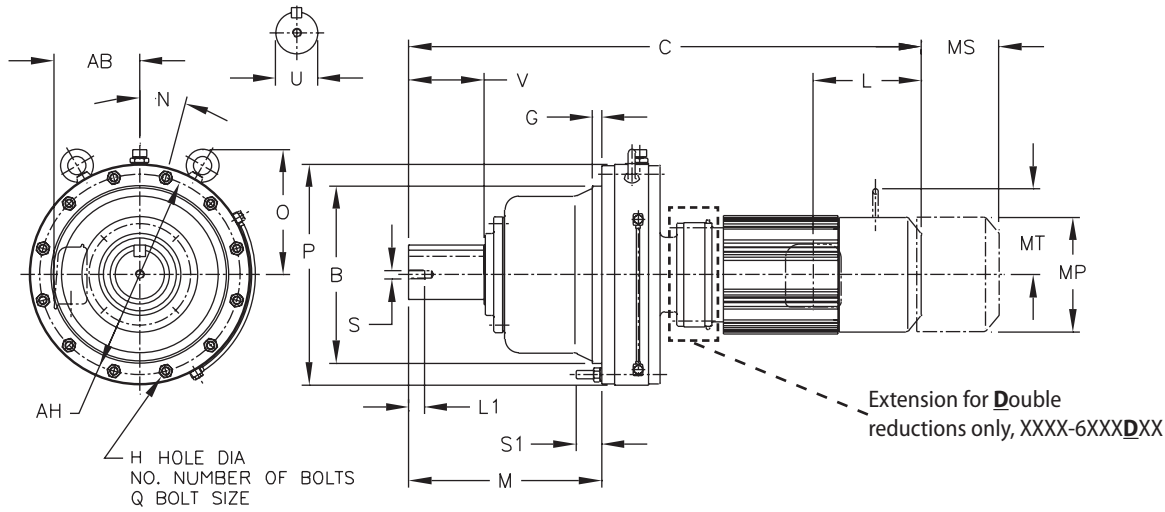


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHFM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CHFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|------------------------------|---------------|--------------|--------------|-----|---------------|----|---------------|-----|--------------|---------------|
| 6140Y 6145Y | 6.50 (165) | 0.63 (16) | 0.43 (11) | 6 | 7.80 (198) | 60 | 9.06 (230) | M10 | 1.22 (31) | 8.07 (205) |

All dimensions are in inches (mm)

| Model CHFM | Low Speed Shaft | | | | |
|------------------------------|------------------|--------------|-----------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6140Y 6145Y | 1.88 (47.625) | 3.54 (90) | 3/8-16UNC | 0.79 (20) | 1/2 x 1/2 x 2.95 (12.7 x 12.7 x 75) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal F-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CHFM02-6145DBY ▶ CHFM20-6145Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | | | | | | |
|-------------------|-----------------------|-------------|---------------|------------|-------------------|-------------------|-------------|-------------|-------------------|------------|------------|-------------------|-------------|-------------|------------|-----------------|------------|------------|----------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | | | | | | |
| CHFM02-6145DBY | 1/4 x 4 (0.2 x 4) | 4.63 (118) | 19.65 (499) | 2.32 (59) | ø4.88 (ø124) | 94 (43) | 20.91 (531) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 97 (44) | | | | | | | |
| CHFM02-6145DBY-AV | | | 20.43 (519) | | | 21.69 (551) | 101 (46) | | | | | | | | | | | | |
| CHFM03-6145DBY | 1/3 x 4 (0.25 x 4) | | 19.65 (499) | | | 94 (43) | 20.91 (531) | | | | | 97 (44) | | | | | | | |
| CHFM03-6145DBY-AV | | | 20.43 (519) | | | 21.69 (551) | 101 (46) | | | | | | | | | | | | |
| CHFM05-6145DBY | 1/2 x 4 (0.4 x 4) | | 5.67 (144) | | | 22.05 (560) | 3.82 (97) | | | | | ø5.94 (ø151) | 105 (48) | 23.74 (603) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 110 (50) |
| CHFM05-6145DBY-AV | | | | | | | | | | | | | 102 (47) | | | | | | 108 (49) |
| CHFM08-6145DBY | 3/4 x 4 (0.55 x 4) | 5.86 (149) | 23.35 (593) | 3.94 (100) | ø6.30 (ø160) | 113 (51) | 25.79 (655) | 6.38 (162) | ø6.30 (ø160) | 4.53 (115) | 4.29 (109) | 124 (56) | | | | | | | |
| CHFM08-6145DBY-AV | | | | | | 113 (51) | | | | | | 124 (56) | | | | | | | |
| CHFM1-6145Y-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 21.30 (541) | 3.82 (97) | □6.22 (□158) | 114 (52) | 23.80 (605) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 124 (57) | | | | | | | |
| CHFM1-6145DBY-EP | | | | | | 118 (54) | | | | | | 128 (58) | | | | | | | |
| CHFM1H-6145Y-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 22.36 (568) | 3.82 (97) | □6.57 (□167) | 121 (55) | 25.10 (638) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 133 (60) | | | | | | | |
| CHFM1H-6145DBY-EP | | | | | | 125 (57) | | | | | | 137 (62) | | | | | | | |
| CHFM2-6145Y-EP | 2 x 4 (1.5 x 4) | | 22.36 (568) | | | 124 (57) | 25.10 (638) | | | | | 136 (62) | | | | | | | |
| CHFM2-6145DBY-EP | | | 24.84 (631) | | | 128 (58) | 27.58 (701) | | | | | 140 (64) | | | | | | | |
| CHFM2-6145DCY-EP | | | 25.39 (645) | | | 131 (60) | 28.13 (715) | | | | | 142 (65) | | | | | | | |
| CHFM3-6145Y-EP | 3 x 4 (2.2 x 4) | | 6.71 (170) | | | 21.77 (553) | 4.53 (115) | | | | | □7.24 (□184) | 136 (62) | 24.84 (631) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 152 (69) |
| CHFM3-6145DBY-EP | | 144 (66) | | 161 (73) | | | | | | | | | | | | | | | |
| CHFM3-6145DCY-EP | | 26.22 (666) | | 147 (67) | 29.29 (744) | 163 (74) | | | | | | | | | | | | | |
| CHFM5-6145Y-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 23.03 (585) | 4.65 (118) | □8.74 (□222) | 160 (73) | 26.59 (676) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 184 (84) | | | | | | | |
| CHFM8-6145Y-EP | 7.5 x 4 (5.5 x 4) | | 24.72 (628) | | | 194 (88) | | | | | | 28.29 (719) | 218 (99) | | | | | | |
| CHFM10-6145Y-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 26.22 (666) | 5.43 (138) | □10.24 (□260) | 221 (100) | 30.35 (771) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 265 (120) | | | | | | | |
| CHFM15-6145Y-EP | 15 x 4 (11 x 4) | | | | | 28.66 (728) | | | | | | 233 (106) | 32.80 (833) | 278 (126) | | | | | |
| CHFM20-6145Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 31.10 (790) | 7.01 (178) | ø12.49 (ø317) | 314 (143) | 36.40 (925) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | 400 (182) | | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal F-Flange Mount

CHFM05-6165DCY ▶ CHFM30-6165Y-EP

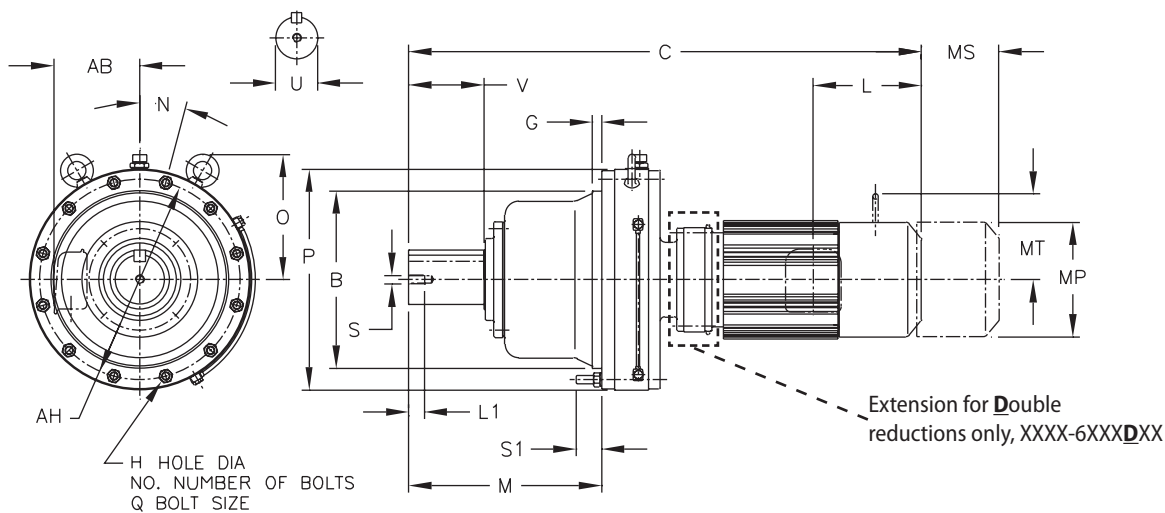


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHFM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CHFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|------------------------------|---------------|--------------|--------------|-----|---------------|----|----------------|-----|--------------|----------------|
| 6160Y 6165Y | 7.87 (200) | 0.39 (10) | 0.55 (14) | 6 | 8.74 (222) | 30 | 11.81 (300) | M12 | 1.38 (35) | 10.63 (270) |

All dimensions are in inches (mm)

| Model CHFM | Low Speed Shaft | | | | |
|------------------------------|------------------|--------------|-----------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6160Y 6165Y | 2.25 (57.15) | 3.54 (90) | 3/8-16UNC | 0.79 (20) | 1/2 x 1/2 x 2.95 (12.7 x 12.7 x 75) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal F-Flange Mount


XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

CHFM05-6165DCY ▶ CHFM30-6165Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | |
|-------------------|-----------------------|----------------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|------------------|------------|-------------------|-------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | |
| CHFM05-6165DCY | 1/2 x 4 (0.4 x 4) | 4.63 (118) | 23.23 (590) | 2.32 (59) | ø4.88 (ø124) | 194 (88) | 24.49 (622) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 197 (90) | |
| CHFM05-6165DCY-AV | | | | | | 201 (92) | | | | | | 207 (94) | |
| CHFM08-6165DCY | 3/4 x 4 (0.55 x 4) | 5.67 (144) | 24.65 (626) | 3.82 (97) | ø5.94 (ø151) | 199 (90) | 26.34 (669) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 205 (93) | |
| CHFM08-6165DCY-AV | | | | | | 207 (94) | | | | | | 218 (99) | |
| CHFM1-6165DCY-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 26.38 (670) | 3.82 (97) | ø6.30 (ø160) | □6.22 (□158) | 212 (96) | 28.88 (734) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 222 (101) |
| CHFM1H-6165Y-EP | 1.5 x 4 (1.1 x 4) | | | | | | | | | | | | 24.25 (616) |
| CHFM1H-6165DCY-EP | | 6.16 (156) | 27.44 (697) | 3.82 (97) | □6.57 (□167) | 219 (100) | 30.18 (767) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 230 (105) | |
| CHFM2-6165Y-EP | 2 x 4 (1.5 x 4) | | | | | | | | | | | 24.25 (616) | 182 (83) |
| CHFM2-6165DCY-EP | | 6.71 (170) | 27.44 (697) | 4.53 (115) | □7.24 (□184) | 222 (101) | 30.18 (767) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | | |
| CHFM3-6165Y-EP | 3 x 4 (2.2 x 4) | | | | | | | | | | | 23.66 (601) | 26.85 (682) |
| CHFM3-6165DCY-EP | | 7.34 (186) | 25.12 (638) | 28.31 (719) | 4.65 (118) | 260 (118) | 31.87 (810) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | | |
| CHFM5-6165Y-EP | 5 x 4 (3.7 x 4) | | | | | | | | | | | 28.31 (719) | 26.81 (681) |
| CHFM5-6165DCY-EP | | 7.5 x 4 (5.5 x 4) | 30.00 (762) | 294 (134) | 33.56 (853) | 294 (134) | 33.56 (853) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | | |
| CHFM8-6165Y-EP | 10 x 4 (7.5 x 4) | | | | | | | | | | | 28.27 (718) | 30.71 (780) |
| CHFM8-6165DCY-EP | | 9.04 (230) | 28.27 (718) | 30.71 (780) | 5.43 (138) | □10.24 (□260) | 291 (132) | 34.84 (885) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | | |
| CHFM10-6165Y-EP | 15 x 4 (11 x 4) | | | | | | | | | | | 32.99 (838) | 7.01 (178) |
| CHFM15-6165Y-EP | | 20 x 4 (15 x 4) | 32.99 (838) | 7.01 (178) | ø12.49 (ø317) | 375 (170) | 38.29 (973) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | | |
| CHFM20-6165Y-EP | 25 x 4 (18.5 x 4) | | | | | | | | | | | 37.17 (944) | 9.06 (230) |
| CHFM25-6165Y-EP | | 30 x 4 (22 x 4) | 37.17 (944) | 9.06 (230) | ø15.12 (ø384) | 652 (296) | 44.02 (1118) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | | |
| CHFM30-6165Y-EP | | | | | | | | | | | | | |

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal F-Flange Mount

CHFM05-6175DCY ▶ CHFM40-6175Y-EP

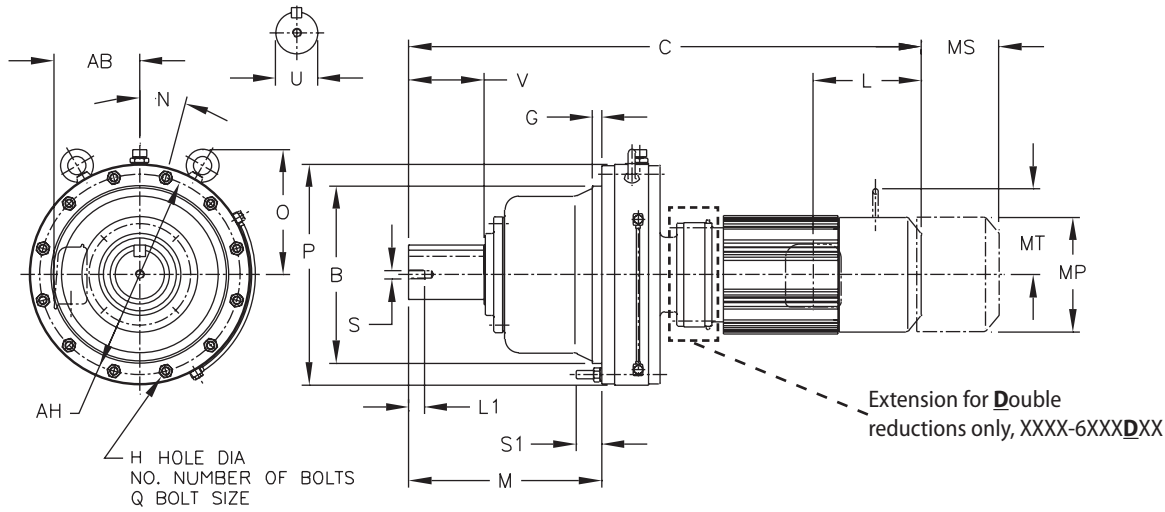


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHFM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CHFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|------------------------------|---------------|--------------|--------------|-----|----------------|------|----------------|-----|--------------|----------------|
| 6170Y 6175Y | 9.84 (250) | 0.47 (12) | 0.55 (14) | 8 | 10.31 (262) | 22.5 | 13.39 (340) | M12 | 1.61 (41) | 11.81 (300) |

All dimensions are in inches (mm)

| Model CHFM | Low Speed Shaft | | | | |
|------------------------------|------------------|--------------|-----------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6170Y 6175Y | 2.75 (69.85) | 3.54 (90) | 1/2-13UNC | 0.94 (24) | 5/8 x 5/8 x 3.15 (15.87 x 15.87 x 80) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal F-Flange Mount


XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

CHFM05-6175DCY ▶ CHFM40-6175Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | |
|-------------------|-----------------------|-------------|---------------|------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|--------------|-----------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | |
| CHFM05-6175DCY | 1/2 x 4 (0.4 x 4) | 4.63 (118) | 25.08 (637) | 2.32 (59) | ø4.88 (ø124) | 245 (111) | 26.34 (669) | 3.58 (91) | ø4.88 (ø124) | 2.40 (61) | - | 248 (113) | | |
| CHFM05-6175DCY-AV | | | | | | 252 (115) | | | | | | 258 (117) | | |
| CHFM08-6175DCY | 3/4 x 4 (0.55 x 4) | 5.67 (144) | 26.50 (673) | 3.82 (97) | ø5.94 (ø151) | 250 (113) | 28.19 (716) | 5.51 (140) | ø5.94 (ø151) | 3.66 (93) | 3.94 (100) | 255 (116) | | |
| CHFM08-6175DCY-AV | | | | | | 258 (117) | | | | | | 269 (122) | | |
| CHFM1-6175DAY-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 27.52 (699) | - | □6.22 (□158) | 237 (108) | 30.02 (763) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 247 (112) | | |
| CHFM1-6175DCY-EP | | | | | | 263 (119) | | | | | | 273 (124) | | |
| CHFM1H-6175DCY-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 29.29 (744) | 3.82 (97) | □6.57 (□167) | 270 (123) | 32.03 (814) | - | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 281 (128) | | |
| CHFM2-6175DAY-EP | 2 x 4 (1.5 x 4) | | | | | 247 (112) | | | | | | 259 (118) | | |
| CHFM2-6175DCY-EP | 2 x 4 (1.5 x 4) | | 29.29 (744) | | | 273 (124) | 32.03 (814) | | | | | 284 (129) | | |
| CHFM3-6175DCY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 28.70 (729) | 4.53 (115) | □7.24 (□184) | 286 (130) | 31.77 (807) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 302 (137) | | |
| CHFM5-6175Y-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 27.05 (687) | - | □8.74 (□222) | 287 (130) | 30.61 (778) | - | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 311 (141) | | |
| CHFM5-6175DCY-EP | | | | | | 311 (141) | | | | | | 335 (152) | | |
| CHFM8-6175Y-EP | 7.5 x 4 (5.5 x 4) | | 28.74 (730) | 4.65 (118) | | 321 (146) | 32.30 (821) | 8.21 (209) | | | | 345 (157) | | |
| CHFM8-6175DCY-EP | | | | | 31.85 (809) | | | | 345 (157) | 35.41 (900) | 369 (168) | | | |
| CHFM10-6175Y-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 29.57 (751) | 5.43 (138) | □10.24 (□260) | 350 (159) | 33.70 (856) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 394 (179) | | |
| CHFM15-6175Y-EP | 15 x 4 (11 x 4) | | | | | 32.01 (813) | | | | | | 362 (165) | 36.14 (918) | 406 (185) |
| CHFM20-6175Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 34.72 (882) | 7.01 (178) | ø12.49 (ø317) | 443 (201) | 40.02 (1017) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | 529 (240) | | |
| CHFM25-6175Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 38.90 (988) | 9.06 (230) | ø15.12 (ø384) | 722 (328) | 45.75 (1162) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | 819 (372) | | |
| CHFM30-6175Y-EP | 30 x 4 (22 x 4) | | | | | | | | | | | 835 (379) | 50.63 (1286) | 932 (423) |
| CHFM40-6175Y-EP | 40 x 4 (30 x 4) | | | | | | | | | | | 43.78 (1112) | | |

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal F-Flange Mount

CHFM1-6185DBY-EP ▶ CHFM50-6185Y-EP

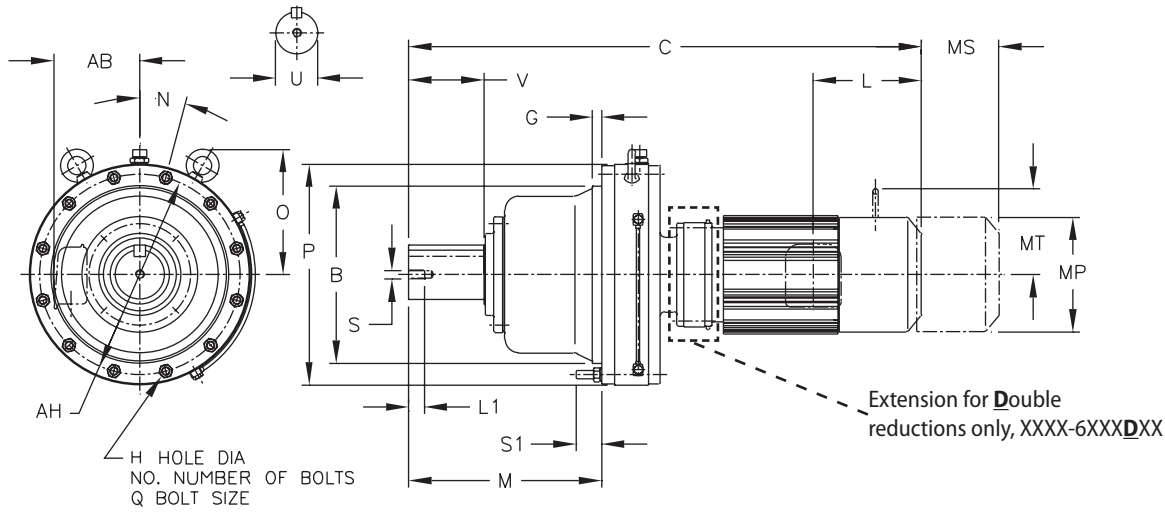


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHFM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CHFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|------------------------------|----------------|--------------|--------------|-----|----------------|------|----------------|-----|--------------|----------------|
| 6180Y 6185Y | 11.02 (280) | 0.47 (12) | 0.55 (14) | 8 | 11.77 (299) | 22.5 | 14.57 (370) | M12 | 1.50 (38) | 12.99 (330) |

All dimensions are in inches (mm)

| Model CHFM | Low Speed Shaft | | | | |
|------------------------------|------------------|---------------|-----------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6180Y 6185Y | 3.13 (79.375) | 4.33 (110) | 1/2-13UNC | 0.94 (24) | 3/4 x 3/4 x 3.74 (19.05 x 19.05 x 95) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal F-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CHFM1-6185DBY-EP ▶ CHFM50-6185Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | | | |
|-------------------|--------------------|-------------|---------------|------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|---|---|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) | | |
| CHFM1-6185DBY-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 30.59 (777) | 3.82 (97) | □6.22 (□158) | 354 (161) | 33.09 (841) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 364 (166) | | |
| CHFM1H-6185DBY-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 31.65 (804) | | □6.57 (□167) | 361 (164) | 34.39 (874) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 373 (169) | | |
| CHFM2-6185DAY-EP | 2 x 4 (1.5 x 4) | | 30.79 (782) | | 327 (149) | 33.52 (852) | 338 (154) | | | | | | | |
| CHFM2-6185DBY-EP | | | 31.65 (804) | | 364 (166) | 34.39 (874) | 376 (171) | | | | | | | |
| CHFM3-6185DBY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 31.06 (789) | 4.53 (115) | □7.24 (□184) | 376 (171) | 34.13 (867) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 393 (178) | | |
| CHFM5-6185Y-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 28.50 (724) | 4.65 (118) | □8.74 (□222) | 361 (164) | 32.07 (815) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 385 (175) | | |
| CHFM5-6185DBY-EP | | | 32.32 (821) | | | 400 (182) | 35.89 (912) | | | | | 424 (193) | | |
| CHFM8-6185Y-EP | 7.5 x 4 (5.5 x 4) | | 30.20 (767) | | | 395 (179) | 33.76 (858) | | | | | 418 (190) | | |
| CHFM8-6185DBY-EP | | | 34.02 (864) | | | 434 (197) | 37.58 (955) | | | | | 458 (208) | | |
| CHFM10-6185Y-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 31.14 (791) | 5.43 (138) | □10.24 (□260) | 425 (193) | 35.28 (896) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 469 (213) | | |
| CHFM10-6185DBY-EP | | | 35.51 (902) | | | 461 (209) | 39.65 (1007) | | | | | 505 (229) | | |
| CHFM15-6185Y-EP | 15 x 4 (11 x 4) | | 33.58 (853) | | | 438 (199) | 37.72 (958) | | | | | 482 (219) | | |
| CHFM15-6185DBY-EP | | | 37.95 (964) | | | 474 (215) | 42.09 (1069) | | | | | 518 (235) | | |
| CHFM20-6185Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 36.18 (919) | 7.01 (178) | ø12.49 (ø317) | 518 (235) | 41.48 (1054) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | 604 (274) | | |
| CHFM25-6185Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 40.35 (1025) | 9.06 (230) | ø15.12 (ø384) | 795 (361) | 47.20 (1199) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | 892 (405) | | |
| CHFM30-6185Y-EP | 30 x 4 (22 x 4) | | | | | 908 (412) | 52.09 (1323) | | | | | 1005 (456) | | |
| CHFM40-6185Y-EP | 40 x 4 (30 x 4) | | 45.24 (1149) | | | 976 (443) | - | - | | | | - | - | - |
| CHFM50-6185Y-EP | 50 x 4 (37 x 4) | | | | | | - | - | | | | - | - | - |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal F-Flange Mount

CHFM1-6195DAY-EP ▶ CHFM60-6195Y-EP

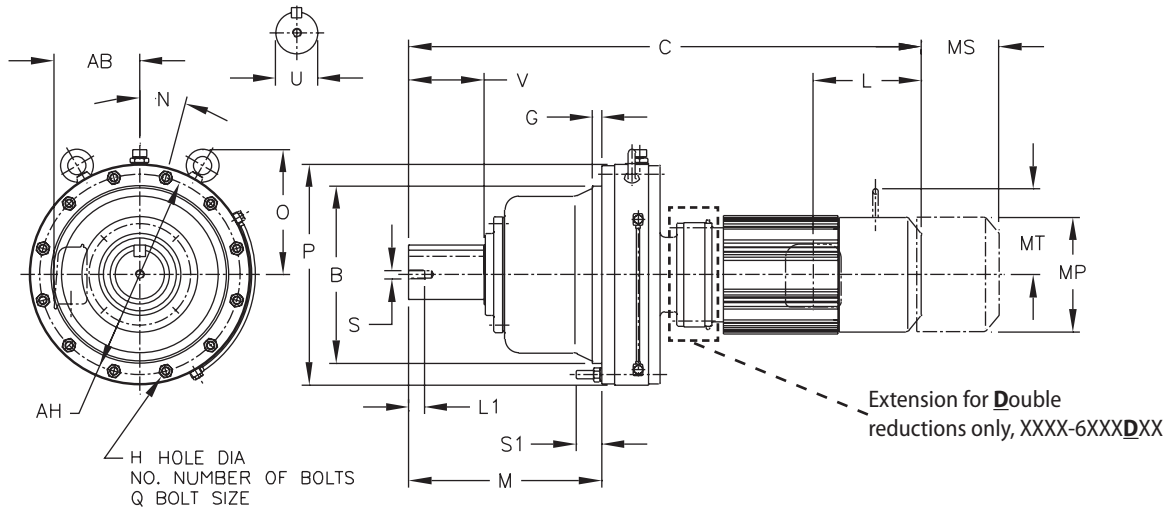


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHFM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CHFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|------------------------------|----------------|--------------|--------------|--------------|----------------|--------------|----------------|-----|--------------|----------------|
| 6190Y 6195Y | 12.60 (320) | 0.39 (10) | 0.55 (14) | 0.47 (12) | 14.37 (365) | 0.59 (15) | 16.93 (430) | M12 | 1.61 (41) | 14.96 (380) |

All dimensions are in inches (mm)

| Model CHFM | Low Speed Shaft | | | | |
|------------------------------|------------------|---------------|-----------|--------------|---|
| | U ^[A] | V | S | L1 | Key |
| 6190Y 6195Y | 3.63 (92.075) | 5.31 (135) | 3/4-10UNC | 1.34 (34) | 7/8 x 7/8 x 4.92 (22.225 x 22.225 x 125) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal F-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CHFM1-6195DAY-EP ▶ CHFM60-6195Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|-------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHFM1-6195DAY-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 32.95 (837) | 3.82 (97) | □6.22 (□158) | 474 (215) | 35.45 (901) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 484 (220) |
| CHFM1H-6195DAY-EP | 1.5 x 4 (1.1 x 4) | 6.16 (156) | 34.02 (864) | | □6.57 (□167) | 481 (219) | 36.75 (934) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 493 (224) |
| CHFM2-6195DAY-EP | 2 x 4 (1.5 x 4) | | | | 484 (220) | 496 (225) | | | | | | |
| CHFM3-6195DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 33.43 (849) | 4.53 (115) | □7.24 (□184) | 497 (226) | 36.50 (927) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 514 (233) |
| CHFM3-6195DBY-EP | | | 34.06 (865) | | | 506 (230) | 37.13 (943) | | | | | 523 (237) |
| CHFM5-6195DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 34.88 (886) | 4.65 (118) | □8.74 (□222) | 523 (237) | 38.44 (977) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 547 (248) |
| CHFM5-6195DBY-EP | | | 35.31 (897) | | | 530 (241) | 38.88 (988) | | | | | 530 (241) |
| CHFM8-6195Y-EP | 7.5 x 4 (5.5 x 4) | 7.34 (186) | 33.78 (858) | 5.43 (138) | □10.24 (□260) | 533 (242) | 37.34 (949) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 557 (253) |
| CHFM8-6195DAY-EP | | | 36.57 (929) | | | 557 (253) | 40.14 (1020) | | | | | 557 (253) |
| CHFM8-6195DBY-EP | | | 37.01 (940) | | | 564 (256) | 40.57 (1031) | | | | | 564 (256) |
| CHFM10-6195Y-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 34.02 (864) | 5.43 (138) | □10.24 (□260) | 38.15 (969) | 42.64 (1083) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 608 (276) |
| CHFM10-6195DBY-EP | | | 38.50 (978) | | | 591 (268) | | | | | | 42.64 (1083) |
| CHFM15-6195Y-EP | 15 x 4 (11 x 4) | 9.04 (230) | 36.46 (926) | 5.43 (138) | □10.24 (□260) | 576 (262) | 40.59 (1031) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 621 (282) |
| CHFM15-6195DBY-EP | | | 40.94 (1040) | | | 604 (274) | 45.08 (1145) | | | | | 604 (274) |
| CHFM20-6195Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 39.17 (995) | 7.01 (178) | ø12.49 (ø317) | 655 (297) | 44.47 (1130) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | - | 741 (336) |
| CHFM20-6195DBY-EP | | | 43.39 (1102) | | | 684 (311) | 48.68 (1237) | | | | | 684 (311) |
| CHFM25-6195Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 43.35 (1101) | 9.06 (230) | ø15.12 (ø384) | 933 (424) | 50.20 (1275) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | - | 1030 (468) |
| CHFM30-6195Y-EP | 30 x 4 (22 x 4) | | 1046 (475) | | | 55.08 (1399) | 1046 (475) | | | | | |
| CHFM40-6195Y-EP | 40 x 4 (30 x 4) | | 48.23 (1225) | | | 1114 (506) | 1114 (506) | | | | | |
| CHFM50-6195Y-EP | 50 x 4 (37 x 4) | | 1114 (506) | | | 1114 (506) | 1114 (506) | | | | | |
| CHFM60-6195Y-EP | 60 x 4 (45 x 4) | 16.33 (415) | 49.69 (1262) | 16.81 (427) | ø18.66 (ø474) | 1243 (564) | - | - | - | - | - | - |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal F-Flange Mount

CHFM1-6205DAY-EP ▶ CHFM75-6205Y-EP

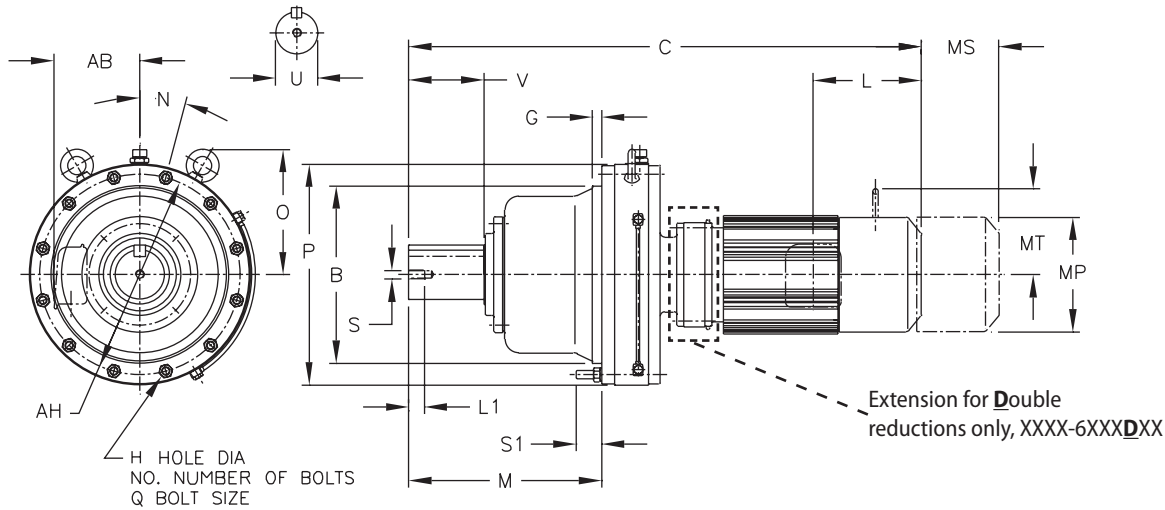


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHFM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CHFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|--------------|----------------|--------------|--------------|-----|----------------|----|----------------|-----|--------------|----------------|
| 6205Y | 14.17 (360) | 0.79 (20) | 0.71 (18) | 12 | 16.14 (410) | 15 | 17.64 (448) | M16 | 2.20 (56) | 15.94 (405) |

All dimensions are in inches (mm)

| Model CHFM | Low Speed Shaft | | | | |
|--------------|------------------|---------------|-----------|--------------|------------------------------------|
| | U ^[A] | V | S | L1 | Key |
| 6205Y | 3.88 (98.425) | 6.50 (165) | 3/4-10UNC | 1.34 (34) | 1 x 1 x 6.5 (25.4 x 25.4 x 165) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal F-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CHFM1-6205DAY-EP ▶ CHFM75-6205Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|-------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHFM1-6205DAY-EP | 1 x 4 (0.75 x 4) | 5.98 (152) | 34.57 (878) | 3.82 (97) | □6.22 (□158) | 510 (231) | 37.07 (942) | 6.32 (161) | □6.22 (□158) | 4.80 (122) | 4.25 (108) | 519 (236) |
| CHFM2-6205DAY-EP | 2 x 4 (1.5 x 4) | 6.16 (156) | 35.63 (905) | | □6.57 (□167) | 520 (236) | 38.37 (975) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 531 (241) |
| CHFM3-6205DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 35.04 (890) | 4.53 (115) | □7.24 (□184) | 533 (242) | 38.11 (968) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 549 (249) |
| CHFM3-6205DBY-EP | | | 36.10 (917) | | | 554 (252) | 39.17 (995) | | | | | 571 (259) |
| CHFM5-6205DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 36.50 (927) | 4.65 (118) | □8.74 (□222) | 558 (253) | 40.06 (1018) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 582 (264) |
| CHFM5-6205DBY-EP | | | 37.36 (949) | | | 579 (263) | 40.93 (1040) | | | | | 602 (274) |
| CHFM8-6205DAY-EP | 7.5 x 4 (5.5 x 4) | | 38.19 (970) | | | 592 (269) | 41.75 (1061) | | | | | 616 (280) |
| CHFM8-6205DBY-EP | | | 39.06 (992) | | | 613 (278) | 42.62 (1083) | | | | | 637 (289) |
| CHFM10-6205DBY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 40.55 (1030) | 5.43 (138) | □10.24 (□260) | 640 (290) | 44.69 (1135) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 684 (310) |
| CHFM15-6205Y-EP | 15 x 4 (11 x 4) | | 37.97 (965) | | | 612 (278) | 42.11 (1070) | | | | | 657 (298) |
| CHFM15-6205DBY-EP | | | 42.99 (1092) | | | 652 (296) | 47.13 (1197) | | | | | 696 (316) |
| CHFM20-6205Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 41.02 (1042) | 7.01 (178) | ø12.49 (ø317) | 701 (318) | 46.32 (1177) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 787 (357) |
| CHFM20-6205DBY-EP | | | 45.43 (1154) | | | 733 (333) | 50.73 (1289) | | | | | 819 (372) |
| CHFM25-6205Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 44.80 (1138) | 9.06 (230) | ø15.12 (ø384) | 974 (442) | 51.65 (1312) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1071 (486) |
| CHFM30-6205Y-EP | 30 x 4 (22 x 4) | | 49.69 (1262) | | | 1087 (493) | 56.54 (1436) | | | | | 1184 (537) |
| CHFM40-6205Y-EP | 40 x 4 (30 x 4) | | | | | | | | | | | |
| CHFM50-6205Y-EP | 50 x 4 (37 x 4) | | | | | | | | | | | |
| CHFM60-6205Y-EP | 60 x 4 (45 x 4) | 16.33 (415) | | | ø18.66 (ø474) | 1288 (585) | - | - | - | - | - | - |
| CHFM75-6205Y-EP | 75 x 4 (55 x 4) | | 51.14 (1299) | 16.81 (427) | | 1368 (621) | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal F-Flange Mount

CHFM2-6215DAY-EP ▶ CHFM75-6215Y-EP

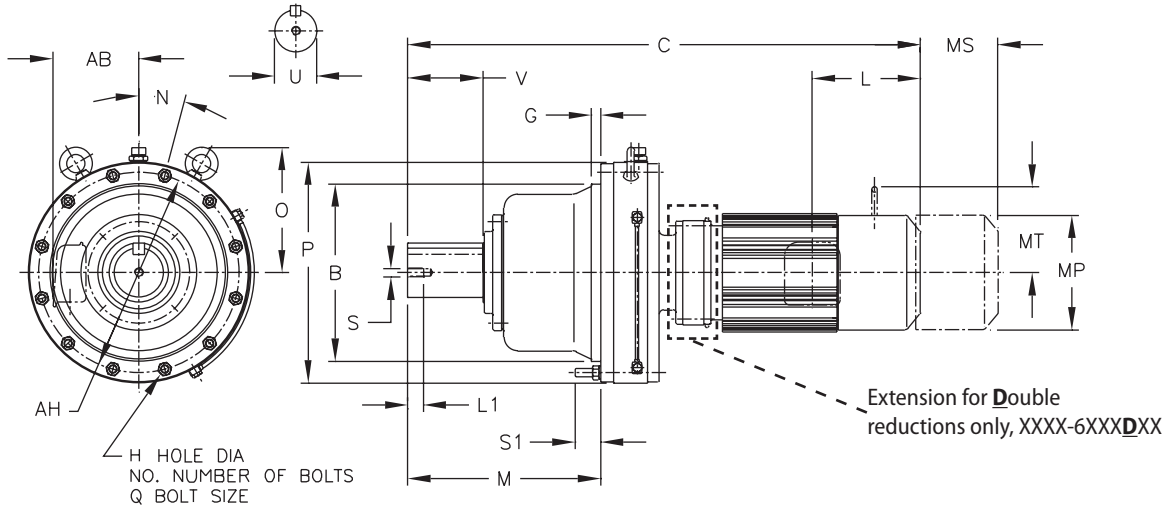


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHFM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CHFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|--------------|----------------|--------------|----------------|-----|----------------|----|----------------|-----|--------------|----------------|
| 6215Y | 15.35 (390) | 0.79 (20) | 0.81 (20.5) | 12 | 16.65 (423) | 15 | 19.09 (485) | M18 | 2.20 (56) | 17.32 (440) |

All dimensions are in inches (mm)

| Model CHFM | Low Speed Shaft | | | | |
|--------------|------------------|---------------|-----------|--------------|------------------------------------|
| | U ^[A] | V | S | L1 | Key |
| 6215Y | 4.25 (107.95) | 6.50 (165) | 3/4-10UNC | 1.34 (34) | 1 x 1 x 6.5 (25.4 x 25.4 x 165) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal F-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CHFM2-6215DAY-EP ▶ CHFM75-6215Y-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|-------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHFM2-6215DAY-EP | 2 x 4 (1.5 x 4) | 6.16 (156) | 37.72 (958) | 3.82 (97) | □6.57 (□167) | 717 (326) | 40.45 (1028) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 729 (331) |
| CHFM3-6215DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 37.13 (943) | 4.53 (115) | □7.24 (□184) | 729 (331) | 40.20 (1021) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 745 (338) |
| CHFM5-6215DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 38.39 (975) | 4.65 (118) | □8.74 (□222) | 753 (342) | 41.95 (1066) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 777 (353) |
| CHFM5-6215DBY-EP | | | 39.57 (1005) | | | 795 (361) | 43.13 (1096) | | | | | 818 (371) |
| CHFM8-6215DAY-EP | 7.5 x 4 (5.5 x 4) | 7.34 (186) | 40.08 (1018) | 4.65 (118) | □8.74 (□222) | 787 (357) | 43.64 (1109) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 811 (368) |
| CHFM8-6215DBY-EP | | | 41.26 (1048) | | | 828 (376) | 44.82 (1139) | | | | | 852 (387) |
| CHFM10-6215DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 41.57 (1056) | 5.43 (138) | □10.24 (□260) | 814 (369) | 45.71 (1161) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 858 (389) |
| CHFM10-6215DBY-EP | | | 42.72 (1085) | | | 856 (389) | 46.85 (1190) | | | | | 901 (409) |
| CHFM15-6215Y-EP | 15 x 4 (11 x 4) | 9.04 (230) | 39.29 (998) | 5.43 (138) | □10.24 (□260) | 798 (362) | 43.43 (1103) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 842 (382) |
| CHFM15-6215DAY-EP | | | 44.02 (1118) | | | 826 (375) | 48.15 (1223) | | | | | 871 (395) |
| CHFM15-6215DBY-EP | | | 45.16 (1147) | | | 869 (394) | 49.29 (1252) | | | | | 913 (414) |
| CHFM20-6215Y-EP | 20 x 4 (15 x 4) | 10.26 (261) | 41.97 (1066) | 7.01 (178) | ø12.49 (ø317) | 882 (400) | 47.26 (1201) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 968 (439) |
| CHFM20-6215DAY-EP | | | 46.46 (1180) | | | 907 (412) | 51.75 (1315) | | | | | 993 (451) |
| CHFM20-6215DBY-EP | | | 47.44 (1205) | | | 952 (432) | 52.74 (1340) | | | | | 1038 (471) |
| CHFM25-6215Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 45.75 (1162) | 9.06 (230) | ø15.12 (ø384) | 1150 (522) | 52.60 (1336) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1247 (566) |
| CHFM25-6215DBY-EP | | | 51.61 (1311) | | | 1230 (558) | 58.46 (1485) | | | | | 1327 (602) |
| CHFM30-6215Y-EP | 30 x 4 (22 x 4) | 13.39 (340) | 45.75 (1162) | 9.06 (230) | ø15.12 (ø384) | 1150 (522) | 52.60 (1336) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1247 (566) |
| CHFM30-6215DBY-EP | | | 51.61 (1311) | | | 1230 (558) | 58.46 (1485) | | | | | 1327 (602) |
| CHFM40-6215Y-EP | 40 x 4 (30 x 4) | 16.33 (415) | 50.63 (1286) | 16.81 (427) | ø18.66 (ø474) | 1263 (573) | 57.48 (1460) | | | | | 1360 (617) |
| CHFM50-6215Y-EP | 50 x 4 (37 x 4) | | 1331 (604) | | | | | | | | | |
| CHFM60-6215Y-EP | 60 x 4 (45 x 4) | 16.33 (415) | 52.09 (1323) | 16.81 (427) | ø18.66 (ø474) | 1459 (662) | - | - | - | - | - | - |
| CHFM75-6215Y-EP | 75 x 4 (55 x 4) | | 1539 (698) | | | | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal F-Flange Mount

CHFM2-6225DAY-EP ▶ CHFM50-6235DBY-EP

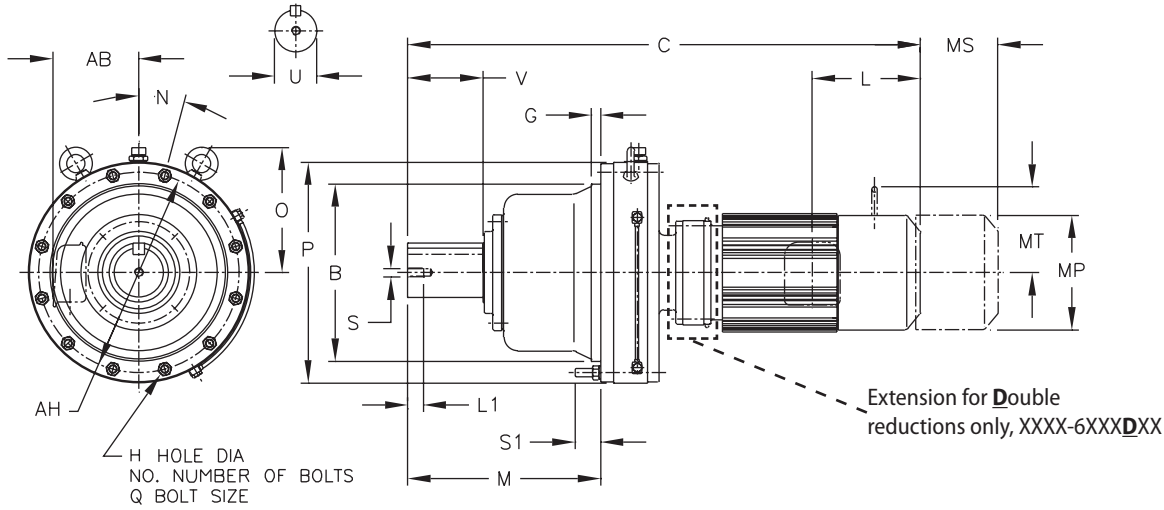


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHFM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CHFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|--------------|----------------|--------------|--------------|-----|----------------|----|----------------|-----|--------------|----------------|
| 6225Y | 16.54 (420) | 0.79 (20) | 0.87 (22) | 12 | 17.87 (454) | 15 | 20.71 (526) | M20 | 2.52 (64) | 18.70 (475) |
| 6235Y | 17.91 (455) | 0.79 (20) | 0.87 (22) | 12 | 19.92 (506) | 15 | 22.13 (562) | M20 | 2.56 (65) | 20.08 (510) |

All dimensions are in inches (mm)

| Model CHFM | Low Speed Shaft | | | | |
|--------------|-------------------|---------------|-----------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6225Y | 4.63 (117.475) | 6.50 (165) | 3/4-10UNC | 1.34 (34) | 1-1/4 x 7/8 x 6.5 (31.75 x 22.225 x 165) |
| 6235Y | 5.00 (127) | 7.87 (200) | 1-8UNC | 1.61 (41) | 1-1/4 x 7/8 x 7.87 (31.75 x 22.225 x 200) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal F-Flange Mount


XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

CHFM2-6225DAY-EP ▶ CHFM50-6235DBY-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|-------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHFM2-6225DAY-EP | 2 x 4 (1.5 x 4) | 6.16 (156) | 39.37 (1000) | 3.82 (97) | □6.57 (□167) | 830 (377) | 42.11 (1070) | 6.56 (167) | □6.57 (□167) | 5.04 (128) | 4.61 (117) | 841 (382) |
| CHFM3-6225DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 38.78 (985) | 4.53 (115) | □7.24 (□184) | 841 (382) | 41.85 (1063) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 858 (389) |
| CHFM5-6225DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 40.04 (1017) | 4.65 (118) | □8.74 (□222) | 865 (393) | 43.60 (1108) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 889 (404) |
| CHFM5-6225DBY-EP | | | 42.13 (1070) | | | 966 (438) | 45.69 (1161) | | | | | 990 (449) |
| CHFM8-6225DAY-EP | 7.5 x 4 (5.5 x 4) | 7.34 (186) | 41.73 (1060) | 4.65 (118) | □8.74 (□222) | 899 (408) | 45.30 (1151) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 923 (419) |
| CHFM8-6225DBY-EP | | | 43.82 (1113) | | | 1000 (454) | 47.38 (1204) | | | | | 1024 (465) |
| CHFM10-6225DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 43.23 (1098) | 5.43 (138) | □10.24 (□260) | 926 (420) | 47.36 (1203) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 970 (440) |
| CHFM10-6225DBY-EP | | | 44.65 (1134) | | | 1029 (467) | 48.78 (1239) | | | | | 1073 (487) |
| CHFM15-6225DAY-EP | 15 x 4 (11 x 4) | 9.04 (230) | 45.67 (1160) | 5.43 (138) | □10.24 (□260) | 939 (426) | 49.80 (1265) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 983 (446) |
| CHFM15-6225DBY-EP | | | 47.09 (1196) | | | 1041 (473) | 51.22 (1301) | | | | | 1086 (493) |
| CHFM20-6225DAY-EP | 20 x 4 (15 x 4) | 10.26 (261) | 48.11 (1222) | 7.01 (178) | ø12.49 (ø317) | 1019 (463) | 53.41 (1357) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 1105 (502) |
| CHFM20-6225DBY-EP | | | 49.80 (1265) | | | 1122 (509) | 55.10 (1400) | | | | | 1208 (548) |
| CHFM25-6225Y-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 47.32 (1202) | 9.06 (230) | ø15.12 (ø384) | 1289 (585) | 54.17 (1376) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1386 (629) |
| CHFM25-6225DBY-EP | | | 53.98 (1371) | | | 1401 (636) | 60.83 (1545) | | | | | 1498 (680) |
| CHFM30-6225Y-EP | 30 x 4 (22 x 4) | 13.39 (340) | 47.32 (1202) | 9.06 (230) | ø15.12 (ø384) | 1289 (585) | 54.17 (1376) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1386 (629) |
| CHFM30-6225DBY-EP | | | 53.98 (1371) | | | 1401 (636) | 60.83 (1545) | | | | | 1498 (680) |
| CHFM40-6225Y-EP | 40 x 4 (30 x 4) | 16.33 (415) | 52.20 (1326) | 16.81 (427) | ø18.66 (ø474) | 1402 (636) | 59.06 (1500) | | | | | 1499 (680) |
| CHFM40-6225DBY-EP | | | 58.86 (1495) | | | 1514 (687) | 65.71 (1669) | | | | | 1611 (731) |
| CHFM50-6225Y-EP | 50 x 4 (37 x 4) | | 52.20 (1326) | | | 1470 (667) | | | | | | |
| CHFM60-6225Y-EP | 60 x 4 (45 x 4) | | | | | 1595 (724) | | | | | | |
| CHFM75-6225Y-EP | 75 x 4 (55 x 4) | | | | | 1675 (760) | | | | | | |
| CHFM3-6235DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 42.17 (1071) | 4.53 (115) | □7.24 (□184) | 1078 (489) | 45.24 (1149) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 1095 (497) |
| CHFM5-6235DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 43.62 (1108) | 4.65 (118) | □8.74 (□222) | 1103 (501) | 47.19 (1199) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 1127 (511) |
| CHFM8-6235DAY-EP | | | 45.31 (1151) | | | 1137 (516) | 48.88 (1242) | | | | | 1161 (527) |
| CHFM10-6235DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 46.77 (1188) | 5.43 (138) | □10.24 (□260) | 1165 (529) | 50.91 (1293) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1209 (549) |
| CHFM15-6235DAY-EP | 15 x 4 (11 x 4) | 9.04 (230) | 49.21 (1250) | 5.43 (138) | □10.24 (□260) | 1177 (534) | 53.35 (1355) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1222 (554) |
| CHFM15-6235DBY-EP | | | 49.76 (1264) | | | 1251 (568) | 53.90 (1369) | | | | | 1295 (588) |
| CHFM20-6235DAY-EP | 20 x 4 (15 x 4) | 10.26 (261) | 51.50 (1308) | 7.01 (178) | ø12.49 (ø317) | 1261 (572) | 56.79 (1443) | 12.30 (313) | ø12.61 (ø320) | 9.53 (242) | | 1347 (611) |
| CHFM20-6235DBY-EP | | | 52.36 (1330) | | | 1331 (604) | 57.66 (1465) | | | | | 1417 (643) |
| CHFM25-6235DAY-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 55.67 (1414) | 9.06 (230) | ø15.12 (ø384) | 1539 (698) | 62.52 (1588) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1636 (742) |
| CHFM25-6235DBY-EP | | | 56.54 (1436) | | | 1608 (730) | 63.39 (1610) | | | | | 1705 (774) |
| CHFM30-6235DAY-EP | 30 x 4 (22 x 4) | 13.39 (340) | 55.67 (1414) | 9.06 (230) | ø15.12 (ø384) | 1539 (698) | 62.52 (1588) | 15.91 (404) | ø15.28 (ø388) | 12.13 (308) | | 1636 (742) |
| CHFM30-6235DBY-EP | | | 56.54 (1436) | | | 1608 (730) | 63.39 (1610) | | | | | 1705 (774) |
| CHFM40-6235DBY-EP | 40 x 4 (30 x 4) | | | | | 1721 (781) | 68.27 (1734) | | | | | 1818 (825) |
| CHFM50-6235DBY-EP | 50 x 4 (37 x 4) | | 61.42 (1560) | | | 1789 (812) | | | | | | |

Note: [1] MP Dimension Symbol ø = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal F-Flange Mount

CHFM3-6245DAY-EP ▶ CHFM60-6255DBY-EP

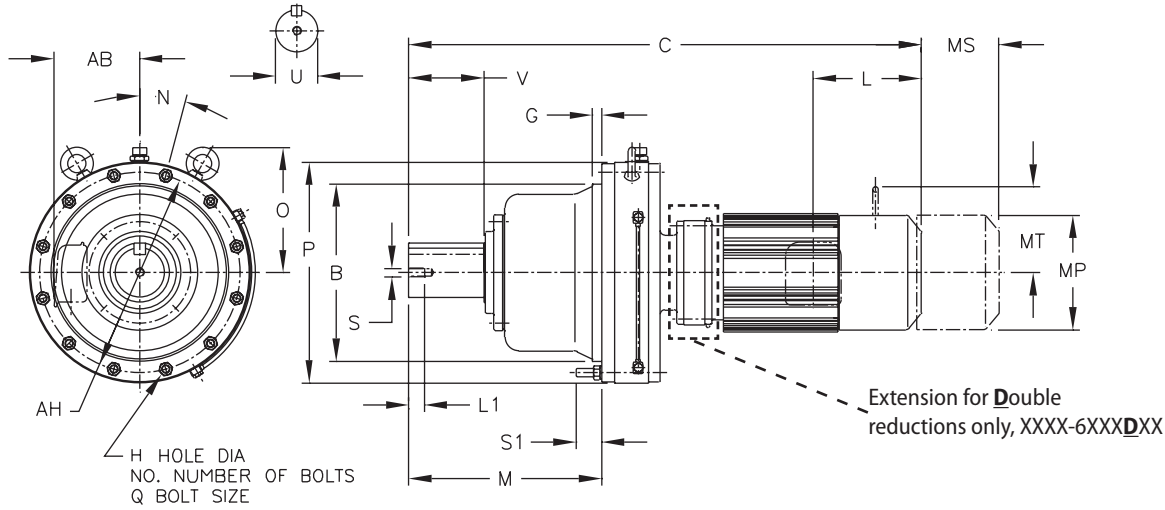


Table 1: Shaft Tolerances All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHFM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CHFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|--------------|----------------|--------------|--------------|--------------|----------------|--------------|----------------|-----|--------------|----------------|
| 6245Y | 19.69 (500) | 0.98 (25) | 1.06 (27) | 12 | 20.83 (529) | 15 | 24.17 (614) | M24 | 2.56 (65) | 22.05 (560) |
| 6255Y | 21.26 (540) | 1.18 (30) | 1.06 (27) | 0.47 (12) | 24.25 (616) | 0.59 (15) | 26.38 (670) | M24 | 3.58 (91) | 24.02 (610) |

All dimensions are in inches (mm)

| Model CHFM | Low Speed Shaft | | | | |
|--------------|------------------|---------------|------------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6245Y | 5.50 (139.7) | 7.87 (200) | 1-8UNC | 1.61 (41) | 1-1/4 x 7/8 x 7.87 (31.75 x 22.225 x 200) |
| 6255Y | 6.25 (158.75) | 9.45 (240) | 1-1/4-7UNC | 2.05 (52) | 1-1/2 x 1 x 9.45 (38.1 x 25.4 x 240) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal F-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)


CHFM3-6245DAY-EP ▶ CHFM60-6255DBY-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|-------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHFM3-6245DAY-EP | 3 x 4 (2.2 x 4) | 6.71 (170) | 43.66 (1109) | 4.53 (115) | □7.24 (□184) | 1312 (595) | 46.73 (1187) | 7.60 (193) | □7.24 (□184) | 5.43 (138) | 5.04 (128) | 1329 (603) |
| CHFM5-6245DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 45.12 (1146) | 4.65 (118) | □8.74 (□222) | 1337 (607) | 48.68 (1237) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 1361 (617) |
| CHFM8-6245DAY-EP | 7.5 x 4 (5.5 x 4) | | 46.81 (1189) | | | 1371 (622) | 50.37 (1280) | | | | | 1395 (633) |
| CHFM10-6245DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 48.27 (1226) | 5.43 (138) | □10.24 (□260) | 1399 (635) | 52.40 (1331) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 1443 (655) |
| CHFM15-6245DAY-EP | 15 x 4 (11 x 4) | | 50.71 (1288) | | | 1411 (640) | 54.84 (1393) | | | | | 1455 (660) |
| CHFM15-6245DBY-EP | | | 51.22 (1301) | | | 1478 (671) | 55.35 (1406) | | | | | 1523 (691) |
| CHFM20-6245DAY-EP | 20 x 4 (15 x 4) | 10.26 (261) | 52.99 (1346) | 7.01 (178) | φ12.49 (φ317) | 1494 (678) | 58.29 (1481) | 12.30 (313) | φ12.61 (φ320) | 9.53 (242) | | 1580 (717) |
| CHFM20-6245DBY-EP | | | 53.82 (1367) | | | 1558 (707) | 59.11 (1502) | | | | | 1644 (746) |
| CHFM25-6245DAY-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 57.17 (1452) | 9.06 (230) | φ15.12 (φ384) | 1772 (804) | 64.02 (1626) | 15.91 (404) | φ15.28 (φ388) | 12.13 (308) | | 1869 (848) |
| CHFM25-6245DBY-EP | | | 57.99 (1473) | | | 1835 (833) | 64.84 (1647) | | | | | 1932 (877) |
| CHFM30-6245DAY-EP | 30 x 4 (22 x 4) | | 57.17 (1452) | | | 1772 (804) | 64.02 (1626) | | | | | 1869 (848) |
| CHFM30-6245DBY-EP | | | 57.99 (1473) | | | 1835 (833) | 64.84 (1647) | | | | | 1932 (877) |
| CHFM40-6245DBY-EP | 40 x 4 (30 x 4) | | 62.87 (1597) | | | 1948 (884) | 69.72 (1771) | | | | | 2045 (928) |
| CHFM50-6245DBY-EP | 50 x 4 (37 x 4) | | | | | | | | | | | |
| CHFM5-6255DAY-EP | 5 x 4 (3.7 x 4) | 7.34 (186) | 50.83 (1291) | 4.65 (118) | □8.74 (□222) | 1942 (881) | 54.39 (1382) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 1966 (892) |
| CHFM8-6255DAY-EP | 7.5 x 4 (5.5 x 4) | | 52.52 (1334) | | | 1976 (897) | 56.08 (1425) | | | | | 2000 (908) |
| CHFM10-6255DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 53.35 (1355) | 5.43 (138) | □10.24 (□260) | 2005 (910) | 57.48 (1460) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 2050 (930) |
| CHFM15-6255DAY-EP | 15 x 4 (11 x 4) | | 55.79 (1417) | | | 2018 (916) | 59.92 (1522) | | | | | 2062 (936) |
| CHFM15-6255DBY-EP | | | 56.65 (1439) | | | 2188 (993) | 60.79 (1544) | | | | | 2232 (1013) |
| CHFM20-6255DAY-EP | 20 x 4 (15 x 4) | 10.26 (261) | 58.50 (1486) | 7.01 (178) | φ12.49 (φ317) | 2098 (952) | 63.80 (1621) | 12.30 (313) | φ12.61 (φ320) | 9.53 (242) | | 2184 (991) |
| CHFM20-6255DBY-EP | | | 59.37 (1508) | | | 2266 (1028) | 64.67 (1643) | | | | | 2352 (1067) |
| CHFM25-6255DAY-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 62.68 (1592) | 9.06 (230) | φ15.12 (φ384) | 2378 (1079) | 69.53 (1766) | 15.91 (404) | φ15.28 (φ388) | 12.13 (308) | | 2475 (1123) |
| CHFM25-6255DBY-EP | | | 63.54 (1614) | | | 2545 (1155) | 70.39 (1788) | | | | | 2642 (1199) |
| CHFM30-6255DAY-EP | 30 x 4 (22 x 4) | | 62.68 (1592) | | | 2378 (1079) | 69.53 (1766) | | | | | 2475 (1123) |
| CHFM30-6255DBY-EP | | | 63.54 (1614) | | | 2545 (1155) | 70.39 (1788) | | | | | 2642 (1199) |
| CHFM40-6255DAY-EP | 40 x 4 (30 x 4) | | 67.56 (1716) | | | 2491 (1130) | 74.41 (1890) | | | | | 2588 (1174) |
| CHFM40-6255DBY-EP | | | 68.43 (1738) | | | 2658 (1206) | 75.28 (1912) | | | | | 2755 (1250) |
| CHFM50-6255DBY-EP | 50 x 4 (37 x 4) | | | | | | | | | | | |
| CHFM60-6255DBY-EP | 60 x 4 (45 x 4) | 16.33 (415) | 69.88 (1775) | 16.81 (427) | φ18.66 (φ474) | 2854 (1295) | | | | | | |

Gearmotors

Dimensions

Note: [1] MP Dimension Symbol φ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover



Dimensions Integral Horizontal F-Flange Mount

CHFM8-6265DAY-EP ▶ CHFM60-6265DAY-EP

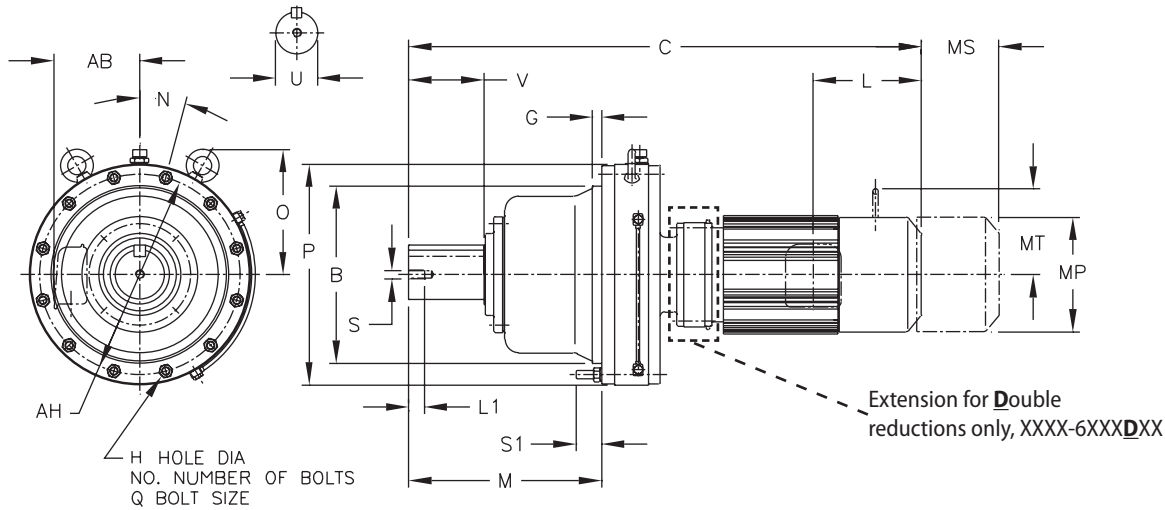


Table 1: Shaft Tolerances

All dimensions are in inches (mm)

| Low Speed Shaft Nominal Diameter | Tolerance Inches |
|---|-------------------------------------|
| 0.500 through 0.625 (12.700 through 15.875) | +0.0000 / -0.0004 (+0.000 / -0.011) |
| 0.750 through 1.125 (19.050 through 28.757) | +0.0000 / -0.0005 (+0.000 / -0.013) |
| 1.250 through 1.875 (31.750 through 47.625) | +0.0000 / -0.0006 (+0.000 / -0.016) |
| 2.000 through 3.125 (50.800 through 79.375) | +0.0000 / -0.0007 (+0.000 / -0.019) |
| 3.250 through 4.625 (82.550 through 117.475) | +0.0000 / -0.0009 (+0.000 / -0.022) |
| 4.750 through 7.000 (120.650 through 177.800) | +0.0000 / -0.0010 (+0.000 / -0.025) |

Note: CHFM units are oil lubricated standard, must be installed as shown above.


Dimensions are in inches (mm)

| Model CHFM | B | G | H | NO. | M | N | P | Q | S1 | AH |
|--------------|----------------|--------------|--------------|--------------|----------------|--------------|----------------|-----|--------------|----------------|
| 6265Y | 22.44 (570) | 1.57 (40) | 1.34 (34) | 0.47 (12) | 28.03 (712) | 0.59 (15) | 28.98 (736) | M30 | 3.35 (85) | 25.98 (660) |

All dimensions are in inches (mm)

| Model CHFM | Low Speed Shaft | | | | |
|--------------|-------------------|----------------|------------|--------------|--|
| | U ^[A] | V | S | L1 | Key |
| 6265Y | 6.63 (168.275) | 11.81 (300) | 1-1/4-7UNC | 2.05 (52) | 1-3/4 x 1-1/4 x 11.81 (44.45 x 31.75 x 300) |

Note: [A] Toleranced dimension, please refer to Table 1 above.



Dimensions Integral Horizontal F-Flange Mount

XXXX-6XX0/6XX5 Frame sizes have equal dimensions, different ratings.

All dimensions are in inches (mm), lbs (kg)

CHFM8-6265DAY-EP ▶ CHFM60-6265DAY-EP

| Model | HP x P (kW x P) | AB | Without Brake | | | | With Brake | | | | | |
|-------------------|----------------------|-------------|---------------|-------------|-------------------|-------------------|--------------|-------------|-------------------|-------------|------------|-------------------|
| | | | C | ML | MP ^[1] | Weight lb (kg) | C | ML | MP ^[1] | MS | MT | Weight lb (kg) |
| CHFM8-6265DAY-EP | 7.5 x 4 (5.5 x 4) | 7.34 (186) | 58.31 (1481) | 4.65 (118) | □8.74 (□222) | 2683 (1217) | 61.87 (1572) | 8.21 (209) | □8.74 (□222) | 6.02 (153) | 6.30 (160) | 2707 (1228) |
| CHFM10-6265DAY-EP | 10 x 4 (7.5 x 4) | 9.04 (230) | 58.54 (1487) | 5.43 (138) | □10.24 (□260) | 2713 (1231) | 62.68 (1592) | 9.57 (243) | □10.24 (□260) | 7.44 (189) | 7.32 (186) | 2758 (1251) |
| CHFM15-6265DAY-EP | 15 x 4 (11 x 4) | | 60.98 (1549) | | | 2726 (1237) | 65.12 (1654) | | | | | 2770 (1257) |
| CHFM20-6265DAY-EP | 20 x 4 (15 x 4) | 10.26 (261) | 63.70 (1618) | 7.01 (178) | ∅12.49 (∅317) | 2804 (1272) | 69.00 (1753) | 12.30 (313) | ∅12.61 (∅320) | 9.53 (242) | - | 2890 (1311) |
| CHFM25-6265DAY-EP | 25 x 4 (18.5 x 4) | 13.39 (340) | 67.87 (1724) | 9.06 (230) | ∅15.12 (∅384) | 3083 (1399) | 74.72 (1898) | 15.91 (404) | ∅15.28 (∅388) | 12.13 (308) | - | 3180 (1443) |
| CHFM30-6265DAY-EP | 30 x 4 (22 x 4) | | | | | 3196 (1450) | 79.61 (2022) | | | | | 3293 (1494) |
| CHFM40-6265DAY-EP | 40 x 4 (30 x 4) | | 72.76 (1848) | | | 3264 (1481) | - | - | - | - | | - |
| CHFM50-6265DAY-EP | 50 x 4 (37 x 4) | | 3392 (1539) | | | - | - | - | - | - | | - |
| CHFM60-6265DAY-EP | 60 x 4 (45 x 4) | 16.33 (415) | 74.21 (1885) | 16.81 (427) | ∅18.66 (∅474) | 3392 (1539) | - | - | - | - | - | - |

Note: [1] MP Dimension Symbol ∅ = Round Fan Cover
MP Dimension Symbol □ = Square Fan Cover

3


Options

Options

Integral Vertical F-Flange Mount, Overhead Drive

Double Reduction

CVFM-6130/5DCY ▶ 6180/5DBY

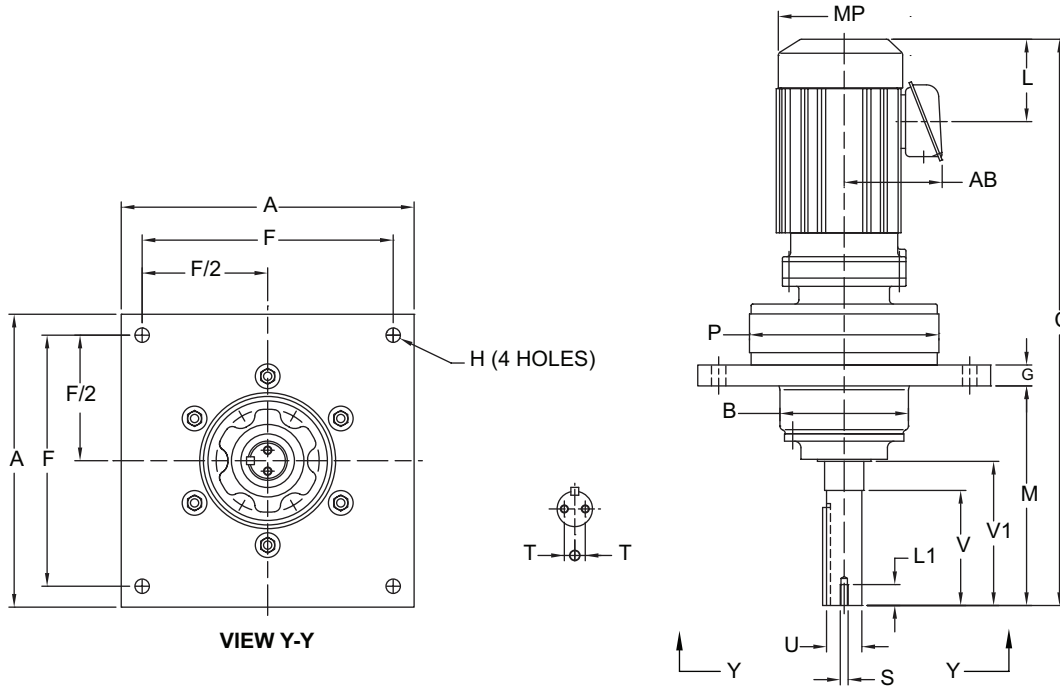

All dimensions are in inches

| Model CVFM | Model DVX | A | B | C | F | G | H | M | P |
|------------|-----------|-------|-------|-------|-------|------|------|-------|-------|
| 6130/5DCY | 35DVX | 12.50 | 6.14 | 17.91 | 10.50 | 0.88 | 0.56 | 9.50 | 9.06 |
| 6140/5DBY | 40DVX | 14.00 | 6.14 | 18.80 | 12.00 | 1.00 | 0.43 | 10.50 | 9.06 |
| 6160/5DCY | 50DVX | 16.00 | 7.68 | 20.15 | 14.00 | 0.98 | 0.81 | 10.50 | 11.81 |
| 6170/5DCY | 60DVX | 19.50 | 9.45 | 25.82 | 17.00 | 1.57 | 0.94 | 15.50 | 13.39 |
| 6180/5DBY | 70DVX | 22.00 | 12.99 | 28.00 | 19.00 | 1.75 | 1.12 | 15.50 | 14.57 |

Cyclo® 6000

All dimensions are in inches

| Model CVFM | Model DVX | Low Speed Shaft | | | | | | |
|------------|-----------|-----------------|------------------|------|------|------------|------|------------------|
| | | T | U ^[A] | V | V1 | S | L1 | Key |
| 6130/5DCY | 35DVX | 0.38 | 1.6250 | 4.50 | 5.76 | 5/16-18UNC | 1.00 | 3/8 X 3/8 X 3.70 |
| 6140/5DBY | 40DVX | 0.50 | 1.6875 | 5.50 | 6.89 | 3/8-16UNC | 1.00 | 3/8 X 3/8 X 4.69 |
| 6160/5DCY | 50DVX | 0.75 | 2.1875 | 5.50 | - | 3/8-16UNC | 1.00 | 1/2 X 1/2 X 5.24 |
| 6170/5DCY | 60DVX | 0.75 | 2.4375 | 7.50 | - | 3/8-16UNC | 1.00 | 5/8 X 5/8 X 6.50 |
| 6180/5DBY | 70DVX | 1.00 | 2.9375 | 7.50 | 9.22 | 3/8-16UNC | 1.00 | 3/4 X 3/4 X 6.50 |

Note: [A] Toleranced dimension, please refer to Table 1.

Table 1 - Shaft Tolerances

| Shaft Nominal Diameter (inches) | Tolerances (inches) |
|-------------------------------------|---------------------|
| 1.250 (1 1/4) through 1.875 (1 7/8) | +0.0000/-0.0006 |
| 2.000 (2) through 3.125 (3 1/8) | +0.0000/-0.0007 |
| 3.250 (3 1/4) through 4.625 (4 5/8) | +0.0000/-0.0009 |

Options

Integral Vertical F-Flange Mount, Overhead Drive

Double Reduction

CVFM-6130/5DCY ▶ 6180/5DBY (cont.)

All dimensions are in inches


| Model | Motor | | Without Brake | | | | Appx Wt (lb) |
|------------------|-------|------|---------------|------|------|------|-----------------|
| | HP | Pole | C | AB | L | MP | |
| CVFM05-6130/5DCY | 1/2 | 4 | 23.58 | 5.04 | 2.32 | 4.88 | 138 |
| CVFM08-6130/5DCY | 3/4 | 4 | 25.19 | 5.63 | 3.82 | 5.83 | 147 |
| CVFM1-6130/5DCY | 1 | 4 | 25.19 | 5.63 | 3.82 | 5.83 | 147 |
| CVFM1H-6130/5DCY | 1.5 | 4 | 26.49 | 5.83 | 3.94 | 6.30 | 156 |
| CVFM2-6130/5DCY | 2 | 4 | 26.49 | 5.83 | 3.94 | 6.30 | 156 |
| CVFM05-6140/5DBY | 1/2 | 4 | 24.15 | 5.04 | 2.32 | 4.88 | 150 |
| CVFM08-6140/5DBY | 3/4 | 4 | 25.74 | 5.63 | 3.82 | 5.83 | 158 |
| CVFM1-6140/5DBY | 1 | 4 | 25.74 | 5.63 | 3.82 | 5.83 | 158 |
| CVFM1H-6140/5DBY | 1.5 | 4 | 27.07 | 5.83 | 3.94 | 6.30 | 167 |
| CVFM2-6140/5DBY | 2 | 4 | 27.07 | 5.83 | 3.94 | 6.30 | 167 |
| CVFM05-6160/5DCY | 1/2 | 4 | 25.03 | 5.04 | 2.32 | 4.88 | 249 |
| CVFM08-6160/5DCY | 3/4 | 4 | 26.61 | 5.63 | 3.82 | 5.83 | 258 |
| CVFM1-6160/5DCY | 1 | 4 | 26.61 | 5.63 | 3.82 | 5.83 | 258 |
| CVFM1H-6160/5DCY | 1.5 | 4 | 27.90 | 5.83 | 3.94 | 6.30 | 267 |
| CVFM2-6160/5DCY | 2 | 4 | 27.90 | 5.83 | 3.94 | 6.30 | 267 |
| CVFM3-6160/5DCY | 3 | 4 | 28.69 | 6.10 | 4.13 | 6.81 | 276 |
| CVFM5-6160/5DCY | 5 | 4 | 29.60 | 6.54 | 5.00 | 8.35 | 298 |
| CVFM05-6170/5DCY | 1/2 | 4 | 30.70 | 5.04 | 2.32 | 4.88 | 404 |
| CVFM08-6170/5DCY | 3/4 | 4 | 32.28 | 5.63 | 3.82 | 5.83 | 413 |
| CVFM1-6170/5DCY | 1 | 4 | 32.28 | 5.63 | 3.82 | 5.83 | 413 |
| CVFM1H-6170/5DCY | 1.5 | 4 | 33.58 | 5.83 | 3.94 | 6.30 | 422 |
| CVFM2-6170/5DCY | 2 | 4 | 33.58 | 5.83 | 3.94 | 6.30 | 422 |
| CVFM3-6170/5DCY | 3 | 4 | 34.36 | 6.10 | 4.13 | 6.81 | 431 |
| CVFM5-6170/5DCY | 5 | 4 | 35.27 | 6.54 | 5.00 | 8.35 | 453 |
| CVFM8-6170/5DCY | 7.5 | 4 | 37.00 | 6.54 | 5.00 | 8.35 | 468 |
| CVFM1-6180/5DBY | 1 | 4 | 34.14 | 5.63 | 3.82 | 5.83 | 591 |
| CVFM1H-6180/5DBY | 1.5 | 4 | 35.44 | 5.83 | 3.94 | 6.30 | 599 |
| CVFM2-6180/5DBY | 2 | 4 | 35.44 | 5.83 | 3.94 | 6.30 | 599 |
| CVFM3-6180/5DBY | 3 | 4 | 36.22 | 6.10 | 4.13 | 6.81 | 606 |
| CVFM5-6180/5DBY | 5 | 4 | 37.13 | 6.54 | 5.00 | 8.35 | 628 |
| CVFM8-6180/5DBY | 7.5 | 4 | 38.86 | 6.54 | 5.00 | 8.35 | 643 |
| CVFM10-6180/5DBY | 10 | 4 | 39.77 | 8.31 | 5.63 | 9.88 | 677 |

Cyclo® 6000

Options

Options

Slide Rail

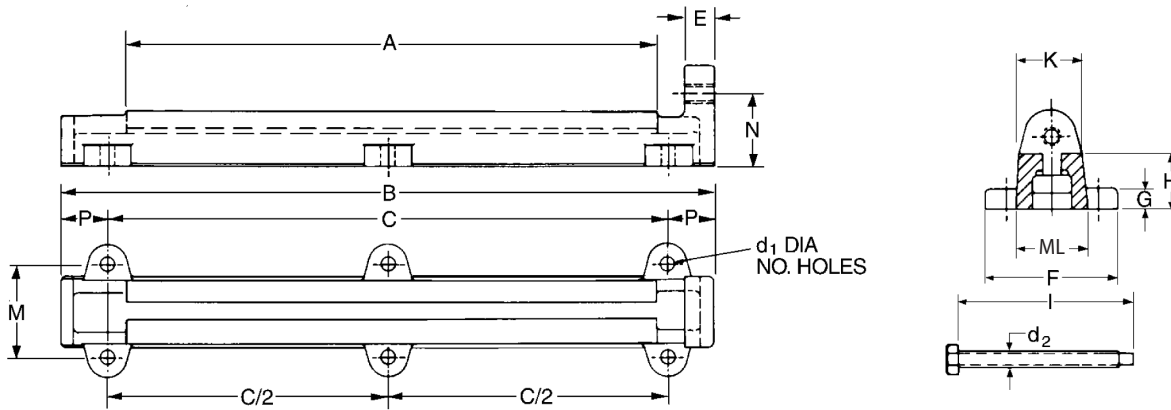

All dimensions are in inches


| Model ^[1] | A | B | C | E | F | G | H | K | ML | M | N | P | d ₁ | No. Holes | C/2 | Wt. Lbs. Pc. | Adjust ^[2] Bolt (d. x i) | Cyclo Mount ^[2] Bolt (Sq.Hd.) |
|----------------------------------|-------|-------|-------|------|-------|------|------|------|-------|------|------|------|----------------|-----------|-------|--------------|-------------------------------------|--|
| 6090, 6095 6100, 6105 610H | 10.63 | 17.32 | 16.14 | .79 | 1.34 | 0.71 | 1.97 | 1.18 | .79 | — | 2.28 | .59 | .55 | 2 | — | 5 | M12 x 4.72 | M10 x 1.57 |
| 6120, 6125 612H | 11.42 | 20.08 | 18.50 | 1.18 | 1.97 | 0.98 | 2.76 | 1.57 | 1.18 | — | 3.15 | .79 | .71 | 2 | — | 10 | M16 x 5.12 | M12 x 1.97 |
| 6130, 6135 6140, 6145 614H | 15.75 | 20.47 | 16.93 | 1.18 | 4.72 | 0.79 | 1.97 | 1.97 | 2.36 | 3.35 | 2.44 | 1.77 | .55 | 4 | — | 14 | M16 x 6.30 | M16 x 2.56 |
| 6160, 6165 616H | 20.47 | 25.20 | 21.65 | 1.18 | 5.12 | 0.98 | 2.05 | 2.17 | 2.76 | 3.74 | 2.76 | 1.77 | .55 | 4 | — | 26 | M16 x 7.87 | M16 x 2.56 |
| 6170, 6175 | 21.65 | 29.53 | 23.62 | 1.77 | 7.09 | 1.18 | 2.56 | 3.15 | 3.74 | 5.12 | 3.35 | 2.95 | .87 | 4 | — | 38 | M24 x 9.45 | M20 x 3.15 |
| 6180, 6185 | 25.59 | 33.46 | 27.56 | 1.77 | 7.09 | 1.18 | 3.15 | 3.15 | 3.74 | 5.12 | 3.94 | 2.95 | .87 | 4 | — | 42 | M24 x 11.81 | M20 x 3.15 |
| 6190, 6195 | 25.59 | 33.46 | 27.56 | 1.77 | 9.06 | 1.57 | 3.54 | 3.94 | 5.12 | 6.69 | 4.33 | 2.95 | 1.02 | 4 | — | 84 | M24 x 11.81 | M24 x 3.94 |
| 6205 | 31.50 | 39.37 | 33.46 | 1.77 | 9.06 | 1.38 | 3.94 | 4.72 | 5.91 | 7.09 | 4.92 | 2.95 | 1.02 | 6 | 16.73 | 114 | M24 x 12.99 | M24 x 4.33 |
| 6215 | 31.50 | 39.37 | 33.46 | 1.77 | 9.06 | 1.38 | 3.94 | 4.72 | 5.91 | 7.09 | 4.92 | 2.95 | 1.02 | 6 | 16.73 | 114 | M24 x 12.99 | M24 x 4.53 |
| 6225, 6235 | 32.28 | 48.82 | 37.00 | 2.17 | 10.04 | 1.61 | 5.51 | 6.69 | 10.04 | 6.89 | 6.50 | 5.91 | 1.54 | 6 | 18.50 | 254 | M36 x 16.34 | M30 x 4.72 |
| 6245 | 44.09 | 60.63 | 48.82 | 2.17 | 10.04 | 1.61 | 6.89 | 6.69 | 10.04 | 6.89 | 7.87 | 5.91 | 1.54 | 6 | 24.41 | 346 | M36 x 25.20 | M36 x 5.31 |
| 6255 | 44.09 | 60.63 | 48.82 | 2.17 | 10.04 | 1.61 | 6.89 | 6.69 | 10.04 | 6.89 | 7.87 | 5.91 | 1.54 | 6 | 24.41 | 346 | M36 x 25.20 | M36 x 5.51 |

Notes: [1] Models 6090 through 6255 require two rails

[2] Metric bolts furnished by factory; lengths show in inches

Low Speed Shaft Specifications

Metric DIN Style "G"

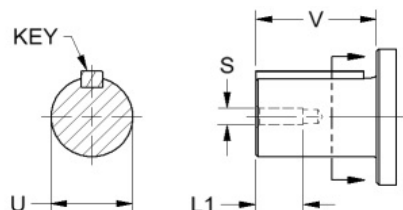


All dimensions are in mm

| Size | Type | ØU | Tolerance | V | S | L1 | Key Dimensions |
|-------|------|-------|------------------|----|-----|----|----------------|
| 606 X | G | 14 k6 | +0.012 +0.001 | 25 | M5 | 16 | 5 x 5 x 20 |
| 607 X | G | 19 k6 | +0.015 +0.002 | 30 | M6 | 16 | 6 x 6 x 25 |
| 608 X | G | 22 k6 | +0.015 +0.002 | 35 | M6 | 16 | 6 x 6 x 30 |
| 609 X | G | 28 k6 | +0.015 +0.002 | 35 | M8 | 20 | 8 x 7 x 32 |
| 610 X | G | 28 k6 | +0.015 +0.002 | 35 | M8 | 20 | 8 x 7 x 32 |
| 611 X | G | 32 k6 | +0.018 +0.002 | 45 | M8 | 20 | 10 x 8 x 37 |
| 612 X | G | 38 k6 | +0.018 +0.002 | 55 | M8 | 20 | 10 x 8 x 50 |
| 613 X | G | 50 h6 | 0 -0.016 | 70 | M10 | 20 | 14 x 9 x 56 |
| 614 X | G | 50 h6 | 0 -0.016 | 90 | M10 | 20 | 14 x 9 x 80 |

X = 0 or 5; single stage and multistage

Metric JIS

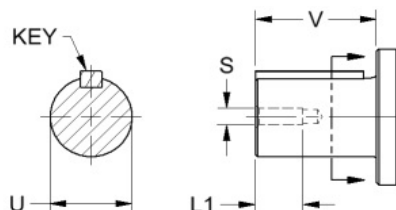


All dimensions are in mm

| Size | Type | ØU | Tolerance | V | S | L1 | Key Dimensions |
|-------|------|--------|-------------|-----|-----|----|----------------|
| 606 X | - | 14 h6 | +0/-0.011 | 25 | M5 | 16 | 5 x 5 x 20 |
| 607 X | - | 18 h6 | +0/-0.011 | 30 | M6 | 16 | 6 x 6 x 25 |
| 608 X | - | 22 h6 | +0/-0.013 | 35 | M6 | 16 | 6 x 6 x 30 |
| 609 X | - | 28 h6 | +0/-0.013 | 35 | M8 | 20 | 8 x 7 x 32 |
| 610 X | - | 28 h6 | +0/-0.013 | 35 | M8 | 20 | 8 x 7 x 32 |
| 611 X | - | 32 h6 | +0/-0.016 | 45 | M8 | 20 | 10 x 8 x 37 |
| 612 X | - | 38 h6 | +0/-0.016 | 55 | M8 | 20 | 10 x 8 x 50 |
| 613 X | - | 50 h6 | +0/-0.016 | 70 | M10 | 20 | 14 x 9 x 56 |
| 614 X | - | 50 h6 | +0/-0.016 | 90 | M10 | 20 | 14 x 9 x 80 |
| 616 X | - | 60 h6 | 0 -0.019 | 90 | M10 | 20 | 18 x 11 x 80 |
| 617 X | - | 70 h6 | 0 -0.019 | 90 | M12 | 24 | 20 x 12 x 80 |
| 618 X | - | 80 h6 | 0 -0.019 | 110 | M12 | 24 | 22 x 14 x 100 |
| 619 X | - | 95 h6 | 0 -0.022 | 135 | M20 | 34 | 25 x 14 x 125 |
| 620 X | - | 100 h6 | 0 -0.022 | 165 | M20 | 34 | 28 x 16 x 165 |
| 621 X | - | 110 h6 | 0 -0.022 | 165 | M20 | 34 | 28 x 16 x 165 |
| 622 X | - | 120 h6 | 0 -0.022 | 165 | M20 | 34 | 32 x 18 x 165 |
| 623 X | - | 130 h6 | 0 -0.025 | 200 | M24 | 41 | 32 x 18 x 200 |
| 624 X | - | 140 h6 | 0 -0.025 | 200 | M24 | 41 | 36 x 20 x 240 |
| 625 X | - | 160 h6 | 0 -0.025 | 240 | M30 | 52 | 40 x 22 x 240 |
| 626 X | - | 170 h6 | 0 -0.025 | 300 | M30 | 52 | 40 x 22 x 300 |
| 627 X | - | 180 h6 | 0 -0.025 | 330 | M30 | 52 | 45 x 22 x 330 |

X = 0 or 5; single stage and multistage

Metric DIN Style "E"

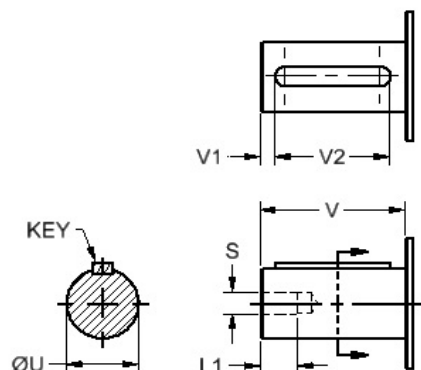

All dimensions are in mm

| Size | Type | ØU | Tolerance | V | S | L1 | Key Dimensions | V ₁ | V ₂ |
|-------|------|-------|------------------|-----|-----|----|----------------|----------------|----------------|
| 606 X | E | 14 k6 | +0.012 +0.001 | 30 | M5 | 16 | 5 x 5 x 20 | 2.5 | 25 |
| 607 X | E | 20 k6 | +0.015 +0.002 | 40 | M6 | 16 | 6 x 6 x 25 | 4 | 32 |
| 608 X | E | 25 k6 | +0.015 +0.002 | 50 | M10 | 20 | 6 x 6 x 30 | 3.5 | 40 |
| 609 X | E | 25 k6 | +0.015 +0.002 | 50 | M10 | 20 | 8 x 7 x 32 | 3.5 | 40 |
| 610 X | E | 30 k6 | +0.015 +0.002 | 60 | M10 | 20 | 8 x 7 x 32 | 3.5 | 50 |
| 611 X | E | 35 k6 | +0.018 +0.002 | 70 | M12 | 20 | 10 x 8 x 37 | 7 | 56 |
| 612 X | E | 35 k6 | +0.018 +0.002 | 70 | M12 | 24 | 10 x 8 x 50 | 7 | 56 |
| 613 X | E | 50 k6 | +0.018 +0.002 | 100 | M16 | 30 | 14 x 9 x 56 | 10 | 80 |
| 614 X | E | 50 k6 | +0.018 +0.002 | 100 | M16 | 30 | 14 x 9 x 80 | 10 | 80 |

X = 0 or 5; single stage and multistage

Options

Industry Packages

Four food-grade packages are available for use in machinery where there is incidental food contact. (Chemi SHIELD, SHIELD360, Food-Grade, and Ultra SHIELD360)

The food-grade optional packages are available for Cyclo® frame sizes 6060 through 6165.

When ordering, choose the Special Specification Code (SSC) that meets your requirements to obtain the features listed below.

| Modification | Chemi SHIELD360* | Chemical Duty | Mill Duty | Low Temp | High Temp | Weather Proof IP54 | Washdown IP55 | SHIELD360* | Food-Grade | Ultra SHIELD360* |
|-------------------------------------|------------------|---------------|-----------|----------|-----------|--------------------|---------------|------------|------------|------------------|
| Special Specification Code | YBA7 | A32 | YB50 | C30 | D50 | A11/A10 | A1C/N43 | YBA5 | YBA1 | YBA8 |
| Motor Portion | | | | | | | | | | |
| Gasketed Conduit Box | X | X | | | | X | X | X | X | |
| V Ring Seal- Fan End | X | X | | | | X | X | X | X | |
| Special Oil Seal | | | | X | X | | | | | |
| Special Windings | | | | X | X | | | | | |
| Sealer @ Joints | X | X | | | | X | X | X | X | |
| Stainless Steel or Zinc Hardware | X | X | | | | | | | | |
| Special Fan | | | | X | X | | | | | |
| Epoxy Paint | | X | X | | | | X | | | |
| FDA Epoxy Paint | | | | | | | | | X | |
| FDA White Acrylic Top Coat | | | | | | | | X | | |
| FDA Stainless Grey Acrylic Top Coat | X | | | | | | | | | |
| Brake Cover and Seal | X | X | | | | X | X | X | | |
| Reducer Portion | | | | | | | | | | |
| Severe Duty Breather | X | X | X | | | X | X | | | X |
| Epoxy Paint | | X | X | | | | X | | | |
| FDA Epoxy Paint | | | | | | | | | X | |
| FDA White Acrylic Top Coat | | | | | | | | X | | |
| FDA Stainless Grey Acrylic Top Coat | X | X | | | | | | | | |
| FDA Stainless Grey Epoxy Clear Top | | | | | | | | | | X |
| FDA Grease/Oil | | | | | | | | X | X | X |
| Low Temp Grease / Oil | | | | X | | | | | | |
| High Temp Grease / Oil | | | | | X | | | | | |
| Double Output Seals | | | X | | | | X | | | |
| Polyacrylate High Temp Seals | | | | | X | | | | | |
| Low Temperature Seals | | | | X | | | | | | |
| FKM AM & Chemical | X | X | | | | | | | | X |
| Stainless Steel or Zinc Hardware | | | | | | | | | | X |
| Stainless or Tesa Nameplate | X | X | | | | | | | | X |
| Stainless Steel Output Shaft | X | | | | | | | | | X |
| High Capacity Bearing | | | X | | | | | | | |
| Shoulder Bolts or Dowel Pins | | | X | | | | | | | |
| Modified Oil Gauge | | | | | X | | | | | |
| Ductile Iron Housing | | | X | | | | | | | |

Stainless Steel Solid Shaft - maximum torque ratings with standard solid shaft diameters are the same as those listed in this catalog for standard models. Consult the factory when ordering smaller than standard diameters, or if there will be overhung load.

* UltraShield360™ available in quill input option only

Low Temp Package = -30 degrees C Maximum. For lower temperature requirements consult factory.

High Temp Package = 50 degrees C Maximum. For higher temperature requirements consult factory.

This page intentionally left blank.

4


Technical Information

Overhung Loads • Slow Speed Shaft

Overhung Loads are loads that act perpendicular to the reducer shaft. Each reducer has a maximum allowable overhung load (OHL) capacity, which is shown in the Frame Size Selection Tables for each reducer. In applications with an OHL, it is critical that the OHL is calculated and that the chosen reducer is adequately sized for the maximum OHL.

How to Calculate Overhung Load (OHL)

Step 1. Measure distance X from reducer collar surface to the centerline of the OHL.



Step 2. Determine Lf (Load Location Factor) for your chosen Frame Size, using Load Location Factor Table on the next page.

Step 3. Determine Cf (Connection Factor) and Fs (Shock Factor) from the tables below:

| Connection Factor (Cf) | | | Shock Factor (Fs) | |
|-------------------------|------------|------|-------------------|-----|
| CONNECTION TYPE | | Cf | SHOCK FACTOR | Fs |
| General Purpose Chain | Single Row | 1.0 | No Shock | 1.0 |
| | Double Row | 1.25 | Moderate Shock | 1.3 |
| Machined Gear or Pinion | | 1.25 | Heavy Shock | 1.6 |
| Synchronous Belt | | 1.5 | | |
| V-Belt | | 1.5 | | |
| Flat Belt | | 2.5 | | |

Step 4. Apply Lf, Cf and Sf to the formula to calculate the OHL.

$$Pr = \frac{TI}{R} \leq \frac{Pro}{Lf \cdot Cf \cdot Fs} \quad (\text{lbs, N})$$

- Pr = Actual radial load
- TI = Actual transmitted torque on slow speed shaft of reducer (lb • in, N • m)
- R = Pitch circle radius of sprocket, gear, pulley, ect. (inch, meter)
- Pro = Allowable radial load (lbs, N)
- Cf = Connection factor
- Fs = Shock factor
- Lf = Load location factor

Note: When the Slow Speed Shaft is under both Radial and Axial Load, calculate Overhung Load first and proceed with calculations on Axial Loads page 4.6

Step 5. Refer back to the Frame Size Selection Tables (pp. 2.9–2.100) to determine maximum allowable OHL capacity for the selected Frame Size.

If the calculated OHL does not exceed the OHL capacity (from Selection Table), the selected Frame Size is acceptable.



If the calculated OHL exceeds the OHL capacity, there are two standard options that can increase the OHL capacity of a reducer:

- High Capacity Bearings Option–R1
- Ductile Iron Housing & High Capacity Bearings Option–R2

If neither of these options adequately increase the OHL capacity:

1. Choose the next larger Frame Size, or
2. Move the OHL closer to the collar surface, or
3. Decrease the OHL by increasing the pitch diameter of the connecting drive.

Be sure to recalculate and verify the OHL capacity for the new frame size.

Overhung Loads, Slow Speed Shaft continued

Table 4.1 Load Location Factors (Lf), Slow Speed Shaft

| Frame Size | | X (inches) | | | | | | | | | | | | | | | | | | | |
|----------------------|--|------------|------|------|------|-------|-------|-------|------|-------|------|-------|------|-------|------|------|------|------|------|------|------|
| Single Reduction | Double Reduction | 1/4 | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 1 3/4 | 2 | 2 1/2 | 3 | 3 1/2 | 4 | 4 1/2 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
| 6060, 6065 | 6060DA, 6065DA | 0.86 | 1.08 | 1.49 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6070, 6075 | 6070DA, 6075DA | 0.85 | 0.96 | 1.23 | 1.61 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6080, 6085 | — | 0.83 | 0.91 | 1.01 | 1.30 | 1.63 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6090, 6095 | 6090DA, 6095DA | 0.88 | 0.95 | 1.10 | 1.40 | 1.73 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6100 6105 610H | 6100DA, 6105DA | 0.88 | 0.95 | 1.10 | 1.40 | 1.73 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6110, 6115 | — | 0.80 | 0.87 | 0.95 | 1.02 | 1.12 | 1.30 | 1.51 | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6120, 6125 612H | 6120DA, 6120DB 6125DA, 6125DB | — | 0.85 | 0.91 | 0.98 | 1.14 | 1.36 | 1.57 | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6130 6135 | 6130DA, 6130DB 6130DC, 6135DA 6135DB, 6135DC | — | — | 0.86 | 0.92 | 0.97 | 1.08 | 1.24 | 1.40 | 1.72 | — | — | — | — | — | — | — | — | — | — | — |
| 6140 6145 614H | 6140DA, 6140DB 6140DC, 6145DA 6145DB, 6145DC | — | — | — | 0.74 | 0.82 | 0.91 | 0.99 | 1.12 | 1.37 | 1.62 | 1.88 | — | — | — | — | — | — | — | — | — |
| 6160 6165 616H | 6160DA, 6160DB 6160DC, 6165DA 6165DB, 6165DC | — | — | — | 0.87 | 0.91 | 0.95 | 1.00 | 1.13 | 1.39 | 1.67 | 1.94 | — | — | — | — | — | — | — | — | — |
| 6170 6175 | 6170DA, 6170DB 6170DC, 6175DA | — | — | — | 0.89 | 0.93 | 0.96 | 1.00 | 1.13 | 1.39 | 1.67 | 1.94 | — | — | — | — | — | — | — | — | — |
| 6180 6185 | 6180DA, 6180DB 6185DA, 6185DB | — | — | — | 0.85 | 0.88 | 0.92 | 0.95 | 0.99 | 1.15 | 1.37 | 1.58 | — | — | — | — | — | — | — | — | — |
| 6190 6195 | 6190DA, 6190DB 6195DA, 6195DB | — | — | — | — | 0.86 | 0.88 | 0.91 | 0.93 | 0.99 | 1.13 | 1.30 | 1.48 | 1.67 | — | — | — | — | — | — | — |
| 6205 | 6205DA, 6205DB | — | — | — | — | — | — | 0.74 | 0.78 | 0.86 | 0.95 | 1.04 | 1.13 | 1.22 | 1.31 | 1.49 | — | — | — | — | — |
| 6215 | 6215DA, 6215DB | — | — | — | — | — | — | 0.73 | 0.78 | 0.86 | 0.95 | 1.04 | 1.14 | 1.23 | 1.32 | 1.50 | — | — | — | — | — |
| 6225 | 6225DA, 6225DB | — | — | — | — | — | — | 0.88 | 0.90 | 0.94 | 0.98 | 1.02 | 1.06 | 1.10 | 1.14 | 1.23 | — | — | — | — | — |
| 6235 | 6235DA, 6235DB | — | — | — | — | — | — | 0.84 | 0.85 | 0.89 | 0.93 | 0.97 | 1.00 | 1.04 | 1.08 | 1.16 | 1.23 | — | — | — | — |
| 6245 | 6245DA, 6245DB | — | — | — | — | — | — | 0.84 | 0.86 | 0.90 | 0.93 | 0.97 | 1.00 | 1.04 | 1.08 | 1.15 | 1.22 | — | — | — | — |
| 6255 | 6255DA, 6255DB | — | — | — | — | — | — | — | 0.83 | 0.86 | 0.89 | 0.93 | 0.95 | 0.99 | 1.02 | 1.08 | 1.21 | 1.38 | 1.54 | — | — |
| 6265 | 6265DA | — | — | — | — | — | — | — | — | — | 0.84 | 0.88 | 0.90 | 0.93 | 0.95 | 1.02 | 1.16 | 1.31 | 1.47 | 1.64 | 1.80 |
| 6275 | 6275DA | — | — | — | — | — | — | — | — | — | — | 0.71 | 0.76 | 0.80 | 0.85 | 0.95 | 1.08 | 1.23 | 1.37 | 1.52 | 1.67 |

Overhung Loads, Slow Speed Shaft continued

**Table 4.2 High Capacity Bearings Option
Type R1
Slow Speed Shaft Overhung Load Capacity (lbs.)**

| Frame Size | | Output Shaft Speed (RPM) | | | | | | | |
|----------------------|--|--------------------------|-------|-------|-------|-------|-------|-------|-------|
| Single Reduction | Double Reduction | 10 & Below | 15 | 20 | 25 | 30 | 35 | 40 | 50 |
| 6130, 6135 | 6130DA, 6130DB 6130DC, 6135DA 6135DB, 6135DC | 3310 | 3310 | 3310 | 3310 | 3310 | 3310 | 3310 | 3310 |
| 6160 6165 616H | 6160DA, 6160DB 6160DC, 6165DA 6165DB, 6165DC | 4960 | 4960 | 4960 | 4960 | 4960 | 4960 | 4960 | 4960 |
| 6170 6175 | 6170DA, 6170DB 6170DC, 6175DA 6175DB, 6175DC | 6640 | 6640 | 6640 | 6640 | 6640 | 6640 | 6640 | 6640 |
| 6180 6185 | 6180DA, 6180DB 6185DA, 6185DB | 9370 | 9370 | 9370 | 9370 | 9370 | 9370 | 9370 | 9370 |
| 6190 6195 | 6190DA, 6190DB 6195DA, 6195DB | 13200 | 13200 | 13200 | 13200 | 13200 | 13200 | 13200 | 12400 |

| Frame Size | | Output Shaft Speed (RPM) | | | | | | | |
|----------------------|--|--------------------------|-------|------|------|------|------|------|------|
| Single Reduction | Double Reduction | 60 | 80 | 100 | 125 | 150 | 200 | 250 | 300 |
| 6130, 6135 | 6130DA, 6130DB 6130DC, 6135DA 6135DB, 6135DC | 3310 | 3170 | 3040 | 2820 | 2670 | 2450 | 2290 | 2170 |
| 6160 6165 616H | 6160DA, 6160DB 6160DC, 6165DA 6165DB, 6165DC | 4960 | 4960 | 4850 | 4520 | 4280 | 3920 | 3660 | 3460 |
| 6170 6175 | 6170DA, 6170DB 6170DC, 6175DA 6175DB, 6175DC | 6640 | 6640 | 6590 | 6150 | 5820 | 5360 | 4980 | 4740 |
| 6180 6185 | 6180DA, 6180DB 6185DA, 6185DB | 9370 | 9280 | 8660 | 8140 | 7690 | 7050 | — | — |
| 6190 6195 | 6190DA, 6190DB 6195DA, 6195DB | 11900 | 10600 | 9900 | 9220 | 8600 | 7800 | — | — |

Overhung Loads, Slow Speed Shaft continued

**Table 4.3 Ductile Iron Housing and High Capacity Bearings Option
Type R2
Slow Speed Shaft Overhung Load Capacity (lbs.)**

| Frame Size | | Output Shaft Speed (RPM) | | | | | | | | | |
|----------------------|--|--------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Single Reduction | Double Reduction | 4 & Below | 5 | 6 | 8 | 10 | 15 | 20 | 25 | 30 | 35 |
| 6130, 6135 | 6130DA, 6130DB 6130DC, 6135DA 6135DB, 6135DC | 5396 | 5396 | 5396 | 5396 | 5396 | 5351 | 4901 | 4586 | 4339 | 4137 |
| 6160 6165 616H | 6160DA, 6160DB 6160DC, 6165DA 6165DB, 6165DC | 7554 | 7554 | 7554 | 7554 | 7554 | 7554 | 7554 | 7487 | 7082 | 6767 |
| 6170 6175 | 6170DA, 6170DB 6170DC, 6175DA 6175DB, 6175DC | 10319 | 10319 | 10319 | 10319 | 10319 | 10319 | 10319 | 10184 | 9645 | 9195 |
| 6180 6185 | 6180DA, 6180DB 6185DA, 6185DB | 12522 | 12522 | 12522 | 12522 | 12522 | 12522 | 12522 | 12522 | 12522 | 12140 |
| 6190 6195 | 6190DA, 6190DB 6195DA, 6195DB | 16142 | 16142 | 16142 | 16142 | 16142 | 16142 | 16142 | 16142 | 15580 | 14861 |
| 6205 | 6205DA, 6205DB | 21987 | 21987 | 21987 | 21987 | 21987 | 20031 | 18390 | 17199 | 16277 | 15535 |
| 6215 | 6215DA, 6215DB | 29860 | 28327 | 26754 | 24505 | 22932 | 20346 | 18660 | 17446 | 16524 | 15760 |
| 6225 | 6225DA, 6225DB | 36196 | 35072 | 33273 | 30351 | 28327 | 25180 | 23156 | 21650 | 20479 | 19559 |
| 6235 | 6235DA, 6235DB | 41142 | 41142 | 41142 | 38219 | 35746 | 31700 | 29002 | 27203 | 25629 | 24505 |
| 6245 | 6245DA, 6245DB | 50135 | 46987 | 44514 | 40692 | 37995 | 33723 | 31025 | 29002 | 27428 | 26079 |
| 6255 | 6255DA, 6255DB | 61601 | 58004 | 54856 | 50360 | 47212 | 41592 | 38219 | 35746 | 33948 | 32374 |
| 6265 | 6265DA | 63624 | 63624 | 63624 | 60701 | 56879 | 50360 | 46088 | 42941 | 40692 | 39119 |
| 6275 | 6275DA | 61151 | 61151 | 61151 | 61151 | 61151 | 61151 | 61151 | 61151 | 61151 | — |

| Frame Size | | Output Shaft Speed (RPM) | | | | | | | | | |
|----------------------|--|--------------------------|-------|-------|-------|-------|-------|-------|-------|------|------|
| Single Reduction | Double Reduction | 40 | 50 | 60 | 80 | 100 | 125 | 150 | 200 | 250 | 300 |
| 6130, 6135 | 6130DA, 6130DB 6130DC, 6135DA 6135DB, 6135DC | 4002 | 3710 | 3507 | 3237 | 3035 | 2833 | 2675 | 2451 | 2293 | 2172 |
| 6160 6165 616H | 6160DA, 6160DB 6160DC, 6165DA 6165DB, 6165DC | 6497 | 6070 | 5755 | 5283 | 4946 | 4609 | 4362 | 4024 | 3732 | 3462 |
| 6170 6175 | 6170DA, 6170DB 6170DC, 6175DA 6175DB, 6175DC | 8835 | 8273 | 7824 | 7172 | 6722 | 6272 | 5935 | 5463 | 4991 | 4744 |
| 6180 6185 | 6180DA, 6180DB 6185DA, 6185DB | 11668 | 10904 | 10319 | 9465 | 8858 | 8296 | 7846 | 7194 | — | — |
| 6190 6195 | 6190DA, 6190DB 6195DA, 6195DB | 14276 | 13354 | 12657 | 11601 | 10859 | 10139 | 9622 | 8835 | — | — |
| 6205 | 6205DA, 6205DB | 14928 | 13961 | 13219 | 12140 | 11353 | 10589 | 10027 | 9218 | — | — |
| 6215 | 6215DA, 6215DB | 15153 | 14164 | 13399 | 12320 | 11533 | 10769 | 10207 | 9353 | — | — |
| 6225 | 6225DA, 6225DB | 18772 | 17558 | 16637 | 15265 | 14276 | 13354 | 12657 | 11578 | — | — |
| 6235 | 6235DA, 6235DB | 23606 | 22055 | 20886 | 19177 | 17941 | 16749 | — | — | — | — |
| 6245 | 6245DA, 6245DB | 25180 | 23606 | 22235 | 20414 | 19087 | 17851 | — | — | — | — |
| 6255 | 6255DA, 6255DB | 31250 | 29002 | 27653 | 25180 | 23606 | 22100 | — | — | — | — |
| 6265 | 6265DA | 37320 | 35072 | 33273 | 30351 | 28327 | 26529 | — | — | — | — |
| 6275 | 6275DA | — | — | — | — | — | — | — | — | — | — |

Indicates ductile iron housing and high capacity bearing is standard

Axial Loads

How to Calculate Axial Loads

When axial and overhung loads are combined to act on the Slow Speed Shaft, this formula is used to determine if the combined loading is acceptable for the selected Cyclo® reducer.

Axial Loads are loads that act parallel to the reducer shaft. Each reducer has a maximum allowable axial load capacity, which is shown in table below. When the maximum allowable axial load exceeds the capacity shown in the table, the next larger frame size should be chosen.

Axial Load, PA

$$P_a \leq \frac{P_{ao}}{C_f \cdot F_s} \quad (\text{lbs, N})$$

Formula for Combined Radial and Axial Load on Slow Speed Shaft

$$\left(\frac{P_r \cdot L_f}{P_{ro}} + \frac{P_a}{P_{ao}} \right) \cdot C_f \cdot F_s \leq 1$$

- Pr = Actual Overhung Load
- Lf = Load Location Factor
- Pro = Allowable Overhung Load
- Pa = Actual Axial Load (lbs, N)
- Pao = Allowable Axial Load (lbs,N)
- Cf = Connection Factor
- Fs = Shock Factor



If the calculated loads exceed the limits shown below in Axial Load Capacity Table:

1. Decrease the OHL by moving the load closer to the shaft collar or by increasing the pitch diameter of the connecting device,
- or
2. Select the next larger frame size. Repeat the Axial Load calculation to verify the selection.

Table 4.6 Axial Load Capacity, Slow Speed Shaft (lbs.)


| Frame Size | | Output Shaft Speed (RPM) | | | | | | | | | | | | | | | |
|------------------|---|--------------------------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|-----------|
| Single Reduction | Double Reduction | ~10 | 15 | 20 | 25 | 30 | 35 | 40 | 50 | 60 | 80 | 100 | 125 | 150 | 200 | 250 | 300 |
| 6060 6065 | 6060DA 6065DA | 66 | 66 | 66 | 66 | 66 | 66 | 66 | 66 | 66 | 66 | 66 | 66 | 66 | 66 | — | — |
| 6070 6075 | 6070DA 6075DA | 176 | 176 | 176 | 176 | 176 | 176 | 176 | 176 | 176 | 176 | 176 | 176 | 176 | 176 | 176 | 176 |
| 6080 6085 | — | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 |
| 6090 6095 | 6090DA 6095DA | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 | 221 |
| 6100 6105 610H | 6100DA 6105DA | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 |
| 6110 6115 | — | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 | 330 |
| 6120 6125 612H | 6120DA 6120DB 6125DA 6125DB | 661 | 661 | 661 | 661 | 661 | 661 | 661 | 661 | 661 | 661 | 661 | 661 | 661 | 623 | 562 | 537 |
| 6130 6135 | 6130DA 6130DB 6130DC 6135DA 6135DB 6135DC | 881 | 881 | 881 | 881 | 881 | 881 | 881 | 881 | 881 | 881 | 881 | 881 | 881 | 881 | 881 | 881 |
| 6140 6145 614H | 6140DA 6140DB 6140DC 6145DA 6145DB 6145DC | 1214 | 1214 | 1214 | 1214 | 1214 | 1214 | 1214 | 1214 | 1214 | 1176 | 1093 | 1025 | 982 | 866 | 825 | 776 |
| 6160 6165 616H | 6160DA 6160DB 6160DC 6165DA 6165DB 6165DC | 1545 | 1545 | 1545 | 1545 | 1545 | 1545 | 1545 | 1545 | 1545 | 1545 | 1545 | 1545 | 1545 | 1416 | 1281 | — |
| 6170 6175 | 6170DA 6170DB 6170DC 6175DA 6175DB 6175DC | 2205 | 2205 | 2205 | 2205 | 2205 | 2205 | 2205 | 2205 | 2205 | 2205 | 2205 | 2205 | 2176 | 2028 | 1819 | 1648 1547 |
| 6180 6185 | 6180DA 6180DB 6185DA 6185DB | 3080 | 3080 | 3080 | 3080 | 3080 | 3080 | 3080 | 3080 | 3080 | 3080 | 3080 | 2945 | 2810 | 2473 | — | — |
| 6190 6195 | 6190DA 6190DB 6195DA 6195DB | 4406 | 4406 | 4406 | 4406 | 4406 | 4406 | 4406 | 4406 | 4406 | 4406 | 4406 | 4159 | 3934 | 3462 | — | — |
| 6205 | 6205DA 6205DB | 5958 | 5283 | 4744 | 4406 | 4182 | 4069 | 3979 | 3754 | 3530 | 3192 | 2968 | 2878 | 2765 | 2540 | — | — |
| 6215 | 6215DA 6215DB | 6183 | 5508 | 4969 | 4631 | 4406 | 4182 | 4069 | 3867 | 3642 | 3305 | 3080 | 2968 | 2878 | 2653 | — | — |
| 6225 | 6225DA 6225DB | 6610 | 5755 | 5216 | 4879 | 4631 | 4406 | 4204 | 3957 | 3754 | 3440 | 3237 | 3058 | 2945 | 2720 | — | — |
| 6235 | 6235DA 6235DB | 7936 | 7059 | 6385 | 5958 | 5621 | 5283 | 5081 | 4744 | 4519 | 4182 | 3979 | 3754 | — | — | — | — |
| 6245 | 6245DA 6245DB | 8386 | 7599 | 6947 | 6475 | 6138 | 5868 | 5643 | 5283 | 5013 | 4721 | 4474 | 4294 | — | — | — | — |
| 6255 | 6255DA 6255DB | 10814 | 9690 | 8858 | 8296 | 7891 | 7554 | 7262 | 6835 | 6407 | 6025 | 5733 | 5441 | — | — | — | — |
| 6265 | 6265DA | 11691 | 11691 | 11466 | 10679 | 10072 | 9622 | 9353 | 8746 | 8386 | 7824 | 7419 | 6992 | — | — | — | — |
| 6275 | 6275DA | 13242 | 13242 | 13242 | 13242 | 13242 | 13242 | 13242 | 13242 | 13242 | — | — | — | — | — | — | — |

Overhung Loads • High Speed Shaft

Overhung Loads are loads that act perpendicular to the reducer shaft. Each reducer has a maximum allowable overhung load (OHL) capacity, which is shown in the Frame Size Selection Tables for each reducer. In applications with an OHL, it is critical that the OHL is calculated and that the chosen reducer is adequately sized for the maximum OHL.

How to Calculate Overhung Load (OHL)

Step 1. Measure distance X from reducer collar surface to the centerline of the OHL.



Step 2. Determine Lf (Load Location Factor) for your chosen Frame Size, using Load Location Factor Table on the next page.

Step 3. Determine Cf (Connection Factor) and Fs (Shock Factor) from the tables below:

| Connection Factor (Cf) | | | Shock Factor (Fs) | |
|-------------------------|------------|------|-------------------|-----|
| CONNECTION TYPE | | Cf | SHOCK FACTOR | Fs |
| General Purpose Chain | Single Row | 1.0 | No Shock | 1.0 |
| | Double Row | 1.25 | Moderate Shock | 1.3 |
| Machined Gear or Pinion | | 1.25 | Heavy Shock | 1.6 |
| Synchronous Belt | | 1.50 | | |
| V-Belt | | 1.50 | | |
| Flat Belt | | 2.50 | | |

Step 4. Apply Lf, Cf and Sf to the formula to calculate the OHL.

$$Pr = \frac{TI}{R} \leq \frac{Pro}{Lf \cdot Cf \cdot Fs} \quad (\text{lbs, N})$$

Pr = Actual radial load
 TI = Actual transmitted torque on slow speed shaft of reducer (lb • in, N • m)
 R = Pitch circle radius of sprocket, gear, pulley, ect. (inch, meter)
 Pro = Allowable radial load (lbs, N)
 Cf = Coupling factor
 Fs = Shock factor
 Lf = Load location factor

Step 5. Refer back to the OHL Capacity Table to determine maximum allowable OHL capacity for the selected Frame Size.

If the calculated OHL does not exceed the OHL capacity (from Selection Table), the selected Frame Size is acceptable.



If the calculated OHL exceeds the OHL capacity, you must choose the next larger Frame Size. Be sure to recalculate and verify the OHL capacity for the new frame size.

Overhung Loads, High Speed Shaft continued

Table 4.8 Load Location Factors (Lf), High Speed Shaft

| Frame Size | | L (inch) | | | | | | | | | | | | | | | | | | |
|------------------|---|----------|------|------|------|-------|-------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|
| Single Reduction | Double Reduction | 1/4 | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 1 3/4 | 2 | 2 1/2 | 3 | 3 1/2 | 4 | 4 1/2 | 5 | 5 1/2 | 6 | 6 1/2 | 7 | 7 1/2 |
| 6060 6065 | 6060DA 6065DA 6070DA 6075DA | 0.78 | 1.07 | 1.52 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6070 6075 | 6090DA 6095DA 6100DA 6105DA 6120DA 6125DA 6130DA 6135DA 6140DA 6145DA | 0.78 | 1.07 | 1.52 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6080 6085 | — | 0.78 | 1.07 | 1.52 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6090 6095 | 6120DB 6125DB 6130DB 6135DB 6140DB 6145DB 6160DA 6165DA 6170DA 6175DA | 0.90 | 1.09 | 1.52 | 2.03 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6100 6105 610H | 6130DC 6135DC 6140DC 6145DC 6160DB 6165DB 6170DB 6175DB 6180DA 6185DA | 0.93 | 1.09 | 1.52 | 2.03 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6110 6115 | — | 0.93 | 1.09 | 1.52 | 2.03 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6120 6125 612H | 6160DC 6165DC 6170DC 6175DC 6190DA 6195DA 6205DA | — | 0.87 | 1.10 | 1.43 | 1.77 | 2.12 | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 6130 6135 | 6180DB 6185DB 6190DB 6195DB 6205DB 6215DA 6225DA | — | 0.84 | 0.98 | 1.25 | 1.53 | 1.83 | 2.11 | — | — | — | — | — | — | — | — | — | — | — | — |
| 6140 6145 614H | — | — | 0.84 | 0.98 | 1.25 | 1.53 | 1.83 | 2.11 | — | — | — | — | — | — | — | — | — | — | — | — |
| 6160 6165 616H | 6215DB 6235DA 6245DA | — | 0.94 | 0.97 | 1.06 | 1.22 | 1.36 | 1.51 | 1.66 | — | — | — | — | — | — | — | — | — | — | — |
| 6170 6175 | 6255DA 6225DB | — | — | 0.95 | 0.99 | 1.09 | 1.23 | 1.38 | 1.51 | 1.79 | 2.08 | — | — | — | — | — | — | — | — | — |
| 6180 6185 | 6235DB 6245DB | — | — | — | 0.96 | 1.01 | 1.11 | 1.24 | 1.37 | 1.63 | 1.88 | 2.15 | — | — | — | — | — | — | — | — |
| 6190 6195 | 6255DB 6265DA 6275DA | — | — | — | 0.95 | 0.99 | 1.06 | 1.15 | 1.26 | 1.47 | 1.69 | 1.90 | — | — | — | — | — | — | — | — |
| 6205 | — | — | — | — | 0.93 | 0.96 | 0.99 | 1.04 | 1.11 | 1.26 | 1.40 | 1.55 | 1.70 | 1.84 | — | — | — | — | — | — |
| 6215 | — | — | — | — | 0.93 | 0.96 | 0.99 | 1.03 | 1.09 | 1.23 | 1.36 | 1.50 | 1.63 | 1.76 | — | — | — | — | — | — |
| 6225 | — | — | — | — | 0.94 | 0.97 | 0.99 | 1.02 | 1.04 | 1.10 | 1.20 | 1.32 | 1.43 | 1.55 | — | — | — | — | — | — |
| 6235 | — | — | — | — | 0.84 | 0.86 | 0.88 | 0.93 | 0.99 | 1.10 | 1.22 | 1.33 | 1.45 | 1.57 | — | — | — | — | — | — |
| 6245 | — | — | — | — | 0.91 | 0.93 | 0.95 | 0.98 | 1.00 | 1.10 | 1.21 | 1.32 | 1.43 | 1.54 | — | — | — | — | — | — |
| 6255 | — | — | — | — | — | 0.93 | 0.94 | 0.96 | 1.00 | 1.07 | 1.15 | 1.23 | 1.31 | 1.39 | 1.47 | 1.55 | 1.63 | 1.71 | — | — |
| 6265 | — | — | — | — | — | 0.93 | 0.94 | 0.96 | 1.00 | 1.07 | 1.15 | 1.23 | 1.31 | 1.39 | 1.47 | 1.55 | 1.63 | 1.71 | — | — |
| 6275 | — | — | — | — | — | — | — | 0.94 | 0.98 | 1.02 | 1.13 | 1.23 | 1.34 | 1.45 | 1.56 | 1.66 | 1.77 | 1.90 | 2.00 | — |

Overhung Loads, High Speed Shaft continued

Table 4.9 Overhung Load Capacity, High Speed Shaft (lbs.)

| Frame Size | | Input Speed (RPM) | | | | | | | |
|-------------------|---|---------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Single Reduction | Double Reduction | Ratio | 1750 | 1450 | 1165 | 980 | 870 | 720 | 580 |
| 6060 6065 | 6060DA 6065DA 6070DA 6075DA | 6~17, 25~35 21, 43 | 44 17.6 | 33 6.6 | 33 11 | 44 11 | 44 11 | 44 11 | 44 11 |
| 6070 6075 | 6090DA 6095DA 6100DA 6105DA 6120DA 6125DA 6130DA 6135DA 6140DA 6145DA | 6~17, 25~35, 51, 59 21, 43 | 44 11 | 33 11 | 33 11 | 44 11 | 44 11 | 44 33 | 44 44 |
| 6080 6085 | — | 6~15, 21, 29, 43~59, 87 17, 35, 71 | 44 11 | 33 11 | 33 11 | 44 11 | 44 11 | 44 33 | 44 44 |
| 6090 6095 | 6120DB 6125DB 6130DB 6135DB 6140DB 6145D 6160DA 6165DA 6170DA 6175DA | 6~17, 25~71, 119 21, 87 | 66 44 | 66 44 | 66 44 | 66 44 | 66 55 | 66 55 | 66 66 |
| 6100 6105 610H | 6130DC 6135DC 6140DC 6145DC 6160DB 6165DB 6170DB 6175DB 6180DA 6185DA | 6~11, 17~119 13, 15 | 99 99 | 99 77 | 110 99 | 121 110 | 132 110 | 132 121 | 132 132 |
| 6110 6115 | — | 6, 8, 21~87 11~17 | 99 44 | 77 44 | 99 44 | 110 44 | 110 55 | 121 55 | 132 66 |
| 6120 6125 612H | 6160DC 6165DC 6170DC 6175DC 6190DA 6195DA 6205DA | 6~17 21~87 | 133 121 | 155 99 | 166 110 | 175 121 | 198 133 | 198 198 | 198 198 |
| 6130 6135 | 6180DB 6185DB 6190DB 6195DB 6205DB 6215DA 6225DA | 6~17, 21 25~87 | 308 288 | 308 288 | 308 288 | 342 308 | 364 330 | 387 353 | 418 398 |
| 6140 6145 614H | — | 6, 8 11~21 25 29~87 | 308 277 243 121 | 308 220 254 133 | 308 243 265 133 | 342 265 288 155 | 364 277 297 155 | 387 297 308 155 | 418 330 330 243 |
| 6160 6165 616H | 6215DB 6235DA 6245DA | 6~25, 51, 59 29~43, 71, 87 | 398 243 | 398 265 | 441 288 | 463 308 | 486 308 | 486 353 | 486 398 |
| 6170 6175 | 6255DA 6225DB | 11~87 | 463 | 463 | 508 | 508 | 528 | 551 | 596 |
| 6180 6185 | 6235DB 6245DB | 11~87 | 618 | 573 | 618 | 661 | 683 | 751 | 771 |
| 6190 6195 | 6255DB 6265DA 6275DA | 11~25 29~87 | 683 596 | 683 573 | 728 638 | 794 661 | 816 706 | 881 751 | 881 816 |
| 6205 | — | 11~87 | 1214 | 1104 | 1214 | 1324 | 1367 | 1401 | 1389 |
| 6215 | — | 11~87 | 1290 | 1147 | 1223 | 1378 | 1423 | 1533 | 1632 |
| 6225 | — | 11~87 | 1488 | 1302 | 1344 | 1378 | 1488 | 1567 | 1686 |
| 6235 | — | 11~87 | — | — | 2248 | 2140 | 2062 | 2019 | 1963 |
| 6245 | — | 11~87 | — | — | 2496 | 2271 | 2271 | 2383 | 2518 |
| 6255 | — | 11~87 | — | — | 2653 | 2428 | 2540 | 2765 | 2945 |
| 6265 | — | 11~87 | — | — | 2653 | 2428 | 2540 | 2765 | 2945 |
| 6275 | — | 29~87 | — | — | 3305 | 3305 | 3305 | 3305 | 3305 |

Lubrication

Cyclo® Gearmotors are either Grease lubricated or Oil lubricated. Refer to pages 4.11 and 4.12 to determine the unit lubrication type.

- Grease lubricated gearmotors are filled with grease prior to shipment and are ready for installation and operation
- Oil lubricated gearmotors must be filled with the proper amount of approved oil before installation and operation
- Lubrication methods (grease or oil) are specified for Cyclo® driven at standard input speed.

NOTE: Some models normally designed for oil lubrication may be specially ordered for grease lubrication; please consult factory.

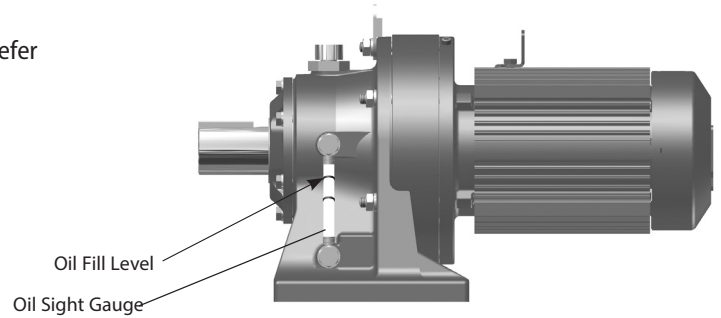


Figure 4.10 Oil Level Gauge

Approved Greases

Grease lubricated gearmotors are filled with grease prior to shipment and are ready for installation and operation. This information is provided for maintenance purposes.

Table 4.10a Approved Grease for Normally Oil Lubricated Units

| Ambient Temperature | | Planetary | Cycloid Discs |
|---------------------|-----------|---|--|
| °F | °C | (NLGI Grade 0) | (NLGI Grade 2) |
| 14 to 122 | -10 to 50 | Shell Gadus S2 V220 (610X, 612X to 617X) | Mobil Unirex N2 Shell Gadus S2 V220 |



When the Cyclo® gearmotor will be used under widely fluctuating temperatures or ambient temperatures (other than those listed here) or any other special conditions, consult the factory.

Approved Oils

Oil lubricated gearmotors must be filled with oil prior to operation. Fill the gearmotor to the correct level with the recommended oil.

Approved Oils:

| | | | | | |
|------------------------|-----------------|-------------------|------------|----------------------|------------------|
| Gulf Oil: | EP Lubricant HD | Shell Oil: | Omala S2 G | Kluber: | Kluberoil GEM1 |
| ExxonMobil Oil: | Spartan EP | Caltex: | Meropa | Idemitsu Oil: | Daphane Mechanic |
| Mobil Oil: | Mobilgear 600XP | Castrol: | Alpha SP | BP Oil: | Energol GR-XP |
| Total: | Carter EP | | | | |

Table 4.10b Ambient Temperatures


| °F | 14 | 32 | 50 | 68 | 86 | 104 | 122 | |
|--------|-----|----|-----------|----|----|-----|-----------------|--|
| °C | -10 | 0 | 10 | 20 | 30 | 40 | 50 | |
| ISO VG | 68 | | 100 / 150 | | | | 220 / 320 / 460 | |

For use in winter or relatively low ambient temperatures, use the lower viscosity oil specified for each ambient temperature range.

For consistent use in ambient temperatures outside of the range 32°F to 104°F (0°C to 40°C), consult factory.


Lubrication continued

HORIZONTAL Mounted Reducer • SINGLE Reduction • Frame Sizes 6060 to 6275



| Frame Size | Reduction Ratio | | | | | | | | | | | | | | | | | |
|--|-----------------|---|-------------------------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|
| | 3 | 5 | 6 | 8 | 11 | 13 | 15 | 17 | 21 | 25 | 29 | 35 | 43 | 51 | 59 | 71 | 87 | 119 |
| 6060, 6065 6070, 6075 6080, 6085 6090, 6095 6100, 6105, 610H 6110, 6115 6120, 6125, 612H | Grease | | Maintenance Free Grease | | | | | | | | | | | | | | | |
| 6130, 6135 6140, 6145, 614H 6160, 6165, 616H 6170, 6175 6180, 6185 6190, 6195 6205 6215 6225 6235 6245 6255 6265 6275 | Oil | | | | | | | | | | | | | | | | | |

HORIZONTAL Mounted Reducer • DOUBLE Reduction • Frame Sizes 6060DA to 6275DA



| Frame Size | Reduction Ratio | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|
| | 104 | 121 | 143 | 165 | 195 | 231 | 273 | 319 | 377 | 473 | 559 | 649 | 731 | 841 | 1003 | 1015 | 1247 | 1479 | 1849 | 2065 | 2537 | 3045 | 3481 | 4437 | 5133 | 6177 |
| 6060DA, 6065DA 6070DA, 6075DA 6090DA, 6095DA 6100DA, 6105DA 6120DA, 6125DA 6120DB, 6125DB | Maintenance Free Grease | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6130DA, 6135DA 6130DB, 6135DB 6130DC, 6135DC 6140DA, 6140DB, 6140DC 6145DA, 6145DB, 6145DC 6160DA, 6165DA 6160DB, 6165DB 6170DA, 6175DA 6170DB, 6175DB 6180DA, 6185DA | Grease | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6160DC, 6165DC 6170DC, 6175DC 6180DB, 6185DB 6190DA, 6195DA 6190DB, 6195DB 6205DA, 6205DB 6215DA, 6215DB 6225DA, 6225DB 6235DA, 6235DB 6245DA, 6245DB 6255DA, 6255DB 6265DA 6275DA | 121 | 165 | Oil | | | | | | | | | | | | | | | | | | | | | | | |

Technical Information

Lubrication continued

Oil Fill Quantities

Table 4.9 Oil Fill Quantities


| Cyclo Horizontal Foot Mounted / Cyclo Horizontal V-Flange Mounted | | | | | | | | | | | | | | |
|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Size | 613X | 614X | 616X | 617X | 618X | 619X | 6205 | 6215 | 6225 | 6235 | 6245 | 6255 | 6265 | 6275 |
| US gal | 0.18 | 0.18 | 0.37 | 0.50 | 0.66 | 1.1 | 1.5 | 2.2 | 2.6 | 4.0 | 4.2 | 5.5 | 7.7 | 14.8 |
| liter | 0.7 | 0.7 | 1.4 | 1.9 | 2.5 | 4 | 5.5 | 8.5 | 10 | 15 | 16 | 21 | 29 | 56 |
| Size | 616XDC | 617XDC | 618XDB | 619XDA | 619XDB | 6205DA | 6205DB | 6215DA | 6215DB | 6225DA | 6225DB | 6235DA | 6235DB | 6245DA |
| US gal | 0.40 | 0.63 | 0.92 | 1.5 | 1.6 | 1.6 | 1.6 | 2.6 | 2.6 | 2.9 | 2.9 | 4.5 | 4.5 | 4.8 |
| liter | 1.5 | 2.4 | 3.5 | 5.8 | 6 | 6 | 6 | 10 | 10 | 11 | 11 | 17 | 17 | 18 |
| Size | 6245DB | 6255DA | 6255DB | 6265DA | 6275DA | | | | | | | | | |
| US gal | 4.8 | 6.1 | 6.1 | 8.5 | 15.9 | | | | | | | | | |
| liter | 18 | 23 | 23 | 32 | 60 | | | | | | | | | |

| Cyclo Vertical V-Flange Mounted | | | | | | | | | | | | | | |
|---------------------------------|--------|--------|--------|--------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Size | 613X | 614X | 616X | 617X | 618X | 619X | 6205 | 6215 | 6225 | 6235 | 6245 | 6255 | 6265 | 6275 |
| US gal | 0.29 | 0.29 | 0.26 | 0.50 | 0.53 | 0.71 | 1.5 | 2.0 | 2.6 | 3.2 | 4.0 | 11.1 | 13.5 | (15.9) |
| liter | 1.1 | 1.1 | 1 | 1.9 | 2 | 2.7 | 5.7 | 7.5 | 10 | 12 | 15 | 42 | 51 | (60) |
| Size | 616XDC | 617XDC | 618XDB | 619XDA | 619XDB | 6205DA | 6205DB | 6215DA | 6215DB | 6225DA | 6225DB | 6235DA | 6235DB | 6245DA |
| US gal | 0.26 | 0.50 | 0.53 | 0.71 | 0.71 | 2.9 | 2.9 | 3.7 | 3.7 | 4.8 | 4.8 | 6.1 | 6.1 | 7.7 |
| liter | 1 | 1.9 | 2 | 2.7 | 2.7 | 11 | 11 | 14 | 14 | 18 | 18 | 23 | 23 | 29 |
| Size | 6245DB | 6255DA | 6255DB | 6265DA | 6275DA | | | | | | | | | |
| US gal | 7.7 | 11.1 | 11.1 | 13.5 | (15.85) | | | | | | | | | |
| liter | 29 | 42 | 42 | 51 | (60.00) | | | | | | | | | |

| Cyclo Horizontal Flange Mounted | | | | | | | | | | | | | | |
|---------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Size | 613X | 614X | 616X | 617X | 618X | 619X | 6205 | 6215 | 6225 | 6235 | 6245 | 6255 | 6265 | 6275 |
| US gal | 0.07 | 0.07 | 0.24 | 0.34 | 0.40 | 0.53 | 0.79 | 1.1 | 1.3 | 2.0 | 2.1 | 2.9 | 3.7 | 7.9 |
| liter | 0.25 | 0.25 | 0.9 | 1.3 | 1.5 | 2 | 3 | 4 | 5 | 7.5 | 8 | 11 | 14 | 30 |
| Size | 616XDC | 617XDC | 618XDB | 619XDA | 619XDB | 6205DA | 6205DB | 6215DA | 6215DB | 6225DA | 6225DB | 6235DA | 6235DB | 6245DA |
| US gal | 0.26 | 0.53 | 0.61 | 1.0 | 1.1 | 1.1 | 1.1 | 1.5 | 1.5 | 1.6 | 1.6 | 2.5 | 2.5 | 2.6 |
| liter | 1 | 2 | 2.3 | 3.8 | 4 | 4 | 4 | 5.5 | 5.5 | 6 | 6 | 9.5 | 9.5 | 10 |
| Size | 6245DB | 6255DA | 6255DB | 6265DA | | | | | | | | | | |
| US gal | 2.6 | 3.4 | 3.4 | 4.5 | | | | | | | | | | |
| liter | 10 | 13 | 13 | 17 | | | | | | | | | | |

X = 0 or 5
 () = With Trochoid Pump

Oil Fill Level

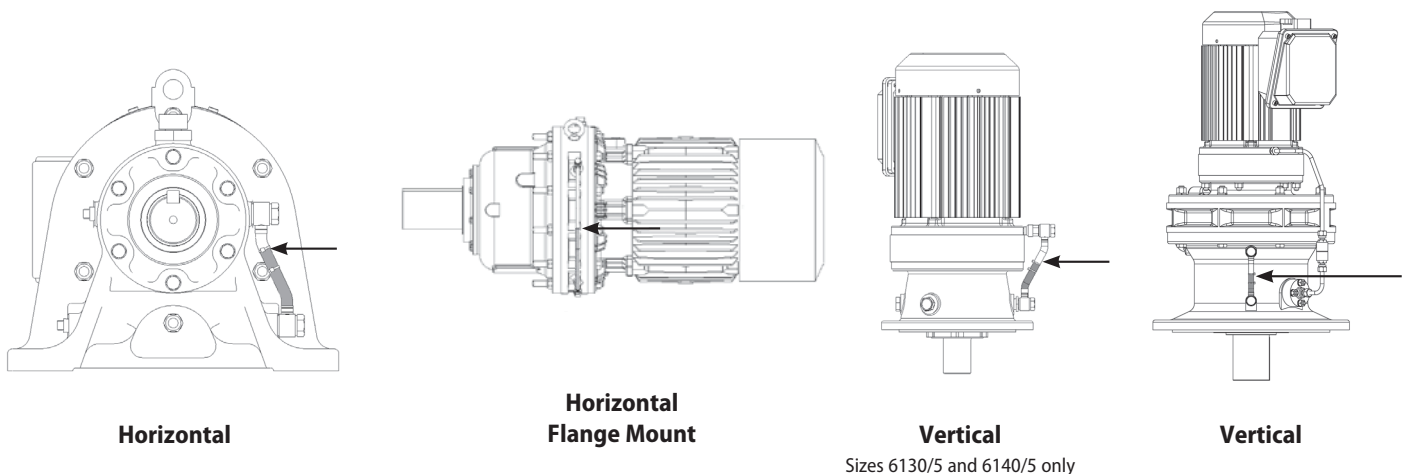

Technical Information

Lubrication continued

Table 4.14a Grease Fill Quantities for Maintenance Free Speed Reducers

oz. (g)

| Frame Size | 606X | 607X | 608X | 609X | 610X | 611X | 612X | 606XDA | 607XDA | 609XDA | 610XDA | 612XDA | 612XDB |
|---------------------------------------|-------------|-------------|-------------|-------------|--------------|--------------|--------------|-------------|-------------|-------------|--------------|--------------|--------------|
| Speed Reduction Mechanism (1st stage) | 0.9 (25) | 0.9 (25) | 1.4 (40) | 2.1 (60) | 4.2 (120) | 6.7 (190) | 8.8 (250) | 0.9 (25) | 0.9 (25) | 0.9 (25) | 0.9 (25) | 0.9 (25) | 2.1 (60) |
| Speed Reduction Mechanism (2nd stage) | | | | | | | | 0.9 (25) | 0.9 (25) | 2.1 (60) | 4.2 (120) | 8.8 (250) | 8.8 (250) |
| Slow Speed Shaft Bearing | 0.5 (15) | 0.5 (15) | 0.9 (25) | 1.1 (30) | 1.1 (30) | 1.6 (45) | 1.9 (55) | 0.5 (15) | 0.5 (15) | 1.1 (30) | 1.1 (30) | 1.9 (55) | 1.9 (55) |

X = 0 or 5

Table 4.14b Grease Fill Quantities for Non-Maintenance Free Speed Reducers

oz. (g)

| Frame Size | 613XDA | 613XDB | 613XDC | 614XDA | 614XDB | 614XDC | 616XDA | 616XDB | 616XDC | 617XDA | 617XDB | 617XDC |
|---------------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|
| Speed Reduction Mechanism (1st stage) | 0.9 (25) | 2.1 (60) | 4.2 (120) | 0.9 (25) | 2.1 (60) | 4.2 (120) | 2.1 (60) | 4.2 (120) | 8.8 (250) | 2.1 (60) | 4.2 (120) | 8.8 (250) |
| Speed Reduction Mechanism (2nd stage) | 15.9 (450) | 15.9 (450) | 15.9 (450) | 15.9 (450) | 15.9 (450) | 15.9 (450) | 26.5 (750) | 26.5 (750) | 26.5 (750) | 35.3 (1000) | 35.3 (1000) | 35.3 (1000) |
| Slow Speed Shaft Bearing | 10.6 (300) | 10.6 (300) | 10.6 (300) | 10.6 (300) | 10.6 (300) | 10.6 (300) | 10.6 (300) | 10.6 (300) | 10.6 (300) | 17.6 (500) | 17.6 (500) | 17.6 (500) |
| Frame Size | 618XDA | 618XDB | 619XDA | 619XDB | 6205DA | 6205DB | 6215DA | 6215DB | 6225DA | 6225DB | 6235DA | 6235DB |
| Speed Reduction Mechanism (1st stage) | 4.2 (120) | 15.9 (450) | 11.6 (330) | 15.9 (450) | 11.6 (330) | 15.9 (450) | 15.9 (450) | 26.5 (750) | 15.9 (450) | 35.3 (1000) | 26.5 (750) | 38.8 (1100) |
| Speed Reduction Mechanism (2nd stage) | 38.8 (1100) | 38.8 (1100) | 52.9 (1500) | 52.9 (1500) | 52.9 (1500) | 52.9 (1500) | 70.5 (2000) | 70.5 (2000) | 88.2 (2500) | 88.2 (2500) | 141.1 (4000) | 141.1 (4000) |
| Slow Speed Shaft Bearing | 21.2 (600) | 21.2 (600) | 24.7 (700) | 24.7 (700) | 24.7 (700) | 24.7 (700) | 28.2 (800) | 28.2 (800) | 31.7 (900) | 31.7 (900) | 35.3 (1000) | 35.3 (1000) |
| Frame Size | 6245DA | 6245DB | 6255DA | 6255DB | 6265DA | | | | | | | |
| Speed Reduction Mechanism (1st stage) | 26.5 (750) | 38.8 (1100) | 35.3 (1000) | 52.9 (1500) | 52.9 (1500) | | | | | | | |
| Speed Reduction Mechanism (2nd stage) | 158.7 (4500) | 158.7 (4500) | 211.6 (6000) | 211.6 (6000) | 282.2 (8000) | | | | | | | |
| Slow Speed Shaft Bearing | 38.8 (1100) | 38.8 (1100) | 42.3 (1200) | 42.3 (1200) | 45.9 (1300) | | | | | | | |

X = 0 or 5

Lubrication continued

Table 4.15a Grease Fill Quantities for Normally Oil-Lubricated Units

oz. (g)

| Frame Size | 6130 6135 6140 6145 | 6160 6165 | 6170 6175 | 6180 6185 | 6190 6195 | 6215 | 6225 | 6235 | 6245 | 6255 | 6265 |
|----------------------------------|------------------------------|---------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|
| Speed Reduction Mechanism | 15.9 (450) | 26.5 (750) | 35.3 (1000) | 36.8 (1100) | 52.9 (1500) | 70.5 (2000) | 88.2 (2500) | 141.1 (4000) | 158.7 (4500) | 211.6 (6000) | 282.2 (8000) |
| Slow Speed Shaft Bearing | 10.6 (300) | 10.6 (300) | 17.6 (500) | 21.2 (600) | 24.7 (700) | 28.2 (800) | 31.7 (900) | 35.3 (1000) | 36.8 (1100) | 42.3 (1200) | 45.9 (1300) |

Table 4.15b Optional Greases

| Application | Temperature Range | | Grease Manufacturer | Brand | NGLI Grade | Cyclo Frame Size |
|-------------------------|-------------------|--------------------------|---------------------|--------------|------------|------------------|
| | °F | °C | | | | |
| Food Grade | 14 to 104 | -10 to 40 | Ultrachem | Omnilube FGM | 2 | 606Xto 612X |
| Low Temperature | -40 to 301 | -40 to -1 ^[1] | ExxonMobil | Beacon 325 | 2 | All |
| | | | Anderol | Royco 22 CF | 2 | All |
| High Temperature | 105 to 180 | 40 to 80 | ExxonMobil | Unirex N | 2 | All |

NOTE: All units filled with grease other than Standard won't be considered Maintenance Free.

[1]: Consult factory for temperatures outside the established range.

Table 4.15c Optional Oils

| Application | Temperature Range | | Oil Manufacturer | Brand | ISO VG | Cyclo Frame Size |
|-------------------|-------------------|------------|------------------|-------------------|--------|-----------------------------|
| | °F | °C | | | | |
| Food Grade | 32 to 95 | 0 to 35 | Kluber | Klubersynth UH1 6 | 460 | 613X to 616X ^[1] |
| Low Temp | -40 to -22 | -40 to -30 | Shell | Tellus S2 V | 15 | All |

NOTE: [1]: Consult factory for Cyclo sizes not listed in the table

Motor Optional Conduit Box Location

Mounting Direction of Terminal Box

The terminal box mounting direction can be changed in units of 90°; specify the direction according to the table below when placing an order.

| Cable port direction | Terminal box mounting position (As viewed from output shaft with motor being horizontal) [1] | |
|----------------------|--|------------------|
| | Left side (N33) | Right side (N34) |
| Type A (N3A) | | |
| Type B (N3B) | | |
| Type C (N3C) | | |
| Type D (N3D) | | |

| Cable port direction | Terminal box mounting position (As viewed from output shaft with motor being horizontal) [1] | |
|----------------------|--|--------------|
| | Top (N35) | Bottom (N36) |
| Type A (N3A) | | |
| Type B (N3B) | | |
| Type C (N3C) | | |
| Type D (N3D) | | |

Note [1]: Arrow indicates direction of lead wires out of terminal boxes.

Table 4.16 Standard Position of Terminal Box and Direction of Lead Wires

| Terminal Box Mounting Position Cable Port Direction | Horizontal Mounting Configuration (Horizontal Slow Speed Shaft) | | | | Vertical Mounting Configuration (Vertical Slow Speed Shaft Down) | |
|--|--|-----------|-------------|-----------|---|-------------|
| | Standard Motor | | Brake Motor | | Standard Motor | Brake Motor |
| | 3 Phase | AF Motor | 3 Phase | AF Moto | 3 Phase | 3 Phase |
| | Left Side | Left Side | Left Side | Left Side | Left Side | Left Side |
| | B | B | B | B | A | A |

Motor continued

Motor Cover Mounting Specifications

Refer to dimension FA or FB when designing the mounting space into which the gearmotor is to fit.

Dimension FA: The space necessary to remove the fan cover or brake cover without removing the motor from the equipment.

Dimension FB: Minimum clearance to provide adequate ventilation..

Notes:

1. In some cases, it may be necessary to move the gearmotor to remove the fan cover or brake cover.
2. Dimension FB is the minimum clearance when the fan cover is up against a closed wall.

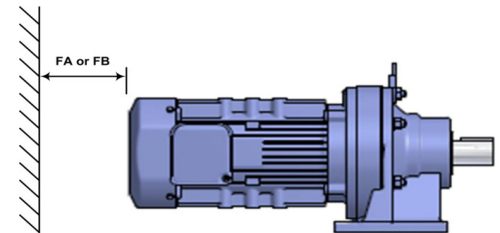


Figure 4.2 Motor Clearance

Table 4.17a Motor Clearance Requirements for IE1 motors (1/8 to 3/4 hp)

Units: inches (mm)

| IE1 Motor | | | Standard 3-Phase Motor | | 3-Phase With Brake Motor | |
|------------|-----------|-----------|------------------------|----------|--------------------------|----------|
| Frame Size | HP x Pole | kW x Pole | FA | FB | FA | FB |
| V-63S | 1/8 x 4 | 0.1 x 4 | - | - | 2.0 (49) | - |
| V-63M | 1/4 x 4 | 0.2 x 4 | 1.9 (48) | 0.8 (20) | 2.5 (61) | 0.8 (20) |
| V-63M | 1/3 x 4 | 0.25 x 4 | | | | |
| V-71M | 1/2 x 4 | 0.4 x 4 | 1.9 (48) | 0.8 (20) | 2.5 (61) | 0.8 (20) |
| V-80S | 3/4 x 4 | 0.55 x 4 | 2.0 (49) | 1.0 (25) | 3.7 (93) | 0.8 (20) |

| | | | | | | |
|-------|---------|----------|----------|----------|----------|----------|
| V-63S | 1/8 x 4 | 0.1 x 4 | - | - | 2.0 (49) | - |
| V-63M | 1/4 x 4 | 0.2 x 4 | 1.9 (48) | 0.8 (20) | 2.5 (61) | 0.8 (20) |
| V-63M | 1/3 x 4 | 0.25 x 4 | | | | |
| V-71M | 1/2 x 4 | 0.4 x 4 | 1.9 (48) | 0.8 (20) | 2.5 (61) | 0.8 (20) |
| V-80S | 3/4 x 4 | 0.55 x 4 | 2.0 (49) | 1.0 (25) | 3.7 (93) | 0.8 (20) |

Table 4.17b Motor Clearance Requirements for EP motors (1 to 75 hp)

Units: inches (mm)

| IE3 Motor | | | 3-Phase Without Brake Motor | | 3-Phase Brake (B) Motor | |
|------------|-----------|-----------|-----------------------------|----------|-------------------------|----------|
| Frame Size | HP x Pole | kW x Pole | FA | FB | FA | FB |
| N-80M | 1 x 4 | 0.75 x 4 | 2.3 (58) | 0.8 (20) | 4.8 (122) | 0.8 (20) |
| N-90S | 1.5 x 4 | 1.1 x 4 | 2.3 (59) | 0.8 (20) | 5.0 (128) | 0.8 (20) |
| N-90L | 2 x 4 | 1.5 x 4 | | | | |
| N-100L | 3 x 4 | 2.2 x 4 | 2.4 (60) | 0.8 (20) | 5.4 (138) | 0.8 (20) |
| N-112M | 5 x 4 | 3.7 x 4 | 2.5 (63) | 1.0 (25) | 6.0 (153) | 0.8 (20) |
| N-132S | 7.5 x 4 | 5.5 x 4 | | | | |
| N-132M | 10 x 4 | 7.5 x 4 | 3.3 (84) | 1.2 (30) | 7.4 (189) | 1 (25) |
| N-160M | 15 x 4 | 11 x 4 | | | | |
| N-160L | 20 x 4 | 15 x 4 | 4.2 (107) | 1.2 (30) | 9.5 (242) | 1.2 (30) |
| N-180MS | 25 x 4 | 18.5 x 4 | 5.3 (134) | 1.2 (30) | 12.1 (308) | 1.2 (30) |
| N-180M | 30 x 4 | 22 x 4 | | | | |
| N-180L | 40 x 4 | 30 x 4 | | | | |
| N-200L | 50 x 4 | 37 x 4 | 5.3 (134) | 1.2 (30) | 13.6 (345) | 1.2 (30) |
| N-200LL | 60 x 4 | 45 x 4 | 6.7 (171) | 1.2 (30) | 14.8 (376) | 1.2 (30) |
| N-225S | 75 x 4 | 55 x 4 | 6.7 (171) | 1.2 (30) | - | - |

Motor continued

Motor Conduit Box Details

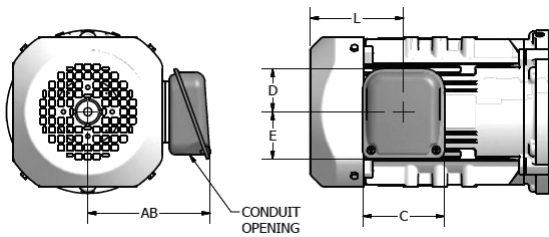


Figure 4.3 Indoor Duty (Optional) Box

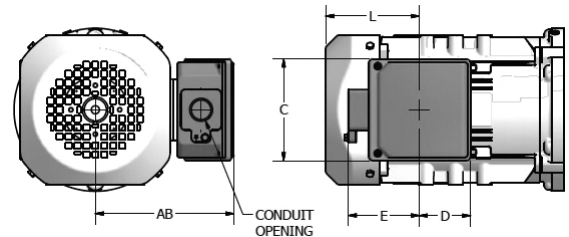


Figure 4.4 Global EP.NA and Outdoor Duty Box

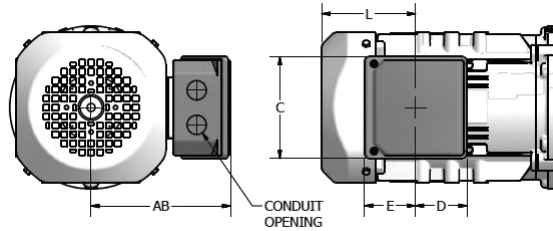


Figure 4.5 Global IE3 CE Box

Table 4.18 Terminal Box Mounting Centers

Units: inches

| Frame Size | Duty Rating | General Dimensions | | | | Without Brake | | With Brake | | Conduit Opening | Material |
|------------------------------------|------------------------------|--------------------|------------|-----------|-----------|---------------|------------|-------------------|------------|-----------------------|------------|
| | | AB | C | D | E | Available? | L | Available? | L | | |
| V-63S | Indoor Duty (Optional) | 4.11 (105) | 3.35 (85) | 2.09 (53) | 1.69 (43) | yes | 1.38 (35) | CF ⁽¹⁾ | 2.76 (70) | Ø0.90 (Ø23) | Steel |
| | Indoor Duty Brake (Optional) | 4.32 (110) | 3.94 (100) | 2.29 (58) | 2.10 (53) | | | yes | | Ø0.90 (Ø23) | Steel |
| | Outdoor Duty (Optional) | 4.98 (127) | 3.94 (100) | 2.42 (62) | 2.76 (70) | | | yes | | NPT1/2 ⁽²⁾ | Steel |
| | Global | 4.63 (118) | 4.09 (104) | 2.24 (57) | 2.16 (55) | | | yes | | NPT1/2 | Al Diecast |
| | Global CE | 4.63 (118) | 4.09 (104) | 2.24 (57) | 2.16 (55) | | | yes | | M16, M25 | Al Diecast |
| VA-63S V-63M VA-63M V-71M | Indoor Duty (Optional) | 4.11 (105) | 3.35 (85) | 2.09 (53) | 1.69 (43) | yes | 2.32 (59) | CF ⁽¹⁾ | 3.58 (91) | Ø0.90 (Ø23) | Steel |
| | Indoor Duty Brake (Optional) | 4.32 (110) | 3.94 (100) | 2.29 (58) | 2.10 (53) | | | yes | | Ø0.90 (Ø23) | Steel |
| | Outdoor Duty (Optional) | 4.98 (127) | 3.94 (100) | 2.42 (62) | 2.76 (70) | | | yes | | NPT1/2 ⁽²⁾ | Steel |
| | Global | 4.63 (118) | 4.09 (104) | 2.24 (57) | 2.16 (55) | | | yes | | NPT1/2 | Al Diecast |
| | Global CE | 4.63 (118) | 4.09 (104) | 2.24 (57) | 2.16 (55) | | | yes | | M16, M25 | Al Diecast |
| VA-71M V-80S | Indoor Duty (Optional) | 4.69 (119) | 3.35 (85) | 1.72 (44) | 2.04 (52) | yes | 3.82 (97) | CF ⁽¹⁾ | 5.51 (140) | Ø0.90 (Ø23) | Steel |
| | Indoor Duty Brake (Optional) | 5.68 (144) | 4.80 (122) | 2.60 (66) | 2.84 (72) | | | yes | | Ø0.90 (Ø23) | Steel |
| | Outdoor Duty (Optional) | 5.55 (141) | 3.94 (100) | 2.20 (56) | 2.95 (75) | | | yes | | G3/4 ⁽²⁾ | Steel |
| | Global | 5.67 (144) | 4.92 (125) | 2.50 (64) | 3.43 (87) | | | yes | | NPT3/4 ⁽²⁾ | Al Diecast |
| | Global CE | 5.71 (145) | 4.92 (125) | 2.50 (64) | 2.47 (63) | | | yes | | 2 - M25 | Al Diecast |
| VA-80S | Indoor Duty (Optional) | 4.88 (124) | 3.35 (85) | 1.72 (44) | 2.04 (52) | yes | 3.94 (100) | CF ⁽¹⁾ | 6.38 (162) | Ø0.90 (Ø23) | Steel |
| | Indoor Duty Brake (Optional) | 5.87 (149) | 4.80 (122) | 2.60 (66) | 2.84 (72) | | | yes | | Ø0.90 (Ø23) | Steel |
| | Outdoor Duty (Optional) | 5.75 (146) | 3.94 (100) | 2.20 (56) | 2.95 (75) | | | yes | | G3/4 ⁽²⁾ | Steel |
| | Global | 5.86 (149) | 4.92 (125) | 2.50 (64) | 3.43 (87) | | | yes | | NPT3/4 ⁽²⁾ | Al Diecast |
| | Global CE | 5.91 (150) | 4.92 (125) | 2.50 (64) | 2.47 (63) | | | yes | | 2 - M25 | Al Diecast |

(1) Please consult factory for brake configuration supporting this conduit box.

(2) Default thread option shown. Alternate thread options available. Please consult factory for alternate conduit thread options.

Motor continued

Table 4.18 Conduit Box Information (continued)

| Frame Size | Duty Rating | General Dimensions | | | | Without Brake | | With Brake | | Conduit Opening | Material |
|------------------|------------------------------|--------------------|------------|-----------|------------|---------------|------------|-------------------|------------|-----------------------|------------|
| | | AB | C | D | E | Available? | L | Available? | L | | |
| N-80M | Indoor Duty (Optional) | 4.85 (123) | 3.35 (85) | 1.72 (44) | 2.04 (52) | Yes | 3.82 (97) | CF ⁽¹⁾ | 6.32 (161) | Ø0.90 (Ø23) | Steel |
| | Indoor Duty Brake (Optional) | 5.99 (152) | 4.80 (122) | 2.60 (66) | 2.84 (72) | | | Yes | | Ø0.90 (Ø23) | Steel |
| | Outdoor Duty (Optional) | 5.87 (149) | 3.94 (100) | 2.20 (56) | 2.95 (75) | | | Yes | | G3/4 ⁽²⁾ | Steel |
| | Global EP.NA | 5.98 (152) | 4.92 (125) | 2.50 (64) | 3.43 (87) | | | Yes | | NPT3/4 ⁽²⁾ | Al Diecast |
| | Global IE3 CE | 6.02 (153) | 4.92 (125) | 2.50 (64) | 2.47 (63) | | | Yes | | 2 - M25 | Al Diecast |
| N-90S N-90L | Indoor Duty (Optional) | 5.03 (128) | 3.35 (85) | 1.72 (44) | 2.04 (52) | Yes | 3.82 (97) | CF ⁽¹⁾ | 6.56 (167) | Ø0.90 (Ø23) | Steel |
| | Indoor Duty Brake (Optional) | 6.17 (157) | 4.80 (122) | 2.60 (66) | 2.84 (72) | | | Yes | | Ø0.90 (Ø23) | Steel |
| | Outdoor Duty (Optional) | 6.04 (154) | 3.94 (100) | 2.20 (56) | 2.95 (75) | | | Yes | | G3/4 ⁽²⁾ | Steel |
| | Global EP.NA | 6.16 (156) | 4.92 (125) | 2.50 (64) | 3.43 (87) | | | Yes | | NPT3/4 ⁽²⁾ | Al Diecast |
| | Global IE3 CE | 6.20 (158) | 4.92 (125) | 2.50 (64) | 2.47 (63) | | | Yes | | 2 - M25 | Al Diecast |
| N-100L N-112S | Indoor Duty (Optional) | 5.93 (151) | 3.94 (100) | 2.09 (53) | 2.29 (58) | Yes | 4.53 (115) | CF ⁽¹⁾ | 7.60 (193) | Ø0.90 (Ø23) | Steel |
| | Indoor Duty Brake (Optional) | 6.72 (171) | 4.80 (122) | 2.60 (66) | 2.84 (72) | | | Yes | | Ø0.90 (Ø23) | Steel |
| | Outdoor Duty (Optional) | 7.21 (183) | 4.84 (123) | 2.52 (64) | 3.43 (87) | | | Yes | | G3/4 ⁽²⁾ | Steel |
| | Global EP.NA | 6.71 (170) | 4.92 (125) | 2.50 (64) | 3.43 (87) | | | Yes | | NPT3/4 ⁽²⁾ | Al Diecast |
| | Global IE3 CE | 6.75 (172) | 4.92 (125) | 2.50 (64) | 2.47 (63) | | | Yes | | 2 - M25 | Al Diecast |
| N-112M | Indoor Duty (Optional) | 6.56 (167) | 3.94 (100) | 2.09 (53) | 2.29 (58) | Yes | 4.65 (118) | CF ⁽¹⁾ | 8.21 (209) | Ø0.90 (Ø23) | Steel |
| | Indoor Duty Brake (Optional) | 7.35 (187) | 4.80 (122) | 2.60 (66) | 2.84 (72) | | | Yes | | Ø0.90 (Ø23) | Steel |
| | Outdoor Duty (Optional) | 7.84 (199) | 4.84 (123) | 2.52 (64) | 3.43 (87) | | | Yes | | G3/4 ⁽²⁾ | Steel |
| | Global EP.NA | 7.34 (186) | 4.92 (125) | 2.50 (64) | 3.43 (87) | | | Yes | | NPT3/4 ⁽²⁾ | Al Diecast |
| | Global IE3 CE | 7.38 (188) | 4.92 (125) | 2.50 (64) | 2.47 (63) | | | Yes | | 2 - M25 | Al Diecast |
| N-132S | Indoor Duty (Optional) | 6.56 (167) | 3.94 (100) | 2.09 (53) | 2.29 (58) | Yes | 4.65 (118) | CF ⁽¹⁾ | 8.21 (209) | Ø0.90 (Ø23) | Steel |
| | Indoor Duty Brake (Optional) | 7.35 (187) | 4.80 (122) | 2.60 (66) | 2.84 (72) | | | Yes | | Ø0.90 (Ø23) | Steel |
| | Outdoor Duty (Optional) | 7.84 (199) | 4.84 (123) | 2.52 (64) | 3.43 (87) | | | Yes | | G1 ⁽²⁾ | Steel |
| | Global EP.NA | 7.34 (186) | 4.92 (125) | 2.50 (64) | 3.43 (87) | | | Yes | | NPT1 ⁽²⁾ | Al Diecast |
| | Global IE3 CE | 7.38 (188) | 4.92 (125) | 2.50 (64) | 2.47 (63) | | | Yes | | 2 - M25 | Al Diecast |
| N-132M | Indoor Duty (Optional) | 7.98 (203) | 4.80 (122) | 2.60 (66) | 2.84 (72) | Yes | 5.43 (138) | Yes | 9.57 (243) | Ø1.69 (Ø43) | Steel |
| | Outdoor Duty (Optional) | 9.26 (235) | 6.06 (154) | 3.11 (79) | 4.13 (105) | | | | | G1 ⁽²⁾ | Steel |
| | Global EP.NA | 9.04 (230) | 6.69 (170) | 3.40 (86) | 4.43 (113) | | | | | NPT1 ⁽²⁾ | Al Diecast |
| | Global IE3 CE | 9.04 (230) | 6.69 (170) | 3.40 (86) | 3.51 (89) | | | | | 2-M32 | Al Diecast |

(1) Please consult factory for brake configuration supporting this conduit box.

(2) Default thread option shown. Alternate thread options available. Please consult factory for alternate conduit thread options.

Motor continued

Table 4.18 Conduit Box Information (continued)

| Frame Size | Duty Rating | General Dimensions | | | | Without Brake | | With Brake | | Conduit Opening | Material |
|---------------------------------|------------------------------|--------------------|-------------|------------|-------------|---------------|-------------|------------|-------------|-------------------------|------------|
| | | AB | C | D | E | Available? | L | Available? | L | | |
| N-160M | Indoor Duty (Optional) | 7.98 (203) | 4.80 (122) | 2.60 (66) | 2.84 (72) | Yes | 5.43 (138) | Yes | 9.57 (243) | Ø1.69 (Ø43) | Steel |
| | Outdoor Duty (Optional) | 9.26 (235) | 6.06 (154) | 3.11 (79) | 4.13 (105) | | | | | G1-1/4 ⁽²⁾ | Steel |
| | Global EP.NA | 9.04 (230) | 6.69 (170) | 3.40 (86) | 4.43 (113) | | | | | NPT1-1/4 ⁽²⁾ | Al Diecast |
| | Global IE3 CE | 9.04 (230) | 6.69 (170) | 3.40 (86) | 3.51 (89) | | | | | 2-M32 | Al Diecast |
| N-160L | Indoor Duty (Optional) | 9.20 (234) | 4.80 (122) | 2.60 (66) | 2.84 (72) | Yes | 7.01 (178) | No | 12.30 (313) | Ø1.69 (Ø43) | Steel |
| | Indoor Duty Brake (Optional) | 10.16 (258) | 6.54 (166) | 3.48 (88) | 3.89 (99) | | | Yes | | Ø1.69 (Ø43) | Steel |
| | Outdoor Duty (Optional) | 10.48 (266) | 6.06 (154) | 3.11 (79) | 4.13 (105) | | | Yes | | G1-1/4 ⁽²⁾ | Steel |
| | Global EP.NA | 10.26 (261) | 6.69 (170) | 3.40 (86) | 4.43 (113) | | | Yes | | NPT1-1/4 ⁽²⁾ | Al Diecast |
| | Global IE3 CE | 10.26 (261) | 6.69 (170) | 3.40 (86) | 3.51 (89) | | | Yes | | 2-M32 | Al Diecast |
| N-180MS N-180M | Indoor Duty (Optional) | 11.69 (297) | 6.54 (166) | 3.48 (88) | 3.89 (99) | Yes | 9.06 (230) | Yes | 15.91 (404) | Ø1.93 (Ø49) | Steel |
| | Outdoor Duty (Optional) | 14.08 (358) | 7.56 (192) | 4.53 (115) | 6.89 (175) | | | | | G1-1/4 ⁽²⁾ | Cast Iron |
| | Global EP.NA | 13.39 (340) | 9.02 (229) | 4.38 (111) | 5.47 (139) | | | | | NPT1-1/4 ⁽²⁾ | Cast Iron |
| | Global IE3 CE | 13.39 (340) | 9.02 (229) | 4.38 (111) | 4.43 (113) | | | | | 2 - M40 | Cast Iron |
| N-180L N-200L | Indoor Duty (Optional) | 11.69 (297) | 6.54 (166) | 3.48 (88) | 3.89 (99) | Yes | 9.06 (230) | Yes | 15.91 (404) | Ø1.93 (Ø49) | Steel |
| | Outdoor Duty (Optional) | 14.08 (358) | 7.56 (192) | 4.53 (115) | 6.89 (175) | | | | | G2 ⁽²⁾ | Cast Iron |
| | Global EP.NA | 13.39 (340) | 9.02 (229) | 4.38 (111) | 5.47 (139) | | | | | NPT2 ⁽²⁾ | Cast Iron |
| | Global IE3 CE | 13.39 (340) | 9.02 (229) | 4.38 (111) | 4.43 (113) | | | | | 2 - M40 | Cast Iron |
| N-200LL N-225S | Indoor Duty (Optional) | 16.24 (413) | 9.45 (240) | 4.19 (106) | 6.30 (160) | Yes | 16.81 (427) | | | Ø3.03 (Ø77) | Steel |
| | Outdoor Duty (Optional) | 19.03 (483) | 10.16 (258) | 5.28 (134) | 11.50 (292) | | | | | G2-1/2 ⁽²⁾ | Cast Iron |
| | Global EP.NA | 16.54 (420) | 10.63 (270) | 5.14 (131) | 6.22 (158) | | | | | NPT3 ⁽²⁾ | Cast Iron |
| | Global IE3 CE | 16.54 (420) | 10.63 (270) | 5.14 (131) | 5.13 (130) | | | | | 2 - M63 | Cast Iron |

(1) Please consult factory for brake configuration supporting this conduit box.

(2) Default thread option shown. Alternate thread options available. Please consult factory for alternate conduit thread options.

Fractional Motor Performance Data - 60Hz Operation

Table 4.21a Standard Three Phase, 230/460V, 60Hz, 1800 RPM Synchronous Speed, TEFC - UL Recognized

| Motor Capacity | | Frame Size | Full Load | | | Current (A) | | | | Starting Torque % of FL | Breakdown Torque % of FL | Nominal Efficiency % | Power Factor % | NEMA Code Letter |
|----------------|------|------------|-----------|--------|-------|-------------|------|-----------------|------------------|-------------------------|--------------------------|----------------------|----------------|------------------|
| HP | kW | | Rated RPM | Torque | | Full Load | | No Load % of FL | Starting % of FL | | | | | |
| | | | | in-lbs | N-m | 230V | 460V | | | | | | | |
| 1/8** | 0.1 | V-63S | 1730 | 4.55 | 0.514 | 0.66 | 0.33 | 86.1 | 424 | 326 | 308 | 63.3 | 60.0 | K |
| 1/4 | 0.2 | V-63M | 1730 | 9.10 | 1.03 | 1.12 | 0.56 | 79.6 | 464 | 300 | 287 | 69.2 | 65.1 | K |
| 1/3 | 0.25 | V-63M | 1700 | 12.2 | 1.38 | 1.24 | 0.62 | 72.0 | 419 | 237 | 226 | 70.1 | 72.0 | G |
| 1/2 | 0.4 | V-71M | 1750 | 18.0 | 2.03 | 2.15 | 1.08 | 77.7 | 456 | 295 | 276 | 71.5 | 65.4 | J |
| 3/4 | 0.55 | V-80S | 1720 | 27.5 | 3.11 | 2.47 | 1.24 | 68.4 | 500 | 266 | 261 | 76.5 | 73.1 | H |

** 1/8 HP is TENV

Table 4.21b Standard Three Phase, 240/480V, 60Hz, 1800 RPM Synchronous Speed, TEFC - UL Recognized

| Motor Capacity | | Frame Size | Full Load | | | Current (A) | | | | Starting Torque % of FL | Breakdown Torque % of FL | Nominal Efficiency % | Power Factor % | NEMA Code Letter |
|----------------|------|------------|-----------|--------|-------|-------------|------|-----------------|------------------|-------------------------|--------------------------|----------------------|----------------|------------------|
| HP | kW | | Rated RPM | Torque | | Full Load | | No Load % of FL | Starting % of FL | | | | | |
| | | | | in-lbs | N-m | 240V | 480V | | | | | | | |
| 1/8** | 0.1 | V-63S | 1740 | 4.53 | 0.512 | 0.69 | 0.35 | 87.4 | 429 | 364 | 341 | 61.9 | 56.3 | L |
| 1/4 | 0.2 | V-63M | 1740 | 9.05 | 1.02 | 1.16 | 0.58 | 83.6 | 466 | 335 | 317 | 68.2 | 61 | K |
| 1/3 | 0.25 | V-63M | 1710 | 12.3 | 1.39 | 1.27 | 0.63 | 77.0 | 429 | 268 | 238 | 69.8 | 68.1 | H |
| 1/2 | 0.4 | V-71M | 1750 | 18.0 | 2.04 | 2.27 | 1.13 | 83.2 | 460 | 328 | 303 | 70.4 | 60.4 | K |
| 3/4 | 0.55 | V-80S | 1730 | 27.3 | 3.09 | 2.52 | 1.26 | 73.4 | 508 | 294 | 285 | 76.0 | 69.2 | H |

** 1/8 HP is TENV

Table 4.21c Non-Standard Three Phase, 230/460V, 60Hz, 1800 RPM Synchronous Speed, TEFC - CSA Approved

| Motor Capacity | | Frame Size | Full Load | | | Current (A) | | | | Starting Torque % of FL | Breakdown Torque % of FL | Nominal Efficiency % | Power Factor % | NEMA Code Letter |
|----------------|------|------------|-----------|--------|-------|-------------|------|-----------------|------------------|-------------------------|--------------------------|----------------------|----------------|------------------|
| HP | kW | | Rated RPM | Torque | | Full Load | | No Load % of FL | Starting % of FL | | | | | |
| | | | | in-lbs | N-m | 230V | 460V | | | | | | | |
| 1/8** | 0.1 | V-63S | 1730 | 4.55 | 0.514 | 0.66 | 0.33 | 86.1 | 424 | 326 | 308 | 63.3 | 60.0 | K |
| 1/4 | 0.2 | V-63M | 1730 | 9.10 | 1.03 | 1.12 | 0.56 | 79.6 | 464 | 300 | 287 | 69.2 | 65.1 | K |
| 1/3 | 0.25 | V-63M | 1700 | 12.2 | 1.38 | 1.24 | 0.62 | 72.0 | 419 | 237 | 226 | 70.1 | 72.0 | G |
| 1/2 | 0.4 | V-71M | 1750 | 18.0 | 2.03 | 2.15 | 1.08 | 77.7 | 456 | 295 | 276 | 71.5 | 65.4 | J |
| 3/4 | 0.55 | V-80S | 1720 | 27.5 | 3.11 | 2.47 | 1.24 | 68.4 | 500 | 266 | 261 | 76.5 | 73.1 | H |

** 1/8 HP is TENV

Table 4.21d Non-Standard Three Phase, 575V, 60Hz, 1800 RPM Synchronous Speed, TEFC - CSA Approved

| Motor Capacity | | Frame Size | Full Load | | | Current (A) | | | | Starting Torque % of FL | Breakdown Torque % of FL | Nominal Efficiency % | Power Factor % | NEMA Code Letter |
|----------------|------|------------|-----------|--------|-------|-------------|------|-----------------|------------------|-------------------------|--------------------------|----------------------|----------------|------------------|
| HP | kW | | Rated RPM | Torque | | Full Load | | No Load % of FL | Starting % of FL | | | | | |
| | | | | in-lbs | N-m | 240V | 480V | | | | | | | |
| 1/8** | 0.1 | V-63S | 1720 | 4.58 | 0.518 | 0.28 | | 91.8 | 464 | 376 | 391 | 65.5 | 54.1 | M |
| 1/4 | 0.2 | V-63M | 1730 | 9.10 | 1.03 | 0.48 | | 85.4 | 458 | 316 | 340 | 69.4 | 60.1 | K |
| 1/3 | 0.25 | V-63M | 1710 | 12.2 | 1.38 | 0.52 | | 78.8 | 423 | 250 | 270 | 71.3 | 67.5 | H |
| 1/2 | 0.4 | V-71M | 1700 | 18.5 | 2.09 | 0.79 | | 75.8 | 468 | 309 | 300 | 75.2 | 63.1 | J |
| 3/4 | 0.55 | V-80S | 1700 | 27.8 | 3.14 | 1.00 | | 74.0 | 530 | 260 | 268 | 75.4 | 71.4 | H |

** 1/8 HP is TENV

Fractional AF-Motor (AV) Performance Data, Inverter Ready - 60Hz Operation

Table 4.22a Three Phase, 230/460V, 60Hz, 1800 RPM Synchronous Speed, 10:1 Constant Torque Speed Range TEFC

| Motor Capacity | | Frame Size | Wiring | Full Load Torque | | Voltage V | 60 Hz Current Amp | Speed RPM | Voltage V | 6 Hz Current Amp | Speed RPM | No Load Current @ 60 Hz |
|----------------|------|------------|--------------|------------------|------|-----------|-------------------|-----------|-----------|------------------|-----------|-------------------------|
| HP | kW | | | in-lbs | N-m | | | | | | | |
| 1/8 | 0.1 | VA-63S | High Voltage | 4.77 | 0.54 | 460 | 0.49 | 1770 | 68 | 0.37 | 125 | 0.46 |
| | | | Low Voltage | | | 230 | 0.98 | | 34 | 0.74 | | 0.92 |
| 1/4 | 0.2 | VA-63M | High Voltage | 9.6 | 1.08 | 460 | 0.91 | 1765 | 68 | 0.79 | 125 | 0.87 |
| | | | Low Voltage | | | 230 | 1.8 | | 34 | 1.6 | | 1.74 |
| 1/3 | 0.25 | VA-63M | High Voltage | 12 | 1.36 | 460 | 0.94 | 1755 | 78 | 0.87 | 125 | 0.87 |
| | | | Low Voltage | | | 230 | 1.9 | | 34 | 1.7 | | 1.74 |
| 1/2 | 0.4 | VA-71M | High Voltage | 19.2 | 2.17 | 460 | 1.3 | 1750 | 70 | 1.1 | 115 | 1.21 |
| | | | Low Voltage | | | 230 | 2.6 | | 35 | 2.3 | | 2.42 |
| 3/4 | 0.55 | VA-80S | High Voltage | 26.3 | 2.97 | 460 | 1.7 | 1760 | 62 | 1.6 | 125 | 1.54 |
| | | | Low Voltage | | | 230 | 3.3 | | 31 | 3.1 | | 3.07 |

Table 4.22b Three Phase, 230/460V, 60Hz, 1800 RPM Synchronous Speed, 10:1 Constant Torque Speed Range TEFC - CSA Approved

| Motor Capacity | | Frame Size | Wiring | Full Load Torque | | Voltage V | 60 Hz Current Amp | Speed RPM | Voltage V | 6 Hz Current Amp | Speed RPM | No Load Current @ 60 Hz |
|----------------|------|------------|--------------|------------------|------|-----------|-------------------|-----------|-----------|------------------|-----------|-------------------------|
| HP | kW | | | in-lbs | N-m | | | | | | | |
| 1/8 | 0.1 | VA-63S | High Voltage | 4.77 | 0.54 | 460 | 0.49 | 1770 | 68 | 0.37 | 125 | 0.46 |
| | | | Low Voltage | | | 230 | 0.98 | | 34 | 0.74 | | 0.92 |
| 1/4 | 0.2 | VA-63M | High Voltage | 9.57 | 1.08 | 460 | 0.91 | 1765 | 68 | 0.79 | 125 | 0.87 |
| | | | Low Voltage | | | 230 | 1.8 | | 34 | 1.6 | | 1.74 |
| 1/3 | 0.25 | VA-63M | High Voltage | 12.0 | 1.36 | 460 | 0.94 | 1755 | 78 | 0.87 | 125 | 0.87 |
| | | | Low Voltage | | | 230 | 1.9 | | 34 | 1.7 | | 1.74 |
| 1/2 | 0.4 | VA-71M | High Voltage | 19.3 | 2.17 | 460 | 1.3 | 1750 | 70 | 1.1 | 115 | 1.21 |
| | | | Low Voltage | | | 230 | 2.6 | | 35 | 2.3 | | 2.42 |
| 3/4 | 0.55 | VA-80S | High Voltage | 26.3 | 2.97 | 460 | 1.7 | 1765 | 62 | 1.5 | 145 | 1.54 |
| | | | Low Voltage | | | 230 | 3.3 | | 31 | 2.9 | | 3.08 |

Table 4.22c Three Phase, 575V, 60Hz, 1800 RPM Synchronous Speed, 10:1 Constant Torque Speed Range TEFC - CSA Approved

| Motor Capacity | | Frame Size | Full Load Torque | | Voltage V | 60 Hz Current Amp | Speed RPM | Voltage V | 6 Hz Current Amp | Speed RPM | No Load Current @ 60 Hz |
|----------------|------|------------|------------------|------|-----------|-------------------|-----------|-----------|------------------|-----------|-------------------------|
| HP | kW | | in-lbs | N-m | | | | | | | |
| 1/8 | 0.1 | VA-63S | 4.77 | 0.54 | 575 | 0.4 | 1770 | 85 | 0.3 | 130 | 0.4 |
| 1/4 | 0.2 | VA-63M | 9.57 | 1.08 | 575 | 0.7 | 1765 | 77 | 0.5 | 85 | 0.62 |
| 1/3 | 0.25 | VA-63M | 12.0 | 1.36 | 575 | 0.7 | 1755 | 95 | 0.7 | 120 | 0.62 |
| 1/2 | 0.4 | VA-71M | 19.4 | 2.17 | 575 | 0.94 | 1745 | 88 | 0.86 | 110 | 0.86 |
| 3/4 | 0.55 | VA-80S | 26.3 | 2.97 | 575 | 1.3 | 1765 | 76 | 1.1 | 140 | 0.98 |

** 1/8 HP is TENV

Motor Performance Data - (EP) Motor, 60Hz Operation

Table 4.23a Three Phase, 230/460v, 60Hz, 1800 RPM Synchronous Speed, TEFC

| Motor Capacity | | Frame Size | Full Load | | | Current (A) | | | | Starting Torque % of FL | Breakdown Torque % of FL | Nominal Efficiency % | Power Factor % | NEMA Code Letter |
|----------------|------|------------|-----------|--------|------|-------------|------|-----------------|------------------|-------------------------|--------------------------|----------------------|----------------|------------------|
| HP | kW | | Rated RPM | Torque | | Full Load | | No Load % of FL | Starting % of FL | | | | | |
| | | | | in-lbs | N-m | 230V | 460V | | | | | | | |
| 1 | 0.75 | N-80M | 1730 | 36.6 | 4.14 | 3.06 | 1.53 | 62.0 | 692 | 343 | 403 | 85.5 | 72.0 | K |
| 1.5 | 1.1 | N-90S | 1730 | 53.7 | 6.07 | 4.15 | 2.08 | 52.1 | 659 | 277 | 341 | 86.5 | 76.5 | J |
| 2 | 1.5 | N-90L | 1730 | 73.2 | 8.28 | 5.61 | 2.80 | 52.7 | 694 | 284 | 356 | 86.5 | 77.2 | J |
| 3 | 2.2 | N-100L | 1740 | 107 | 12.1 | 7.66 | 3.83 | 47.5 | 824 | 317 | 389 | 89.5 | 80.7 | K |
| 5 | 3.7 | N-112M | 1750 | 179 | 20.2 | 12.3 | 6.17 | 44.5 | 821 | 244 | 379 | 89.5 | 83.9 | K |
| 7.5 | 5.5 | N-132S | 1760 | 264 | 29.8 | 17.8 | 8.90 | 42.9 | 1000 | 290 | 461 | 91.7 | 84.2 | L |
| 10 | 7.5 | N-132M | 1760 | 360 | 40.7 | 24.4 | 12.2 | 36.1 | 606 | 193 | 277 | 91.7 | 84.1 | G |
| 15 | 11 | N-160M | 1770 | 525 | 59.3 | 38.4 | 19.2 | 48.0 | 736 | 274 | 369 | 92.4 | 77.8 | J |
| 20 | 15 | N-160L | 1770 | 716 | 80.9 | 47.7 | 23.8 | 36.5 | 828 | 227 | 351 | 93.0 | 85.0 | J |
| 25 | 18.5 | N-180MS | 1780 | 878 | 99.2 | 56.9 | 28.5 | 31.7 | 805 | 245 | 308 | 93.6 | 86.4 | J |
| 30 | 22 | N-180M | 1780 | 1040 | 118 | 67.4 | 33.7 | 28.8 | 673 | 206 | 258 | 93.6 | 87.1 | G |
| 40 | 30 | N-180L | 1780 | 1420 | 161 | 91.6 | 45.8 | 29.5 | 792 | 242 | 295 | 94.1 | 87.0 | J |
| 50 | 37 | N-200L | 1780 | 1760 | 198 | 113 | 56.5 | 31.7 | 890 | 276 | 328 | 94.5 | 86.7 | K |
| 60 | 45 | N-200LL | 1780 | 2140 | 241 | 138 | 69.0 | 37.7 | 962 | 308 | 393 | 95.0 | 86.3 | K |
| 75 | 55 | N-225S | 1780 | 2610 | 295 | 166 | 82.8 | 34.5 | 980 | 301 | 381 | 95.4 | 87.5 | K |

Table 4.23b Three Phase, 240/480V, 60Hz, 1800 RPM Synchronous Speed, TEFC

| Motor Capacity | | Frame Size | Full Load | | | Current (A) | | | | Starting Torque % of FL | Breakdown Torque % of FL | Nominal Efficiency % | Power Factor % | NEMA Code Letter |
|----------------|------|------------|-----------|--------|------|-------------|------|-----------------|------------------|-------------------------|--------------------------|----------------------|----------------|------------------|
| HP | kW | | Rated RPM | Torque | | Full Load | | No Load % of FL | Starting % of FL | | | | | |
| | | | | in-lbs | N-m | 240V | 480V | | | | | | | |
| 1 | 0.75 | N-80M | 1740 | 36.4 | 4.12 | 3.05 | 1.52 | 66.2 | 723 | 380 | 439 | 85.5 | 69.2 | L |
| 1.5 | 1.1 | N-90S | 1740 | 53.4 | 6.04 | 4.09 | 2.05 | 56.6 | 704 | 310 | 375 | 86.5 | 74.1 | J |
| 2 | 1.5 | N-90L | 1730 | 73.2 | 8.28 | 5.54 | 2.77 | 57.8 | 722 | 316 | 387 | 86.5 | 74.5 | K |
| 3 | 2.2 | N-100L | 1750 | 106 | 12.0 | 7.53 | 3.77 | 52.1 | 911 | 352 | 446 | 89.5 | 78.4 | L |
| 5 | 3.7 | N-112M | 1760 | 178 | 20.1 | 12.1 | 6.06 | 49.3 | 886 | 268 | 421 | 89.5 | 81.7 | K |
| 7.5 | 5.5 | N-132S | 1760 | 264 | 29.8 | 17.5 | 8.76 | 47.6 | 1060 | 321 | 506 | 91.7 | 82.0 | M |
| 10 | 7.5 | N-132M | 1760 | 360 | 40.7 | 23.8 | 11.9 | 40.3 | 652 | 212 | 308 | 91.7 | 82.2 | H |
| 15 | 11 | N-160M | 1770 | 525 | 59.3 | 38.7 | 19.3 | 54.0 | 760 | 305 | 405 | 92.4 | 74.0 | K |
| 20 | 15 | N-160L | 1770 | 716 | 80.9 | 46.5 | 23.2 | 41.0 | 893 | 251 | 387 | 93.0 | 83.3 | K |
| 25 | 18.5 | N-180MS | 1780 | 878 | 99.2 | 55.1 | 27.6 | 35.2 | 881 | 268 | 340 | 93.6 | 85.3 | K |
| 30 | 22 | N-180M | 1780 | 1040 | 118 | 64.9 | 32.4 | 29.9 | 748 | 224 | 285 | 93.6 | 86.5 | H |
| 40 | 30 | N-180L | 1780 | 1420 | 161 | 88.8 | 44.4 | 33.3 | 867 | 266 | 326 | 94.1 | 85.9 | J |
| 50 | 37 | N-200L | 1780 | 1760 | 198 | 110.0 | 55.1 | 35.7 | 968 | 304 | 361 | 94.5 | 85.2 | K |
| 60 | 45 | N-200LL | 1780 | 2140 | 241 | 135.0 | 67.6 | 42.0 | 1050 | 329 | 430 | 95.0 | 84.4 | L |
| 75 | 55 | N-225S | 1780 | 2610 | 295 | 161.0 | 80.6 | 38.7 | 1070 | 321 | 417 | 95.4 | 86.1 | L |

Motor continued

Motor Performance Data - (EP) 60Hz Operation (continued)

Table 4.24 Three Phase, 575V, 60Hz, 1800 RPM Synchronous Speed, TEFC

| Motor Capacity | | Frame Size | Full Load | | | Current (A) | | | Starting Torque % of FL | Breakdown Torque % of FL | Nominal Efficiency % | Power Factor % | NEMA Code Letter |
|----------------|------|------------|-----------|--------|------|----------------|-----------------|------------------|-------------------------|--------------------------|----------------------|----------------|------------------|
| HP | kW | | Rated RPM | Torque | | Full Load 575V | No Load % of FL | Starting % of FL | | | | | |
| | | | | in-lbs | N-m | | | | | | | | |
| 1 | 0.75 | N-80M | 1740 | 36.4 | 4.12 | 1.36 | 72.7 | 768 | 430 | 500 | 85.5 | 64.4 | M |
| 1.5 | 1.1 | N-90S | 1740 | 53.4 | 6.04 | 1.69 | 57.8 | 743 | 313 | 386 | 86.5 | 74.5 | K |
| 2 | 1.5 | N-90L | 1730 | 73.2 | 8.28 | 2.22 | 52.3 | 685 | 272 | 341 | 86.5 | 77.9 | J |
| 3 | 2.2 | N-100L | 1740 | 107 | 12.1 | 3.05 | 47.2 | 839 | 322 | 404 | 89.5 | 80.8 | K |
| 5 | 3.7 | N-112M | 1750 | 179 | 20.2 | 4.86 | 42.0 | 798 | 230 | 355 | 89.5 | 84.9 | J |
| 7.5 | 5.5 | N-132S | 1760 | 264 | 29.8 | 7.12 | 42.5 | 957 | 263 | 429 | 91.7 | 84.7 | L |
| 10 | 7.5 | N-132M | 1760 | 360 | 40.7 | 10.1 | 43.9 | 704 | 230 | 332 | 91.7 | 81.3 | H |
| 15 | 11 | N-160M | 1760 | 528 | 59.7 | 14.5 | 41.7 | 710 | 237 | 331 | 92.4 | 82.3 | H |
| 20 | 15 | N-160L | 1770 | 716 | 80.9 | 19.4 | 41.1 | 915 | 257 | 396 | 93.0 | 83.3 | K |
| 25 | 18.5 | N-180MS | 1780 | 878 | 99.2 | 22.8 | 35.2 | 916 | 276 | 350 | 93.6 | 86.1 | K |
| 30 | 22 | N-180M | 1780 | 1040 | 118 | 26.8 | 29.9 | 779 | 230 | 293 | 93.6 | 87.2 | H |
| 40 | 30 | N-180L | 1780 | 1420 | 161 | 37.0 | 31.5 | 857 | 263 | 321 | 94.1 | 86.1 | J |
| 50 | 37 | N-200L | 1780 | 1760 | 198 | 45.5 | 36.0 | 954 | 297 | 352 | 94.5 | 85.9 | K |
| 60 | 45 | N-200LL | 1780 | 2140 | 241 | 55.7 | 40.5 | 1040 | 324 | 422 | 95.0 | 85.4 | L |
| 75 | 55 | N-225S | 1780 | 2610 | 295 | 67.9 | 40.5 | 1110 | 355 | 442 | 95.4 | 85.3 | L |

Motor continued

Motor Performance Data - CE Motor, 50Hz Operation

Table 4.25a Three Phase, 220/380V, 50Hz, 1500 RPM Synchronous Speed, TEFC

| Motor Capacity | | Frame Size | Full Load | | | Current (A) | | | | Starting Torque % of FL | Breakdown Torque % of FL | Nominal Efficiency % | Power Factor % | NEMA Code Letter |
|----------------|------|------------|-----------|--------|-------|-------------|------|-----------------|------------------|-------------------------|--------------------------|----------------------|----------------|------------------|
| HP | kW | | Rated RPM | Torque | | Full Load | | No Load % of FL | Starting % of FL | | | | | |
| | | | | in-lbs | N-m | 220V | 380V | | | | | | | |
| 1/8** | 0.1 | V-63S | 1400 | 6.03 | 0.682 | 0.6 | 0.35 | 78.3 | 371 | 230 | 226 | 63.3 | 69.1 | H |
| 1/4 | 0.2 | V-63M | 1390 | 12.2 | 1.37 | 1.05 | 0.61 | 71.5 | 361 | 206 | 206 | 67.6 | 73.7 | F |
| 1/3 | 0.25 | V-63M | 1360 | 15.5 | 1.75 | 1.22 | 0.71 | 61.4 | 338 | 195 | 181 | 69.1 | 77.8 | E |
| 1/2 | 0.4 | V-71M | 1410 | 24.0 | 2.71 | 2.06 | 1.19 | 68.3 | 353 | 201 | 204 | 69.7 | 73.5 | F |
| 3/4 | 0.55 | V-80S | 1400 | 33.2 | 3.75 | 2.45 | 1.42 | 58.5 | 373 | 206 | 196 | 73.4 | 80.2 | E |
| 1 | 0.75 | N-80M | 1430 | 44.3 | 5.01 | 3.46 | 2.00 | 66.2 | 579 | 383 | 402 | 84.7 | 67.9 | K |
| 1.5 | 1.1 | N-90S | 1430 | 65.0 | 7.35 | 4.49 | 2.59 | 54.4 | 606 | 296 | 343 | 85.4 | 75.1 | J |
| 2 | 1.5 | N-90L | 1420 | 89.2 | 10.1 | 6.10 | 3.52 | 54.9 | 578 | 304 | 338 | 85.4 | 75.5 | H |
| 3 | 2.2 | N-100L | 1440 | 129 | 14.6 | 8.58 | 4.96 | 52.2 | 758 | 344 | 418 | 88.6 | 78.0 | K |
| 4 | 3.0 | N-112S | 1430 | 177 | 20.0 | 11.3 | 6.50 | 45.6 | 676 | 316 | 365 | 87.7 | 80.8 | J |
| 5 | 3.7 | N-112M | 1460 | 214 | 24.2 | 13.5 | 7.80 | 48.5 | 743 | 266 | 378 | 89.6 | 81.2 | J |
| 5.5 | 4.0 | N-112M | 1450 | 233 | 26.3 | 14.4 | 8.30 | 45.2 | 692 | 266 | 378 | 88.9 | 82.9 | J |
| 7.5 | 5.5 | N-132S | 1460 | 318 | 36.0 | - | 11.5 | 49.6 | 907 | 316 | 471 | 90.6 | 80.7 | L |
| 10 | 7.5 | N-132M | 1460 | 434 | 49.1 | - | 15.8 | 44.9 | 590 | 213 | 315 | 90.8 | 79.6 | H |
| 15 | 11 | N-160M | 1460 | 636 | 71.9 | - | 22.3 | 38.5 | 551 | 200 | 283 | 91.4 | 81.6 | G |
| 20 | 15 | N-160L | 1470 | 862 | 97.4 | - | 30.5 | 43.1 | 619 | 230 | 304 | 92.6 | 80.6 | H |
| 25 | 18.5 | N-180MS | 1480 | 1060 | 119 | - | 35.6 | 36.9 | 735 | 245 | 338 | 94.0 | 83.5 | J |
| 30 | 22 | N-180M | 1480 | 1260 | 142 | - | 41.9 | 31.4 | 624 | 206 | 284 | 93.5 | 85.4 | G |

** 1/8 HP is TENV

Table 4.25b Three Phase, 230/400V, 50Hz, 1500 RPM Synchronous Speed, TEFC

| Motor Capacity | | Frame Size | Full Load | | | Current (A) | | | | Starting Torque % of FL | Breakdown Torque % of FL | Nominal Efficiency % | Power Factor % | NEMA Code Letter |
|----------------|------|------------|-----------|--------|-------|-------------|------|-----------------|------------------|-------------------------|--------------------------|----------------------|----------------|------------------|
| HP | kW | | Rated RPM | Torque | | Full Load | | No Load % of FL | Starting % of FL | | | | | |
| | | | | in-lbs | N-m | 230V | 400V | | | | | | | |
| 1/8** | 0.1 | V-63S | 1420 | 5.95 | 0.672 | 0.62 | 0.36 | 83.6 | 361 | 261 | 255 | 62.1 | 64.9 | H |
| 1/4 | 0.2 | V-63M | 1410 | 12.0 | 1.35 | 1.08 | 0.62 | 77.3 | 371 | 236 | 233 | 67.1 | 69.5 | G |
| 1/3 | 0.25 | V-63M | 1380 | 15.3 | 1.73 | 1.22 | 0.7 | 68.4 | 371 | 225 | 205 | 69.4 | 74.2 | F |
| 1/2 | 0.4 | V-71M | 1420 | 23.8 | 2.69 | 2.13 | 1.23 | 75.6 | 366 | 229 | 229 | 68.5 | 68.7 | G |
| 3/4 | 0.55 | V-80S | 1410 | 32.9 | 3.72 | 2.45 | 1.41 | 65.2 | 390 | 225 | 219 | 73.6 | 76.7 | F |
| 1 | 0.75 | N-80M | 1440 | 44.0 | 4.97 | 3.54 | 2.05 | 72.3 | 613 | 423 | 446 | 84.6 | 62.7 | L |
| 1.5 | 1.1 | N-90S | 1440 | 64.5 | 7.29 | 4.50 | 2.60 | 61.4 | 640 | 336 | 387 | 85.6 | 71.1 | K |
| 2 | 1.5 | N-90L | 1430 | 88.6 | 10.0 | 6.17 | 3.56 | 62.2 | 601 | 338 | 375 | 85.8 | 72.3 | J |
| 3 | 2.2 | N-100L | 1450 | 128 | 14.5 | 8.56 | 4.95 | 60.2 | 798 | 382 | 465 | 88.7 | 74.1 | L |
| 4 | 3.0 | N-112S | 1440 | 176 | 19.9 | 11.2 | 6.45 | 53.2 | 727 | 352 | 419 | 87.9 | 76.9 | K |
| 5 | 3.7 | N-112M | 1460 | 214 | 24.2 | 13.7 | 7.90 | 56.0 | 766 | 294 | 420 | 89.0 | 77.5 | K |
| 5.5 | 4.0 | N-112M | 1460 | 231 | 26.2 | 14.4 | 8.30 | 53.4 | 733 | 273 | 388 | 89.1 | 78.8 | K |
| 7.5 | 5.5 | N-132S | 1460 | 318 | 36.0 | - | 11.6 | 56.6 | 937 | 351 | 524 | 90.6 | 76.2 | M |
| 10 | 7.5 | N-132M | 1460 | 434 | 49.1 | - | 16.0 | 51.9 | 704 | 206 | 350 | 91.2 | 75.5 | K |

** 1/8 HP is TENV

Table continued on next page.

Motor continued

Motor Performance Data - IE3 CE Motor, 50Hz Operation (continued)

Table 4.25b continued... Three Phase, 230/400V, 50Hz, 1500 RPM Synchronous Speed, TEFC

| Motor Capacity | | Frame Size | Full Load | | | Current (A) | | | | Starting Torque % of FL | Breakdown Torque % of FL | Nominal Efficiency % | Power Factor % | NEMA Code Letter |
|----------------|------|------------|-----------|--------|------|-------------|------|-----------------|------------------|-------------------------|--------------------------|----------------------|----------------|------------------|
| HP | kW | | Rated RPM | Torque | | Full Load | | No Load % of FL | Starting % of FL | | | | | |
| | | | | in-lbs | N-m | 230V | 400V | | | | | | | |
| 15 | 11 | N-160M | 1470 | 632 | 71.5 | - | 22.2 | 54.4 | 635 | 257 | 378 | 91.5 | 73.0 | J |
| 20 | 15 | N-160L | 1480 | 856 | 96.8 | - | 30.6 | 50.6 | 647 | 256 | 338 | 92.5 | 76.3 | J |
| 25 | 18.5 | N-180MS | 1480 | 1060 | 119 | - | 35.4 | 43.8 | 777 | 272 | 375 | 93.9 | 80.1 | K |
| 30 | 22 | N-180M | 1480 | 1260 | 142 | - | 40.9 | 37.9 | 673 | 227 | 314 | 93.8 | 82.7 | H |
| 40 | 30 | N-180L | 1480 | 1710 | 194 | - | 59.1 | 47.3 | 730 | 265 | 382 | 94.0 | 78.2 | J |
| 50 | 37 | N-200L | 1480 | 2110 | 239 | - | 69.5 | 40.8 | 753 | 266 | 361 | 94.1 | 81.4 | J |
| 60 | 45 | N-200LL | 1480 | 2570 | 290 | - | 82.5 | 41.7 | 845 | 317 | 411 | 94.6 | 83.5 | K |
| 75 | 55 | N-225S | 1480 | 3140 | 355 | - | 97.0 | 38.5 | 921 | 358 | 409 | 95.1 | 85.5 | K |

Table 4.26 Three Phase, 240/415V, 50Hz, 1500 RPM Synchronous Speed, TEFC

| Motor Capacity | | Frame Size | Full Load | | | Current (A) | | | | Starting Torque % of FL | Breakdown Torque % of FL | Nominal Efficiency % | Power Factor % | NEMA Code Letter |
|----------------|------|------------|-----------|--------|-------|-------------|------|-----------------|------------------|-------------------------|--------------------------|----------------------|----------------|------------------|
| HP | kW | | Rated RPM | Torque | | Full Load | | No Load % of FL | Starting % of FL | | | | | |
| | | | | in-lbs | N-m | 240V | 415V | | | | | | | |
| 1/8** | 0.1 | V-63S | 1420 | 5.95 | 0.672 | 0.65 | 0.37 | 88.1 | 378 | 286 | 277 | 60.9 | 60.9 | J |
| 1/4 | 0.2 | V-63M | 1410 | 12.0 | 1.35 | 1.1 | 0.64 | 80.9 | 375 | 260 | 253 | 66.4 | 65.7 | H |
| 1/3 | 0.25 | V-63M | 1390 | 15.2 | 1.72 | 1.23 | 0.71 | 73.0 | 380 | 247 | 223 | 69.5 | 70.6 | G |
| 1/2 | 0.4 | V-71M | 1430 | 23.6 | 2.67 | 2.23 | 1.29 | 80.6 | 364 | 250 | 247 | 67.0 | 64.4 | H |
| 3/4 | 0.55 | V-80S | 1420 | 32.7 | 3.7 | 2.46 | 1.43 | 70.6 | 413 | 248 | 237 | 73.6 | 73.1 | G |
| 1 | 0.75 | N-80M | 1450 | 43.7 | 4.94 | 3.65 | 2.11 | 76.3 | 600 | 461 | 484 | 84.1 | 59.4 | L |
| 1.5 | 1.1 | N-90S | 1440 | 64.5 | 7.29 | 4.57 | 2.64 | 66.3 | 654 | 368 | 422 | 85.5 | 67.4 | K |
| 2 | 1.5 | N-90L | 1440 | 88.0 | 9.95 | 6.29 | 3.63 | 68.7 | 611 | 366 | 406 | 85.4 | 67.3 | K |
| 3 | 2.2 | N-100L | 1450 | 128 | 14.5 | 8.83 | 5.10 | 66.1 | 805 | 412 | 502 | 88.3 | 69.3 | M |
| 4 | 3.0 | N-112S | 1440 | 176 | 19.9 | 11.3 | 6.55 | 59.8 | 751 | 387 | 458 | 87.9 | 73.2 | L |
| 5 | 3.7 | N-112M | 1460 | 214 | 24.2 | 13.9 | 8.00 | 62.5 | 788 | 319 | 453 | 89.2 | 72.7 | L |
| 5.5 | 4.0 | N-112M | 1460 | 231 | 26.2 | 14.5 | 8.35 | 59.7 | 752 | 294 | 418 | 89.0 | 74.8 | K |
| 7.5 | 5.5 | N-132S | 1470 | 316 | 35.7 | - | 11.9 | 64.1 | 958 | 378 | 564 | 90.2 | 72.0 | N |
| 10 | 7.5 | N-132M | 1470 | 431 | 48.7 | - | 16.2 | 58.5 | 629 | 254 | 378 | 90.6 | 71.1 | J |
| 15 | 11 | N-160M | 1470 | 632 | 71.5 | - | 22.4 | 50.6 | 617 | 249 | 354 | 91.6 | 74.6 | H |
| 20 | 15 | N-160L | 1480 | 856 | 96.8 | - | 31.2 | 57.0 | 659 | 275 | 364 | 92.2 | 72.3 | J |
| 25 | 18.5 | N-180MS | 1490 | 1050 | 119 | - | 35.7 | 49.9 | 800 | 292 | 404 | 93.8 | 76.7 | K |
| 30 | 22 | N-180M | 1480 | 1260 | 142 | - | 40.8 | 43.6 | 699 | 245 | 339 | 93.6 | 80.2 | J |
| 40 | 30 | N-180L | 1480 | 1710 | 194 | - | 60.2 | 52.9 | 743 | 285 | 411 | 93.6 | 74.2 | K |
| 50 | 37 | N-200L | 1480 | 2110 | 239 | - | 70.0 | 46.0 | 777 | 287 | 391 | 94.1 | 78.2 | K |
| 60 | 45 | N-200LL | 1480 | 2570 | 290 | - | 82.5 | 47.0 | 876 | 341 | 442 | 94.5 | 80.7 | L |
| 75 | 55 | N-225S | 1480 | 3140 | 355 | - | 96.5 | 43.1 | 960 | 386 | 441 | 95.1 | 83.1 | L |

** 1/8 HP is TENV

Notes on Inverter Operation

Please refer to Frequently Asked Questions on page 1.6.

Motor continued

Standard Wiring Diagrams

Illustrated below are the wiring diagrams for our standard motors. For additional information please refer to the motor name plate. Due to changes in design features, this diagram may not always agree with that on the motor. If different, the motor diagram found inside the conduit box cover should be used.

Table 4.28a Wiring Configuration for 230/460V, 60Hz and 575V, 60Hz by EP.NA Motor

| Motor HP x P | 230/460V, 60Hz | | | 575V, 60Hz | | |
|-----------------|----------------|--------------|-----------------|------------|--------------|---------|
| | Internal | No. of Leads | Diagram | Internal | No. of Leads | Diagram |
| 1/8 x 4 | WYE | 9 | 9-Lead WYE | WYE | 3 | 3-Lead |
| 1/4 x 4 | | | | | | |
| 1/3 x 4 | | | | | | |
| 1/2 x 4 | | | | | | |
| 3/4 x 4 | | | | | | |
| 1 x 4 | | | | | | |
| 1.5 x 4 | | | | | | |
| 2 x 4 | | | | | | |
| 3 x 4 | | | | | | |
| 5 x 4 | | | | | | |
| 7.5 x 4 | DELTA | 9 | 9-Lead DELTA | DELTA | 3 | 3-Lead |
| 10 x 4 | | | | | | |
| 15 x 4 | | | | | | |
| 20 x 4 | | | | | | |
| 25 x 4 | | | | | | |
| 30 x 4 | | | | | | |
| 40 x 4 | | | | | | |
| 50 x 4 | | | | | | |
| 60 x 4 | | | | | | |
| 75 x 4 | | | | | | |

Figure 4.28b 9-Lead WYE

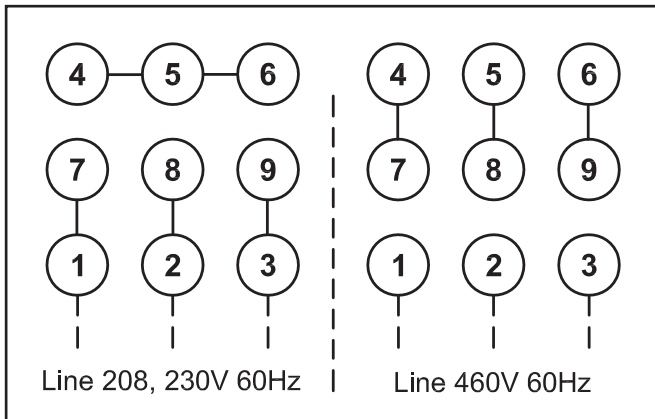


Figure 4.28c 9-Lead DELTA


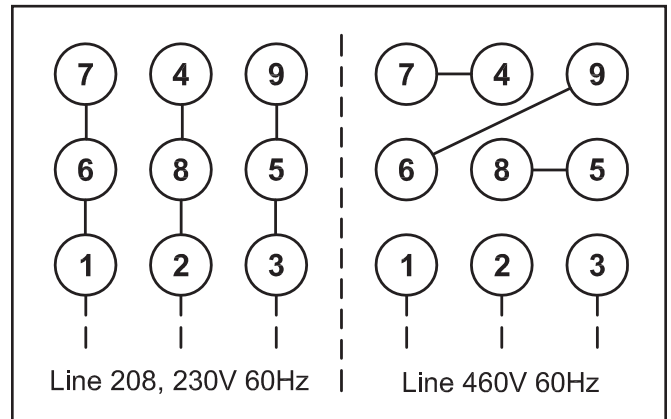


Figure 4.28d 3-Lead SINGLE

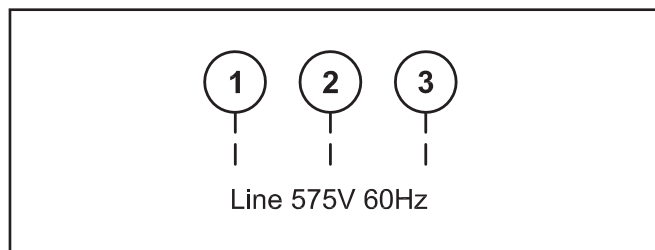

Three-Phase IE3 CE Motors

Table 4.29 Wiring Configuration by IE3 CE Motor

| Motor kW x P | Voltage Configuration | Wiring Diagram |
|-----------------|-------------------------------|------------------------|
| .75 x 4 | 220/380V, 50Hz Three Phase | DELTA-WYE |
| 1.1 x 4 | | |
| 1.5 x 4 | | |
| 2.2 x 4 | | |
| 3.0 x 4 | | |
| 3.7 x 4 | | |
| 5.5 x 4 | 380V, 50Hz Three Phase | WYE-Start DELTA-Run |
| 7.5 x 4 | | |
| 11 x 4 | | |
| 15 x 4 | | |
| 18.5 x 4 | | |
| 22 x 4 | | |
| 30 x 4 | | |
| 37 x 4 | | |
| 45 x 4 | | |
| 55 x 4 | | |

Figure 4.9 DELTA-WYE Diagram


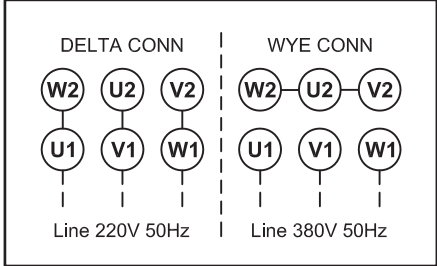


Figure 4.10 WYE-Start DELTA-Run Diagram

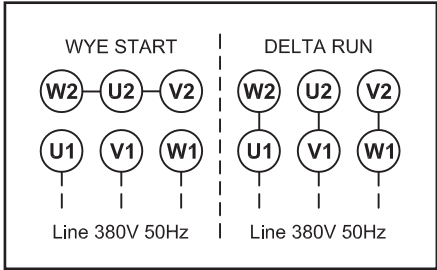

Motor continued

Motor Thermal Rating for Cyclic Applications

Table 4.30 Motor Thermal Rating Table

| Motor Power HP (kW) | Allowable C x Z | | | | Motor Inertia lb-in ² (kg-m ²) | |
|---------------------------|-----------------------------|-----------------------------|-----------------------------|------------------------------|--|-----------------|
| | below 35% ED ^[1] | 35% ~ 50% ED ^[1] | 50% ~ 80% ED ^[1] | 80% ~ 100% ED ^[1] | Standard | with Brake |
| 1/8 (0.1) | 3200 | 3000 | 2000 | 1200 | 1.11 (0.000325) | 1.2 (0.00035) |
| 1/4 (0.2) | 2200 | 2800 | 2800 | 2500 | 1.71 (0.0005) | 1.88 (0.00055) |
| 1/3 (0.25) | 2200 | 2800 | 2800 | 2500 | 1.71 (0.0005) | 1.88 (0.00055) |
| 1/2 (0.4) | 1800 | 2200 | 1500 | 1500 | 2.22 (0.00065) | 2.31 (0.000675) |
| 3/4 (0.55) | 1800 | 2200 | 1500 | 1500 | 3.45 (0.00101) | 3.79 (0.00111) |
| 1 (0.75) | 1400 | 1400 | 800 | 500 | 8.03 (0.00235) | 8.82 (0.00258) |
| 1.5 (1.1) | 1400 | 1400 | 800 | 500 | 11.5 (0.00337) | 13.5 (0.00396) |
| 2 (1.5) | 1200 | 1200 | 500 | 400 | 13.4 (0.00391) | 15.4 (0.0045) |
| 3 (2.2) | 1000 | 900 | 400 | 200 | 30.1 (0.0088) | 33.4 (0.00978) |
| 5 (3.7) | 800 | 800 | 800 | 700 | 66.3 (0.0194) | 71.4 (0.0209) |
| 7.5 (5.5) | 300 | 300 | 200 | 150 | 99.4 (0.0291) | 105 (0.0306) |
| 10 (7.5) | 400 | 350 | 300 | 300 | 140 (0.0409) | 154 (0.045) |
| 15 (11) | 200 | 200 | 150 | 150 | 192 (0.0561) | 206 (0.0602) |
| 20 (15) | 100 | 90 | 78 | 68 | 340 (0.0995) | 393 (0.115) |
| 25 (18.5) | 75 | 65 | 55 | 50 | 875 (0.256) | 926 (0.271) |
| 30 (22) | 75 | 65 | 55 | 50 | 875 (0.256) | 926 (0.271) |
| 40 (30) | 55 | 40 | 17 | 10 | 1110 (0.326) | 1170 (0.342) |

Note: [1] % ED = Duty Cycle.

The calculated C x Z value (steps 1 – 3 outlined below) should be less than the allowable value listed in Motor Thermal Rating table above.

1. Obtain the C value:

$$C = \frac{I_M + I_L}{I_M}$$

I_M = Moment of Inertia of the Motor.
 I_L = Moment of Inertia of the Load as seen from the motor shaft.

2. Obtain the Z value (number of starts per hour):

(a) Assume that one operating period consists of “on-time” t_a (sec.), “off-time” t_b (sec.) and the motor is started nr (times/cycle).

$$Z_r = \frac{3600 \cdot nr}{t_a + t_b} \text{ (times/hour)}$$

(b) When inching, ni (times/cycle) is included in 1 cycling (t_a+t_b), the number of inching times per hour Z_i , is then included in the number of starts.

$$Z_i = \frac{3600 \cdot ni}{t_a + t_b} \text{ (times/hour)}$$

(c) Calculate Z by adding Z_r to Z_i by the following formula.

$$Z = Z_r + \frac{1}{2} \cdot Z_i = \frac{3600}{t_a + t_b} \cdot \left(nr + \frac{1}{2} ni \right) \text{ (times/hour)}$$

3. Calculate C x Z (the product of C and Z)

Use the value of C obtained in Step (1) and value of Z obtained in Step (2).

4. Obtain the duty cycle %ED and compare calculated C x Z in the appropriate column from Motor Thermal Rating Table.

$$\%ED = \frac{t_a}{t_a + t_b} \cdot 100 \quad \begin{matrix} t_a = \text{on-time} \\ t_b = \text{off-time} \end{matrix}$$

Brakemotor Characteristics

The brakemotor on Cyclo® gearmotors operates with direct current supplied by a dual voltage rectifier for 230/460V, or single voltage rectifier/power module for other noted voltages. Rectifier or power module is mounted in the motor conduit box.

When used for outdoor installations, standard brakemotor must be protected by a cover. Such covers are available from the factory, please inquire when ordering.

Note: Advise the factory when ordering if you require brake torque greater or lesser than those shown as standard in the Brakemotor Characteristics table below.

Brake Characteristics

Table 4.31 Brake Characteristics - Standard torque, Delay Time, Work Capacity

| Brake Model | Motor Capacity | | Standard Braking Torque ft - lbs (N - m) | Braking Delay Time (sec) | | | Brake Work Capacity | | |
|------------------------|----------------|------------|---|--------------------------|--------------------------------|----------------------------|----------------------------------|----------------------------------|--|
| | HP x 4P | kW x 4P | | Normal Braking Action | | Fast Braking Action | Allowable E ₀ (J/min) | Gap Adjust (x 10 ⁷ J) | Total E ₁ (x 10 ⁷ J) |
| | | | | Standard Wiring | Inverter Wiring ^[2] | | | | |
| FB-01A | 1/8 | 0.1 | 0.7 (1.0) | 0.15 ~ 0.2 | 0.08 ~ 0.12 | 0.015 ~ 0.02 | 1080 | 2.6 | 6.7 |
| FB-02A | 1/8 ~ 1/3 | 0.1 ~ 0.25 | 1.4 (2.0) | | | | | | |
| FB-05A | 1/4 ~ 1/2 | 0.2 ~ 0.4 | 2.9 (4.0) | | | | | | |
| FB-1D | 1/2 | 0.4 | 5.8 (7.5) | 0.2 ~ 0.3 | 0.1 ~ 0.15 | 0.01 ~ 0.02 | 1620 | 7.0 | 33.1 |
| FB-2D | 3/4 | 0.55 | 11 (15) | | | | | | |
| FB-3D | 3/4 | 0.55 | 16 (22) | 0.3 ~ 0.4 | 0.15 ~ 0.2 | | 2580 | 6.8 | 29.5 |
| FB-1E | 1 | 0.75 | 5.5 (7.5) | 0.25 ~ 0.45 | 0.15 ~ 0.25 | | 3360 | 16.4 | 53.7 |
| FB-1HE | 1.5 | 1.1 | 8.0 (11) | 0.45 ~ 0.65 | 0.25 ~ 0.35 | 0.01 ~ 0.03 | 2580 | 11.6 | 38.7 |
| FB-2E | 2 | 1.5 | 11 (15) | 0.35 ~ 0.55 | 0.15 ~ 0.25 | | 3360 | 20.8 | 46.3 |
| FB-3E | 3 | 2.2 | 16 (22) | 0.75 ~ 0.95 | 0.4 ~ 0.5 | 0.02 ~ 0.04 | 5720 | 26.3 | 105.3 |
| FB-5E | 5 | 3.7 | 30 (40) | 1.1 ~ 1.3 | 0.4 ~ 0.5 | | | | |
| FB-8E | 7.5 | 5.5 | 40 (55) | 1.0 ~ 1.2 | 0.3 ~ 0.4 | | | | |
| FB-10E | 10 | 7.5 | 59 (80) | 1.8 ~ 2.0 | 0.6 ~ 0.7 | | | | |
| FB-15E | 15 | 11 | 80 (110) | 1.6 ~ 1.8 | 0.5 ~ 0.6 | | | | |
| FB-20 | 20 | 15 | 110 (150) | - | - | 0.06 ~ 0.14 ^[3] | 22440 | 191.6 | 1150 |
| FB-30 | 25 | 18.5 | 140 (190) | - | - | 0.03 ~ 0.11 ^[3] | | | |
| | 30 | 22 | 160 (220) | | | | | | |
| | 40 | 30 | 150 (200) | | | | | | |
| ESB-250 ^[2] | 50 | 37 | 200 (266) | - | - | 0.065 | 30672 | 52 | 267 |
| | 60 | 45 | 235 (320) | | | | | | |

Notes: [1] Also applies to wiring where brake is powered separately from the motor leads.

[2] Available only with power module rated for use at 200VAC or 220VAC.

Above table applies to standard brake specification under standard brake torque. Special brakes may perform differently from those shown.

Initial brake torque may be lower than specified brake torque.

If this is the case, under light load start and stop the motor to wear-in the braking surface.

To improve performance for positioning accuracy or lifting applications, consider using fast braking action circuit.

If the brake is operated at a rate greater than the Allowable Brake Work Capacity, E₀,

the brake performance may degrade or become inoperable.

ESB Type brake uses a power module (HD-110M3) that is installed separately from the brakemotor.

ESB Type brake cannot be operated in a vertical orientation.

[3] Values shown for 200V Class and 400V Class Brakes. Please consult factory for 575V Brakes.

Motor continued

Brakemotor Characteristics

Table 4.32 Brake Maintenance - Brake Gap, Brake Lining Thickness

| Brake Model | Brake Gap | | | Brake Lining Thickness | | | |
|------------------------|--------------------------------|-----------------|-------------------|---------------------------|-----------------|------------------------------|--------------|
| | Spec. (Initial) inch (mm) | Limit inch (mm) | Adjustment Method | Spec. (Initial) inch (mm) | Limit inch (mm) | | |
| FB-01A | 0.008 ~ 0.014 (0.2 ~ 0.35) | 0.020 (0.5) | Twist detent | 0.276 (7.0) | 0.256 (6.5) | | |
| FB-02A | | | | | | | |
| FB-05A | | | | | | | |
| FB-1D | 0.012 ~ 0.016 (0.3 ~ 0.4) | 0.024 (0.60) | Shim | 0.347 (8.8) | 0.236 (6.0) | | |
| FB-2D | | 0.028 (0.70) | | | 0.307 (7.8) | | |
| FB-3D | | | | | 0.024 (0.60) | 0.315 (8.0) | |
| FB-1E | | 0.307 (7.8) | | | | | |
| FB-1HE | 0.010 ~ 0.014 (0.25 ~ 0.35) | 0.030 (0.75) | Nut | 0.355 (9.0) | 0.315 (8.0) | | |
| FB-2E | | 0.040 (1.0) | | | | 0.410 (10.4) | |
| FB-3E | | | | | | 0.034 (0.85) | 0.331 (8.4) |
| FB-5E | 0.014 ~ 0.018 (0.35 ~ 0.45) | 0.040 (1.0) | Nut | 0.394 (10.0) | 0.236 (6.0) | | |
| FB-8E | | | | | | | |
| FB-10E | | | | | | 0.047 (1.2) | 0.433 (11.0) |
| FB-15E | | | | | | 0.024 ~ 0.028 (0.6 ~ 0.7) | 0.059 (1.5) |
| FB-20 | | | | | | | |
| FB-30 | 0.028 (0.7) | 0.079 (2.0) | Threaded Ring | 0.236 (6.0) | 0.142 (3.6) | | |
| ESB-250 ^[2] | | | | | | | |

Notes: [1] Also applies to wiring where brake is powered separately from the motor leads.

[2] Available only with power module rated for use at 200VAC or 220VAC.

Above table applies to standard brake specification under standard brake torque. Special brakes may perform differently from those shown. Initial brake torque may be lower than specified brake torque.

If this is the case, under light load start and stop the motor to wear-in the braking surface.

To improve performance for positioning accuracy or lifting applications, consider using fast braking action circuit.

If the brake is operated at a rate greater than the Allowable Brake Work Capacity, E0, the brake performance may degrade or become inoperable.

ESB Type brake uses a power module (HD-110M3) that is installed separately from the brakemotor.

ESB Type brake cannot be operated in a vertical orientation.

[3] Values shown for 200V Class and 400V Class Brakes. Please consult factory for 575V Brakes.

Brakemotor: Brake Current Rating

Table 4.33a Brake Current for Standard Fractional Motor and AF-Motor (AV)

| Brake Model | 230VAC, 50/60Hz | | | 460VAC, 50/60Hz | | | 575VAC, 50/60Hz | | |
|-------------|------------------------|---------|---------|---------------------|---------|---------|------------------------|---------|---------|
| | Vdc (V) | Idc (A) | Iac (A) | Vdc (V) | Idc (A) | Iac (A) | Vdc (V) | Idc (A) | Iac (A) |
| FB-01A | 207VDC Full Wave | 0.05 | 0.06 | 207VDC Half Wave | 0.05 | 0.04 | 259VDC Half Wave | 0.05 | 0.03 |
| FB-02A | | 0.08 | 0.1 | | 0.08 | 0.06 | | 0.09 | 0.07 |
| FB-05A | | 0.1 | 0.1 | | 0.1 | 0.1 | | 0.1 | 0.1 |
| FB-1D | | 0.2 | 0.2 | | 0.2 | 0.2 | | 0.2 | 0.2 |
| FB-2D | | | | | | | | | |
| FB-3D | | | | | | | | | |

Table 4.33b Brake Current for EP.NA Motor

| Brake Model | 230VAC, 50/60Hz | | | 240VAC, 50/60Hz | | | 460VAC, 50/60Hz | | | 480VAC, 50/60Hz | | |
|------------------------|--|------------------------|------------------------|--|------------------------|------------------------|--|------------------------|------------------------|--|------------------------|------------------------|
| | Vdc (V) | Idc (A) | Iac (A) | Vdc (V) | Idc (A) | Iac (A) | Vdc (V) | Idc (A) | Iac (A) | Vdc (V) | Idc (A) | Iac (A) |
| FB-1E | 207VDC Full Wave | 0.1 | 0.1 | 216VDC Full Wave | 0.1 | 0.1 | 207VDC Half Wave | 0.1 | 0.1 | 216VDC Half Wave | 0.1 | 0.1 |
| FB-1HE | | 0.2 | 0.2 | | 0.2 | 0.2 | | 0.2 | 0.2 | | 0.2 | |
| FB-2E | | 0.2 | 0.2 | | 0.2 | 0.2 | | 0.3 | 0.2 | | 0.2 | |
| FB-3E | | 0.4 | 0.4 | | 0.4 | 0.4 | | 0.3 | 0.4 | | 0.3 | |
| FB-5E | | 0.4 | 0.4 | | 0.5 | 0.5 | | 0.4 | 0.3 | | 0.4 | |
| FB-8E | | | | | | | | | | | | |
| FB-10E | | | | | | | | | | | | |
| FB-15E | | | | | | | | | | | | |
| FB-20 | 207VDC /104VDC Module ^[2] | 2.0/1.0 ^[3] | 2.0/0.8 ^[3] | 216VDC /108VDC Module ^[2] | 2.1/1.1 ^[3] | 2.1/0.8 ^[3] | 414VDC /207VDC Module ^[2] | 1.0/0.5 ^[3] | 1.0/0.4 ^[3] | 432VDC /216VDC Module ^[2] | 1.0/0.5 ^[3] | 1.0/0.4 ^[3] |
| ESB-250 ^[1] | | | | | | | | | | | | |

Table 4.33b continued... Brake Current for EP.NA Motor

| Brake Model | 575VAC, 50/60Hz | | |
|------------------------|------------------------|---------|---------|
| | Vdc (V) | Idc (A) | Iac (A) |
| FB-1E | 259VDC Half Wave | 0.1 | 0.1 |
| FB-1HE | | 0.2 | 0.2 |
| FB-2E | | 0.2 | 0.2 |
| FB-3E | | 0.4 | 0.3 |
| FB-5E | | 0.5 | 0.4 |
| FB-8E | | | |
| FB-10E | | | |
| FB-15E | | | |
| FB-20 | 259VDC Half Wave | 0.4 | 0.3 |
| FB-30 | | | |
| ESB-250 ^[1] | | | |

Notes: [1] ESB-250 is available only with power module rated for use at 200VAC or 220VAC.

[2] Power module type brake control generates two voltage levels--1) high excitation voltage for initial release, and 2) lower holding voltage.

[3] 2 brake current values shown corresponding to the two voltage levels from power module--1) excitation current on initial power up, and 2) holding current.

Brake coil design will be specific to brake voltage specified at time of order. Check motor nameplate, to determine brake voltage rating.

FB-20 and FB-30 Brake Coil and Power Module come in two voltage ranges--1) 200-240VAC, and 2) 380-480VAC.

Motor continued

Brakemotor: Brake Current Rating

Table 4.34a Brake Current for Fractional Motor CE Motor

| Brake Model | 220VAC, 50/60Hz | | | 230VAC, 50/60Hz | | | 380VAC, 50/60Hz | | | 400VAC, 50/60Hz | | |
|-------------|--------------------|---------|---------|---------------------|---------|---------|---------------------|---------|---------|---------------------|---------|---------|
| | Vdc (V) | Idc (A) | Iac (A) | Vdc (V) | Idc (A) | Iac (A) | Vdc (V) | Idc (A) | Iac (A) | Vdc (V) | Idc (A) | Iac (A) |
| FB-01A | 99VDC Half Wave | 0.13 | 0.12 | 104VDC Half Wave | 0.13 | 0.12 | 171VDC Half Wave | 0.06 | 0.04 | 180VDC Half Wave | 0.06 | 0.04 |
| FB-02A | | 0.2 | 0.2 | | 0.2 | 0.2 | | 0.08 | 0.07 | | 0.08 | 0.07 |
| FB-05A | | 0.3 | 0.2 | | 0.2 | 0.2 | | 0.1 | 0.1 | | 0.1 | 0.1 |
| FB-1D | | | | | | | | | | | | |

Table 4.34b Combination Table with Brakemotor Inertia

| Brake Model | Motor Frame Sizes | Inertia WR2 lb-in2 (kg-m2) |
|-------------|-------------------|----------------------------|
| FB-1E | N-80M | 8.82 (0.00258) |
| FB-1HE | N-90S | 13.5 (0.00396) |
| FB-2E | N-90L | 15.4 (0.0045) |
| FB-3E | N-100L | 33.4 (0.00978) |
| FB-5E | N-112M | 71.4 (0.0209) |
| FB-8E | N-132S | 105 (0.0306) |
| FB-10E | N-132M | 154 (0.045) |
| FB-15E | N-160M | 206 (0.0602) |
| FB-20 | N-160L | 393 (0.115) |
| FB-30 | N-180MS | 926 (0.271) |
| | N-180M | 926 (0.271) |
| FB-30 | N-180L | 1170 (0.342) |
| ESB-250 | N-200L | 1380 (0.404) |
| | N-200LL | 2550 (0.745) |

Table 4.34c Brake Current for CE Motor

| Brake Model | 220VAC, 50/60Hz | | | 230VAC, 50/60Hz | | | 380VAC, 50/60Hz | | | 400VAC, 50/60Hz | | | | | | |
|------------------------|--------------------|---|------------------------|---------------------|------------------------|--|---------------------|------------------------|------------------------|---------------------|--|------------------------|------------------------|--|------------------------|------------------------|
| | Vdc (V) | Idc (A) | Iac (A) | Vdc (V) | Idc (A) | Iac (A) | Vdc (V) | Idc (A) | Iac (A) | Vdc (V) | Idc (A) | Iac (A) | | | | |
| FB-01A | 99VDC Half Wave | 0.13 | 0.12 | 104VDC Half Wave | 0.13 | 0.12 | 171VDC Half Wave | 0.06 | 0.04 | 180VDC Half Wave | 0.06 | 0.04 | | | | |
| FB-02A | | 0.2 | 0.2 | | 0.2 | 0.2 | | 0.08 | 0.07 | | 0.08 | 0.07 | | | | |
| FB-05A | | 0.3 | 0.2 | | 0.2 | 0.2 | | 0.1 | 0.1 | | 0.1 | 0.1 | | | | |
| FB-1D | | | | | | | | | | | | | | | | |
| FB-1E | | 0.2 | 0.4 | | 0.4 | 0.5 | | 0.4 | 0.2 | | 0.2 | 0.2 | 0.2 | | | |
| FB-1HE | | | | | | | | | | | | | | | | |
| FB-2E | | 0.5 | 0.5 | | 0.5 | 0.6 | | 0.5 | 0.3 | | 0.2 | 0.3 | 0.2 | | | |
| FB-3E | | | | | | | | | | | | | | | | |
| FB-4E | | 1 | 0.7 | | 0.8 | 1 | | 0.8 | 0.4 | | 0.3 | 0.4 | 0.3 | | | |
| FB-5E | | | | | | | | | | | | | | | | |
| FB-8E | | | | | | | | | | | | | | | | |
| FB-10E | | | | | | | | | | | | | | | | |
| FB-15E | | 1.1 | 0.9 | | 1.2 | 0.9 | | 0.5 | 0.4 | | 0.5 | 0.4 | | | | |
| FB-20 | | 198VDC /99VDC Module ^[2] | 2.0/1.0 ^[3] | | 2.0/0.8 ^[3] | 207VDC /104VDC Module ^[2] | | 2.0/1.0 ^[3] | 2.0/0.8 ^[3] | | 342VDC /171VDC Module ^[2] | 0.8/0.4 ^[3] | 0.8/0.3 ^[3] | 360VDC /180VDC Module ^[2] | 0.9/0.5 ^[3] | 0.9/0.4 ^[3] |
| ESB-250 ^[1] | | | 2.2/1.1 ^[3] | | 2.2/0.9 ^[3] | | | | | | | | | | | |

Notes: [1] ESB-250 is available only with power module rated for use at 200VAC or 220VAC.

[2] Power module type brake control generates two voltage levels--1) high excitation voltage for initial release, and 2) lower holding voltage.

[3] 2 brake current values shown corresponding to the two voltage levels from power module--1) excitation current on initial power up, and 2) holding current.

Brake coil design will be specific to brake voltage specified at time of order. Check motor nameplate, to determine brake voltage rating.

FB-20 and FB-30 Brake Coil and Power Module come in two voltage ranges--1) 200-240VAC, and 2) 380-480VAC.

Brakemotor: Optional Brake Torques





Table 4.35 Standard Brake Models

| Brake Model | Motor Capacity | | Braking Torque ft-lbs (N-m) | |
|----------------|----------------|------------|--------------------------------|--|
| | HP x 4P | kW x 4P | Standard | Optional |
| FB-01A | 1/8 | 0.1 | 0.7 (1.0) | 0.25 (0.34), 0.3 (0.4), 0.4 (0.54), 0.48 (0.65), 0.6 (0.8), 0.7 (1.0), 1.0 (1.4) |
| FB-02A | 1/8 ~ 1/3 | 0.1 ~ 0.25 | 1.4 (2.0) | 0.48 (0.65), 0.6 (0.8), 0.7 (1.0), 1.0 (1.4), 1.4 (2.0), 1.9 (2.6), 2.3 (3.1) |
| FB-05A | 1/4 ~ 1/2 | 0.2 ~ 0.4 | 2.9 (4.0) | 0.7 (1.0), 1.0 (1.4), 1.4 (2.0), 1.9 (2.6), 2.3 (3.1) |
| FB-1D | 1/2 | 0.4 | 5.8 (7.5) | 1.9 (2.6), 2.3 (3.1), 2.7 (3.7), 3.9 (5.3), 4.6 (6.2), 6.9 (9.4) 7.7 (10) |
| FB-2D | 3/4 | 0.55 | 11 (15) | 3.6 (4.9), 4.3 (5.8), 5.1 (6.9), 7.2 (9.8), 8.7 (12), 13 (18), 14 (19) |
| FB-3D | 3/4 | 0.55 | 16 (22) | 5.3 (7.2), 6.6 (9.0), 7.4 (10), 11 (15), 13 (18), 19 (26), 21 (28) |
| FB-1E | 1 | 0.75 | 5.5 (7.5) | 7.4 (10), 4.0 (5.5), 3.0 (4.0), 2.2 (3.0) |
| FB-1HE | 1.5 | 1.1 | 8.0 (11) | 11 (15), 5.5 (7.5), 3.7 (5.0), 2.2 (3.0) |
| FB-2E | 2 | 1.5 | 11 (15) | 15 (20), 8.0 (11), 5.5 (7.5), 3.7 (5.0) |
| FB-3E | 3 | 2.2 | 16 (22) | 22 (30), 11 (15), 7.4 (10), 4.4 (6.0) |
| FB-4E | 4 | 3.0 | 22 (30) | 30 (40), 16 (22), 11 (15), 7.4 (10) |
| FB-5E | 5 | 3.7 | 30 (40) | 40 (55), 22 (30), 15 (20), 7.4 (10) |
| FB-8E | 7.5 | 5.5 | 40 (55) | 53 (72), 30 (40), 22 (30), 15 (20) |
| FB-10E | 10 | 7.5 | 59 (80) | 80 (110), 44 (60), 30 (40), 15 (20) |
| FB-15E | 15 | 11 | 80 (110) | 110 (150), 59 (80), 44 (60), 29 (40) |
| FB-20 | 20 | 15 | 110 (150) | 160 (220), 130 (175), 89 (120), 74 (100), 63 (85), 44 (60) |
| FB-30 | 25 | 18.5 | 140 (190) | 160 (220), 110 (150), 89 (120), 74 (100), 44 (60) |
| | 30 | 22 | 160 (220) | 130 (175), 110 (150), 89 (120), 63 (85) |
| | 40 | 30 | 150 (200) | 120 (160), 74 (100) |
| ESB-250 | 50 | 37 | 195 (266) | 275 (372), 235 (320), 155 (212), 120 (160), 78 (106) |
| | 60 | 45 | 235 (320) | 315 (426), 275 (372), 195(266), 155 (212), 120 (160) |

Motor continued

Brakemotor Standard Wiring Connection

Models FB-01A through FB-15E, 230/460V, 60Hz or 575V, 60Hz

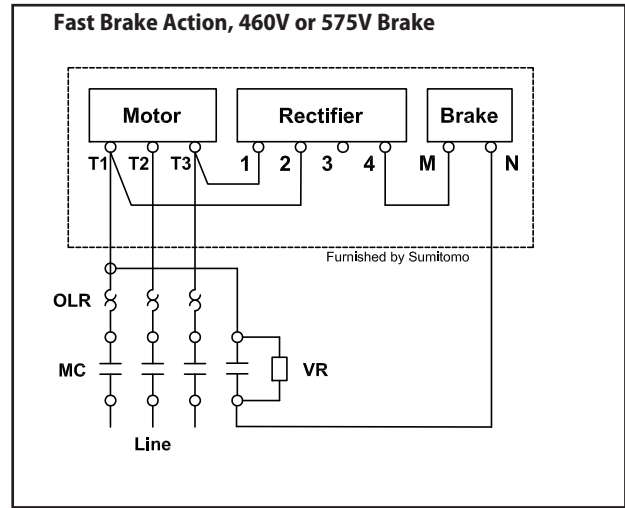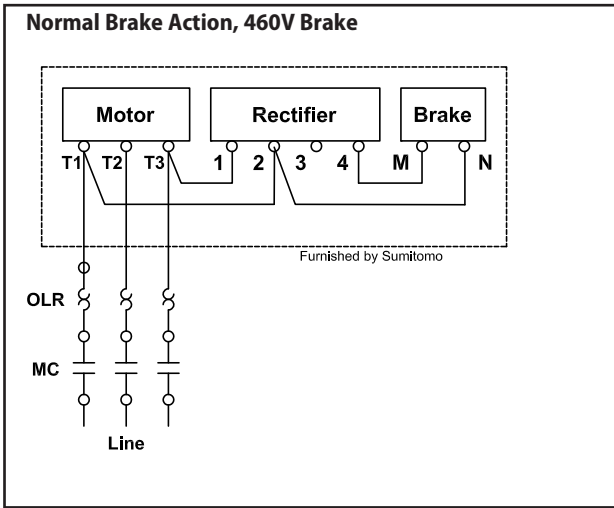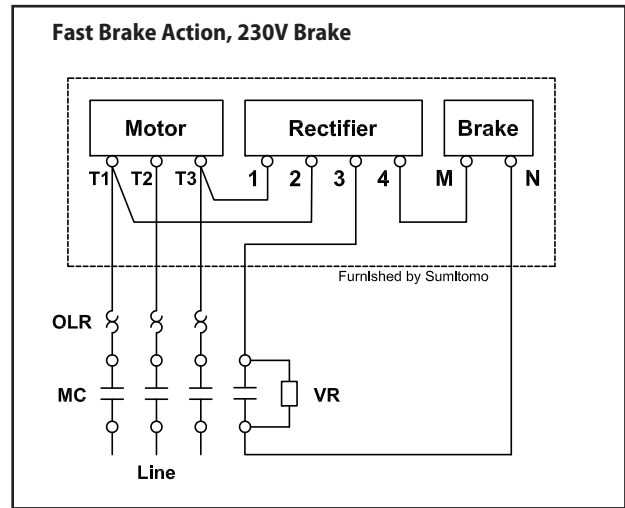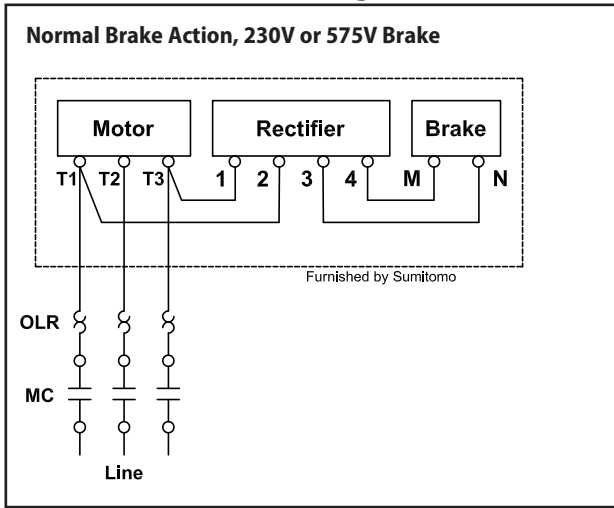

- Key:**
MC: Electromagnetic Relay
OLR: Overload or Thermal Relay
VR: Varistor (protective device, refer to Varistor Specification Table)





Brakemotor Standard Wiring Connection

Table 4.36 Varistor Specification Table

| Operating Voltage | | 190-230V | 380-460V | 575V |
|------------------------|--------------------|------------|-----------|-----------|
| Varistor Rated Voltage | | AC260-300V | AC510V | AC604V |
| Varistor Voltage | | 430-470V | 820V | 1000V |
| Rated Watt | FB-01A, 02A, 05A | Over 0.4W | Over 0.4W | Over 0.4W |
| | FB-1E, 1D | Over 0.6W | Over 0.6W | Over 0.4W |
| | FB-1HE, 2E, 2D, 3D | Over 1.5W | Over 1.5W | Over 0.6W |
| | FB-3E, 4E | Over 1.5W | Over 1.5W | Over 0.6W |
| | FB-5E, 8E | Over 1.5W | Over 1.5W | Over 1.5W |
| | FB-10E, 8E | Over 1.5W | Over 1.5W | Over 1.5W |
| | FB-20, 30 | | | Over 1.5W |

Brakemotor Inverter Wiring Connection

Models FB-01A through FB-15E, 230/460V, 60Hz or 575V, 60Hz

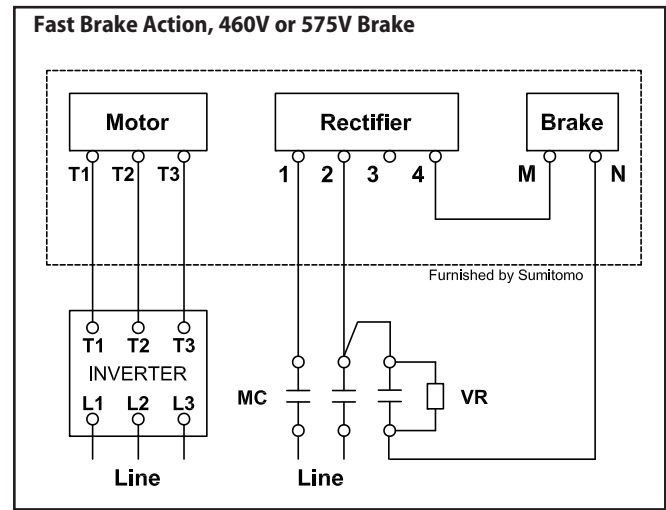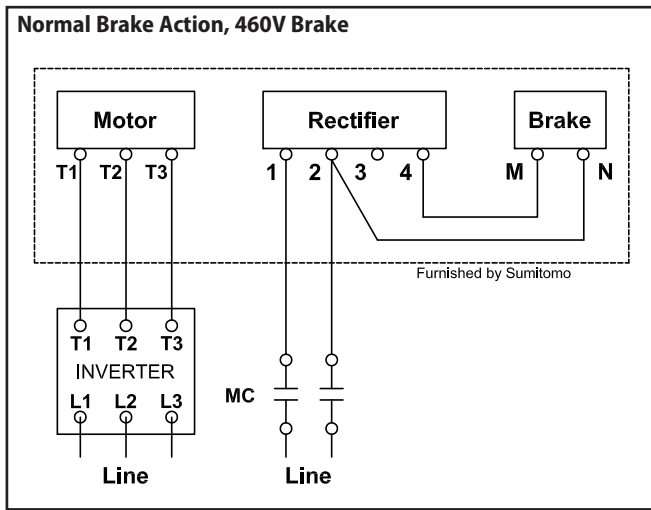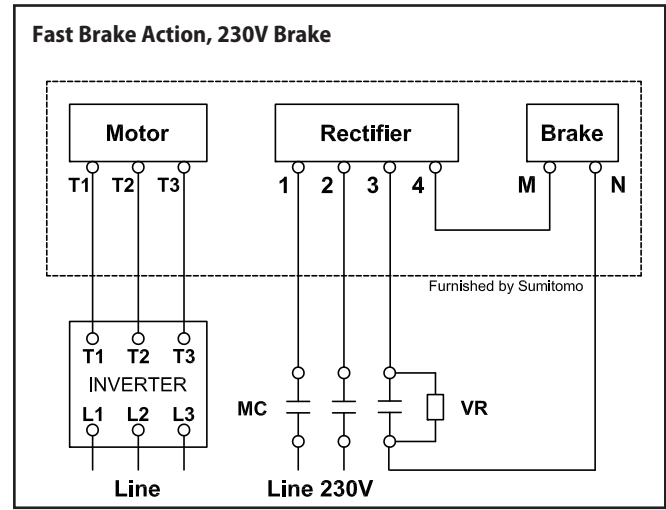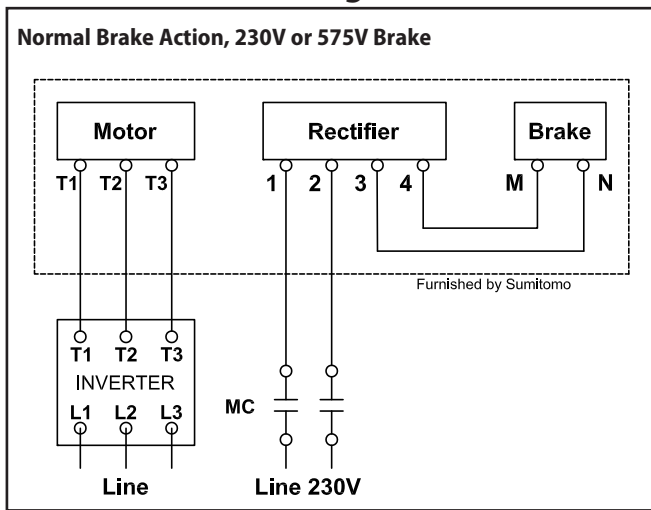

Key:
MC: Electromagnetic Relay
OLR: Overload or Thermal Relay
VR: Varistor (protective device, refer to Varistor Specification Table)

Brakemotor Inverter Wiring Connection, EP.NA Motor







Table 4.37 Varistor Specification Table

| Operating Voltage | | 190-230V | 380-460V | 575V |
|------------------------|--------------------|------------|-----------|-----------|
| Varistor Rated Voltage | | AC260-300V | AC510V | AC604V |
| Varistor Voltage | | 430-470V | 820V | 1000V |
| Rated Watt | FB-01A, 02A, 05A | Over 0.4W | Over 0.4W | Over 0.4W |
| | FB-1E, 1D | Over 0.6W | Over 0.6W | Over 0.4W |
| | FB-1HE, 2E, 2D, 3D | Over 1.5W | Over 1.5W | Over 0.6W |
| | FB-3E, 4E | Over 1.5W | Over 1.5W | Over 0.6W |
| | FB-5E, 8E | Over 1.5W | Over 1.5W | Over 1.5W |
| | FB-10E, 8E | Over 1.5W | Over 1.5W | Over 1.5W |
| | FB-20, 30 | | | Over 1.5W |

Motor Brakemotor Standard Wiring continued

Standard Wiring Connection for CE Motors

Models FB-01A through FB-5E, 220/380V, 50Hz

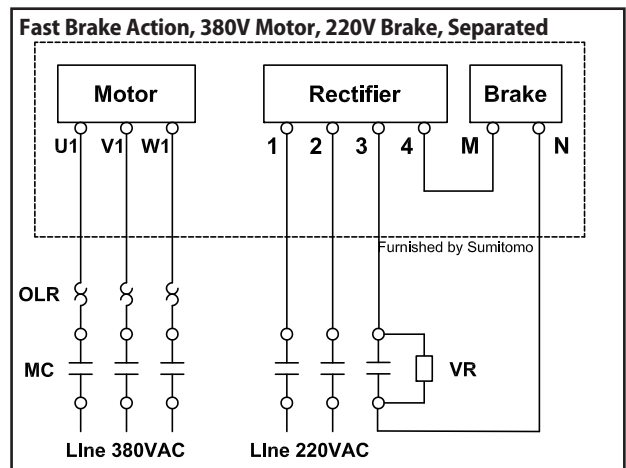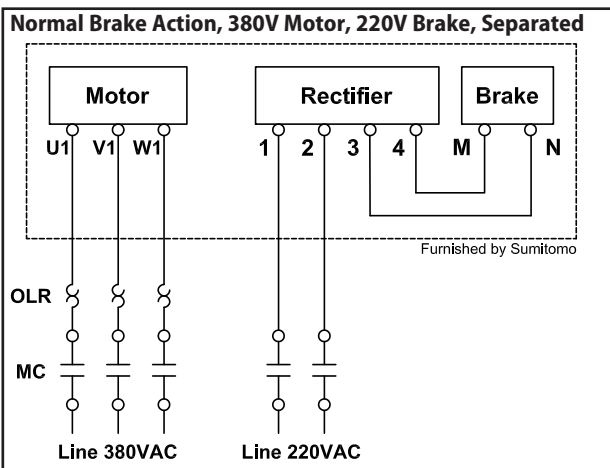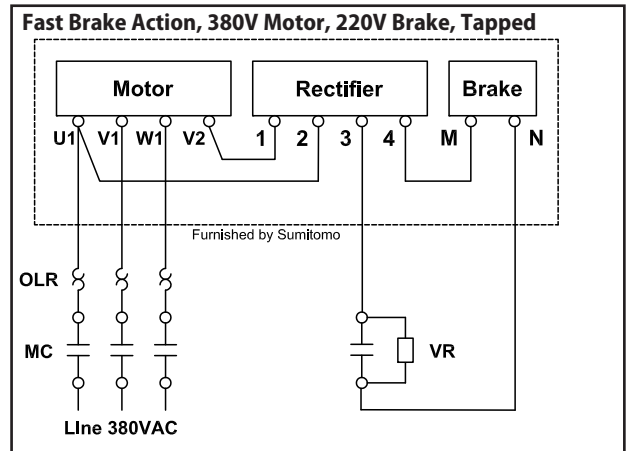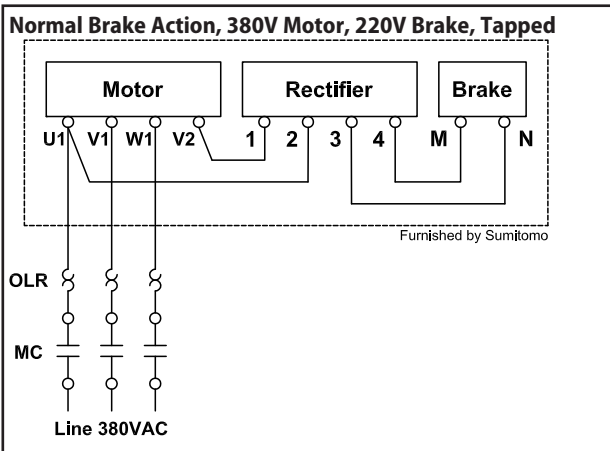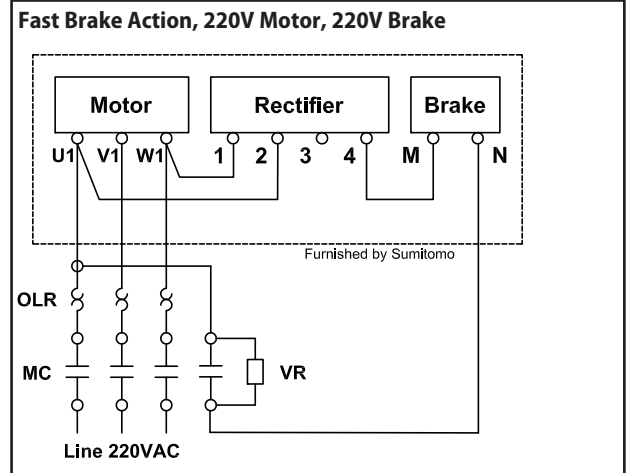
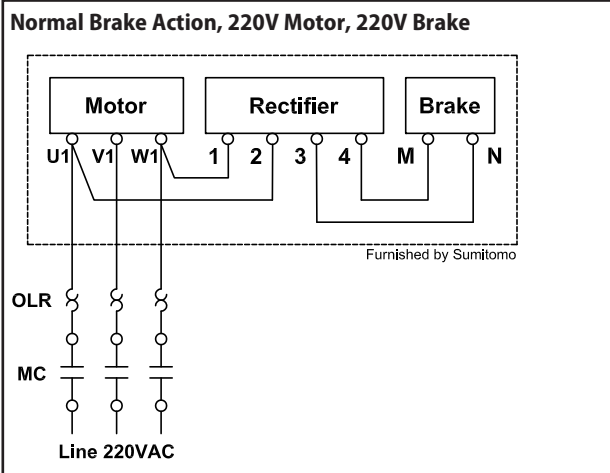


- Key:**
MC: Electromagnetic Relay
OLR: Overload or Thermal Relay
MCB: Magnetic Circuit Breaker
VR: Varistor (protective device, refer to Varistor Specification Table)



Motor Brakemotor, Standard Wiring continued

Standard Wiring Connection for CE Motors (continued)

Models FB-8E through FB-15E, 380V, 50Hz

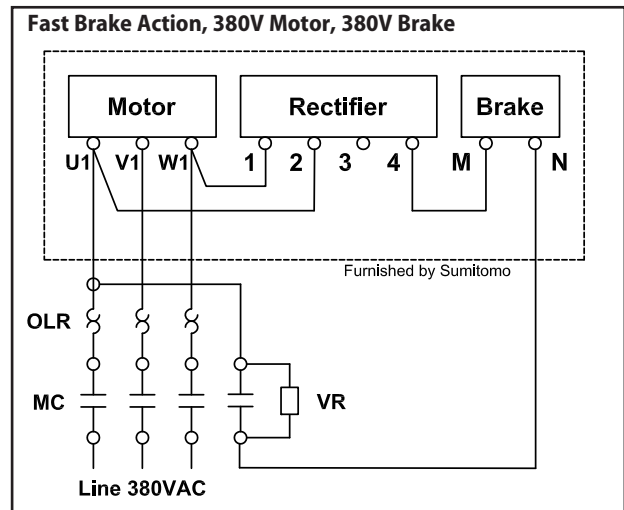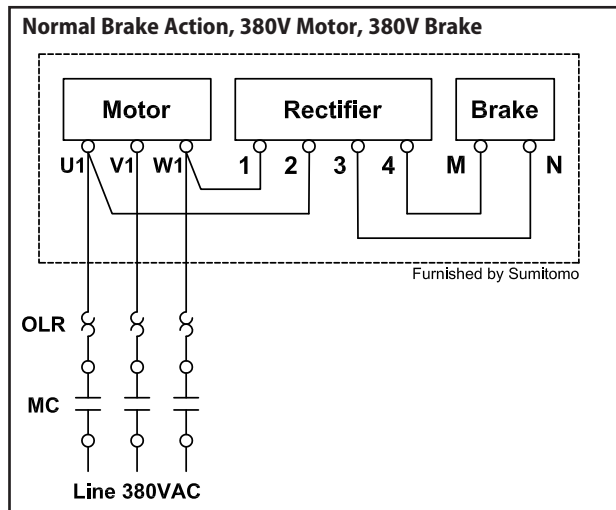

Models FB-01A through FB-15E with Inverter

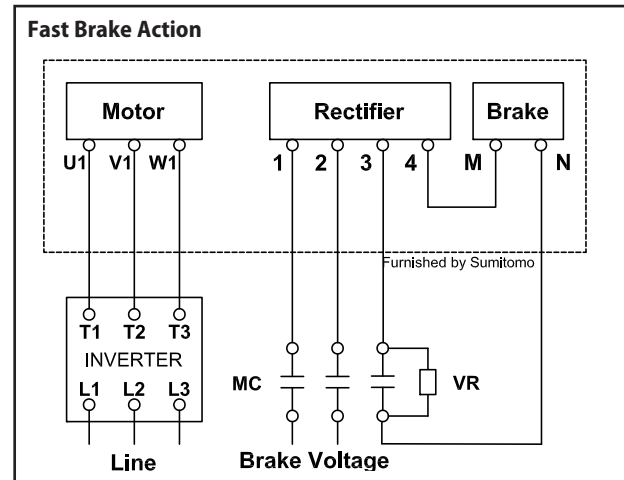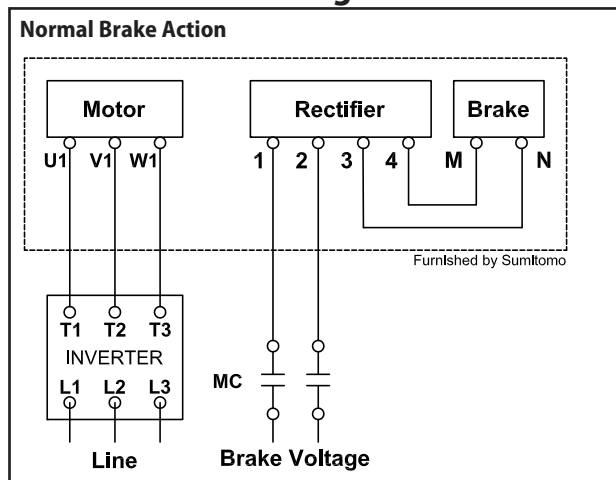

Key:

MC: Electromagnetic Relay OLR: Overload or Thermal Relay MCB: Magnetic Circuit Breaker
 VR: Varistor (protective device, refer to Varistor Specification Table)

Table 4.39a Standard CE Motor, Motor/Brake Voltage

| Motor Power kW x 4P | Brake Model | Motor Voltage | Brake Voltage |
|---------------------|-------------|----------------|---------------|
| 0.1 | FB-01A | 220/380V, 50Hz | 220V, 50Hz* |
| 0.2, 0.25 | FB-02A | | |
| 0.4 | FB-05A | | |
| 0.55 | FB-1D | | |
| 0.75 | FB-1E | | |
| 1.1 | FB-2E | | |
| 1.5 | FB-1HE | | |
| 2.2 | FB-3E | | |
| 3.0 | FB-4E | | |
| 3.7 | FB-5E | | |
| 5.5 | FB-8E | 380V, 50Hz | 380V, 50Hz |
| 7.5 | FB-10E | | |
| 11 | FB-15E | | |


Table 4.39b Varistor Specification Table

| Operating Voltage | 190-230V | 380-460V | 575V |
|------------------------|------------------|-----------|-----------|
| Varistor Rated Voltage | AC260-300V | AC510V | AC604V |
| Varistor Voltage | 430-470V | 820V | 1000V |
| Rated Watt | FB-01A, 02A, 05A | Over 0.4W | Over 0.4W |
| | FB-1E, 1D | Over 0.6W | Over 0.4W |
| | FB-1HE, 2E | Over 1.5W | Over 0.6W |
| | FB-3E, 4E | Over 1.5W | Over 0.6W |
| | FB-5E, 8E | Over 1.5W | Over 1.5W |
| | FB-10E, 8E | Over 1.5W | Over 1.5W |
| | FB-20, 30 | | Over 1.5W |


Motor Brakemotor Standard Wiring continued

Wiring for Brake Models FB-20 / FB-30 - EP.NA Motor and IE3 CE Motor

FB-20 and FB-30 Brake Wiring, 480VAC or less

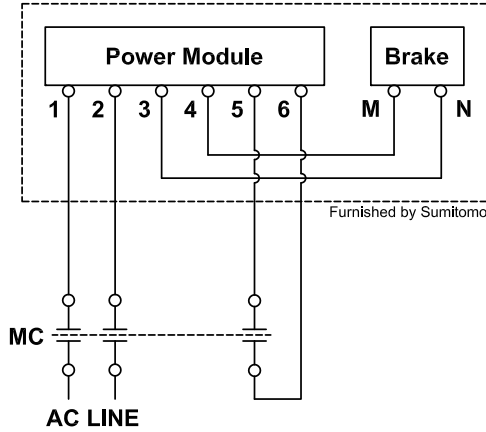

FB-20 and FB-30 Brake Wiring, 575VAC

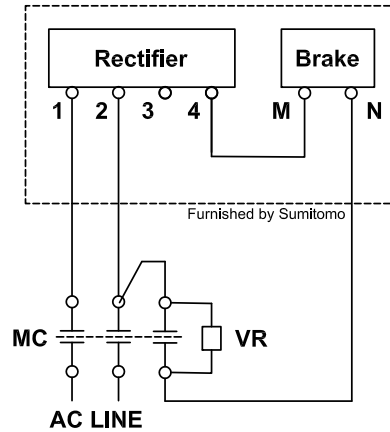

- Key:**
MC: Electromagnetic Relay
VR: Varistor (protective device, refer to Varistor Specification Table)

Motor Brakemotor Standard Wiring continued

Brake Rectifiers and Brake Power Modules

Table 4.41a Brake Rectifiers for EP.NA Motors

| Brake Type | Motor Power HP (kW) x P | 230V/460V Rectifier | | 575V Rectifier | |
|------------|----------------------------|---------------------|-------------|----------------|-------------|
| | | Model Number | Part Number | Model Number | Part Number |
| FB-1E | 1 x 4 | 25FW-4FB3 | EW107WW-01 | 10F-6FB3 | EW104WW-01 |
| FB-1HE | 1.5 x 4 | | | | |
| FB-2E | 2 x 4 | | | | |
| FB-3E | 3 x 4 | | | | |
| FB-5E | 5 x 4 | | | | |
| FB-8E | 7.5 x 4 | | | | |
| FB-10E | 10 x 4 | | | | |
| FB-15E | 15 x 4 | | | | |
| FB-20 | 20 x 4 | | | | |
| FB-30 | 25 x 4 | | | | |
| | 30 x 4 | | | | |
| | 40 x 4 | | | | |

Table 4.41b Brake Rectifiers for IE3 CE Motors

| Brake Type | Motor Power HP (kW) x P | 220V Rectifier | | 380V Rectifier | |
|------------|----------------------------|----------------|-------------|----------------|-------------|
| | | Model Number | Part Number | Model Number | Part Number |
| FB-1E | 0.75 x 4 | 10F-2FB2 | MP983WW-01 | | |
| FB-1HE | 1.1 x 4 | | | | |
| FB-2E | 1.5 x 4 | | | | |
| FB-3E | 2.2 x 4 | | | | |
| FB-4E | 3.0 x 4 | | | | |
| FB-5E | 3.7 x 4 4.0 x 4 | | | | |
| FB-8E | 5.5 x 4 | | | 05F-4FB2 | MP985WW-01 |
| FB-10E | 7.5 x 4 | | | 15F-4FB1 | EW397WW-01 |
| FB-15E | 11 x 4 | | | | |

Table 4.41c Brake Power Modules for EP.NA Motors and IE3 CE Motors

| Brake Type | Motor (HP x P) | 170 ~ 300VAC Module | | 380 ~ 480VAC Module | |
|------------|----------------|---------------------|-------------|---------------------|-------------|
| | | Model Numbers | Part Number | Model Numbers | Part Number |
| FB-20 | 20 x 4 | 13SR-2 | ES075WW-01 | 10SR-4 | MQ003WW-01 |
| FB-30 | 25 x 4 | | | | |
| | 30 x 4 | | | | |
| | 40 x 4 | | | | |

Warranty

Company warrants that (i) all new equipment and parts (collectively, "Equipment") sold by Company will conform to printed drawings and specification sheets issued by Company and (ii) are free of defects in material and workmanship for the time period shown in Table 1. The warranty period commences on the date of shipment of the Equipment by Company.

If, within the warranty period, Company receives from Buyer written notice of any alleged defect in any of the Equipment and, if the Equipment is found by Company not to conform with these warranties (after Buyer has provided Company a reasonable opportunity to perform any appropriate tests on the allegedly defective Equipment), Company will, at its sole option and expense, either repair or replace the Equipment. In all instances, Company reserves the right to require Buyer to deliver the Equipment for repair or replacement to a designated service center and require Buyer to pay all charges for inbound and outbound transportation and for services of any kind, diagnostic or otherwise, excepting only the direct and actual cost of Equipment repair or replacement. Warranty coverage is limited to parts and labor and does not include travel and other expenses. Buyer applications and use of the Equipment may require installation of safety features. Buyer is responsible for furnishing and installing guards or other safety equipment needed to protect operating personnel, even though such equipment may not be furnished by Company with the Equipment purchased. Equipment supplied, but not manufactured, by Company is warranted only to the extent of the original manufacturer's warranty.

Table 1 - Product Warranty

| Product | Warranty Period (After Shipment) | Components Excluded |
|---|----------------------------------|---------------------|
| Cyclo® Speed Reducers and Gearmotors | 2 Years | Bearings and Seals |
| Cyclo® Bevel Buddybox Speed Reducers and Gearmotors | 2 Years | Bearings and Seals |
| Cyclo® Helical Buddybox Speed Reducers and Gearmotors | 2 Years | Bearings and Seals |
| Fine Cyclo® Speed Reducers | 2 Years | Bearings and Seals |
| Beier® Variator Mechanical Adjustable Speed Reducers | 2 Years | Bearings and Seals |
| Hyponic® Speed Reducers and Gearmotors | 2 Years | Bearings and Seals |
| Hedcon® Double Enveloping Worm Gear Speed Reducers | 2 Years | Bearings and Seals |
| Helical Shaft Mount Speed Reducers | 2 Years | Bearings and Seals |
| Rhytax® | 2 Years | Bearings and Seals |
| IB Series Servo Gearheads | 1 Year | Bearings and Seals |
| Astero Gearmotors | 1 Year | Bearings and Seals |
| Variable Frequency Inverters | 1 Year | --- |
| Paramax® Speed Reducers | 2 Years | Bearings and Seals |
| Compower Planetary Speed Reducers | 1 Year | Bearings and Seals |
| Hansen UniMiner | 2 Years | Bearings and Seals |
| Hansen P4 | 2 Years | Bearings and Seals |
| Parts | 1 Year | --- |
| Repairs | 1 Year | Bearings and Seals |

