RK330-04 HVAC Temperature & Humidity Sensor



RK330-04 HVAC Temperature & Humidity Sensor is a professional measurement of air temperature & relative humidity. Sensors are built-in the water-proof and dust-proof shelter. It is widely used in HVAC, storage and environment monitoring field.

FEATURES

- High Sensitivity
- Fast response time
- Wide working temperature range
- Strong anti-interference ability
- Easy installation



APPLICATIONS


- HVAC
- Air conditioning system
- Pipe ventilation system
- Storage
- Environmental monitoring

TECHNICAL SPECIFICATION

Item	Technical Specification				
item	Temperature	Humidity			
Range	-40-125°C(intermediate range is optional)①	0-100%RH			
Accuracy	±0.2℃	±2%RH,±3%RH,±5%RH			
Supply	12-24VDC				
Output Signal	4-20mA,0-5V,0-10V,RS485 MODBUS(RTU)				
Power Consumption	Current output:≤0.48W, Voltage output:≤0.2W, Digital output:≤0.36W				
Load Characteristic	Current output:R _L ≤(U _S -7)/0.02Ω, Vo	Current output: $R_L \le (U_S-7)/0.02\Omega$, Voltage output: $R_L \ge 100k\Omega$			
Operating Temperature	-40°C-+80°C				
Ingress Protection	IP65				
Storage	10-60°C@20%-90%RH				

①Such as 0-50 °C,0-100 °C,-20-60 °C,,-20-80 °C,-40-125 °C...

DIMENSION

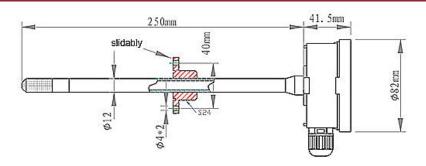

RK330-04 HVAC Temperature & Humidity Sensor



MOUNTING

- Using 2 hole flange(Ø4) installation;
- Installed in the region of the stable environment, avoid direct sunlight, away from the window and air conditioning, heating and other equipment;
- As far as possible away from high-power jamming devices (e.g., frequency converter, motor, etc.), so as not to cause no measurement.

•

PARAMETER SELECTION TABLE

Remark	Series	Туре	Range	Accuracy	Output	Cable Length	
RK							
	330						
		04					
			Α				0-50℃/0-100%RH
			В				0-100℃/0-100%RH
			С				-20-60℃/0-100%RH
			D				-20-80℃/0-100%RH
			Е				-40-125℃/0-100%RH
			Χ				Customize
				А			Temperature:±0.2°C
							Humidity:±5%RH
				В			Temperature:±0.2°C
							Humidity:±3%RH
				С			Temperature:±0.2°C
							Humidity:±2%RH
					Α		4-20mA
					В		0-5V
					С		0-10V
					D		RS485

Example: RK330-04AAA1500 0-50°C/0-100%RH Accuracy: Temperature:±0.2°C,Humidity:±5%RH Output: 4-20mA

Copyright © 2015 Hunan Rika Electronic Tech Co.,Ltd

Hunan Rika Electronic Tech Co., Ltd

Add: Building B5, Taskin, Yuhua District, Changsha City, Hunan Province, China



+86-731-85132979



info@rikasensor.com



www.rikasensor.com