



STONE SELECT

2020 CATALOGUE





STONE SELECT CHAMPION'S SELECTED TIMELESS SOLUTION IN STONE LOOK

INDEX

A ANHUI **P** PENGLAI / **⊖** ANION

EDGE A	04	EVEREST A	12	GEOCENTRIC STONE A	18
MICA A P / ⊖	26	MILESTONE A	32	MOCA CRÈME P	40
NIAGARA A	48	OCEAN STONE A	54	OMAN P	60
REACT A	66	RIVERIA A	78	TITAN A	86
VOLCANO P	92	WAVE GREY P	100		

EDGE



IVORY 604184
Natural
60x60 / 23.6x23.6"



DARK GREY 604188
Natural
60x60 / 23.6x23.6"




LIGHT GREY 604186
Natural
60x60 / 23.6x23.6"

EDGE


COLOR

IVORY




604184
60x60 cm 23.6x23.6"

BEIGE




604185
60x60 cm 23.6x23.6"

LIGHT GREY

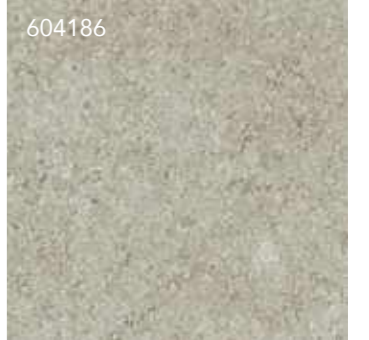


604186
60x60 cm 23.6x23.6"

GREY




604187
60x60 cm 23.6x23.6"

DARK GREY



604188
60x60 cm 23.6x23.6"


EDGE



SIZE




FINISH



GR

Grip



NA

Natural

PRODUCT SPECIFICATIONS


COLOR SIZE FINISH		60x60 cm 23.6x23.6"	By Request
IVORY	Grip	604184H	•
	Natural	604184	•
BEIGE	Grip	604185H	-
	Natural	604185	•
LIGHT GREY	Grip	604186H	-
	Natural	604186	•
GREY	Grip	604187H	-
	Natural	604187	•
DARK GREY	Grip	604188H	•
	Natural	604188	•

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
60X60 CM 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST	Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
60X60 CM 23.6x23.6"	2.78	4	32	32

EVEREST

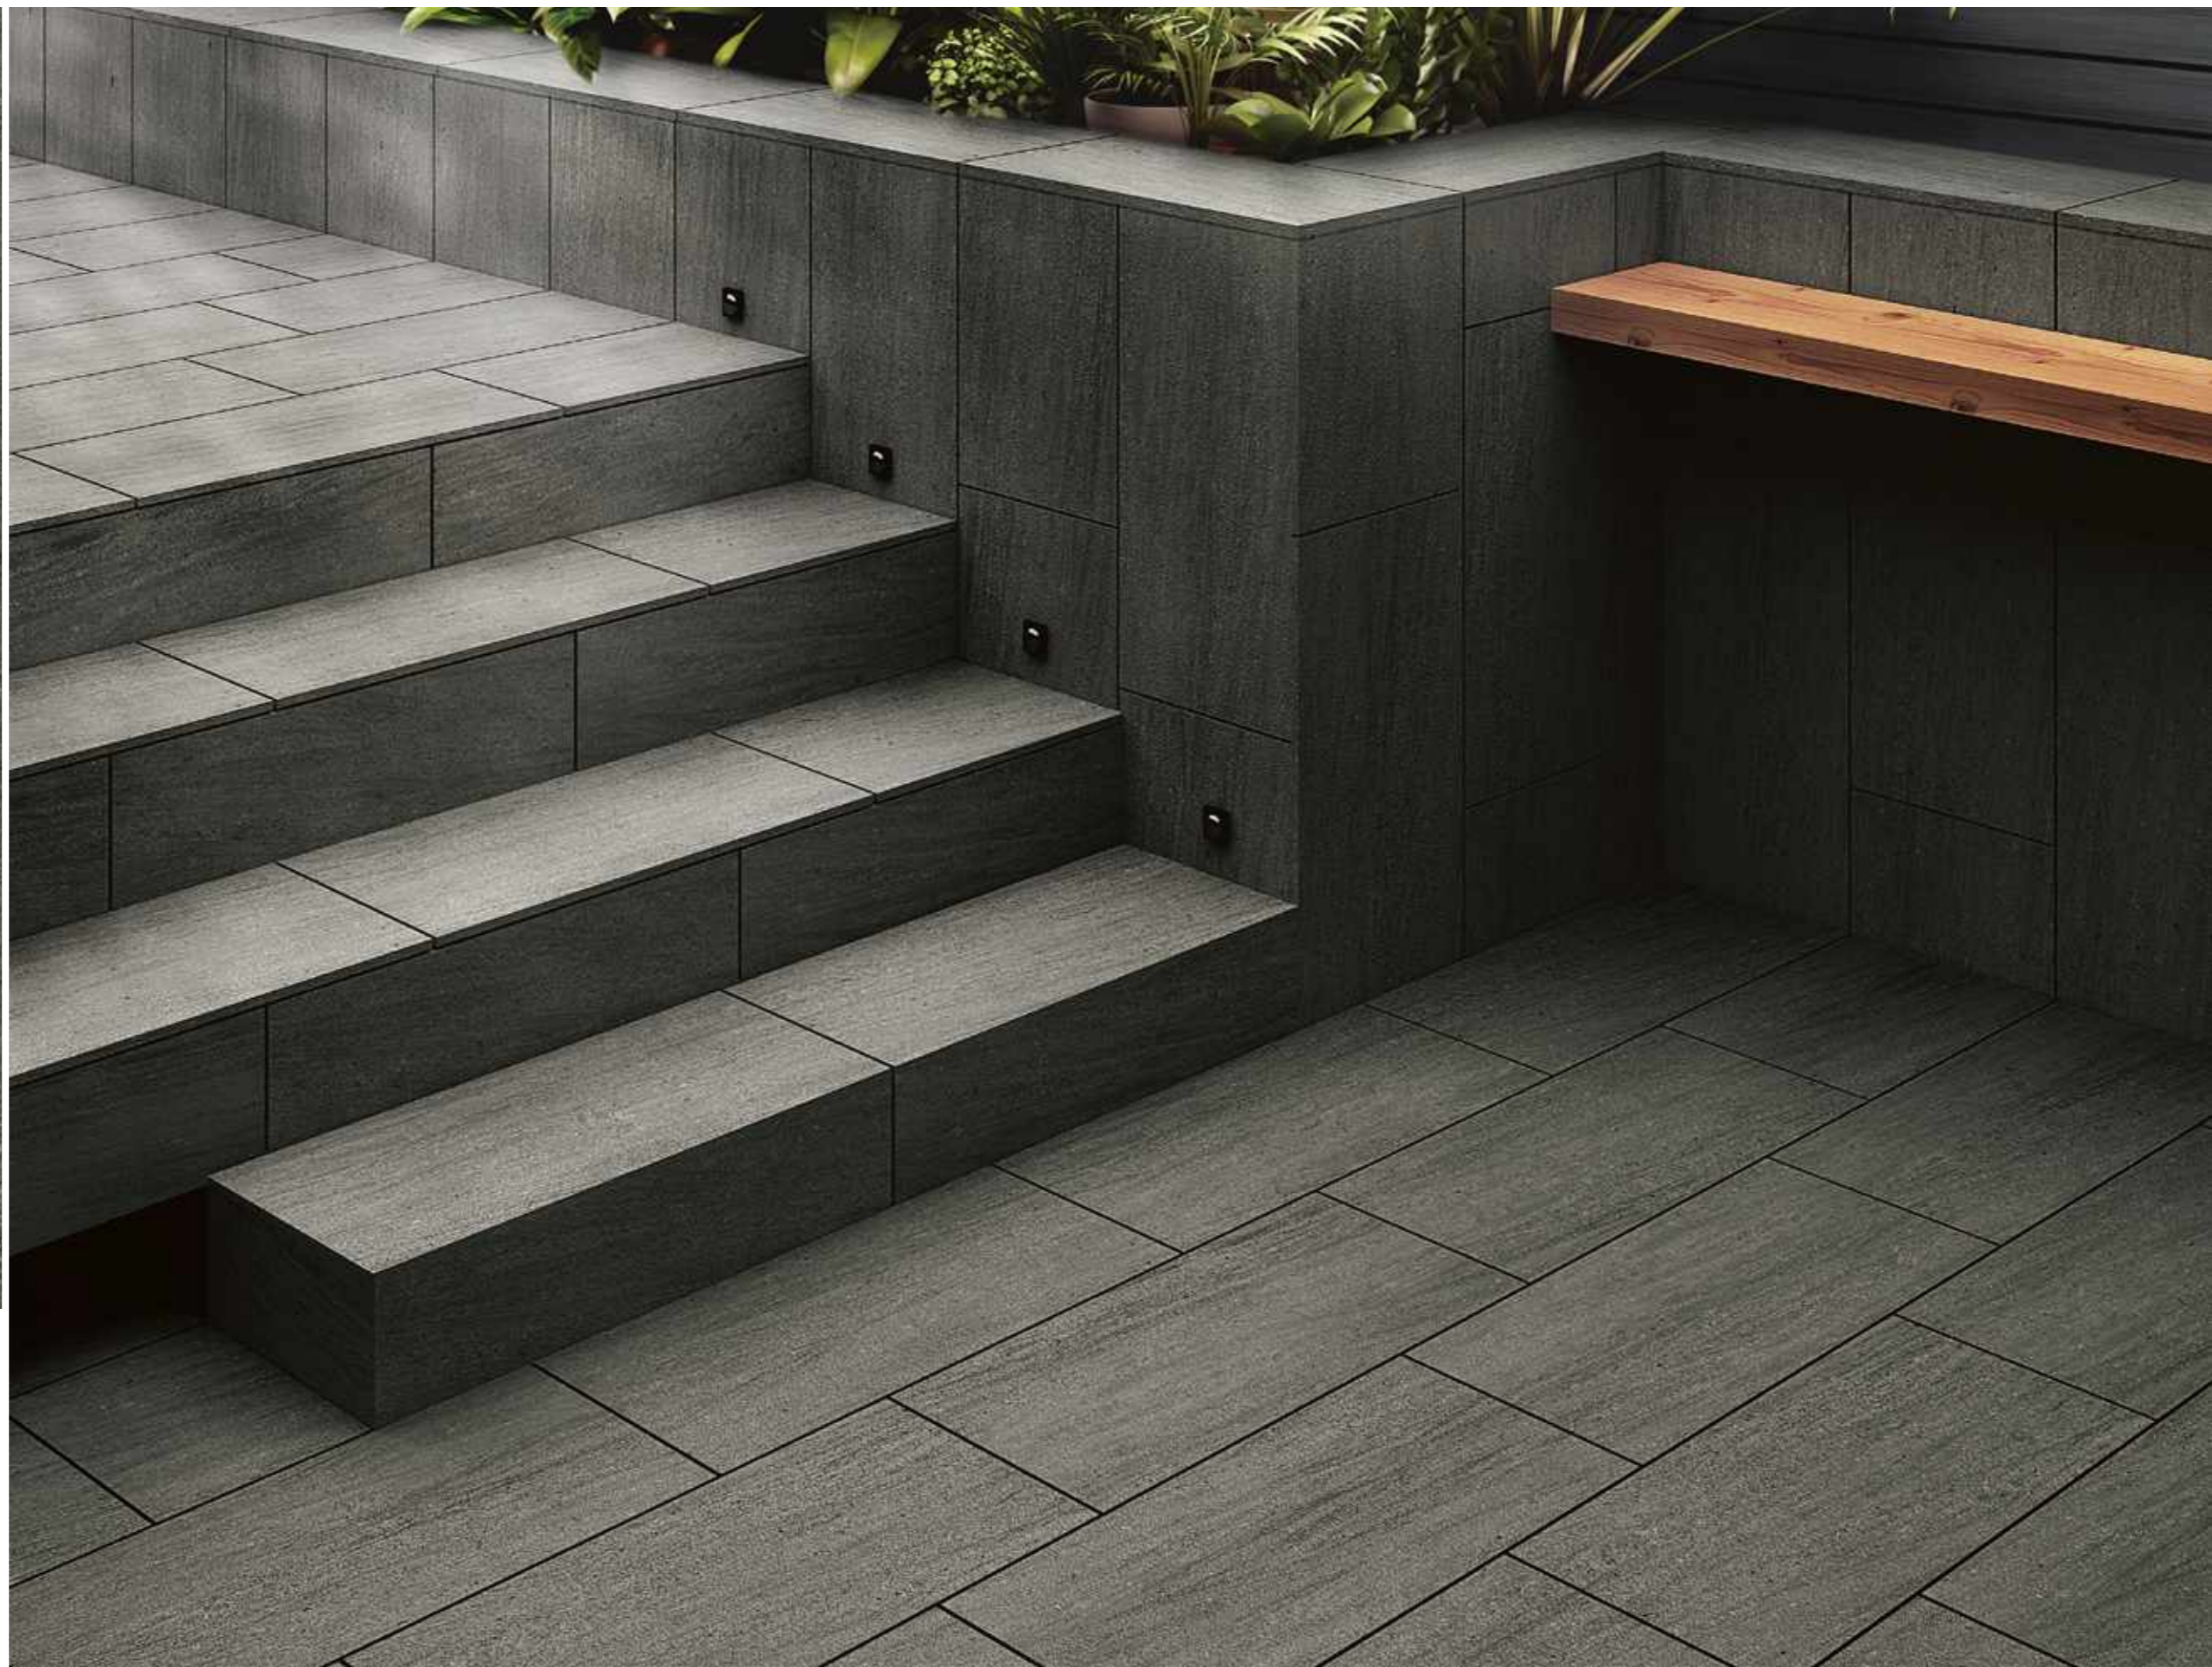

DARK GREY Y631435
Textured
30x60 / 11.8x23.6"



LIGHT GREY SD63003


Textured
30x60 / 11.8x23.6"

EVEREST

COLOR

IVORY

Y631433



30x60 cm 11.8x23.6"

LIGHT GREY

SD63003



30x60 cm 11.8x23.6"

GREY

SD63005



30x60 cm 11.8x23.6"


DARK GREY

Y631435




30x60 cm 11.8x23.6"

EVEREST



SIZE

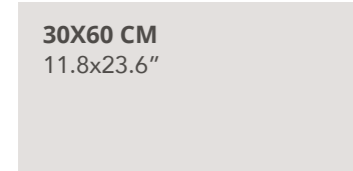

FINISH



Textured

PRODUCT SPECIFICATIONS

COLOR SIZE FINISH	30x60 cm 11.8x23.6"	Regular
IVORY Textured	Y631433	•
LIGHT GREY Textured	SD63003	•
GREY Textured	SD63005	•
DARK GREY Textured	Y631435	•

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
30X60 CM 11.8x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.6

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
30X60 CM 11.8x23.6"	S≥2000N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST	Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
30X60 CM 11.8x23.6"	5.56	7	27	60

GEOCENTRIC STONE



BEIGE CS63501
Natural
30x60 / 11.8x23.6"




BEIGE CS63501
Natural
30x60 / 11.8x23.6"

GEOCENTRIC STONE

COLOR

BEIGE


CS63501



30x60 cm 11.8x23.6"

WALNUT


CS63502



30x60 cm 11.8x23.6"

GREY

CS63506




30x60 cm 11.8x23.6"



GREY CS63506

Natural
30x60 / 11.8x23.6"

GEOCENTRIC STONE



SIZE

30X60 CM
11.8x23.6"

FINISH

NA

Natural

PRODUCT SPECIFICATIONS

COLOR SIZE FINISH		30x60 cm 11.8x23.6"	Regular
BEIGE Natural		CS63501	•
WALNUT Natural		CS63502	•
GREY Natural		CS63506	•

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
30X60 CM 11.8x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	± 0.5	± 0.8	± 0.6

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
EN14411 (ISO 13006)						
30X60 CM 11.8x23.6"						

PACKING LIST	Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
30X60 CM 11.8x23.6"	5.56	7	27	60

MICA



ASPHALT GREY
SF71017Y

Natural 75x150 / 29.5x59.1"

MICA

COLOR _____

IVORY

75x150 cm 29.5x59.1"

SF71011Y



720° VR

STERLING GREY

75x150 cm 29.5x59.1"

SF71013Y



720° VR

MOONSHINE GREY

75x150 cm 29.5x59.1"

SF71015Y



720° VR

COLOR _____

ASPHALT GREY

SF71017Y



75x150 cm 29.5x59.1"




720° VR

DECOR _____

RIDGE IVORY


SW75011T



25x75 cm 9.8x29.5"

RIDGE STERLING GREY


SW75013T



25x75 cm 9.8x29.5"


RIDGE MOONSHINE GREY

SW75015T


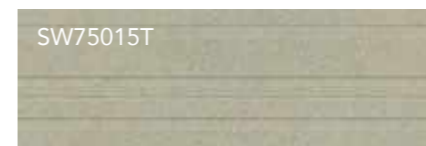


25x75 cm 9.8x29.5"


MICA



SIZE

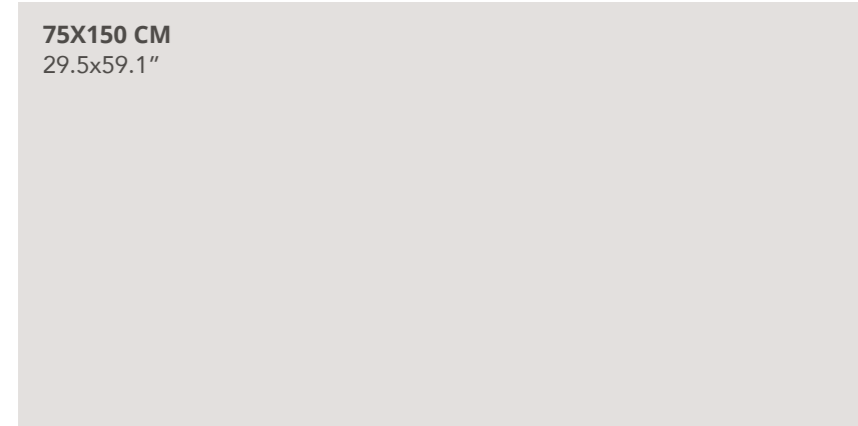

FINISH



Natural

PRODUCT SPECIFICATIONS


COLOR SIZE FINISH		25x75 cm 9.8x29.5"	Regular	75x150 cm 29.5x59.1"	Regular	Anion
IVORY	Natural	SW75011	•	SF71011Y	•	•
STERLING GREY	Natural	SW75013	•	SF71013Y	•	•
MOONSHINE GREY	Natural	SW75015	•	SF71015Y	•	•
ASPHALT GREY	Natural	-	-	SF71017Y	•	•
RIDGE IVORY	Natural	SW75011T	-	-	-	-
RIDGE STERLING GREY	Natural	SW75013T	-	-	-	-
RIDGE MOONSHINE GREY	Natural	SW75015T	-	-	-	-

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	> 10	± 2.0	± 2.0	± 0.5	± 1.5	+2.0~-1.5	+2.0~-1.5	± 2.0	± 2.0
25X75 CM 9.8x29.5"	≤ 18	± 0.3	± 0.3	± 0.3	± 0.3	+0.6~-0.4	+0.5	± 0.8	± 0.8
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
75X150 CM 29.5x59.1"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+1.2~-0.8	+0.8~-0.6	± 1.0	± 1.0

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
25X75 CM 9.8x29.5"	S≥2000N / R≥18N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm ²	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3
75X150 CM 29.5x59.1"	S≥2000N / R≥40N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST	Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
25X75 CM 9.8x29.5"	5.33	7	23	43
25X75 CM 9.8x29.5" (Decor)	5.33	6	20	43
75X150 CM 29.5x59.1"	0.89	2	58	15

MILESTONE

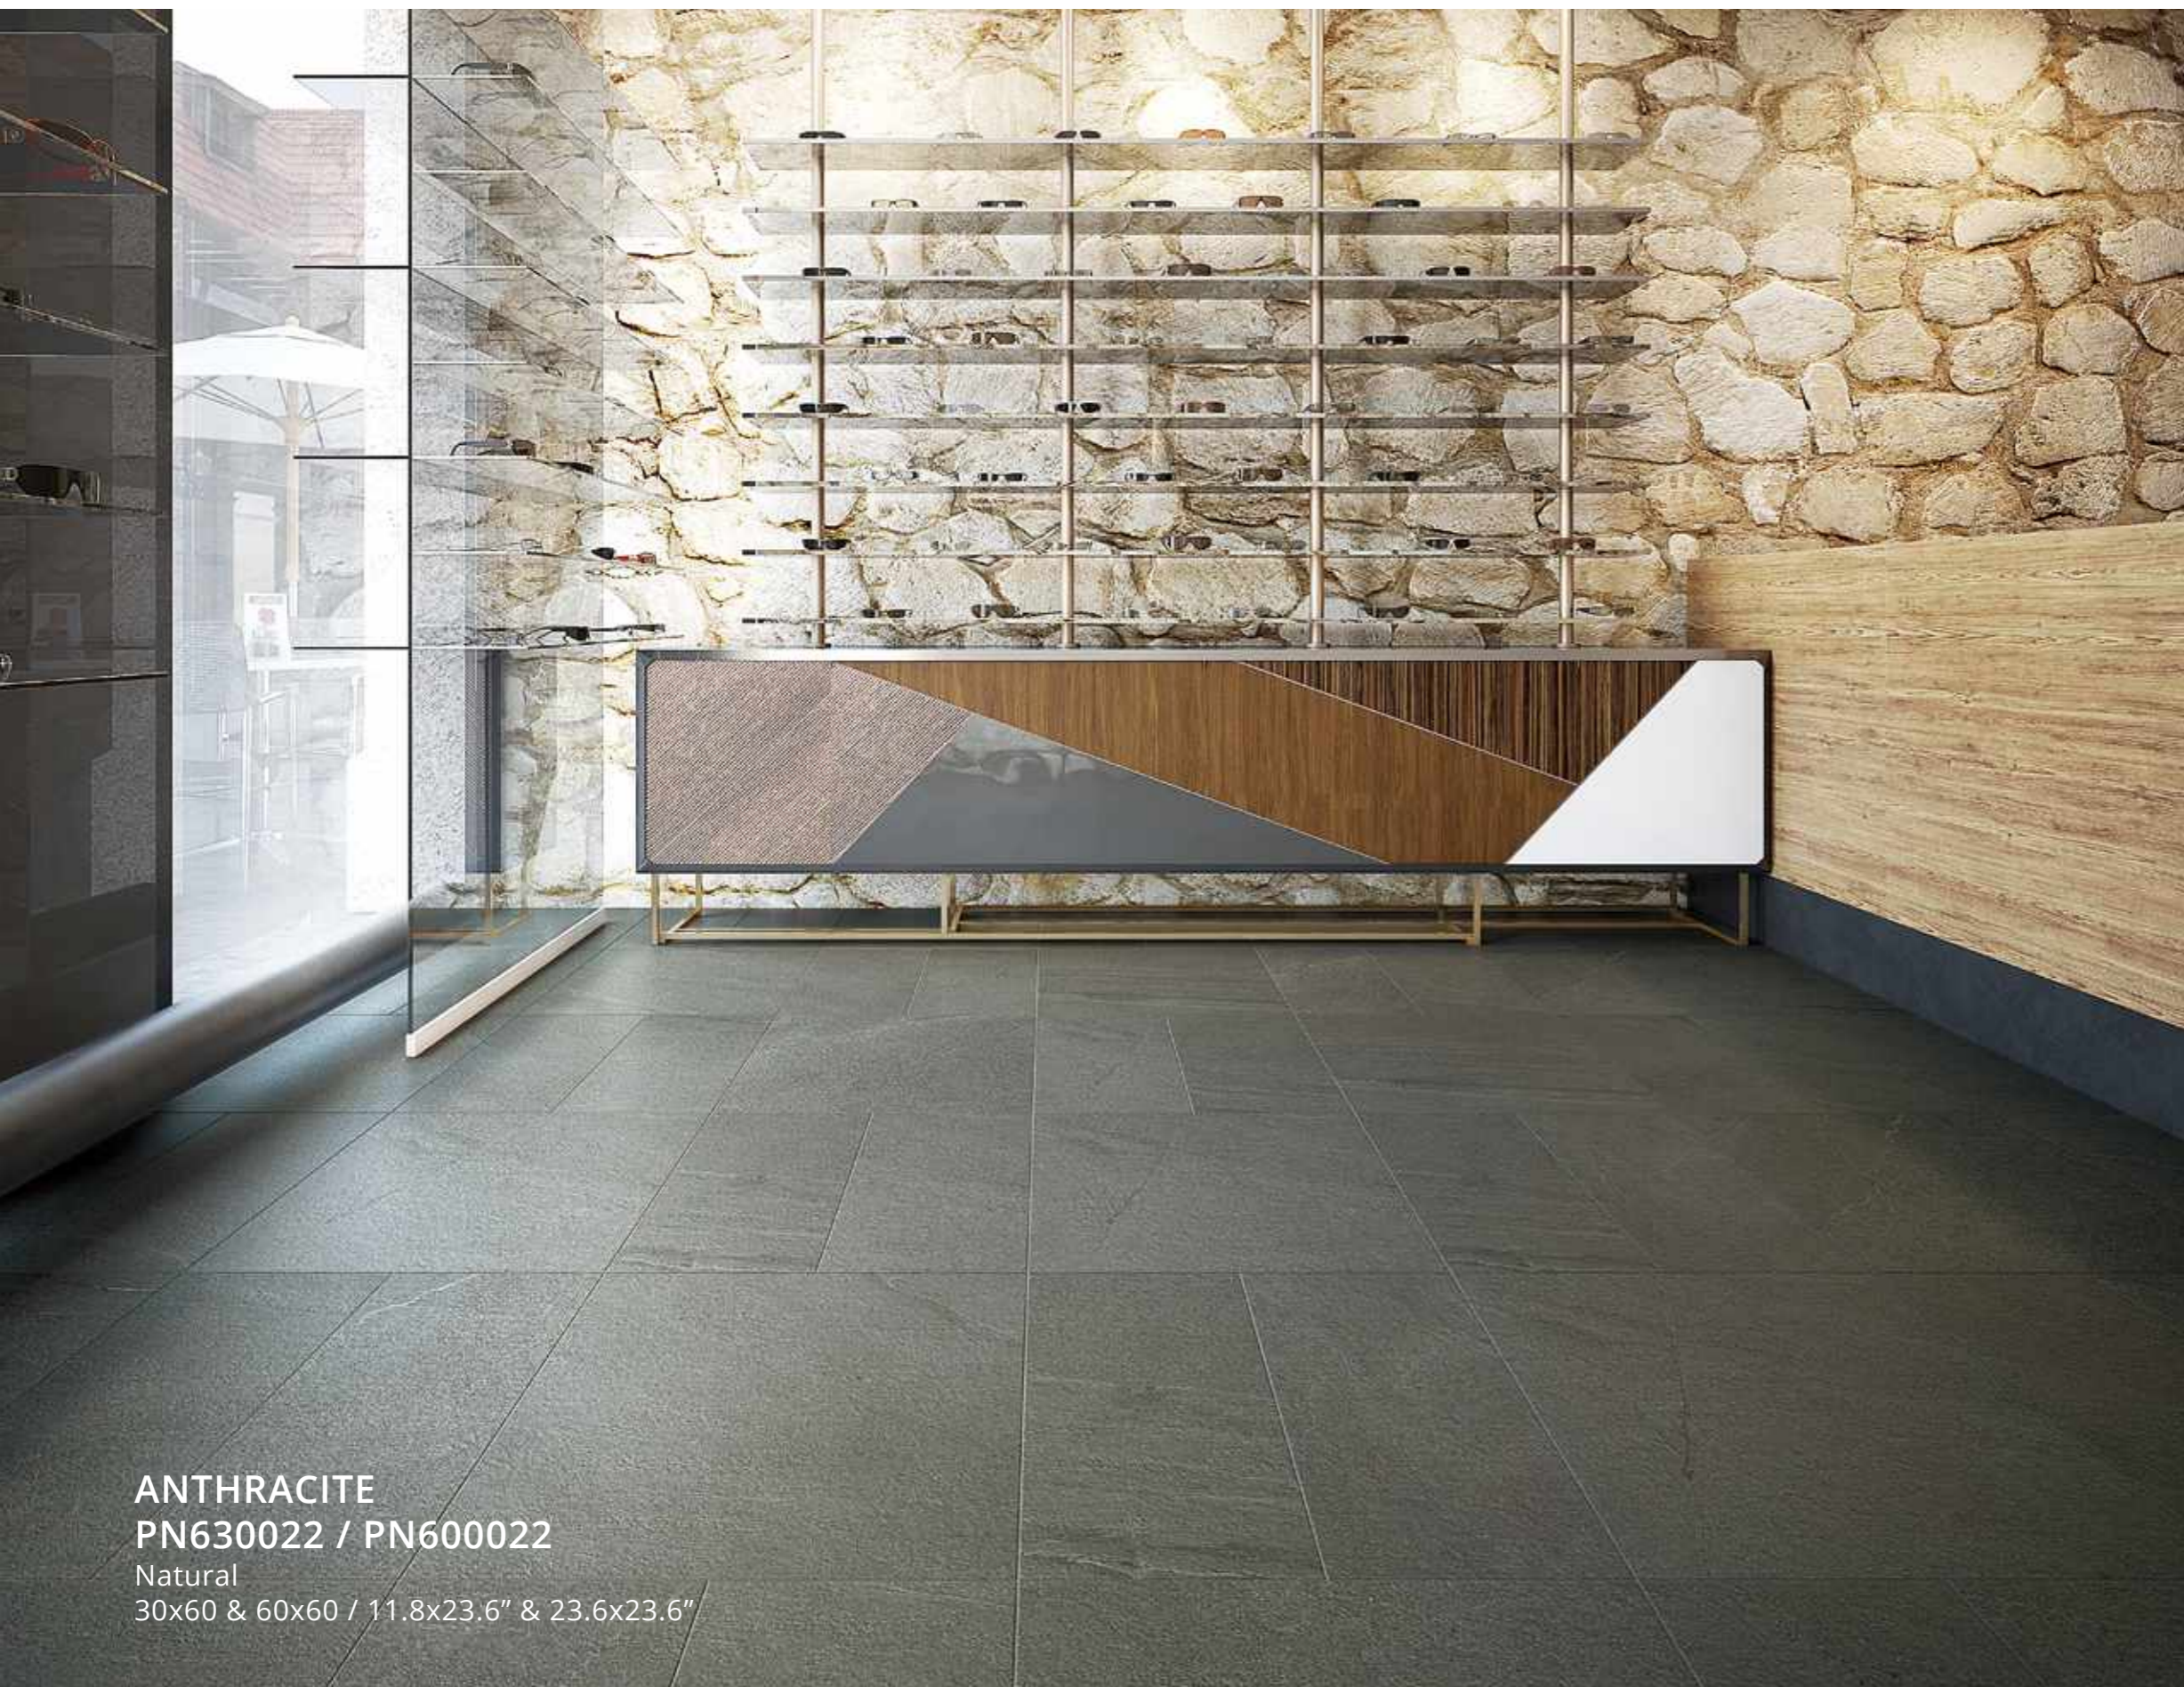

ANTHRACITE
PN630022 / PN600022
Natural
30x60 & 60x60 / 11.8x23.6" & 23.6x23.6"



OYSTER PN600021

Natural

60x60 / 23.6X23.6"



OYSTER PN630021 / PN600021

Natural
30x60 & 60x60 / 11.8x23.6" & 23.6x23.6"




MILESTONE

COLOR

IVORY

PN600019



60x60 cm 23.6x23.6"

BEIGE

PN600020



60x60 cm 23.6x23.6"

OYSTER

PN600021



60x60 cm 23.6x23.6"


ANTHRACITE

PN600022





60x60 cm 23.6x23.6"


MILESTONE



SIZE

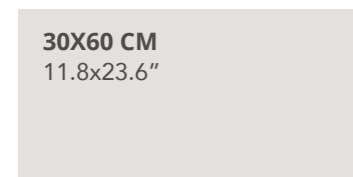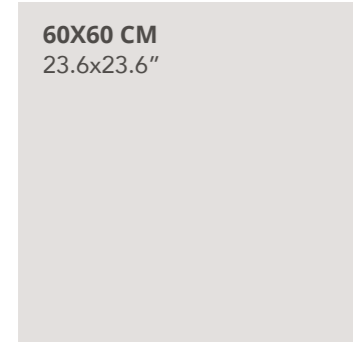

FINISH



Natural

PRODUCT SPECIFICATIONS

COLOR SIZE FINISH		30x60 cm 11.8x23.6"	60x60 cm 23.6x23.6"	By Request
IVORY	Natural	PN630019	PN600019	•
BEIGE	Natural	PN630020	PN600020	•
OYSTER	Natural	PN630021	PN600021	•
ANTHRACITE	Natural	PN630022	PN600022	•

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
30X60 CM 11.8x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.6
60X60 CM 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
30X60 CM 11.8x23.6"	S≥2000N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST		Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
30X60 CM	11.8x23.6"	5.56	7	27	60
60X60 CM	23.6x23.6"	2.78	4	32	32

MOCA CRÈME

LIGHT
PNN900353
Satin 90x90 / 35.4x35.4"





CLASSIC
PNN900354
Satin 90x90 / 35.4x35.4"

MOCA CRÈME

COLOR _____

LIGHT

PNN900353



90x90 cm 35.4x35.4"

CLASSIC

PNN900354




90x90 cm 35.4x35.4"

DECOR _____

STEEL LIGHT

PNC490353T1

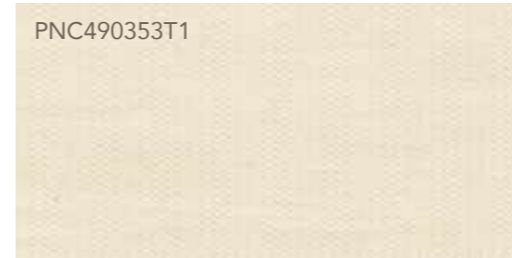

45x90 cm 17.7x35.4"

STRIP LIGHT

PNC490353T2





45x90 cm 17.7x35.4"


MOCA CRÈME




SIZE

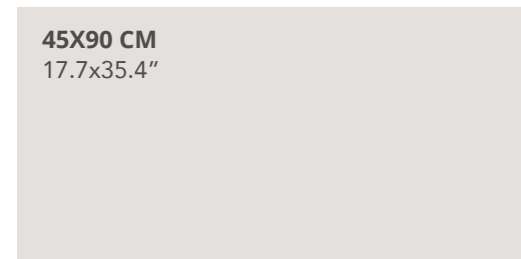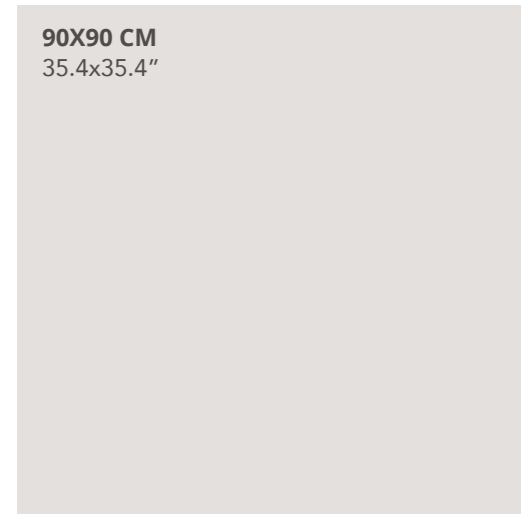


FINISH



Natural



Satin



Sand Blasted

PRODUCT SPECIFICATIONS

COLOR SIZE FINISH		45x90 cm 17.7x35.4"	60x60 cm 23.6x23.6"	Regular	By Request	90x90 cm 35.4x35.4"	By Request
LIGHT	Natural	-	PNF600353	•	-	-	-
	Satin	PNN490353	PNN600353	-	•	PNN900353	•
CLASSIC	Natural	-	PNF600354	•	-	-	-
	Satin	PNN490354	PNN600354	-	•	PNN900354	•
	Sand Blasted	-	PNC600354	-	•	-	-
STEEL LIGHT	Natural	PNC490353T1	-	-	-	-	
STRIP LIGHT	Natural	PNC490353T2	-	-	-	-	

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
45X90 CM 17.7x35.4"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 1.0	± 0.8
60X60 CM 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8
90X90 CM 35.4x35.4"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 1.0	± 1.0

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm ²	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3
45X90 CM 17.7x35.4"	S≥2600N / R≥40N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
90X90 CM 35.4x35.4"	S≥2600N / R≥40N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST		Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
45X90 CM 17.7x35.4"		2.47	3	31	44
60X60 CM 23.6x23.6"		2.78	4	32	32
90X90 CM 35.4x35.4"		1.23	2	41	30

NIAGARA

IVORY PN600023
Natural
60x60 / 23.6x23.6"



NIAGARA

COLOR

IVORY

PN600023



60x60cm 23.6x23.6"

GREY

PN600024



60x60cm 23.6x23.6"

CHARCOAL

PN600026




60x60cm 23.6x23.6"





GREY PN600024

Natural
60x60 / 23.6x23.6"


NIAGARA




SIZE

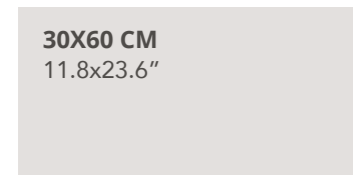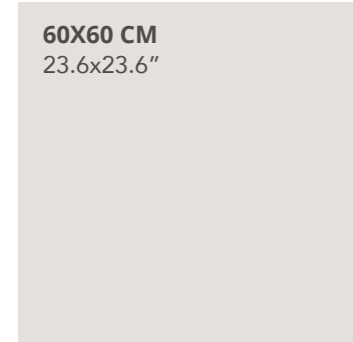

FINISH



Grip



Natural

PRODUCT SPECIFICATIONS

COLOR SIZE FINISH		30x60 cm 11.8x23.6"	Regular	60x60 cm 23.6x23.6"	By Request
IVORY	Grip	-	-	PN600023H	•
	Natural	PN630023	•	PN600023	•
GREY	Grip	-	-	PN600024H	•
	Natural	PN630024	•	PN600024	•
CHARCOAL	Grip	-	-	PN600026H	•
	Natural	PN630026	•	PN600026	•

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
30X60 CM 11.8x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.6
60X60 CM 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
30X60 CM 11.8x23.6"	S≥2000N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST		Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
30X60 CM 11.8x23.6"		5.56	7	27	60
60X60 CM 23.6x23.6"		2.78	4	32	32

OCEAN STONE

DARK GREY FR60319
Natural
60x60 cm / 23.6x23.6"



OCEAN STONE

COLOR

ARTIC WHITE

FR60315



60x60 cm 23.6x23.6"

BEIGE

FR60310



60x60 cm 23.6x23.6"

GREY

FR60312



60x60 cm 23.6x23.6"

DARK GREY

FR60319



60x60 cm 23.6x23.6"

TABAC

FR60317



60x60 cm 23.6x23.6"

BLACK

FR60318




60x60 cm 23.6x23.6"

ARTIC WHITE / GREY

FR60315 / FR60312

Natural 60x60 cm / 23.6x23.6"

OCEAN STONE



SIZE

60X60 CM
23.6x23.6"

30X60 CM
11.8x23.6"

FINISH

NA

Natural

PRODUCT SPECIFICATIONS

COLOR SIZE FINISH		30x60 cm 11.8x23.6"	By Request	60x60 cm 23.6x23.6"	Regular
ARTIC WHITE	Natural	FR63315	•	FR60315	•
BEIGE	Natural	FR63310	•	FR60310	•
GREY	Natural	FR63312	•	FR60312	•
DARK GREY	Natural	FR63319	•	FR60319	•
TABAC	Natural	FR63317	•	FR60317	•
BLACK	Natural	FR63318	•	FR60318	•

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
30X60 CM 11.8x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.6
60X60 CM 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
30X60 CM 11.8x23.6"	S≥2000N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST		Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
30X60 CM	11.8x23.6"	5.56	7	27	60
60X60 CM	23.6x23.6"	2.78	4	32	32

OMAN



BEIGE
F61763 / C21763GL
Natural / Sturctared
60x120 & 20x120
23.6x47.2" & 7.9x47.2"

OMAN

COLOR

BEIGE

F61763



60x120 cm 23.6x47.2"



720° VR

DECOR

BEIGE




C21763GL 20x120 cm 7.9x47.2"


BEIGE F61763

Natural
60x120 / 23.6x47.2"

SIZE

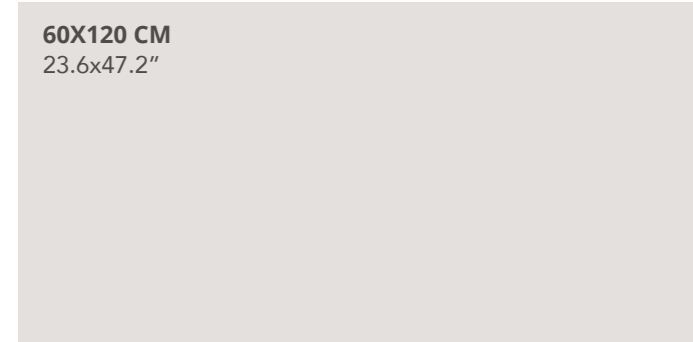

FINISH



NA

Natural



ST

Structured (3 in 1)

PRODUCT SPECIFICATIONS


COLOR SIZE FINISH	20x120 cm 7.9x47.2"	60x120 cm 23.6x47.2"	Regular
BEIGE	Natural	-	F61763 •
	Structured (3 in 1)	C21763GL	-

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
20X120 CM 7.9x47.2"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.5	+0.5~-0.5	± 1.0	± 1.0
60X120 CM 23.6x47.2"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.5	+0.5~-0.5	± 1.0	± 1.0

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm ²	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3
20X120 CM 7.9x47.2"	S≥2600N / R≥40N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60X120 CM 23.6x47.2"	S≥2600N / R≥40N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST	Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
20X120 CM 7.9x47.2"	4.17	4	25	36
60X120 CM 23.6x47.2"	1.39	2	38	48

REACT

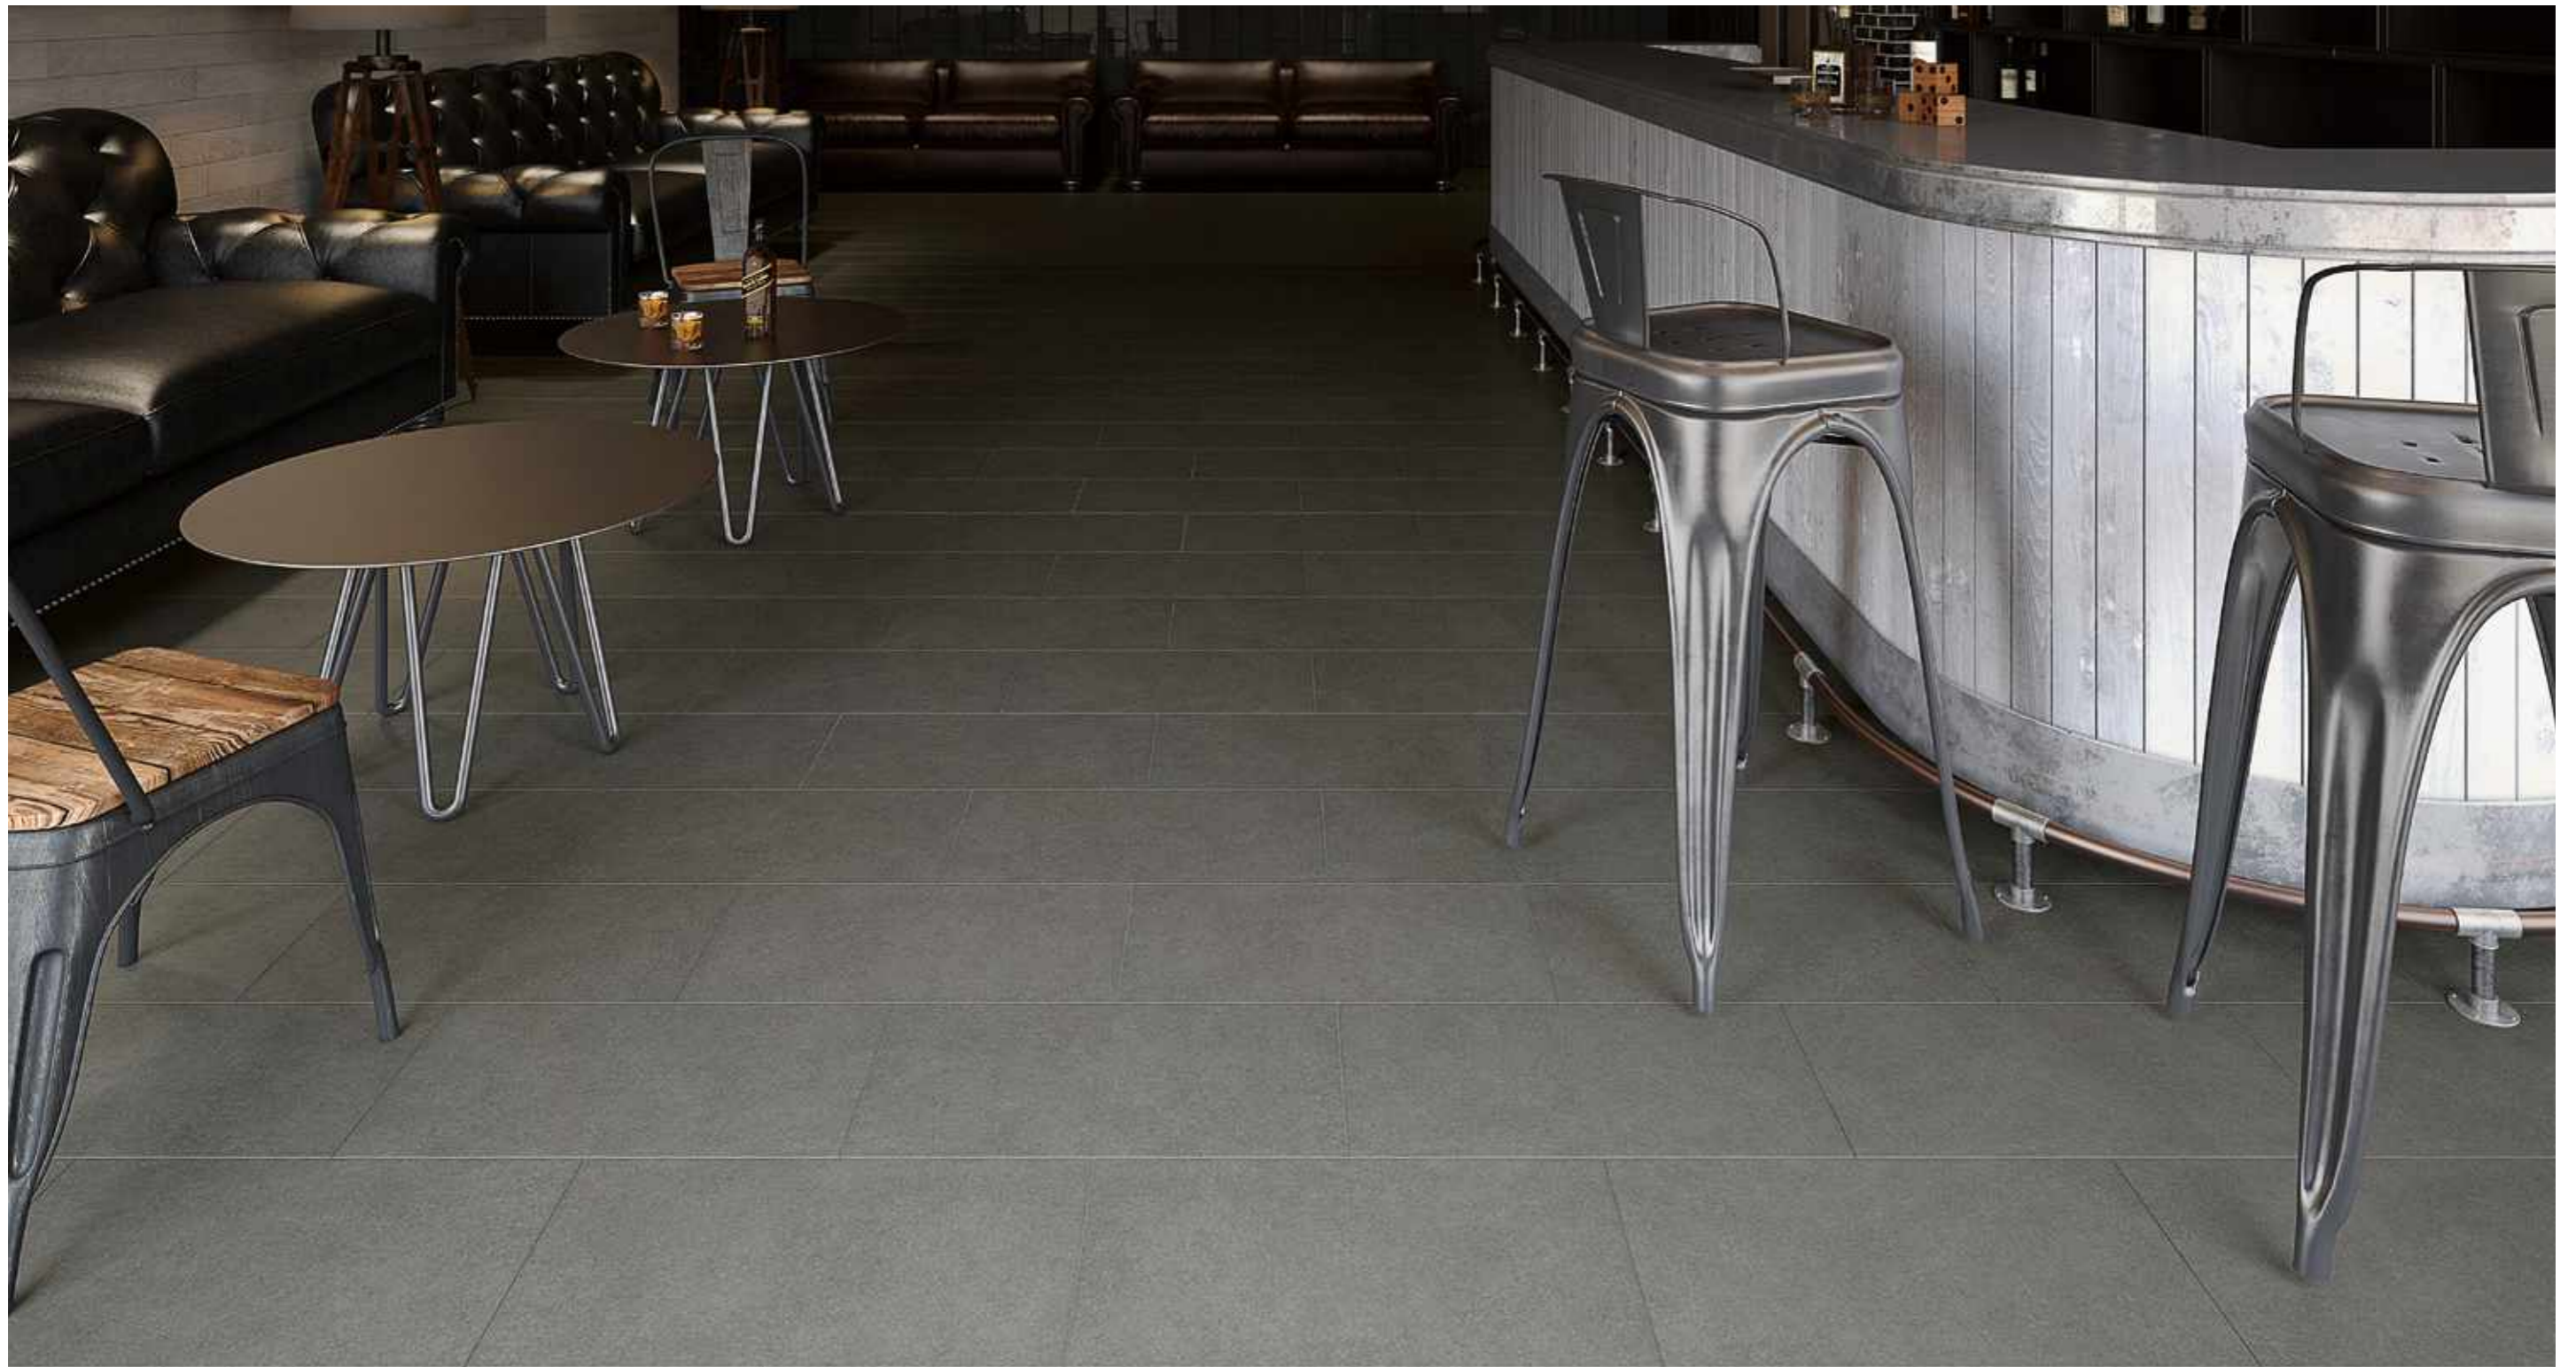

DARK GREY PN630007
Natural
30x60 cm / 11.8x23.6"



LIGHT GREY PN600003
Natural
60x60 / 23.6x23.6"



LIGHT GREY PN600003

Natural
60x60 / 23.6x23.6"



LIGHT GREY PN600003
Natural
60x60 / 23.6x23.6"

REACT

COLOR _____

IVORY

PN800001



80x80 cm 31.5x31.5"

LIGHT BROWN

PN800005



80x80 cm 31.5x31.5"

COLOR _____

CHARCOAL

PN800008



80x80 cm 31.5x31.5"

LIGHT GREY

PN800003



80x80 cm 31.5x31.5"


DARK GREY

PN800007



80x80 cm 31.5x31.5"

REACT

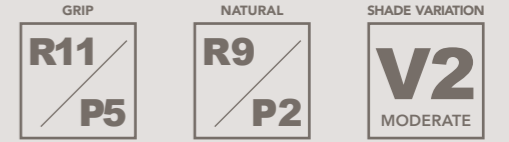

SIZE



FINISH



PRODUCT SPECIFICATIONS

COLOR SIZE FINISH		30x60 cm 11.8x23.6"	40x80 cm 15.7x31.5"	60x60 cm 23.6x23.6"	Regular	By Request	80x80 cm 31.5x31.5"	By Request
IVORY	Grip	PN630001H	-	PN600001H	-	•	-	-
	Natural	PN630001	PN480001	PN600001	•	-	PN800001	•
LIGHT GREY	Grip	PN630003H	-	PN600003H	-	•	-	-
	Natural	PN630003	PN480003	PN600003	•	-	PN800003	•
LIGHT BROWN	Grip	PN630005H	-	PN600005H	-	•	-	-
	Natural	PN630005	PN480005	PN600005	•	-	PN800005	•
DARK GREY	Grip	PN630007H	-	PN600007H	-	•	-	-
	Natural	PN630007	PN480007	PN600007	•	-	PN800007	•
CHARCOAL	Grip	PN630008H	-	PN600008H	-	•	-	-
	Natural	PN630008	PN480008	PN600008	•	-	PN800008	•

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
30X60 CM 11.8x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.6
40X80 CM 15.7x31.5"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 1.0	± 1.0
60X60 CM 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8
80X80 CM 31.5x31.5"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 1.0	± 1.0

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm ²	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3
30X60 CM 11.8x23.6"	S≥2000N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
40X80 CM 15.7x31.5"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
80X80 CM 31.5x31.5"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST		Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
30X60 CM 11.8x23.6"		5.56	7	27	60
40X80 CM 15.7x31.5"		3.10	5	38	32
60X60 CM 23.6x23.6"		2.78	4	32	32
80X80 CM 31.5x31.5"		1.56	3	46	26

RIVERIA

GREY 600216
Natural
60x60 / 23.6x23.6"



BEIGE 600203
Natural
60x60 / 23.6x23.6"



BEIGE 600203
Natural
60x60 / 23.6x23.6"

RIVERIA

COLOR

WHITE

600201

60x60 cm 23.6x23.6"

SAND

600202

60x60 cm 23.6x23.6"

BEIGE

600203

60x60 cm 23.6x23.6"

GREY

600216

60x60 cm 23.6x23.6"

WALNUT

600217


60x60 cm 23.6x23.6"

CHARCOAL


600218

60x60 cm 23.6x23.6"


RIVERIA

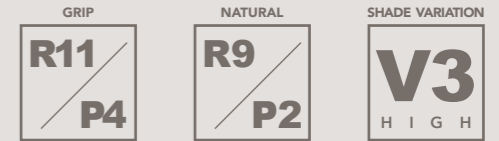

SIZE

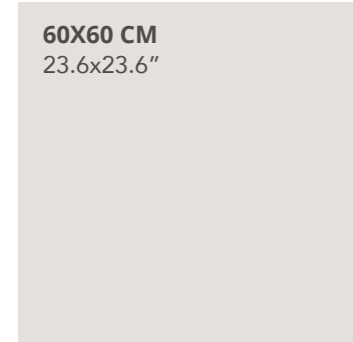


FINISH



GR

Grip



NA

Natural

PRODUCT SPECIFICATIONS

COLOR SIZE FINISH		60x60 cm 23.6x23.6"	Regular	By Request
WHITE	Grip	600201EX	•	-
	Natural	600201	•	-
SAND	Grip	600202EX	-	•
	Natural	600202	•	-
BEIGE	Grip	600203EX	-	•
	Natural	600203	•	-
GREY	Grip	600216XEX	•	-
	Natural	600216	•	-
WALNUT	Grip	600217XEX	-	•
	Natural	600217	•	-
CHARCOAL	Grip	600218XEX	•	-
	Natural	600218	•	-

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
60X60 CM 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm ²	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST	Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
60X60 CM 23.6x23.6"	2.78	4	32	32

TAUPE 600109
Natural
60x60 / 23.6x23.6"

TITAN





TITAN

COLOR

BEIGE


600107



60x60 cm 23.6x23.6"

LIGHT GREY

600108



60x60 cm 23.6x23.6"

TAUPE

600109



60x60 cm 23.6x23.6"

DECOR

GREY





B60661T

60x60 cm 23.6x23.6"

LIGHT GREY 600108

Natural
60x60 / 23.6x23.6"

TITAN



SIZE

60X60 CM
23.6x23.6"

FINISH

NA

Natural

PRODUCT SPECIFICATIONS

COLOR SIZE FINISH		60x60 cm 23.6x23.6"	By Request
BEIGE	Natural	600107	•
LIGHT GREY	Natural	600108	•
TAUPE	Natural	600109	•
GREY	Natural	B60661T	-

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
60X60 CM 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm ²	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST	Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
60X60 CM 23.6x23.6"	2.78	4	32	32



VOLCANO

LIGHT GREY / DARK GREY
E60403 / E60406
Brushed
60x60 cm / 23.6x23.6"



LIGHT GREY / DARK GREY
E60403 / E60406
Brushed
60x60 cm / 23.6x23.6"

VOLCANO

COLOR _____

BEIGE

E61401



60x120 cm 23.6x47.2"

LIGHT GREY

E61403



60x120 cm 23.6x47.2"

DARK GREY

E61406



60x120 cm 23.6x47.2"

COLOR _____

CHARCOAL

E61408



60x120 cm 23.6x47.2"


VOLCANO



SIZE



FINISH

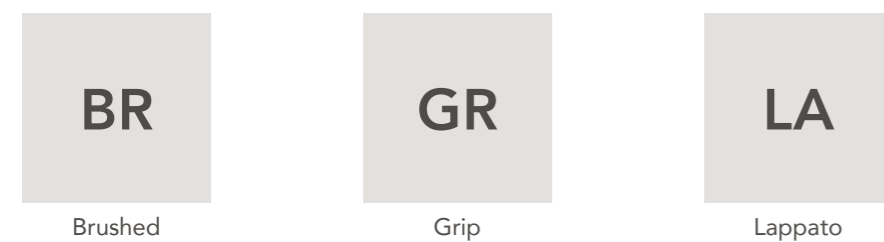

PRODUCT SPECIFICATIONS

COLOR SIZE FINISH		60x60 cm	By	60x120 cm	By	90x90 cm	By
		23.6x23.6"	Request	23.6x47.2"	Request	35.4x35.4"	Request
BEIGE	Brushed	E60401	•	E61401	•	E90401	•
	Lappato	B60401	•	-	-	-	-
LIGHT GREY	Brushed	E60403	•	E61403	•	E90403	•
	Grip	-	-	61403H	-	-	-
DARK GREY	Brushed	E60406	•	E61406	•	-	-
	Grip	-	-	61406H	-	-	-
	Lappato	B60406	•	-	-	-	-
CHARCOAL	Brushed	E60408	•	E61408	•	E90408	•
	Grip	-	-	61408H	-	-	-

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
60X60 CM 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8
60X120 CM 23.6x47.2"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 1.0	± 1.0
90X90 CM 35.4x35.4"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 1.0	± 1.0

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm ²	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60X120 CM 23.6x47.2"	S≥2600N / R≥40N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
90X90 CM 35.4x35.4"	S≥2600N / R≥40N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST	Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
60X120 CM 23.6x47.2"	1.39	2	38	48
90X90 CM 35.4x35.4"	1.23	2	41	30

WAVE GREY



GREY
PNN900352
Satin 90x90 / 35.4x35.4"



LIGHT GREY / STRIP GREY
PNN900351 / PNC490352T2

Satin / Natural
90x90 & 45x90
35.4x35.4" & 17.7x35.4"

WAVE GREY

COLOR _____

LIGHT GREY

PNN900351



90x90 cm 35.4x35.4"

GREY

PNN900352



90x90 cm 35.4x35.4"

DECOR _____

STEEL GREY

PNC490352T1



45x90 cm 17.7x35.4"

STRIP GREY

PNC490352T2





45x90 cm 17.7x35.4"


WAVE GREY




SIZE

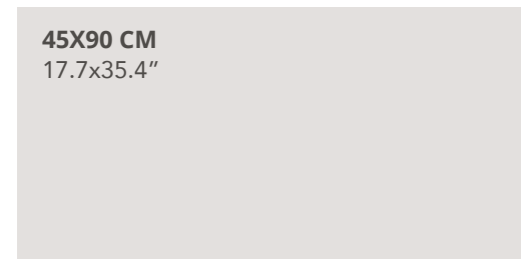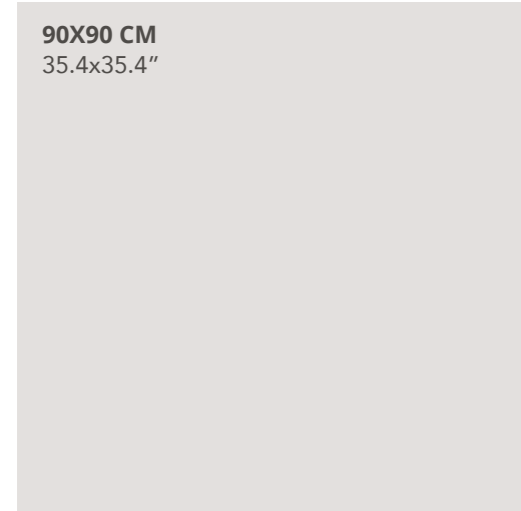

FINISH



Natural



Satin



Sand Blasted

PRODUCT SPECIFICATIONS

COLOR SIZE FINISH	Variation	45x90 cm 17.7x35.4"	60x60 cm 23.6x23.6"	Regular	By Request	90x90 cm 35.4x35.4"	By Request
LIGHT GREY	Natural	V3	-	PNF600351	•	-	-
	Satin	V3	PNN490351	PNN600351	-	•	PNN900351
GREY	Natural	V3	-	PNF600352	•	-	-
	Satin	V3	PNN490352	PNN600352	-	•	PNN900352
	Sand Blasted	V3	-	PNC600352	-	•	-
STEEL GREY	Natural	V2	PNC490352T1	-	-	-	-
STRIP GREY	Natural	V2	PNC490352T2	-	-	-	-

	Water Absorption (%)	Dimension (mm)		Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
		Length	Width						
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
45X90 CM 17.7x35.4"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 1.0	± 1.0
60X60 CM 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 0.8	± 0.8
90X90 CM 35.4x35.4"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 1.0	± 1.0

	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm ²	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3
45X90 CM 17.7x35.4"	S≥2600N / R≥40N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60X60 CM 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
90X90 CM 35.4x35.4"	S≥2600N / R≥40N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5

PACKING LIST	Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT
45X90 CM 17.7x35.4"	2.50	3	31	44
60X60 CM 23.6x23.6"	2.78	4	34	32
90X90 CM 35.4x35.4"	1.23	2	41	30





CHAMPION BUILDING MATERIALS CO., LTD.

No. 200-7, Zhugaocuo, Dapu Li 13 Lin, Zhunan Town, Miaoli Hsien, Taiwan, R.O.C.

+886 - 37- 583810 export@mail.champion.com.tw www.champion-tile.com