

# AQUALINE ALN01-60B

## CARTRIDGE FILTER ELEMENT FOR HIGH FLOW APPLICATIONS

FILTER ELEMENT DATASHEET

ARTICLE CODE : ALN01-60B



### GENERAL INFORMATION

Compared to conventional cartridge filters, AquaLine saves money by lowering capital cost and operating costs. When comparing filters with the same efficiencies or Beta ratings, nothing outperforms the cost/performance value achieved with AquaLine. Whether it is for process water, waste water, food & beverage, pharmaceutical, or other fluids for pre-filtration, guard filtration or final filtration, AquaLine is the right choice.

The AquaLine system utilizes proven CodeLine corrosion resistant FRP pressure vessels which provide considerable reduction in capital expenditure over metallic offerings. The housings make use of a quick opening closure that does not require tools allowing access to the element in seconds. Additionally, each housing accepts a single element providing both efficient and convenient change-outs.

This innovative element design allows for the elimination of the many additional components (caps, springs, guide posts, etc) required to seal and secure conventional filters in housings. The simplified design affords significantly easier element change-outs while assuring effective sealing and high efficiency particle removal. The elements provide an integral molded handle further easing access and removal.

AquaLine filters are available with a broad range of media types and micron ratings to match requirements of the application. For temperatures above 130°F (54.4°C) up to 180°F (82.2°C) please contact Pentair.

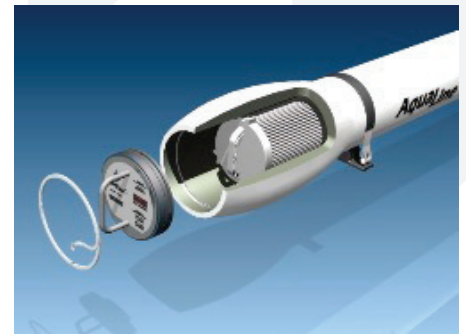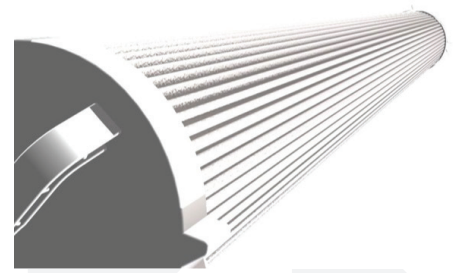


Unlike conventional housings, AquaLine Systems are modular to offer configurations for flow rates ranging from 50 gpm to 10,000 gpm. AquaLine systems can also be connected to pump, multi-media bed, adsorption, neutralization and membrane modules to provide you with multiple process solutions.

# AQUALINE ALN01-60B

## CARTRIDGE FILTER ELEMENT FOR HIGH FLOW APPLICATIONS

### FILTER ELEMENT DATASHEET

#### PRESSURE CURVE

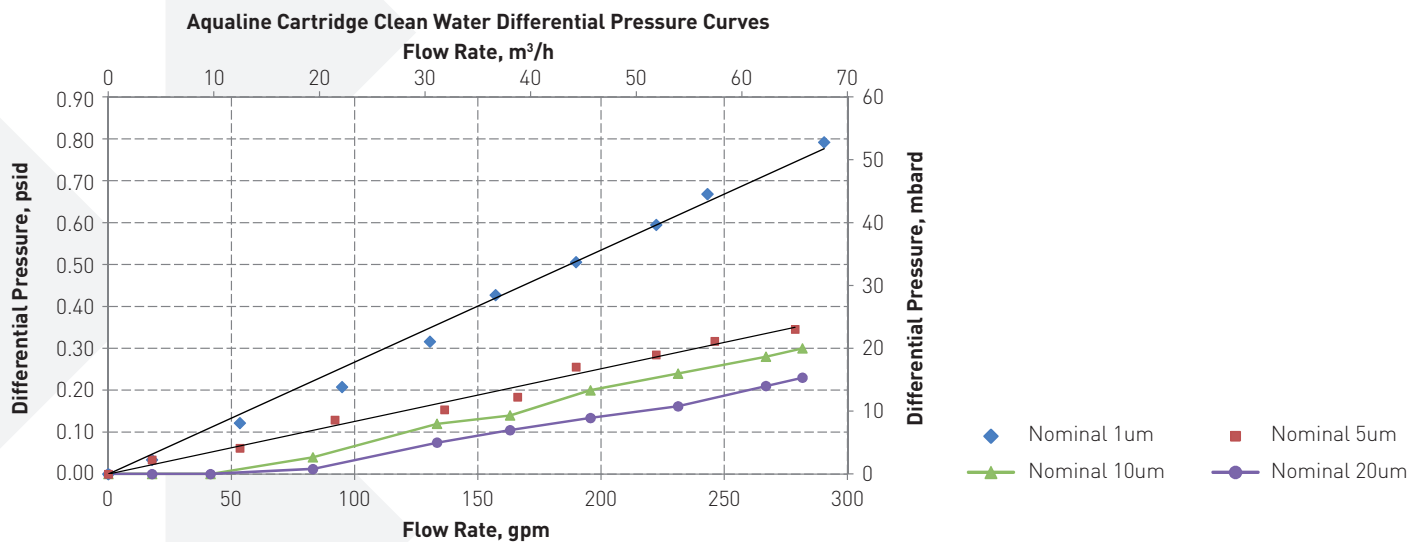

#### SPECIFICATIONS

|                  |   |
|------------------|---|
| ELEMENT TYPE     | AQUALINE Fluid Process element  |
| SEPARATION MEDIA | Proprietary PolyForm media formulation comprised of 100% polypropylene micro-fibers cross-linked into a Locked Pore Structure specifically designed to separate particulate from high flow liquid streams |
| MEDIA EFFICIENCY | 1 micron (Nominal)  |
| END CAPS         | Nylon   |
| SEALS            | Buna-N O-Rings  |
| COMPONENTS       | PVC core  |
| CONFIGURATION    | Single Open End; Outside-in Flowing   |
| DIMENSIONS       | Nominal Length: 60" (152.4cm)<br>Nominal O. D.: 6.75" (17.15cm)   |
| RATINGS          | Recommended change out 25-30 PSID (based on process limits)<br>Maximum Operating Temperature is 130°F (54.4°C)  |



#### ADVANCED FILTRATION

PENTAIR ADVANCED FILTRATION, L/52-55, VERNA INDUSTRIAL ESTATE ,VERNA ,GOA, INDIA-403 722 [ADVANCEDFILTRATION.PENTAIR.COM](mailto:ADVANCEDFILTRATION.PENTAIR.COM)

Note: The information and data contained in this document are based on our general experience and are believed to be correct. They are given in good faith and are intended to provide a guideline for the selection and use of our products. Since the conditions under which our products may be used are beyond our control, this

information does not imply any guarantee of final product performance and we cannot accept any liability with respect to the use of our products. The quality of our products is guaranteed under our conditions of sale. Existing industrial property rights must be observed.

DS AQUALINE ALN01-60B EN 2916 © 2016 Pentair. All Rights Reserved.



Headquarters: 54/18 Bui Quang La, Ward 12, Go Vap District, HCMC, Viet Nam

Office: 12 DHT10B, Dong Hung Thuan Ward, District 12, HCMC, Viet Nam

Phone: (028) 6258 5368 - (028) 6291 9568

Email: [info@atswatertechnology.com](mailto:info@atswatertechnology.com)

Website: [www.atswatertechnology.com](http://www.atswatertechnology.com)