



BH1XL Fuse Holder

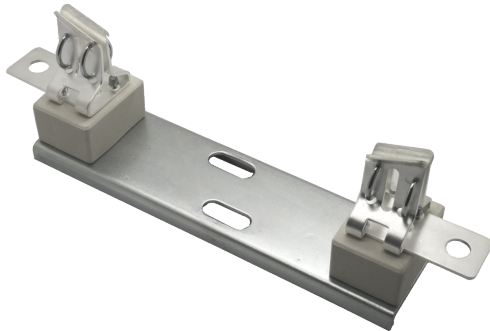

FEATURES:

- Rated Voltage : DC 1500V
- Rated Current : 200A
- Short Circuit Current Rating (SCCR): 50kA
- Uimp: 3.8 kV
- Max. power withstand rating: 40W
- Standard: Reference to UL4248
- Material: Fuse Clip: Silver Plated Copper
- Spring: Zinc Plated Steel
- Mounting Plate: Zinc Plated Steel
- Insulator: Ceramic
- Designed for ADLER AX6 (NH1XL) fuse links

DIMENSIONS (mm)

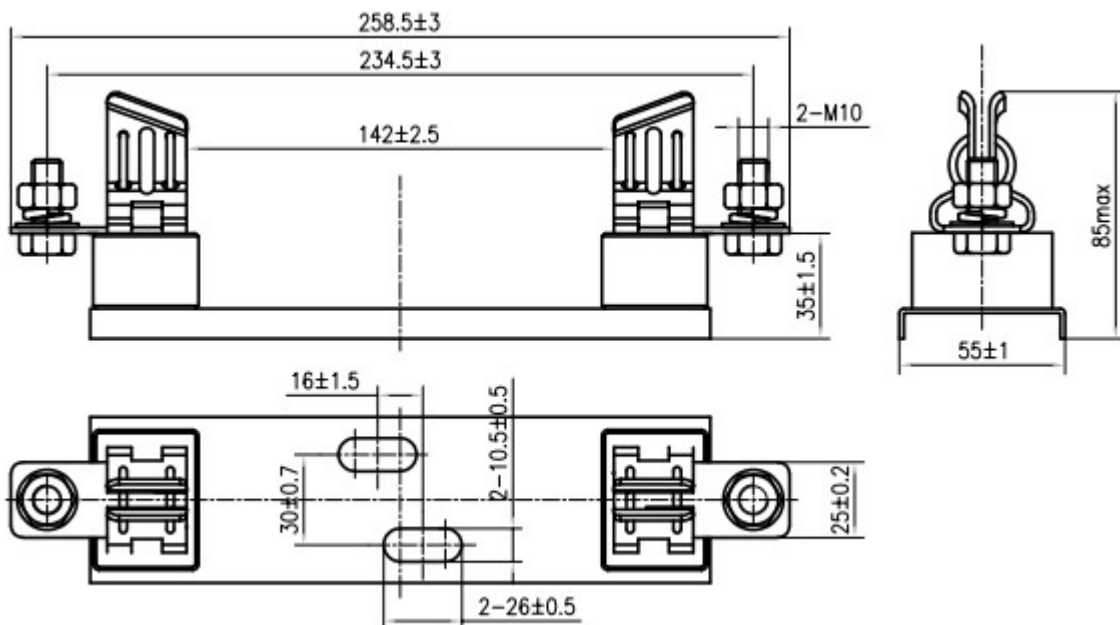

INSTALLATION

- Ref. Torque: Mounting Plate: 15 N.m
- Terminal Screw (M10): 32 N.m
- Operating Temperature: -40°C to $+90^{\circ}\text{C}$
- Storage Temperature: -40°C to $+70^{\circ}\text{C}$
- Be aware of surface condensation phenomenon in case of temperature changes !
- Class III pollution index for fuse links
- Avoid exposure to gas or oxidizing chemicals that could cause metal corrosions and accumulation of dust particles, which may affect the insulation material.