

## BH400 1500 V Fuse Holder




### FEATURES:

ADLER BH400 touch safe fuse holder is designed for all standard 22x58 mm PV fuses such as ADLER A94 series. With current ratings up to 80 A at 1500 VDC, this holder provides the most compact and effective solution to protect 1500 VDC circuits and equipment in photovoltaic applications.

**Note:** SCCR is limited to the interrupting rating of the installed fuse or 10 kA, which ever is less.

### DIMENSIONS: mm

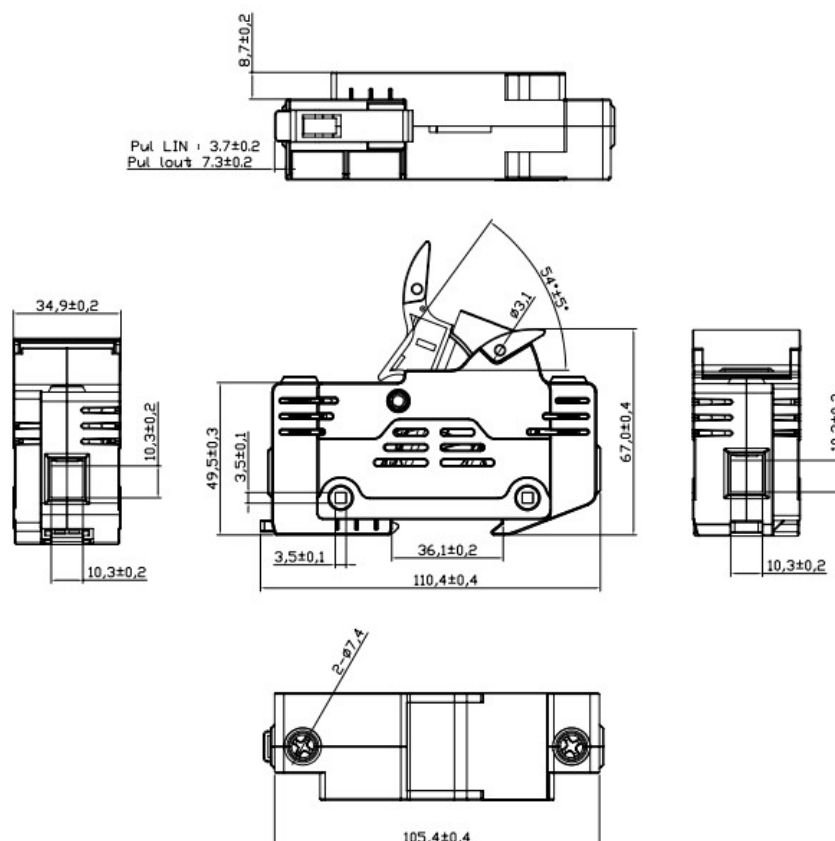

### DESCRIPTION:

The BH400 touch safe holder is designed for 22x58 mm fuse link, especially for use with photovoltaic equipment.

### SPECIFICATIONS:

- Rated Voltage: 1500 VDC
- Rated Current: up to 80 A
- Short Circuit Current Rating (SCCR): DC 10 kA
- Standards: UL 4248-18 and EN 60947-3 (10 kA at 1500 VDC)
- Max. Dissipation: 8 W
- Material Flammability: UL 94-V0
- Mounting: DIN Rail mounting
- Max. Torque: 4 N·m
- Wire Range: 1-11 AWG
- Operation Temperature: -40 °C to +150 °C