

DPT100: single phase

single-function transducers



Accurate
class 0.2, 0.5 & 1



USB
programming



Response time
~100-220 ms



Compact size

Compact, long range site configurable transducers

DPT100 is a range of compact, configurable single measurand transducers designed to meet the demanding needs of supply utilities and industrial applications. It offers accurate true-RMS measurements for high efficiency and quick response time. It is equipped with two load-independent, galvanically-isolated analogue outputs that can be configured for desired input range and output curves.

- Best in class response time
- Long range, site-configurable inputs and outputs
- Load-independent accuracy on all outputs
- Diagnostic LEDs
- Compact footprint



System	Measurement functions (Measurands)	Output type	Output range	no. of outputs	Accuracy class
AC	Voltage, current, frequency, active power	Option for mA or V	0-20 mA, 4-20 mA, 0-10 mA, 0-5 mA* 0-2 mA*, 0-1 mA*, 0-5 V, 0-10 V	2	0.2, 0.5, 1.0
DC	Voltage, current	Option for mA or V	0-20 mA, 4-20 mA, 0-10 mA, 0-5 mA* 0-2mA*, 0-1 mA*, 0-5 V#, 0-10 V#	2	0.2, 0.5, 1.0


*available in accuracy class 1.0

#Available with DC Voltage function only


DPT100: single phase

Output cuves


Curve A
Linear

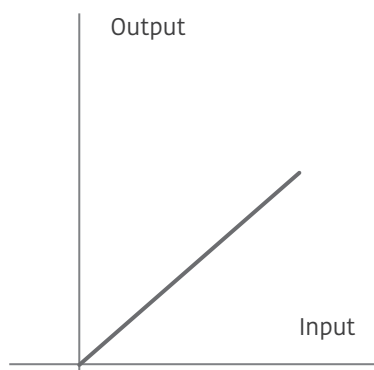


Curve B
Linear with live zero

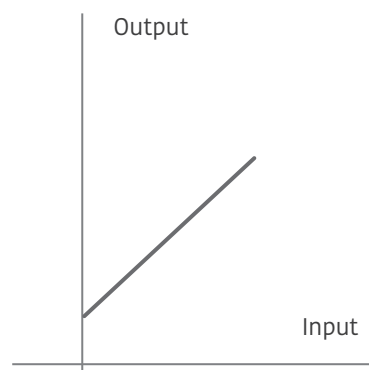


Curve F
Compressed upper region

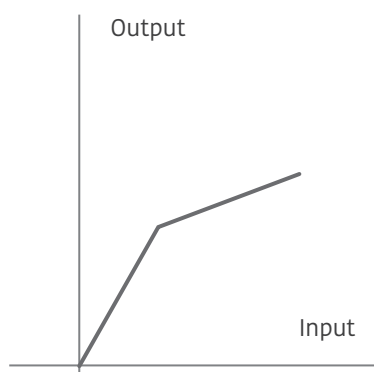

Curve F
Compressed lower region

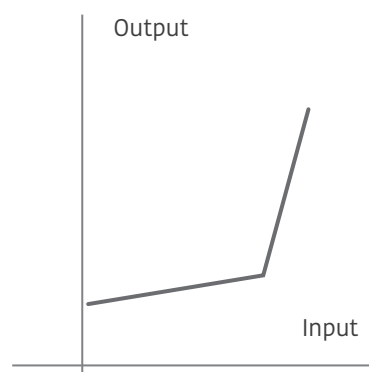

Mechanical dimensions

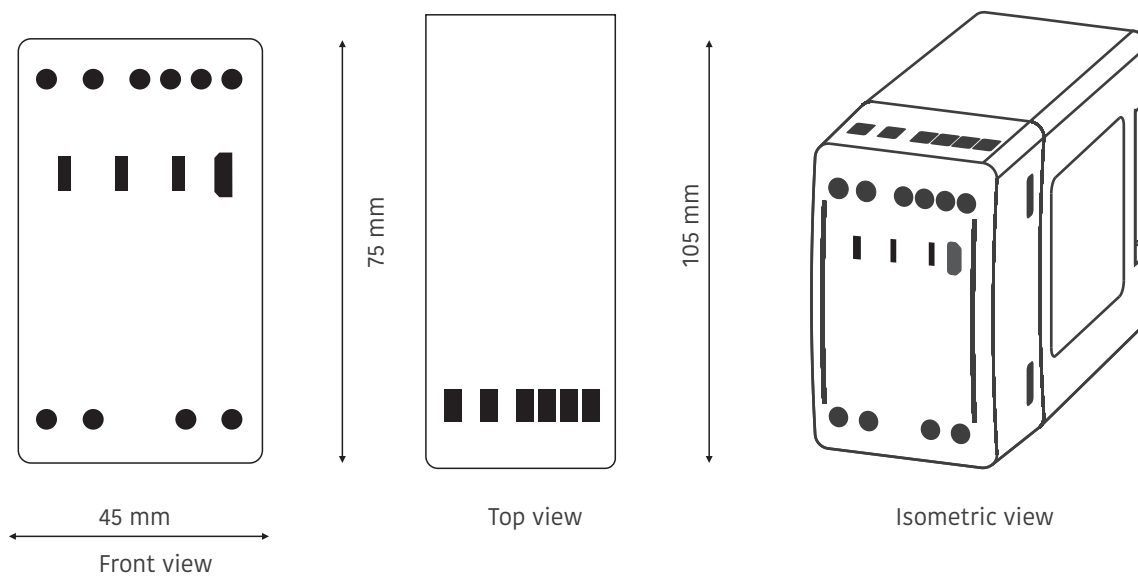



Technical specifications

Variants

AC/DC voltage

Nominal input (U_n)	57.7 to 415 V
Measuring range	0 to 130 % U_n (up to 500 V)
Measurement frequency	50/60 Hz ($\pm 5\%$)
Burden	≤ 0.2 VA
Maximum overload voltage	1.3 x U_n continuously (500 V max.) 2 x U_n for 1 s, with up to 10 repetitions at 10 s intervals
Scale factor	0.8 to 1.3 U_n
For self-powered variant (AC/DC Voltage)	
Measurement range	80 to 276 V AC/DC
Measurement range	0 to 110% U_n
Burden	≤ 6 VA, 3W with one output at 750 Ω ≤ 7 VA, 3.5W with two outputs at 750 Ω each

AC current

Nominal input (I_n)	1 A to 5 A
Measuring current range	0 to 150% I_n
Scale factor	0.6 to 1.5 of I_n
Burden	≤ 0.2 VA
Maximum overload current	2 x I_n continuously 20 x I_n for 1 s, with up to 10 repetitions at 100 s intervals

DC current

Measurement input range	-20-0-(+20) mA directly, or -300-0-(+300) mV through shunt
-------------------------	--

Frequency

Nominal input voltage (U_n)	57.7 to 415 V
Measurement range	45 Hz to 55 Hz or 55 Hz to 65 Hz
Accuracy	$\pm 0.2\%$

Active Power

Nominal input voltage (U_n)	57.7 to 415 V
Input voltage range	0 to 130 % U_n (up to 500 V)
Nominal input current (I_n)	1 A to 5 A
Input current range	0 to 150% I_n
Measurement frequency	50/60 Hz ($\pm 5\%$)
Scale factor	0.5 to 1.5 of $U_n \times I_n$ (at unity power factor)

High auxiliary

Nominal voltage range	80-276 V AC/DC ($\pm 10\%$)
Frequency	50/60 Hz
Maximum burden	≤ 6 VA, 3W with one output at 750 Ω ≤ 7 VA, 3.5W with two outputs at 750 Ω each

Low auxiliary

Nominal voltage range	24-80 V DC ($\pm 10\%$)
Maximum burden	≤ 3 W with one output, ≤ 4 W with two outputs
Self-powered (only for voltage transducers)	
Nominal voltage range	80-276 V AC/DC
Maximum burden	≤ 6 VA, 3W with one output at 750 Ω ≤ 7 VA, 3.5W with two outputs at 750 Ω each

DPT100: single phase



Technical specifications

Analogue outputs

Type	mA or V
Maximum load resistance	$\leq 750 \Omega$ for 20 mA, $\geq 2 \text{ k}\Omega$ for 10 (for each output)
Response time	5 cycles measurement ($\leq 100\text{--}220 \text{ ms}$)
Ripple	$< 0.4 \%$ peak to peak

Temperature range

Operating range	$-5 \text{ }^{\circ}\text{C}$ to $+55 \text{ }^{\circ}\text{C}$
Functional range	$-25 \text{ }^{\circ}\text{C}$ to $+70 \text{ }^{\circ}\text{C}$
Usage group	1

Mechanical

Dimension (W x H x D)	45 x 75 x 105 mm
Weight	0.4 kg (approx.)
Material	Fire-retardant polycarbonate (PC-FR), UL94 V-0
Mounting	DIN (EN 50022)
Connector type	Screw terminals
Conductor size for terminals	$\leq 4 \text{ mm}^2$

Environmental

Protection class	II (double insulation) EN 61010-1
Pollution degree	2
Installation category	CAT III for $\leq 300\text{V AC}$ and CAT II for $\leq 600\text{V AC}$
Protection degree	Protection housing: IP 40, terminals: IP 20

Compliance

Standards	IEC 60688, IEC 61010-1, IEC 61010-2-30, IEC 61326-1, DIN 50022
-----------	--

Communication ports

Micro USB	For on-site configuration can be configured without auxiliary power
-----------	--

Configuration software tool


ConfigView
For on-site configuration of measurement inputs, measurands, output curve and online parameter reading. It can be freely downloaded from www.cewesecure.se

Ordering key

DPT XXX-1YY

Example

DPT 611-126
where high auxiliary (6),
mA output (1), accuracy class 0.2,
function (6)

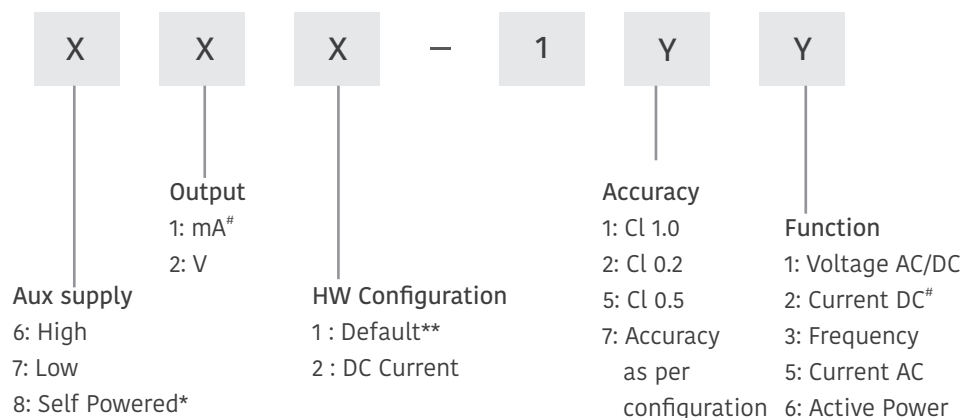

*Self powered is voltage transducer only.
** Default means AC/DC voltage, AC current
#Current DC available only in
HW configuration: DC Current, output: mA

Specifications are subject to change without prior notice

Australia

sales_australia@securemeters.com
www.securemeters.com/au

Europe

sales_europe@securemeters.com
www.securemeters.com/eu

India, SE Asia, Africa

sales_india@securemeters.com
www.securemeters.com/in

UAE

sales_middleeast@securemeters.com
www.securemeters.com/me

UK

sales_uk@securemeters.com
www.securemeters.com/uk

www.cewesecure.se