

DPT300: three phase

multi-function transducers



Accurate
class 0.2, 0.5 & 1



USB
programming



Response time
~100-220 ms




Modbus RTU

compact, long range
site configurable transducers

DPT300 is a range of compact, configurable multiple measurand transducers designed to meet the demanding needs of supply utilities and industrial applications. It offers accurate true-RMS measurements for high efficiency and quick response time. It is equipped with up to four load-independent, galvanically-isolated analogue outputs that can be configured for desired measurands, input range and different curves. DPT300 transducers comply with IEC 60688.

- Best in class response time
- Long range, site-configurable inputs, outputs and measurands
- Load-independent accuracy on all outputs
- 4-in-1 programmable transducers
- Diagnostic LEDs
- Compact footprint

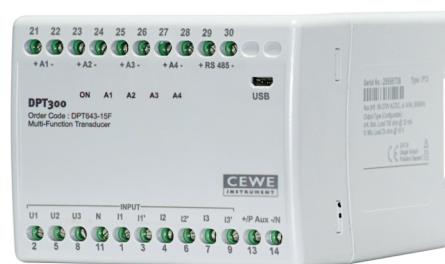

Measurement functions (Measurands)	Output range	No. of outputs	Accuracy class
Current, active power, frequency, reactive power, power factor, apparent power	0-1 mA*, 0-2 mA**, 0-5 mA**, 0-10 mA, 0-20 mA, 4-20 mA, -20 -(+20) mA, -10-(+10) mA, -5-(+5) mA**, -2-(+2) mA**, -1-(+1) mA*, 0-5 V, 0-10 V, -10-(+10) V, -5-(+5) V	2 or 4	0.2, 0.5, 1.0
Voltage	0-1 mA*, 0-2 mA**, 0-5 mA**, 0-10 mA, 0-20 mA, 4-20 mA 0-5 V, 0-10 V	2 or 4	0.2, 0.5, 1.0

*available in accuracy class 1.0


**available in accuracy class 0.5 and class 1.0

Power factor accuracy ± 0.2 degree at nominal input range


DPT300: three phase

Output cuves


Curve A
Linear

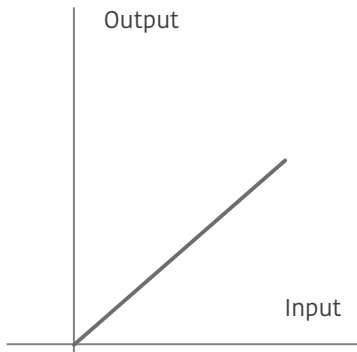


Curve B
Linear with live zero

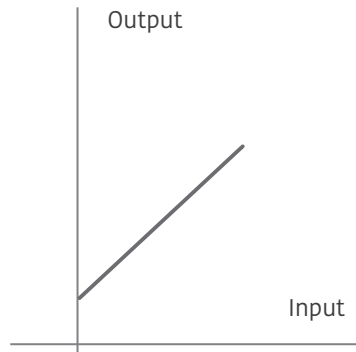


Curve F
Compressed upper region

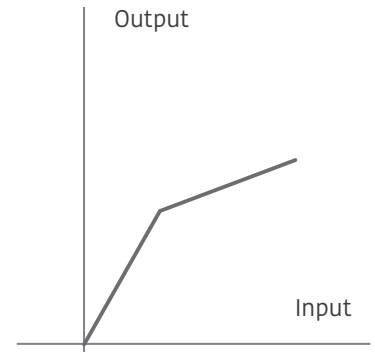


Curve F
Compressed lower region

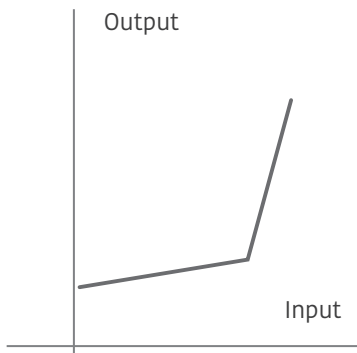


Curve C
Bipolar

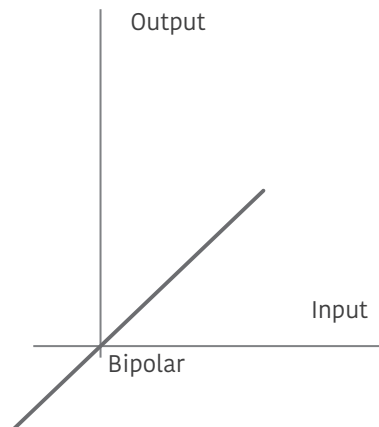


Curve D
bipolar with live zero

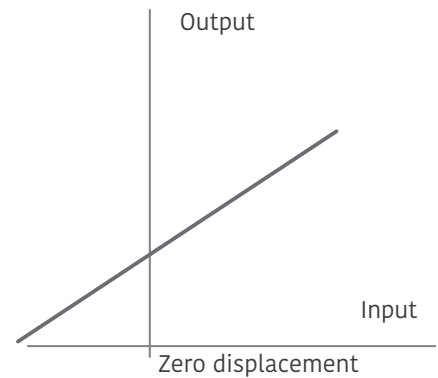


Mechanical dimensions

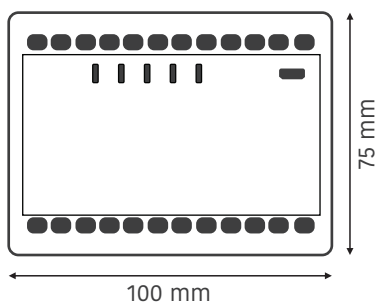

Front view

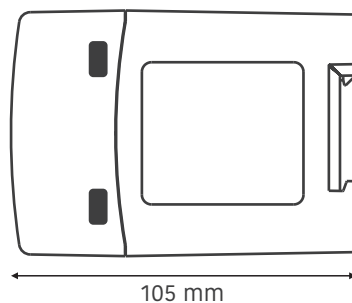

Side view

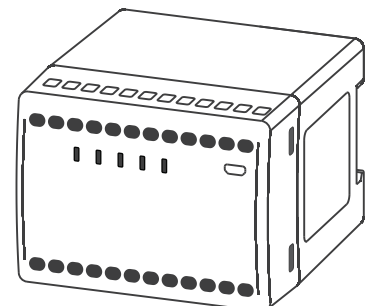

Isometric view



Technical specifications

Site-configurable measurement functions (measurands)

AC voltage	
Nominal input (U_n)	3 x 100 to 415 V L-L (3-phase 3-wire system) 3 x 57.5 to 240V L-N (3-phase 4-wire system)
Measuring range	0 to 130% U_n (500 V max.)
Measurement frequency	50/60 Hz ($\pm 5\%$)
Burden	≤ 0.2 VA
Maximum overload voltage	1.3 x U_n continuously (500 V max.) 2 x U_n for 1 s, with up to 10 repetitions at 10 s intervals
Scale factor	0.8 to 1.5 U_n
AC current	
Nominal input (I_n)	1A to 5A
Maximum input current	0 to 150% I_n
Scale factor	0.6 to 1.5
Burden	≤ 0.2 VA per phase
Maximum overload current	2 x I_n continuously 20 x I_n for 1 s, with up to 10 repetitions at 100 s intervals
Active power/reactive power/ apparent power	
Nominal input voltage (U_n)	3 x 100 to 415 V L-L (3 phase 3 wire system) 3 x 57.5 to 240V L-N (3 phase 4 wire system)
Input voltage range	0-130% U_n (up to 500 V)
Nominal input current (I_n)	1A to 5A
Input current range	0 to 150% I_n
Measurement frequency	50/60 Hz ($\pm 5\%$)
Scale factor	0.5 to 1.5 (active power, at unity power factor) 0.3 to 1 (reactive power, at reactive power factor >0.8 or unity) $U_n \times I_n$ primary (apparent power)
Active power factor / load power factor	
Nominal input voltage (U_n)	3 x 100 to 415 V L-L (3 phase 3 wire system) 3 x 57.5 to 240V L-N (3 phase 4 wire system)
Input voltage range	0-130 % U_n (up to 500 V)
Nominal input current (I_n)	1A to 5A
Input current range	0 to 150 % I_n
Measurement frequency	50/60 Hz ($\pm 5\%$)
Measurement range	-1...0...1
Resolution (phase angle)	± 0.2 degree (at nominal range)
Frequency	
Nominal input voltage (U_n)	3 x 100 to 415 V L-L (3 phase 3 wire system) 3 x 57.5 to 240V L-N (3 phase 4 wire system)
Nominal input current (I_n)	1A to 5A
Measurement range	45Hz to 55Hz or 55Hz to 65Hz
Accuracy	$\pm 0.2\%$
High auxiliary	
Nominal voltage range	80-276 V AC/DC ($\pm 10\%$)
Frequency	50/60 Hz
Maximum burden	≤ 11 VA, 6 W with two outputs at 750 Ω each ≤ 12 VA, 7 W with four outputs at 750 Ω each
Low auxiliary	
Nominal voltage range	24-80 V DC ($\pm 10\%$)
Maximum burden	≤ 6 W with two outputs at 750 Ω each ≤ 8 W with four outputs at 750 Ω each

DPT300: three phase



Technical specifications

Analogue outputs

Type	Current & Voltage (bipolar)
Maximum Load resistance	$\leq 750 \Omega$ for 20 mA, $\geq 2 \text{ k}\Omega$ for 10 V (for each output)
Response time	5 cycles measurement ($\leq 100\text{--}250 \text{ ms}$)
Ripple	$< 0.4 \%$ peak to peak

Temperature range

Operating temperature	-5°C to $+55^\circ\text{C}$
Storage temperature	-25°C to $+70^\circ\text{C}$
Usage group	1

Mechanical

Dimension (W x H x D)	100 x 75 x 105 mm
Weight	0.7 kg (approx.)
Material	Fire-retardant polycarbonate (PC-FR), UL94 V-0
Mounting	DIN (EN 50022)
Connector type	Screw terminals
Conductor size for terminals	$\leq 4 \text{ mm}^2$

Environmental

Protection class	II (double insulation) EN 61010-1
Pollution degree	2
Installation category	CAT III for $\leq 300\text{V AC}$ and CAT II for $\leq 600\text{V AC}$
Protection degree	Protection housing: IP 40, terminals: IP 20

Compliance

Standards	IEC 60688, IEC 61010-1, IEC 61010-2-30, IEC 61326-1, DIN 50022
-----------	--

Communication ports

Micro USB B-Type	For configuration Can be configured without auxiliary power
RS-485	Modbus RTU enabled (Suitable for integration with SCADA/PLC)
Baud rate	1200-38400 baud

Configuration software


Configview
For on-site configuration of measurement inputs, measurands, output curve and online parameter reading. It can be freely downloaded from www.cewesecure.se

Ordering key

DPT XX3-1YF

Example

DPT 643-12F
where high auxiliary (6),
output nos. (4), accuracy class(2)

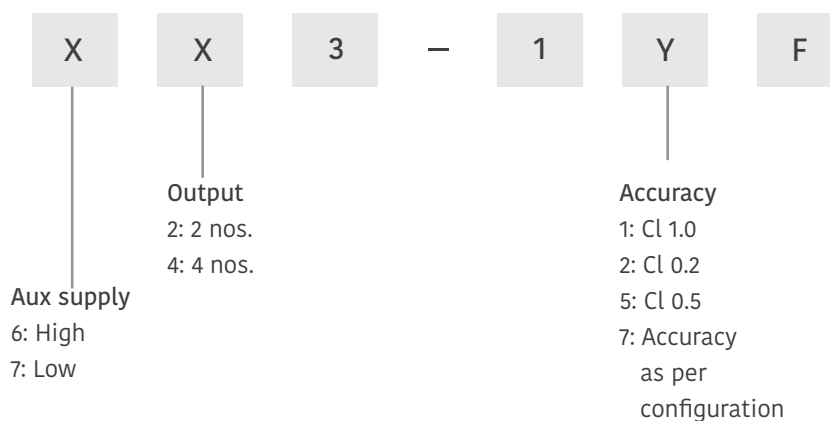

Specifications are subject to change without prior notice

Australia

sales_australia@securemeters.com
www.securemeters.com/au

Europe

sales_europe@securemeters.com
www.securemeters.com/eu

India, SE Asia, Africa

sales_india@securemeters.com
www.securemeters.com/in

UAE

sales_middleeast@securemeters.com
www.securemeters.com/me

UK

sales_uk@securemeters.com
www.securemeters.com/uk