
KALLISTA

FEATURES

- Solid metal construction for durability and reliability
- Two-handle, widespread lavatory faucet for NSF 61 8" (203 mm) - 16" (406 mm) centers
- Quarter-turn washerless ceramic disc valves
 OBC
- 1.2 gal/min (4.5 l/min) maximum flow rate
- Includes Soft Touch drain
- Thin, slender form
- Meets CalGreen requirements for bathroom sink faucets
- Complements the Per Se collection

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- EPA WaterSense®
- CSA B651
- ICC/ANSI A117.1
- All applicable US Federal and State material regulations Compliant when installed to the specific requirement of this regulation

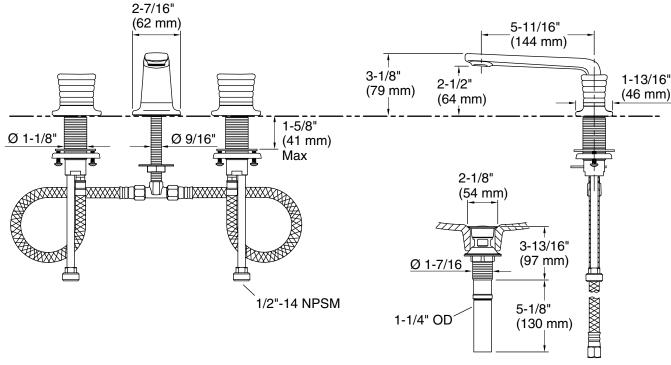

Soft Touch Drain

INSTALLATION NOTES						
Mounting surface hole size. All dimensions are nominal.						
Spout	Ø 5/8" (16 mm)					
Handles	Ø 1-5/16" (33 mm)					
Deck Thickness	Min	Max				
Spout		2-1/2" (64 mm)				
Handles		1-5/8" (41 mm)				

SPECIFIED MODEL							
Model	Description	Finishes					
P24705-CC	Per Se Decorative Sink Faucet, Saint-Louis Crystal Knobs	CP Polished Chrome	AD Nickel Silver	W7 Black Nickel	24K Polished Gold		

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.

Per Se_® Sink Faucet, Saint-Louis Crystal Knobs

P24705-CC CSA B651 OBC

ST[®]LOUIS