



300M WIRELESS HD VIDEO TRANSMISSION SYSTEM

MODEL: PRO300 Plus

- Middle-Long distance: 1080P video wireless transmission with no latency up to 300m;
- Exquisite design: plug & play; simple installation;
- Transmitter supports Sony F-type battery and with screw holes for V buckle for flexible fixing; Receiver with V-mount (both Female & Male) battery plates"
- Reliable and stable: LEMO socket for more stable power supply; strong anti-jamming capability under 5GHz frequency band.



MODEL:PRO300 Plus



SHENZHEN CRYSTAL VIDEO TECHNOLOGY CO.,LTD

ADD: F13,F518 Idea Land, Baoyuan Road, Baoan Central Area, Shenzhen, China

Post code 518102

Tel: +86-755-26716688-6652

E-mail: Sales@cv-hd.com

www.cv-hd.com

Fax: +86-755-29188427


E-mail: Marketing@cv-hd.com

300M WIRELESS HD VIDEO TRANSMISSION SYSTEM

MODEL: PRO300 Plus

Mechanical Information


TX:PRO300 Plus

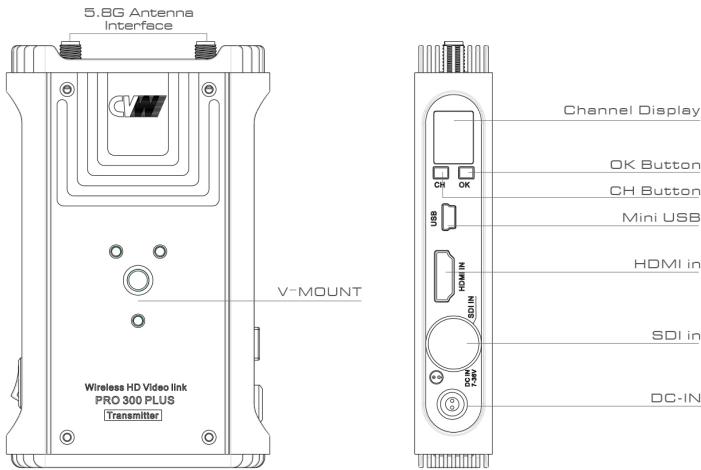

Ordering information	Ordering NO.	Description	Unit/Set
	7059	TX	1
	3059	RX	1

TX:PRO300 Plus	
Antenna Mode	External antenna
Transmission power	17dBm
Operating Frequency	5. 1-5. 9GHz
Bandwidth	40MHz
Mechanical Interface	SONY V-Type Battery Plate 1/4 "professional fixed screw hole
OLED Screen	Channel setting; Connection status Video status
Operating Voltage	DC12V/2A(7V-36V)
Transmission Distance	open environment: up to 300m
Video format	480i, 480p(SDI nonsupport)576i, 576p(SDI nonsupport)720p, 1080i, 1080p
Power Consumption	8W
Product Size	126.2*78*23mm
Audio Format	PCM
Temperature	-10-50°C(Working);-40-80°C(Storage)

RX:PRO300 Plus

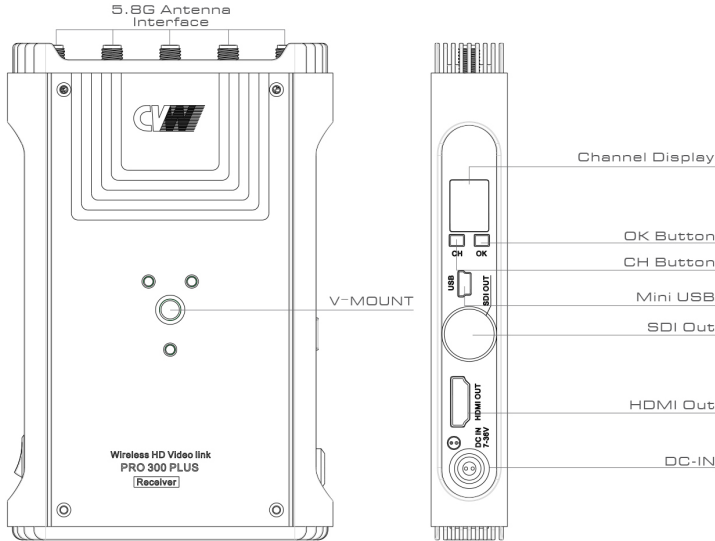

RX:PRO300 Plus	
Antenna Mode	External antenna
Receiving Sensitivity	-70dB
Operating Frequency	5. 1-5. 9GHz
Bandwidth	40MHz
Mechanical Interface	SONY V-Type Battery Plate 1/4 "professional fixed screw hole
OLED Screen	Channel setting; Connection status Video status
Operating Voltage	DC12V/2A(7V-36V)
Transmission Distance	open environment: up to 300m
Video format	480i, 480p(SDI nonsupport)576i, 576p(SDI nonsupport)720p, 1080i, 1080p
Power Consumption	7W
Product Size	150*98*23mm
Audio Format	PCM
Temperature	-10-50°C(Working);-40-80°C(Storage)

Application



Film Shooting



Live Sporting Events



Remote Monitoring



Live Wedding Broadcasting



Forum Broadcasting



SHENZHEN CRYSTAL VIDEO TECHNOLOGY CO.,LTD

ADD: F13,F518 Idea Land, Baoyuan Road, Baoan Central Area, Shenzhen, China

Post code 518102

Tel: +86-755-26716688-6652

E-mail: Sales@cv-hd.com

www.cv-hd.com

Fax: +86-755-29188427

E-mail: Marketing@cv-hd.com