

KM 7464 FR

Induction hob with onset controls
with PowerFlex cooking area for maximum power output



- Quick selection via numerical keybank – ComfortSelect
- 4 cooking zones incl. 1 high-power PowerFlex cooking area
- A width of 626mm with stainless steel frame for surface installation
- Shortest heating-up times - TwinBooster
- Communication with the hood - automatic function Con@ctivity

EAN: 4002516149248 / material number: 11144020

| Heating type | |
|------------------------------------|-------------------|
| Heating type | Induction |
| Construction type | |
| Independent of cooker | • |
| Design | |
| Elegant glass ceramic surface | • |
| Ceramic surface colour | Black |
| Stainless-steel frame | • |
| Surface-mounted installation | • |
| Cooking zone details | |
| Number of cooking zones | 4 |
| Number of cooking areas | 1 |
| Maximum number of pans | 4 |
| PowerFlex cooking zone | |
| No. | 2 |
| Size in mm | Ø 150 – 230 |
| Max. rating in W | 2100 |
| Max. Booster power rating in W | 3000 |
| Max. TwinBooster power rating in W | 3650 |
| Cooking zone | |
| Position | front left |
| Type | Dual-circuit ring |
| Size in mm | Ø 140-190 |
| Max. rating in W | 1850 |
| Max. Booster power rating in W | 2500 |
| Max. TwinBooster power rating in W | 3000 |
| Position | rear left |
| Type | Dual-circuit ring |
| Size in mm | Ø 100-160 |
| Max. rating in W | 1400 |
| Max. Booster power rating in W | 1700 |
| Max. TwinBooster power rating in W | 2200 |
| Position | right |
| Type | PowerFlex bridge |
| Size in mm | 230x390 |
| Max. rating in W | 3400 |
| Max. Booster power rating in W | 4800 |
| Max. TwinBooster power rating in W | 7300 |

more information:
<http://www.miele.co.uk/domestic>

For further information please see next page...

KM 7464 FR


Induction hob with onset controls
with PowerFlex cooking area for maximum power output



| User convenience | |
|---|--------|
| Networking with Miele@home | • |
| Automatic function Con@ctivity 3.0 | • |
| Display colour | Yellow |
| Permanent pan recognition | • |
| Pan and pan size recognition | • |
| Stop & Go function | • |
| Recall function | • |
| Minute minder | • |
| Safety switch-off | • |
| Auto heat-up | • |
| Keeping warm | • |
| Individual setting options (e.g. buzzers) | • |
| Efficiency and sustainability | |
| Power rating in off mode in W | 0.5 |
| Power rating in standby mode in W | 1.0 |
| Power rating in networked standby in W | 2.0 |
| Time until automatic switch to off mode in min | 20 |
| Time until automatic switch to standby in min | 20 |
| Time until automatic switch to networked standby in min | 20 |
| Cleaning convenience | |
| Easy to clean ceramic glass | • |
| Safety | |
| Safety switch-off | • |
| Lock function | • |
| System lock | • |
| Integrated cooling fan | • |
| Overheating protection | • |
| Residual heat indicator | • |
| Technical data | |
| Dimensions in mm (width) | 626 |
| Dimensions in mm (height) | 52 |
| Casing height incl. connection box in mm | 45 |
| Dimensions in mm (depth) | 526 |
| Cutout dimensions in mm (width) with surface-mounted installation | 560 |
| Cutout dimensions in mm (depth) with surface-mounted installation | 490 |
| Weight in kg | 11 |
| Total rated load in kW | 7.3 |
| Voltage in V | 230 |
| Connection cable length in m | 1.4 |
| Standard accessories | |
| Mains cable | • |

KM 7464 FR

Induction hob with onset controls
with PowerFlex cooking area for maximum power output

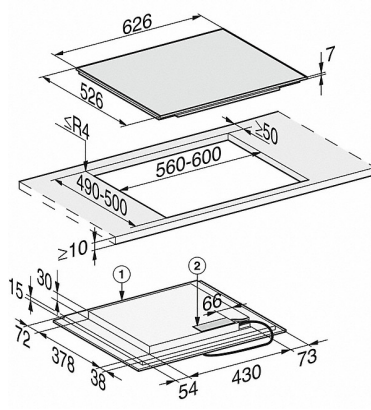

KM 7464 FR (installation drawings)

1) at the front 2) Mains connection box with mains connection cable, L = 1440 mm