

DG 7440

Built-in steam oven  
for healthy cooking with automatic programmes, networking and sous-vide cooking.



- Large clear text display with sensor controls – DirectSensor
- Perfect results – DualSteam technology
- Perfect results guaranteed every time – Automatic programmes
- Oven compartment lighting – 2 LED spotlights
- Network-enabled WiFi appliance – Miele@home

EAN: 4002516156666 / material number: 11094430

<b>Model and design</b>	
Built-in steam oven	•
PureLine	•
Appliance colour	Stainless steel/Clean Steel
<b>Convenience features</b>	
External steam generation	•
Menu cooking without transfer of taste	•
Automatic programmes with programmable settings for cooking results	•
Keeping warm	•
<b>Operating modes</b>	
Defrosting	•
Automatic programmes	•
Steam cooking	•
Sous-vide	•
Reheat	•
Eco steam cooking	•
Special applications	•
<b>User convenience</b>	
Display	DirectSensor
SoftClose	•
MultiLingua	•
Quantity-independent cooking	•
Steam cooking on up to 3 levels at the same time	•
Menu cooking	•
Steam reduction before end of programme	•
Time of day display	•
Date display	•
Minute minder	•
Programmable start of cooking duration	•
Programmable end of cooking duration	•
Programmable cooking duration	•
Actual temperature display	•
Target temperature display	•
Audible signal when target temperature is reached	•
Recommended temperature	•
User programmes	20
Individual settings	•
<b>Efficiency and sustainability</b>	
Power rating in off mode in W	0.5
Power rating in standby mode in W	1.0
Power rating in networked standby in W	2.0
Time until automatic switch to standby in min	20
Time until automatic switch to networked standby in min	20
Time until automatic switch to off mode in min	20

DG 7440

Built-in steam oven

for healthy cooking with automatic programmes, networking and sous-vide cooking.




<b>Cleaning convenience</b>	
Stainless steel front with CleanSteel finish	•
Stainless-steel oven compartment with linen structure	•
External steam generator	•
Floor heater for condensate reduction	•
Quick-release side racks	•
Removable side racks	•
Automatic descaling	•
CleanGlass door	•
<b>Steam technology and water supply</b>	
DualSteam	•
Fresh water container volume in l	1.5
Removal of fresh water container with Push2release mechanism	•
<b>Safety</b>	
Appliance cooling system and touch-cool fronts	•
Safety switch-off	•
System lock	•
Vapour cooling system	•
<b>Technical data</b>	
L – Oven compartment	•
Oven compartment volume in l	40.0
No. of shelf levels	4
Door hinge	Bottom
Oven light	2 LED spots
Niche depth in mm	550
Appliance width in mm	595
Appliance height in mm	455
Weight in kg	26.4
Total rated load in kW	3.6
Voltage in V	230
Fuse rating in A	16
Length of supply lead in m	2.0
<b>Standard accessories</b>	
Perforated stainless steel cooking container	2
Solid stainless steel cooking containers	1
Wire rack	1
Condensate tray	1
Descaling tablets	2

DG 7440


Built-in steam oven

for healthy cooking with automatic programmes, networking and sous-vide cooking.

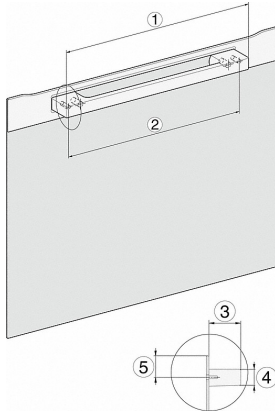


DG2840, DG7x40, DGC7x4x, DG7x6x, DGC7x6x, DGD7635, DGM7x4x, DO7, H28B/BP, H7x4xB/BM/BP, H7x6xB/BP, installation drawing

- 1) 400 mm
- 2) 360 mm
- 3) 47 mm
- 4) 24 mm
- 5) 32.5 mm

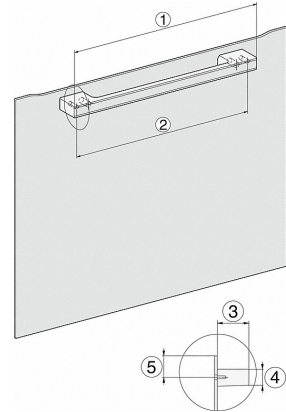


DG7x40, DGC7x4x, DGC7x6x, DG7635, DGM7x4x, DO7, H2860B/BP, H7240BM, H7x40BM, H7x4xB/BP, H7x6xB/BP, installation drawings

- 1) 400 mm
- 2) 360 mm
- 3) 47 mm
- 4) 27 mm
- 5) 32.5 mm

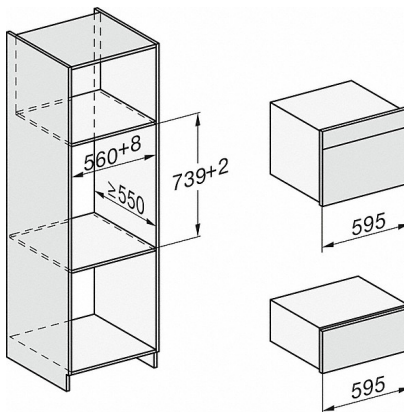

ESW7x20, installation drawings

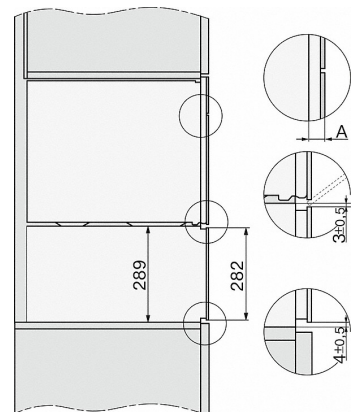


ESW7x20, DG7xxx, DGM7xxx installation drawings


DG 7440

Built-in steam oven

for healthy cooking with automatic programmes, networking and sous-vide cooking.

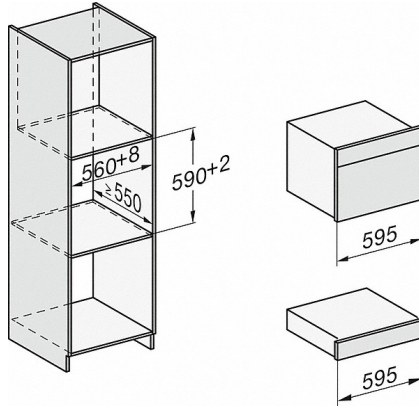


ESW7x10, installation drawings

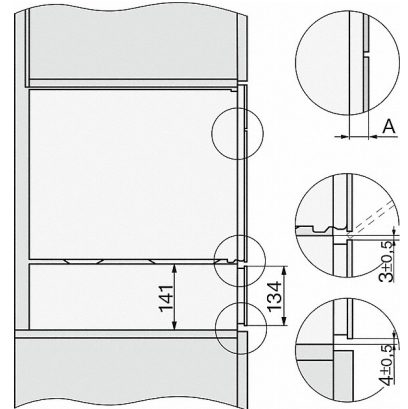


ESW7x10, EVS7010, DG7x4x, DGM7x4x installation drawings


A) 22 mm glass, 23,3 mm stainless steel

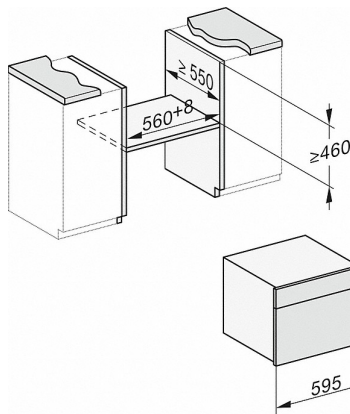


DG7x4x, DGM7x4x, DGC7x4x, DGC7x4xX installation drawings

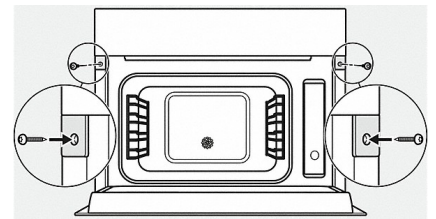

DG7xxx, DGM7xxx, installation drawings

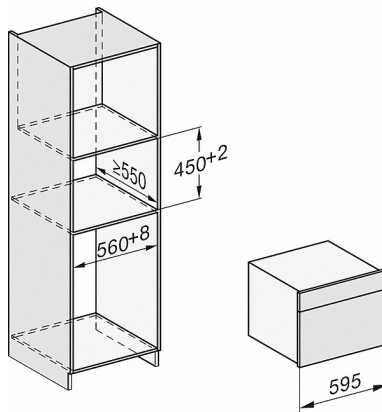

DG7x4x, DGM7x4x, installation drawings

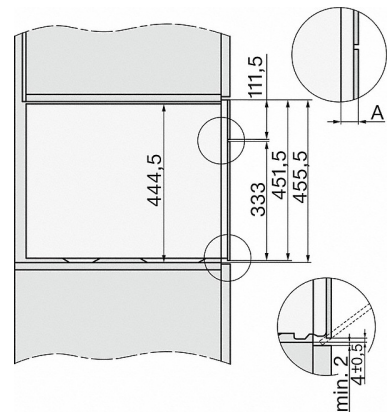

DG7x4x, DGM7x4x, DG7x4x-55, DGM7x4x-55, installation drawings

A 22 mm glass  
23,3 mm metal