


KM 6357

Induction cooktop with onset controls
with PowerFlex cooking zone for maximum versatility and performance.

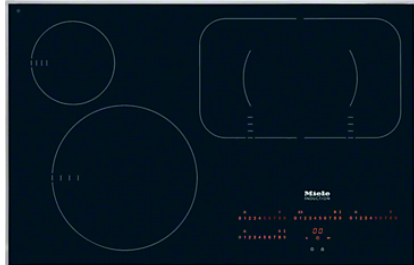


- Fast selection w. numerical linear keybanks – Direct control plus
- Attractive design – 806mm wide with all-round frame
- Versatile and fast – 4 cooking zones incl. 1 PowerFlex area
- Communication with rangehood – automatic function Con@ctivity 2.0
- Broad performance spectrum – keeping warm function & TwinBooster

| Heating type | |
|---|---------------------|
| Heating type | Induction |
| Construction type | |
| Independent of cooker | • |
| Design | |
| Elegant glass ceramic surface | • |
| Print design | LightPrint |
| Stainless-steel frame | • |
| Cooking zone details | |
| Number of cooking zones | 4 |
| PowerFlex cooking zones | |
| No. | 2 |
| Diameter in mm | 150x230 |
| Rating in W | 2.100 |
| Booster in W | 3.000 |
| TwinBooster in W | 3700 |
| Cooking zone | |
| Position | front left |
| Type | Dual-circuit ring |
| Diameter in mm | Ø 180-280 |
| Rating in W | 2600 |
| Booster in W | 3000 |
| TwinBooster in W | 3700 |
| Position | rear left |
| Type | Dual-circuit ring |
| Diameter in mm | Ø 100-160 |
| Rating in W | 1400 |
| Booster in W | 2200 |
| Position | Rear centre right |
| Type | PowerFlex bridge |
| Diameter in mm | 230x390 |
| Rating in W | 3400 |
| Booster in W | 4800 |
| TwinBooster in W | 7400 |
| User convenience | |
| Operation via sensor controls | Direct Control Plus |
| Pan and pan size recognition | • |
| Stop & Go function | • |
| Minute minder | • |
| Safety switch-off | • |
| Auto heat-up | • |
| Keeping warm | • |
| Individual setting options (e.g. buzzers) | • |
| Displays | |
| Digital power level display | • |
| Appliance networking | |
| Automatic function Con@ctivity 2.0 | • |
| Cleaning convenience | |
| Easy to clean ceramic glass | • |

KM 6357



Induction cooktop with onset controls
with PowerFlex cooking zone for maximum versatility and performance.

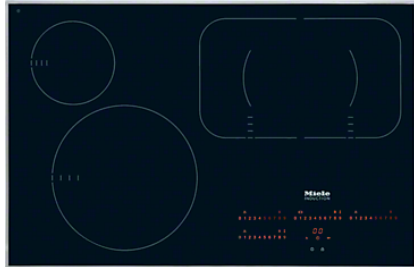

| Safety | |
|---|-----|
| Safety switch-off | • |
| Lock function | • |
| System lock | • |
| Integrated cooling fan | • |
| Overheating protection | • |
| Residual heat indicator | • |
| Technical data | |
| Dimensions in mm (width) | 806 |
| Dimensions in mm (depth) | 526 |
| Casing height incl. connection box in mm | 45 |
| Cutout dimensions in mm (width) with surface-mounted installation | 780 |
| Cutout dimensions in mm (depth) with surface-mounted installation | 500 |
| Voltage in V | 230 |
| Total rated load in kW | 7.4 |
| Weight in kg | 13 |
| Length of supply lead in m | 1.4 |
| Standard accessories | |
| Mains cable | • |

KM 6357

Induction cooktop with onset controls
with PowerFlex cooking zone for maximum versatility and performance.

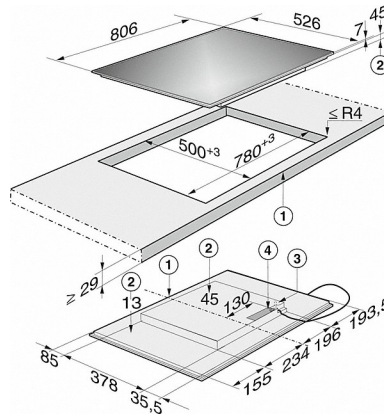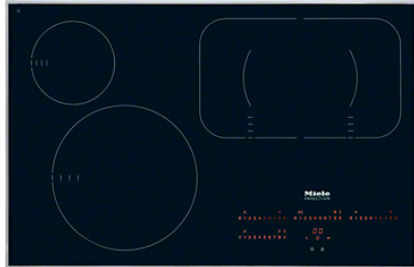

KM 6357 PowerFlex (Installation drawing) - VG AUS

1. Front
2. Casing depth
3. Miele@home connection
4. Mains connection box, mains connection cable, L = 1440 mm, supplied loose