


## KM 6366-1

Induction cooktop with onset controls  
with 3 PowerFlex cooking zones for maximum versatility and performance.

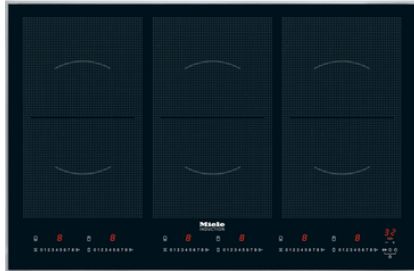


- Intuitive selection via numerical linear keybank – Direct control
- Attractive design – 806mm wide with all-round frame
- Versatile and fast – 6 cooking zones incl. 3 PowerFlex zones
- Communication with rangehood – automatic function Con@ctivity 2.0
- Shortest heating-up times – TwinBooster

<b>Heating type</b>	
Heating type	Induction
<b>Construction type</b>	
Independent of cooker	•
<b>Design</b>	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Print design	LightPrint
Stainless-steel frame	•
<b>Cooking zone details</b>	
Number of cooking zones	6
<b>PowerFlex cooking zones</b>	
No.	6
Diameter in mm	150x230
Rating in W	2.100
Booster in W	3.000
TwinBooster in W	3700
<b>Cooking zone</b>	
Position	left centre
Type	PowerFlex bridge
Diameter in mm	230x390
Rating in W	3400
Booster in W	3700
Position	Centred
Type	PowerFlex bridge
Diameter in mm	230x390
Rating in W	3400
Booster in W	4800
TwinBooster in W	7400
Position	right
Type	PowerFlex bridge
Diameter in mm	230x390
Rating in W	3400
Booster in W	4800
TwinBooster in W	7400
<b>User convenience</b>	
Operation via sensor controls	Direct selection
Pan and pan size recognition	•
Stop & Go function	•
Minute minder	•
Safety switch-off	•
Auto heat-up	•
Keeping warm	•
<b>Displays</b>	
Digital power level display	•
<b>Appliance networking</b>	
Automatic function Con@ctivity 2.0	•
<b>Cleaning convenience</b>	
Easy to clean ceramic glass	•

## KM 6366-1



Induction cooktop with onset controls  
with 3 PowerFlex cooking zones for maximum versatility and performance.

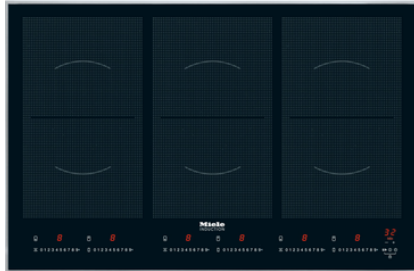

Safety	
Safety switch-off	•
Lock function	•
System lock	•
Fault monitoring	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	806
Dimensions in mm (depth)	526
Casing height incl. connection box in mm	45
Cutout dimensions in mm (width) with surface-mounted installation	780
Cutout dimensions in mm (depth) with surface-mounted installation	500
Voltage in V	230
Total rated load in kW	11.1
Weight in kg	15
Length of supply lead in m	1.4
Standard accessories	
Mains cable	•


## KM 6366-1

Induction cooktop with onset controls  
with 3 PowerFlex cooking zones for maximum versatility and performance.

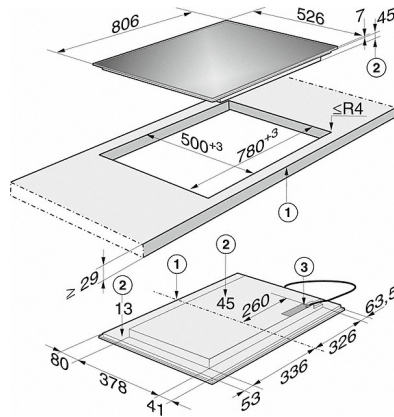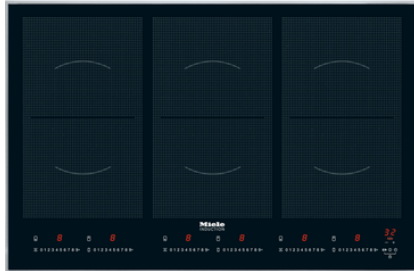

KM 6366 PowerFlex (Installation drawing) - VG AUS

1. Front
2. Casing depth
3. Mains connection box, mains connection cable 1440 mm, supplied loose

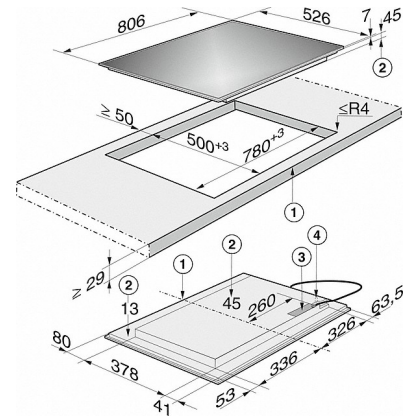

KM 6366-1 PowerFlex (Installation drawing)

1. Front
2. Casing depth
3. Mains connection box, mains connection cable 1440 mm, supplied loose
4. Con@ctivity connection point