

Applications

K-757

HIGH PERFORMANCE KARAOKE SYSTEM

P Audio has developed a high performance karaoke loudspeaker system that features very high fidelity and extended frequency response. The K-757 was designed for professional karaoke systems where high output and reliability are required. The K-757 is also ideally suited for high performance semi-pro and home applications where ultra high fidelity is required.

The K-757 features an 8 inch (200mm) long throw low frequency transducer and two ultra high frequency super tweeters oriented to provide wide horizontal coverage. The high frequency response extends to beyond 18kHz. Both the 8 inch low frequency transducer and the high frequency drivers utilize P Audio's legendary high thermal capacity assembly systems to insure both high power handling and high reliability. The rated power handling is 300 watts of program material. This power rating makes the K-757 ideal for both professional karaoke systems as well as high performance home systems.

The K-757 is constructed of high density wood to insure the necessary stiffness and damping required for acoustic accuracy and color free response. The enclosure is finished in an attractive black color. Each ultra high frequency driver is mounted behind a functional acoustic lens to insure wide acoustic dispersion. The K-757 weighs a mere 16.9 lbs (7.7kg), making it easy to move for semi portable applications. Standard push style inputs make the K-757 easy and fast to mate with system electronics, such as the P Audio KA-8000 Karaoke Amplifier.





Specifications

GENERAL SPECIFICATION

Type	2 Way Full Range Passive Bass Reflex
Power	300 Watt
Nominal Impedance	8 Ohm
Sensitivity (1W@1M)	89 dB
Frequency Response	70Hz – 18 kHz
Dimension (H x W x D)	481mm x 267mm x 290mm (18.9" x 10.5" x 11.4")
Finish Color	Black



PHYSICAL INFORMATION

LF Component	8" (200 mm) Cone Speaker
HF Component	3" (76 mm) Cone Speaker
Construction	12 mm (1/2") Birch Plywood
Grill	Polymer Injected with acoustic screw in high frequency
Connector	1 x Push Terminal
Rigging / Fitting	2 x Recessed M8 Mounting Point
Standard Packing	1 Pc / Pack
Unit Weight	7.7 kg (16.9 lbs)
Shipping Weight	8.2 kg (18.0 lbs)
Packing Dimension HxWxD (cm)	49 x 30 x 29 (1.57 cu.ft)

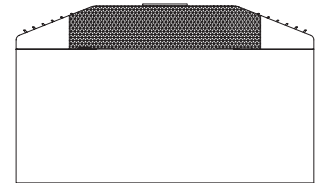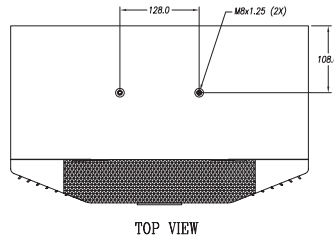



TOP VIEW

BOTTOM VIEW

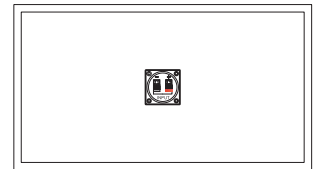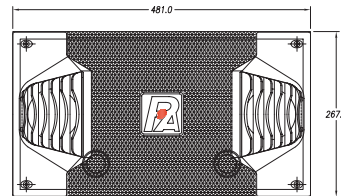


FRONT VIEW

BACK VIEW



SIDE VIEW

SIDE VIEW

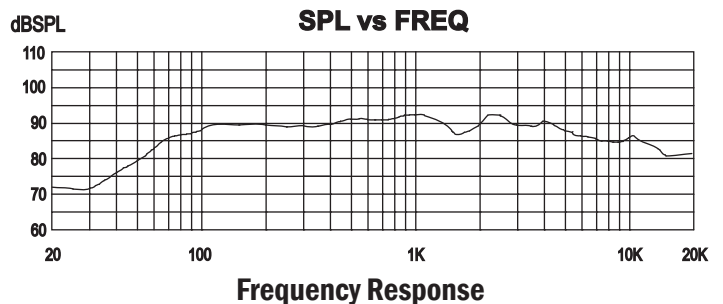

19/4 Moo 2 T.Bangkratuk A. Samparn Nakornpathom 73210 Thailand
 Tel: +66-2-441-6600 Auto 30 Lines
 e-mail: info@paudiothailand.com
 Web site: www.paudiothailand.com
 All rights reserved by P.Audio System Co., Ltd. 2007

