



MZH 3042-L | MZH 3062-L | MZH 3072-L

Goosenecks for ME 34 | ME 35 | ME 36 microphone heads

**MZH 3072-L****MZH 3062-L****MZH 3042-L**

The MZH 3042-L, MZH 3062-L and MZH 3072-L are sturdy and elegant metal goosenecks with two flexible elements for use with the ME 34, ME 35 and ME 36 microphone capsules. The LED light ring indicates an active microphone. The rugged, matte black goosenecks are fitted with a balanced floating XLR-5M connector, enabling the microphone to be powered from 12 - 48V phantom power. Two pins are dedicated for power supply of the LED light ring.

FEATURES

- Sturdy and elegant metal gooseneck for unobtrusive miking
- RF shielding against intermodulation from wireless equipment/devices
- LED light ring for speech indication
- AC/DC lightring powering

PRODUCT VARIANTS

MZH 3042-L	Art. no. 009437
MZH 3062-L	Art. no. 504609
MZH 3072-L	Art. no. 504610


SPECIFICATIONS

Connection	XLR 5
Phantom power	P12 - P48 V
Powering voltage lightring	9 - 30 V
Current consumption lightring	18 mA
Lightring connection polarity	no polarity
Coating	matte black
Diameter	MZH 3042-L: 6 mm MZH 3062-L: 8 mm MZH 3072-L: 8 mm
Number of flexible elements	2
Length	MZH 3042-L: 415 mm MZH 3062-L: 615 mm MZH 3072-L: 715 mm
Weight	MZH 3042-L: 110 g MZH 3062-L: 130 g MZH 3072-L: 135 g

ACCESSORIES

Microphone heads:		
ME 34	black	Art. no. 005060
ME 34 W	white	Art. no. 005061
ME 35	black	Art. no. 005062
ME 35 W	white	Art. no. 005063
ME 36	black	Art. no. 005064
ME 36 W	white	Art. no. 005065
MZT 30 L	installation XLR 5F connector	Art. no. 009446
MZS 31	shockmount	Art. no. 005087

CONNECTIVITY



- 1 Ground
- 2 Microphone +
- 3 Microphone -
- 4 LED: 9 - 30 V = any polarity
- 5 LED: 9 - 30 V = any polarity




MZH 3042-L | MZH 3062-L | MZH 3072-L


Goosenecks for ME 34 | ME 35 | ME 36 microphone heads

DIMENSIONS


MZH3042L

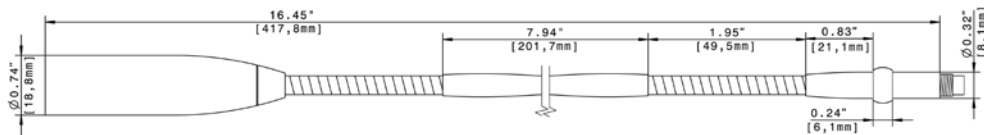

MZH3062L

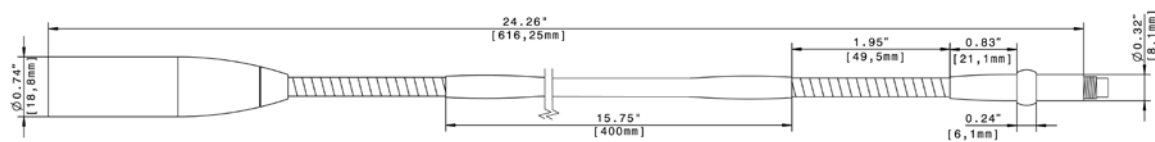

MZH3072L

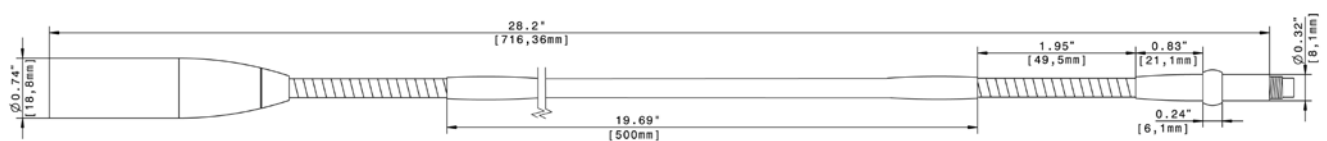

ARCHITECT'S SPECIFICATION

The unit shall be streamlined in appearance, with a boom diameter of 8 mm (.31"), an overall length of 40 cm (15.75"), 60 cm (23.6"), or 70 cm (27.5"), and a double bend to facilitate precise positioning. It must also be finished with a durable anti-reflective matte black coating and have a pre-amp housed within its XLR-5 connector housing. The unit must be mountable using a table stand, direct to surface receptacle or via a silent shock mount system. The unit shall accept the ME34, ME35 and ME36 microphone capsules.

The unit shall be a Sennheiser MZH 3042-L.

The unit shall be a Sennheiser MZH 3062-L.

The unit shall be a Sennheiser MZH 3072-L.