

DT-7009C




- The HDMI signal supports signal 3D and HDMI format 1080P 60HZ. - Using solution of without compression transmission (bandwidth of 175-225mhz is adopted) to keep source signal
- Using super 5 or 6 Ethernet cable to extend up to 35 to 60m.
- The receiving port is designed to EQ automatic adjustment button so as to keep signal stable
(Please use the standard 24 AWG, oxygen-free copper wire core that is suitable for super 5 or 6 Ethernet cable.
Using crystal head pressing line matched with cable wire core so as to avoid the weaker signal.)



Overview

This product has broken the HDMI cable transmission distance limit, According to diferent requirements, choose different transmitting terminal, use one or more cable can make the single or multiple HDMI (more output) signal increased up to 60 meters. And increase the local HDMI output all the way,the convenient user use. Widely used in high-definition LCD TV sales show place, data distribution, information release, meeting rooms, schools and various training venues.

Application

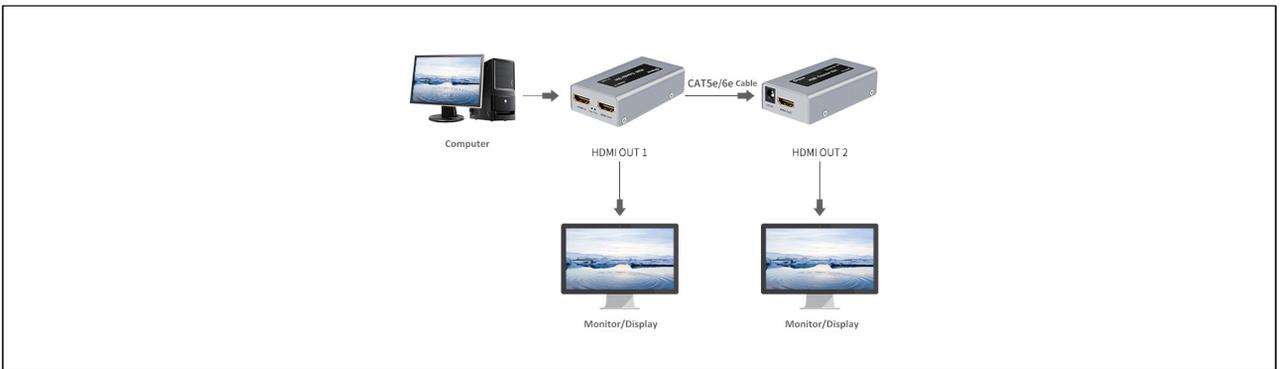

Basic parameters

1. HDMI signal supports signal 3D and HDMI format 1080P@60Hz.
2. HDMI signal supports 1920*1080, backward compatible with multiple resolutions.
3. Using solution of without compression transmission (bandwidth of 175- 225 mhz is adopted) to keep source signal.
4. Using super 5 or 6 Ethernet cable extend up to 60m.
5. The receiving port is designed to EQ automatic adjustment button so as to keep signal stable.
6. The product of infrared transmission can control the remote signal source or other equipment.

Packing List

ITEM	QTY
HDMI Single cable Extender	2 pc
Power Adaptor	2 pc
User Manual	1 pc
Mounting Kit (Optional)	1 pair

Related Product

NAME	MODEL
HDMI Single cable Extender	DT-7009C